

RCHITECTURAL RECORD

SEPTEMBER 1962 • TWO DOLLARS PER COPY

BUILDING TYPES STUDY: HOSPITALS

LINCOLN CENTER FOR THE PERFORMING ARTS

ACOUSTICS OF PHILHARMONIC HALL

FULL CONTENTS ON PAGES 4 & 5



PWARDS, A FIRE BARRIER; OWNWARDS, AN AIR DIFFUSER


All five stories and penthouse of the two-million-dollar National Cash Register Building at Hartford, Conn., will be air conditioned — with Armstrong Ventilating Fire Guard Ceilings distributing the air. In this new system, a stub duct feeds conditioned air to the plenum, where an even pressure forces it down through the perforated ceiling into the room below. Using Armstrong's Plenum Engineering Procedures, the engineers varied the proportion of Ventilating to non-ventilating Fire Guard thereby allowing a common plenum to supply several conditioned spaces, each with different air flow requirements. Both regular and Ventilating Fire Guard lay-in units easily satisfy the 1½-hour fire-protection rating required for this building. And Ventilating Fire Guard

ceilings (instead of a duct-and-diffuser system and intermediate fire protection) saved at least \$40,000.

INFORMATION. For special plenum-engineering data, giving all facts and formulae for the correct design of this ventilating system, contact your Armstrong Acoustical Contractor or Armstrong District Office. For general information, write Armstrong Cork Company, 4209 Rock Street, Lancaster, Pa.

National Cash Register Building, Hartford, Conn. <u>Architects</u>: P. J. di Corcia Associates, Manchester, Conn. <u>Air System Consultant-Contractor</u>: The Horton Company, Hartford, Conn. <u>Construction Consultant-General Contractor</u>: Horn Construction, Inc., Hartford, Conn. <u>Acoustical Contractor</u>: Conn Acoustics, Newington, Conn.



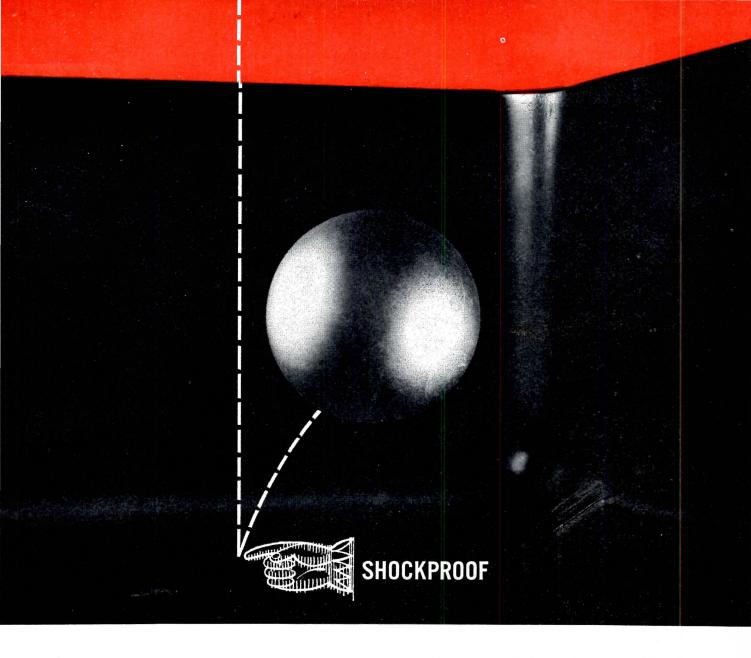

DURCON® LABORATORY SINKS can take it. As shown above, our quality control engineers drop a 3-lb. steel ball into Durcon sinks from heights of 6 to 9 feet. These tests prove Durcon resists impact blows far greater than those encountered in normal lab service.

Made of a modified epoxy resin, Durcon sinks stubbornly resist the corrosive effects of most chemicals—organic and inorganic acids, alkalis, salts **and** solvents. Hot solutions don't warp them. Nor do they support combustion. They're molded in one piece for extra strength. (No joints to cause leaks or trap liquids.) Smooth coved corners and dished bottoms assure complete drainage. And Durcon sinks are virtually impermeable to moisture for life.

These sinks are easy to install. They weigh about 60% less than stone sinks of comparable size . . . one man can put them in place without mechanical aids. Wall thickness is just half that of old-style sinks permitting installation of larger capacity sinks in cramped quarters.

Get the complete facts on Durcon Lab Sinks. They actually cost less than stone or porcelain sinks. Contact your nearest Laboratory Furniture Manufacturer, or write us for Bulletin PF/5d.




DURCON LAB SINKS give you a complete selection—Table Sinks, End Sinks, Drainboard Sink Units, Double Compartment Sinks, Cylindrical Sinks, Cup Sinks and Troughs . . . in a wide range of sizes.

THE DURIRON COMPANY, INC., DAYTON, OHIO DURCO





DOVER ELEVATORS

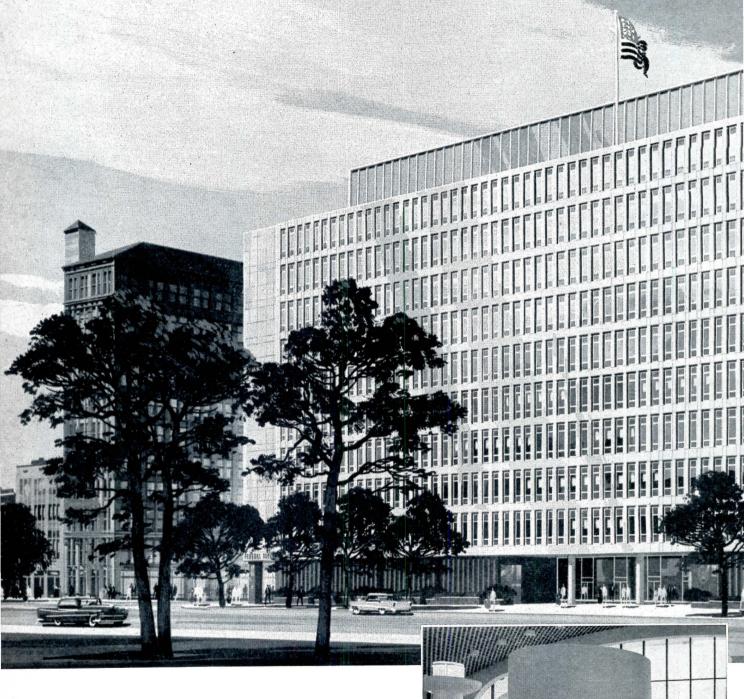

ABOVE

Federal Office Building, Cincinnati, Ohio. To be equipped with 13 Dover high-speed elevators. Architects and Engineers: Potter, Tyler, Martin & Roth; Vogt, Ivers & Associates; Harry Hake and Harry Hake, Jr. General Contractor: J. W. Bateson Company, Inc., and J. W. Bateson Construction Company, Inc., Joint Venturers.

RIGHT

Distinctive elevator enclosures, entrances and cars add architectural interest to building interiors. This round enclosure in a Denver bank building houses a Rotary Oildraulic® Elevator manufactured by the Dover Elevator Division,

built to meet the requirements of tomorrow



The 13 high-speed Dover Electric Elevators to be installed in the new Cincinnati Federal Office Building now under construction will give efficient service for the life of this building.

Dover achieves long-time elevator dependability through the manufacture of all major components in our own plants and the mechanical and electrical mating of these components.

Dover Electric Elevators are available in a wide

range of speeds, capacities and control systems to suit modern traffic requirements. Manufacturing facilities and installation organization assure "on schedule" delivery, and 24-hour maintenance protects building owners from tenant-annoying service interruptions. Write for catalog; ask our engineering department for help on any vertical transportation project. Dover Corporation, Elevator Division, 1105 Kentucky, Memphis 2, Tenn.



OVER

LEVATO

Architectural Engineering

ACOUSTICS OF PHILHARMONIC HALL 196

Acoustics of concert halls need not be a matter of change, points out Dr. Leo L. Beranek of Bolt, Beranek and Newman. Interviews with musical people and a study of 60 concert halls in 20 countries led to the identification of 12 attributes of acoustics important to music. This article tells how the acoustical design considered these attributes

HOSPITAL AIR CONDITIONING 205

Hospital air conditioning poses problems of temperature and humidity control, as well as cleanliness, which affect not only system selection and design, but layout of hospital spaces as well. Author is Alfred Greenberg, Consulting Engineer

BUILDING COMPONENTS 215

Finishes for Cabinet Work: Part 2

PRODUCT REPORTS 217

OFFICE LITERATURE 218

READER SERVICE INQUIRY CARD 233



Cover:

Philharmonic Hall, New York City. Architect, Max Abramovitz. Photograph by Louis Checkman

Advertising Index 338

ARCHITECTURAL RECORD September 1962 Vol. 182, No. 3 Published monthly, except May 1962, when semi-monthly, by F. W. Dodge Corporation, a McGraw-Hill Company. This issue is published in national and separate editions. Additional pages of separate editions numbered or allowed for as follows: Western edition, 32-1 through 32-32. Regional edition, southern, R-1 through R-4.

Executive, editorial, circulation and advertising offices: 119 West 40th Street, New York 18, N. Y. Western Editorial Office: 2877 Shasta Road, Berkeley 8, Calif. Office of Publication, 10 Ferry Street, Concord, N. H.; second-class mail postage paid at Concord,

Subscription rate for individuals in the field served \$5.50 per year in U. S., U. S. Possessions and Canada; single copies \$2.00, except Mid-May 1962 issue \$2.95. Further details on page 6. Postmaster; Please send Form 3579 to Circulation Manager, ARCHITECTURAL RECORD, 119 West 40th Street, New York 18, N. Y.

ARCHITECTURAL

Record Reports

BEHIND THE RECORD 9

"Design-Oriented Education" by Emerson Goble STUDY OF WASHINGTON SKYLINE WOULD SET DESIGN OBJECTIVES FOR FUTURE DEVELOPMENT 10

LUCKMAN IS U.S. CHOICE FOR NEW YORK FAIR 10

BUILDINGS IN THE NEWS

"Three Entries Share Top Prize in This Year's Ruberoid Awards" 12 "Eight Churches Cited in Annual Awards" 14

CURRENT TRENDS IN CONSTRUCTION 18

A monthly analysis prepared for the RECORD by George A. Christie, Economist, F. W. Dodge Corporation

CONSTRUCTION COST INDEXES 20

ARCHITECTS WANT PENN STATION SAVED:

THEIR PICKET LINES HAVE PROVED IT 23

EDUCATIONAL BUILDING CONFERENCE URGES INTERNATIONAL INFORMATION CENTERS 26

WORLD CONFERENCE ON SHELL STRUCTURES OPENS SEPTEMBER 30 IN SAN FRANCISCO 26

REQUIRED READING 58

CALENDAR AND OFFICE NOTES 296

Architects and Buildings

ABRAMOVITZ, MAX. Philharmonic Hall, Lincoln Center, New York City 136
BECKET, WELTON, AND ASSOCS. Veterans Administration Hospital, Palo Alto, Calif. . BELLUSCHI, PIETRO. Juilliard Building, Lincoln Center,

New York City 148
COHEN, HAFT & ASSOCS. Wheaton House Apartments,

Wheaton, Md. 158 DORMAN, RICHARD, & ASSOCS. Office Building, Bever-

ter, Lincoln Center, New York City 146
NEMENY, GEORGE. Marshall Safir House, Kings Point,

ODELL, A. G., JR. & ASSOCS. Charlotte Memorial Hospital, Charlotte, N.C. 182
SAARINEN, EERO, & ASSOCS. Vivian Beaumont Reper-

WURSTER, BERNARDI AND EMMONS. Jackson Lake Apartments, Oakland, Calif. 155

Authors and Articles

BERANEK, LEO L. "Acoustics of Philharmonic Hall" 196 GREENBERG, ALFRED. "Hospital Air Conditioning"

205 FINISHES FOR CABINET WORK 215
PLANNING THE PATIENT CARE UNIT IN THE
GENERAL HOSPITAL 172

Features

LINCOLN CENTER, NEW YORK CITY 133 A comprehensive design report on a unique new center for the performing arts, presented as the first unit—Philharmonic Hall—opens

FLEXIBILITY KEYNOTES NEW I.B.M. LAB 149 Sherwood, Mills and Smith use a two-foot module to achieve maximum adaptability in this very pleasant product development laboratory

BIG APARTMENT WITH ROW HOUSE LOOK 155 Wurster, Bernardi and Emmons give an agreeable domestic scale to a 192-unit apartment by use of three courts and varying the mass of the design

APARTMENTS FOCUS ON BIG GARDEN 159 Low-rise apartments turn backs to traffic and face wooded grove

LUXURY FOR SMALL UNITS IN HIGH-RISE 161 Victor Gruen Associates' new apartment house features sliding walls, balconies, a pool, and a lot of electrical equipment

NARROW LOT AND PARKING NEEDS DETERMINE PLAN 163 A 50-ft-wide lot, 217 ft deep with streets on both ends, together with off-street parking requirements, led to an unusual solution to a difficult problem

A WATERFRONT HOUSE OF WARMTH AND CHARACTER 167 George Nemeny combines the familiar with the new for a large but intimate family home

RECORD

CONTENTS
September 1962

Building Types Study 311: Hospitals

INTRODUCTION 171

PLANNING THE PATIENT CARE UNIT IN THE GENERAL HOSPITAL 172 A new study, by the Architectural and Engineering Branch of the U. S. Public Health Service, on the latest principles of nursing unit planning and construction

COMPLETE MEDICAL CENTER REALIZED THROUGH MASTER PLANNING
How one architectural firm, A. G. Odell Jr. and Associates, planned
the modernization and expansion of a community hospital

NEURO-PSYCHIATRIC HOSPITAL PLANNED LIKE CAMPUS OF A COLLEGE 191 Welton Becket and Associates, the architects of this Veterans Administration hospital, composed and related the 15 buildings of the complex group with a campus-like master plan

Coming in the Record

CITY ARCHITECTURE: A SERIES OF ARTICLES BY LEWIS MUMFORD

Few authors on few subjects would seem so significantly met as Lewis Mumford with the architecture of the city, and there can be few subjects—perhaps none—of greater relevance to architects in our time. Next month, "The Disappearing City," first article of a series.

SCHOOLS, AND WHAT'S NEW WITH "AUDITORIUMS"

The quotation marks will be understood by all architects involved in school design, because these days there are not only many new concepts but a clutch of new names for spaces which once would have been easily recognizable as, and called by no other name than, auditorium. In the Building Types Study on schools next month, an architect, an architectural researcher and a systems design authority cover current principles and practice in design of auditoriums, their newest uses as instructional spaces and the related design possibilities opened up by new developments in equipment. Examples are schools whose facilities range from "forum" to "cafetoria"—to auditorium.

ARCHITECTURAL RECORD (combined with AMERICAN ARCHITECT and ARCHITECTURE), title ® reg. in U. S. Patent office, © copyright 1962 by F. W. Dodge Corporation, a McGraw-Hill Company. All rights reserved including the right to reproduce the contents of this publication either in whole or in part. Quotations on bulk reprints of articles available on request. Indexed in Reader's Guide to Periodical Literature, Art Index, Industrial Arts Index and Engineering Index.

Every effort will be made to return material submitted for possible publication (if accompanied by stamped, addressed envelope), but the editors and the corporation will not be responsible for loss or damage.

SUBSCRIPTIONS: Available only by paid subscription. Publisher reserves the right to refuse non-qualified subscriptions. Subscriptions to Architectural Record solicited only from architects and engineers. Position, firm connection, and type of firm must be indicated on subscription orders forwarded to Circulation Manager, Architectural Record, 119 West 40th Street, New York 18, N. Y. Subscription prices: U. S., U. S. Possessions and Canada: \$5.50 per year; other Western Hemisphere countries, to those who by title are architects and engineers, \$9.00 per year. Single copy price except Mid-May 1962 issue \$2.00; Mid-May 1962 issue \$2.95. Beyond Western Hemisphere, to those who by title are architects and engineers, \$9.00 per year for 12 monthly issues not including Mid-May 1962 issue. Subscriptions from all others outside U. S., U. S. Possessions and Canada for 12 monthly issues, not including Mid-May issue, \$24.00 per year.

CHANGE OF ADDRESS: Subscribers are requested to furnish promptly both old and new address, sending, if possible, stencil impression from magazine wrapper; new postal zone number, if any, should be included. Allow one month for change.

UNCONDITIONAL GUARANTEE: The publisher, upon written request, agrees to refund the part of the subscription price applying to the remaining unfilled portion of the subscription if service is unsatisfactory.

OTHER F. W. DODGE SERVICES: Dodge Reports—Dodge Construction Statistics—Sweet's Catalog Services—Dodge Mailing Service—Home Planners' Digest—The Modern Hospital—The Nation's Schools—College and University Business—Hospital Purchasing File—Chicago Construction News—Daily Pacific Builder (San Francisco)—The Daily Journal (Denver)—Real Estate Record & Builders Guide—Dow Building Cost Calculator.





Staff of Architectural Record

Emerson Goble, A.I.A.

SENIOR EDITORS
Jeanne M. Davern, Assistant to the Editor
Robert E. Fischer, Engineering
James S. Hornbeck, A.I.A., Features
William Dudley Hunt, Jr., A.I.A.
Elisabeth Kendall Thompson, A.I.A., West

ASSOCIATE EDITORS
Herbert L. Smith, Jr., A.I.A., Houses
Mildred F. Schmertz, Design
Grace M. Anderson
William B. Foxhall
Anne Keffer, Production

ASSISTANT EDITOR Kathryn Gallant

EDITORIAL ASSISTANT Jan Rahm

DESIGN
Eugene H. Hawley, Director
Alex H. Stillano, Associate
Sigman-Ward, Drafting

EDITORIAL CONSULTANTS
Robert Anshen, F.A.I.A.
Edward Larrabee Barnes, A.I.A.
Walter Gropius, F.A.I.A.
Robert F. Hastings, F.A.I.A.
Paul Rudolph, A.I.A.

INDUSTRY CONSULTANTS
GOrdon W. McKinley, Economics
Clyde Shute, Statistical
Clifford G. Dunnells, Jr., Field Research
Daniel J. Howe, Jr., Public Relations
Ernest Mickel, Washington

PUBLISHER Robert F. Marshall

EDITORIAL DIRECTOR Robert M. Cunningham, Jr.

PUBLISHING ADVISER H. Judd Payne

CIRCULATION MANAGER Marshall T. Ginn

Officers of F. W. Dodge Corporation

Honorary chairman of the board James McV. Breed

CHAIRMAN OF THE BOARD
Paul Abbott

PRESIDENT Irving W. Hadsell

EXECUTIVE VICE PRESIDENTS
Julius T. Little, Robert F. Marshall,
T. Oliver Morgan, O. O. Paulsell

EXECUTIVE VICE PRESIDENT AND TREASURER Howard M. Thompson

VICE PRESIDENTS Robert M. Cunningham, Jr., William H. Hatch, Jr., Gordon W. McKinley Richard H. Ray

REGIONAL VICE PRESIDENTS George H. Atherton, Miles W. Beatty, Carl S. Bennett, Robert G. Bingham, Alton W. Kitchens, Sam L. Marshall, Jr., Arthur D. Prior

CONTROLLER Stuart W. McLaughlin

ASSISTANT VICE PRESIDENTS
Walter F. DeSaix, Clifford G. Dunnells, Jr
Gault Eastman, Edwin H. Freed, Clyde Shu

SECRETARY John J. Cooke

ASSISTANT SECRETARIES William C. Breed, Jr., George W. Morgan

ASSISTANT TREASURER Irving B. Satin Now! Get the facts on

SILENT GLISS


The silent Glish drapery track

Outstanding new concept i

CUBICLE TRACK

(with matching drapery tracks for windows)

for hospital installation






Suspended Style Cubicle Track


Slim, light-weight, yet strong and rigid! Easily curved. Removable dust-cover insert for sanitation; no dirtcatching crevices.



Invisible-Mount
Style Cubicle Track
Features ingenious

Features ingenious mounting levers which are attached to ceiling first, then swung out-of-sight to lock track in place. May be curved.








Double-Flange Style Cubicle Track

Extremely versatile. Easily mounted to ceiling with flanges exposed or covered by faceboard, tile, plaster, etc. May be curved.



Revolutionary patented design features separated, semi-enclosed channels to eliminate cord tangling or drooping. All nylon cord.



sew-on nylon carriers for easy hanging. • NOISELESS. No rollers; no metal-to-metal "squeal." Silent, self-lubricating . . . virtually friction-free. Send for full information *now*.

Designed in Switzerland; manufactured in U.S.A. exclusively by

SILENT GLISS, INC., FREEPORT, ILLINOIS

Distributing Companies:

Angevine Co., Crystal Lake, Illinois Drapery Hardware Mfg. Co., Monrovia, California

THREE OF THE Newell COMPANIES

Manufacturers of Quality Drapery Hardware Since 1903


Now . . . the first radically different major development in drapery track, with a complete line for both cubicle and window use. • VIRTUALLY MAINTENANCE-FREE, because construction is solid anodized, siliconized extruded aluminum with molded nylon fittings for long life and smooth operation. Cord traversing models feature separated, semienclosed channels which eliminate tangling and drooping; use all-nylon cord for maximum trouble-free service. • SANITARY, because design is smooth, streamlined, without dust-catching crevices. Anodized, siliconized track surface sheds dust and soil; nylon fittings and carriers are easy to keep clean. • VERSATILE. Complete range of tracks (surface-mounted or recessed ceiling models; also suspended style) . . . some easily curved. Choice of eyelet or



Write for the illustrated catalog shown here, with details on the COMPLETE LINE of Silent Gliss tracks for both cubicle and window drapery use. A request on your letterhead will bring it promptly.

Address Dept. AR-9.

For more data sirely 4 on Inquiry Card

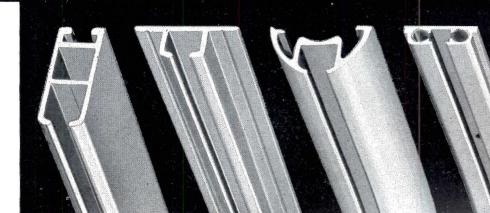



...where
Portland Cement Concrete
must be beautiful
USE



General Engineering Building, University of Washington, Seattle, and reflection mirrored in Frosh Pond.

Precast Concrete Curtain Walls and Column Covers—The problem here was to design a building in harmony with the Tudor Gothic of the upper campus. ¶ Precast concrete curtain walls made with Trinity White portland cement were selected. ¶ The fins are white cement and quartz; the interior of the diamond is white cement and very coarse aggregate mixed with orange-colored crushed glass; the column covers and end walls are coarse aggregate with the matrix tinted slightly to a tan. ¶ Precast exposed aggregate concrete (Mo-Sai) by Olympian Stone Company. Wick Construction Company, General Contractors. Harmon, Pray & Detrich, Architects.

TRINITY WHITE IS A PRODUCT OF GENERAL PORTLAND CEMENT COMPANY

Offices: Chicago, Illinois · Chattanooga, Tennessee · Dallas, Texas · Fort Worth, Texas · Houston, Texas Fredonia, Kansas · Fort Wayne, Indiana · Jackson, Michigan · Tampa, Florida · Miami, Florida · Los Angeles, California



Design-Oriented Education

In its preoccupation with the expanded role of the architect, the American Institute of Architects has assigned an *ad hoc* committee to look into the implications for the education of architects. Obviously architects are not going to gain new status merely by asking for it: increased competence will have to be the basis for any forward steps.

One of the members of that committee has campaigned for years for some way to attract more and better trained engineers to the building field. He is Robert Hastings, head of the huge architect-engineer organization of Smith, Hinchman & Grylls of Detroit (and an editorial consultant to the ARCHITECTURAL RECORD staff). He points out that other scientific and engineering fields are more lucrative and more glamorous than building design, and that at least we should be able to offer more recognition than we now do to boys who might choose the technical side of building design, be they engineering or architectural students. He has argued for the architectural-engineering type of education in the hope of developing a new group of technically competent building designers.

Others have pointed out that no engineering students are specifically trained for building design, and that architectural students cannot be expected to study technical subjects as an engineering student should. It is difficult for architectural students to take courses taught by engineering faculties because they need an architect's view of the material rather than an engineer's.

Now comes another member of the A.I.A.'s *ad hoc* committee on education with a still more radical proposal: the training of engineers for building design by the architectural faculty. He is Dean G. Holmes Perkins of the University of Pennsylvania, who offered his suggestion in a speech before the Royal Architectural Institute of Canada. He bases the idea on the importance of a dedication to design:

"The essence of his (the architect's) professional contribution to

society is and should remain his unique dedication to creative design. . . . The change in architectural education which we anticipate lies not in any change in the basic creative orientation of the profession but in the expanded areas of service where he will be expected to exercise design leadership. Several professions guite properly claim a special competence in portions of the field. A school for architects can no longer confine itself to those traditional skills required for professional registration which reflects only too devastatingly the state of the profession of ten years ago. We must prepare the student for his role tomorrow. The first essential is the maintenance of leadership in design."

How educate for such leadership? "The corollary to this proposition is that all those contributing to the design of the urban environment should be educated by a single faculty embracing all the needed skills. Under such a design-oriented faculty the planner, the architect, the landscape architect, the artist and those structural and mechanical engineers who are concerned with buildings can receive a sounder and more mutually rewarding education. They will learn from one another by working together in preparation for professional collaboration in practice."

He continues: "A creative attitude must prevail in all the parts-from the design of a city to that of a structural system. Under the umbrella of a single faculty dedicated to the design of the total urban environment, programs in landscape, in structural and mechanical engineering, in art, in planning, and in architecture will all contribute their share to the common cause. The fragmentation prevailing today fails to attract good candidates in several areas—notably in engineering, where the more talented are seduced by the glamour and high rewards in rocketry and electronics. The new faculty with its emphasis on creativity can bring a heightened prestige to all the design professions."

-Emerson Goble

STUDY OF WASHINGTON SKYLINE WOULD SET DESIGN OBJECTIVES FOR FUTURE DEVELOPMENT

What seems likely to be the most intensive analysis in history of a city skyline will be undertaken in Washington, D.C., in a study planned for the next year by the National Capital Planning Commission in cooperation with the Commission of Fine Arts.

Purpose of the study, as defined by Morton Hoppenfeld, urban designer of the N.C.P.C., is "to evaluate the present and potentially committed skyline toward the establishment of design objectives for future development."

In a report which will be the basis of the study, Mr. Hoppenfeld noted that, as the U.S. capital, Washington should have a skyline of "a quality unique in the United States if not in the world" and added that "special attention will be given to the pre-eminence in the skyline of the Capitol dome, the Washington Monument and the Lincoln Memorial, and their relation to the rest of the city."

The report also discussed the significance of the skyline in the city-planning-building process generally:

"Traditionally, the skyline is considered at the city scale; that is, the total skyline, or at least portions which, in the consensus of the beholders, represent the essence of the city. This is undoubtedly the most

important aspect of the skyline. However, there are others. Each street, sector and district of the metropolis has its own skyline, which has served to evoke local loyalties and a sense of belonging.

"The city's skyline inevitably serves to state symbolically its essential character, scale and communal values. The skyline of each street, sector and district serves in a similar way to give focus and orientation and to state the nature of the immediate environment. Both at the macro-scale of the metropolis and at the micro-scale of the neighborhood, the skyline serves as a basic aspect of the image of the community in the minds of the beholders.

"Reading the skyline, as we all do daily (consciously or unconsciously), is one of the principal ways in which we gain intelligence about our city. The skyline, combined with other visual aspects, special streets, pathways, places, landmarks, etc., is a structuring element of city design. As part of our way of perceiving our environment, it is subject to esthetic response. When the skyline is consistent with everything we think and feel about a place, it gives us pleasure; when it is inappropriate, it disturbs us.

"If we can accept the traditional concept of the skyline as a manifestation of other urban phenomena and values, then it cannot be studied abstractly or in isolation. It should be noted here, however, that the skyline is not conceived only as a product of other forces. In the design of the city, apparent form is of prime consideration. As the situation warrants, the visual aspect might well dominate the other determinants of urban form."

Elements of the study were outlined as follows:

- 1. A visual survey of the existing skyline—primarily photographic, but supported by maps and analytical sketches.
- 2. An analytical study of topographical features and present zoning criteria intended to produce a picture of "the present potential skyline."
- 3. Careful and continuous consideration in the evolution of the comprehensive plan of "the skyline as both product and objective."
- 4. Articulation of skyline implications in special area plans as they are developed.
- 5. Special skyline design studies at various scales and points of view to establish formal objectives.

LUCKMAN IS U. S. CHOICE FOR NEW YORK FAIR

After months of Congressional footdragging, the U. S. last month had \$17 million to finance its participation in the 1964 New York World's Fair and in rapid succession named a commissioner and an architect.

The commissioner is Norman K. Winston of New York, chairman of the board of Winston-Muss Corp., volume builders of houses and apartment buildings; and the architect is Charles Luckman Associates of Los Angeles and New York.

Theme of the U.S. exhibit is "Challenge to Greatness" and the pavilion

to house it will contain 190,000 sq ft of exhibit space and will be erected on a circular site of four and a quarter acres.


Mr. Winston's assignment is to supervise development of a pavilion that represents "significant American contributions to art, science, industry and culture," and he pledged his best efforts to creation of an exhibit which will describe for the world "the benefits of our way of life."

And Mr. Luckman said of his commission: "We recognize this as both

an opportunity and an obligation. To fulfill this obligation, we are in the process of developing a unique design concept which we hope and believe will be worthy of the appointment."

More specific information there was not—at least for release—at press-time.

Responsibility for Federal participation in the Fair has been assigned by President Kennedy to the Department of Commerce, with the Genera Services Administration to supervise design and construction.

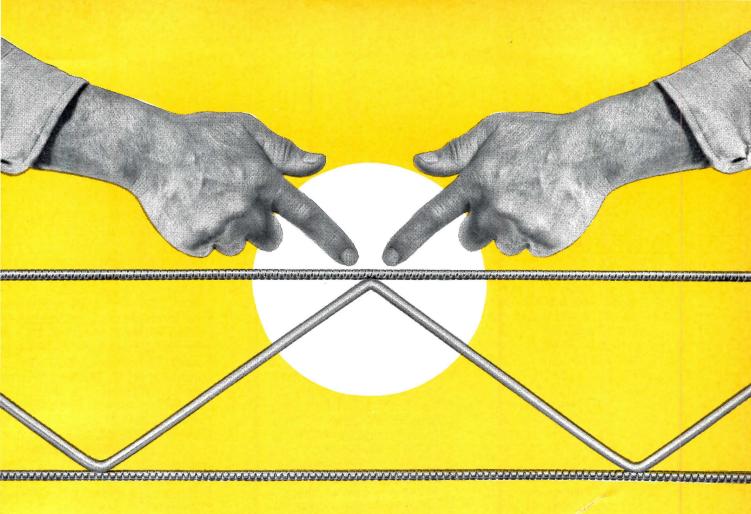

This is Dur-o-wal

the masonry wall reinforcement with the trussed design

Don't be misled by the common habit of calling all metal-rod reinforcement "durowal". Look for this trussed design. It distinguishes the real Dur-o-wal, insures maximum flexural strength, with all steel members effectively in tension and working together.

Impartial tests have proved that truss-designed Dur-o-wal exceeds accepted standards—increases the flexural strength of a masonry wall 71 to 261 per cent, depending on weight Dur-o-wal used, type of mortar, number of courses.


An independent new research study shows that Dur-o-wal tied walls outfunction brick-header tied walls. Write to any Dur-o-wal address below for 44-page test report.

DUR-O-WAL


The Original Masonry Wall Reinforcement with the Truss Design

DUR-O-WAL MANUFACTURING PLANTS

- Cedar Rapids, Iowa, P.O. Box 150 Baltimore, Md., 4500 E. Lombard St. Birmingham, Ala., P.O. Box 5446
- Syracuse, N.Y., P.O. Box 628
- Toledo, Ohio, 1678 Norwood Ave. Pueblo, Colo., 29th and Court St.
- Phoenix, Ariz., P.O. Box 49 Aurora, III., 260 S. Highland Ave.
- . Seattle, Wash., 3310 Wallingford Ave.
 - . Minneapolis, Minn., 2653 37th Ave. So. Hamilton, Ont., Canada, 789 Woodward Ave.



STRENGTH WITH FLEXIBILITY—this basic masonry wall requirement is met for sure (and economically!) when Dur-o-wal, above, is used with the ready-made, self-flexing Rapid Control Joint, below.



THREE ENTRIES SHARE TOP PRIZE IN THIS YEAR'S RUBEROID AWARDS

For the first time in its history, the Annual \$25,000 Architects' Competition sponsored by the Ruberoid Company divides its three major national awards totaling \$17,500 equally among three entries (shown acrosspage). All four winners of the three grand awards are connected with architectural education, three being 1962 graduates of architectural schools while the fourth is a university professor.

On the jury were Chairman Edmund Bacon, A.I.A., executive director, Philadelphia City Planning Commission; Vernon Demars, A.I.A., San Francisco; James J. Hurley, chairman, Taylor-Hurley Associates, Inc., New York; Ralph Rapson, A.I.A., head, School of Architecture, University of Minnesota; William L. Slayton, commissioner, Urban Renewal Administration, Washington. B. Sumner Gruzen, F.A.I.A, New York, served as professional adviser.


The jury of this fourth annual competition, which had 158 entries, felt the three grand award winners presented completely different approaches to the problem of urban renewal, which was this year's theme. They decided to give equal recognition to avoid the designation of any one as a pattern containing all the elements sought.

The problem involved a theoretical city whose former reason for growth—river bank textile mills—had vanished and whose present state was one of blight, with mixed factory and residential structures and a growing population based economically on a new industry—electronics. Located at the center of an expanding urban sprawl, the area was to become the city's heart. Entries were to develop

the site by providing all major facilities and environment for living, working, culture and recreation in balanced quantities for residents there and also to provide various activities to benefit people throughout the region. This meant residences for at least 5,000 families, including housing for the elderly, offices, shopping areas, a community college, expansion of an existing hospital and full recreational facilities.

In addition to the three national grand award winners, national merit awards of \$500 went to: Minoru Takeyama, Pratt Institute, Brooklyn; Herman F. Goeters, J. D. F. Boggs Jr. and Robert F. Lindsey, Goeters, Boggs & Associates, Houston: Jan Lubicz-Nycz, Marquis & Stoller, San Francisco: John D. Dver, Thomas S. Marvel and John W. Shenefield, Harvard Graduate School of Design Cambridge, Mass.; Jean-Michel Charnet, Murphy & Mackey, Architects. St. Louis; and Joseph L. Young and F. Kempton Mooney, Lyles, Bissett Carlisle & Wolff, Columbia, S.C.

Student first prize design is shown below. Second prize of \$1000 went Michael Marczuke, University Minnesota; \$500 third prize ofto Daniel E. Green and Eugene J Mackey, Washington University, St Louis; \$250 merit awards, to Jay Barton Walter, Edward Richard Nile Duk Won Lee, Melvin Leon Ford University of Southern California Terrence Andrew McCormick and Ilmar Reinvald, University of Illinois Elam L. Denham, Tadeusz M. Janowaski, Donald E. Sporleder, R. Alar Forrester, Anthony Pellecchia, Ilmai Reinvald, University of Illinois Richard A. DeVine and H. Stow Chapman, University of Illinois.

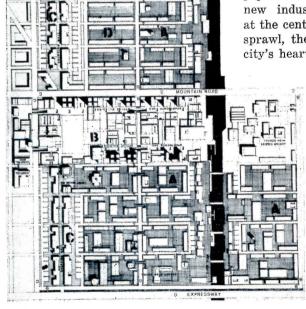


\$2,000 FIRST STUDENT PRIZE: Edward Z. Jacobson and Kenneth Schwarz, Carnegie Institute of Technology

"This design has a rich variety of building types through which are distributed institutions. It has a richness of urban spaces and a human urban quality. An eminently practical project to build and possibly economically feasible. The design demonstrates considerable maturity at the student level in terms of solving in a very practical way a very difficult urban problem"

GRAND AWARD: Stephen N. Abend, Washington University, St. Louis


'. . . Boldly experimental . . . urban . . . very lear, sharp, big circulation pattern that leaves interior circulation relatively free of over-all circulation. Presents interesting idea of raising automobile parking off the ground, leaving land free for living and playing. Clear separation between rigid discipline of urban core and fairly free treatment of resilential areas is important. Its incorporation of small ndustry in residential section, presumably with the walk-to-work idea, is noble and should be tried in practice"





One of the very few solutions derived from the broad regional aspect of the natural topography rather than imposition on the land of arbitrary preconceived architectural forms. Transition from irregular topography at edge of river to rigid demands of building technology on the city side is extremely well handled. Clear differentiation between what is nature in the park and what is related to man in the structure is an outstanding characteristic of the design. Handling of traffic and parking and truck servce, while economically difficult, is imaginative as is also the intermixture of office space, retailing and manufacturing in the residential structure . . . a basically new solution to the problem"

GRAND AWARD: Stuart K. Neumann and Donald L. Williams, University of Illinois

General skill of the whole design and the well-balanced study that has gone into the parts, unit plans; every aspect is particularly well presented. Grouping of communities and intermixture with each community of a considerable variety in living types from partment houses to row houses is striking. This variation would not negate total concept of the design and therefore it is a design that could be staged. Its strong statement of clusters of housing with open pace in between has great potential with many significant ideas that could be related to urban situations."

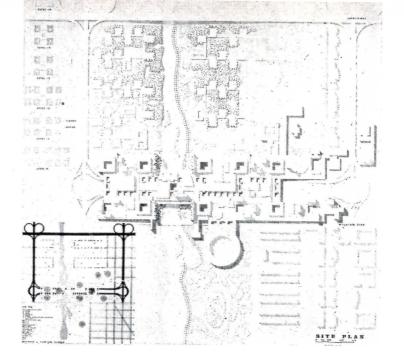

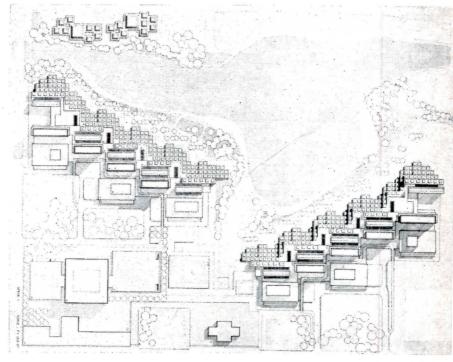

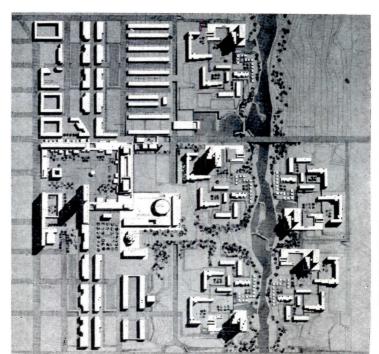

EIGHT CHURCHES CITED IN AWARDS

Eight churches won awards of merit at this year's 22nd National Conference of Church Architecture in Cleveland.

The three-day conference, attended by some 1,500 architects, artists and church men, was jointly sponsored by the Church Architectural Guild of America and the National Council of Churches' Department of Church Building, in cooperation with the Cleveland Chapter, American Institute of Architects, and the Cleveland Area Church Federation. The purpose of the conference was to stimulate creative and practical thinking on the basic relationship of architecture and planning to the needs of the church.

Architectural awards to the eight churches shown on these pages were given on the basis of "success in creating a contemporary religious affirmation."


The jury which selected the eight from 152 exhibits submitted was composed of Rev. Dr. Hugh T. Kerr, professor of Systematic Theology, Princeton University; Dr. Robert Iglehart, chairman, Department of Art, University of Michigan; and Paul Hayden Kirk, F.A.I.A., Seattle.

"For a church building to express 'contemporary religious affirmation'," concluded the jury, "at least three requirements must be met: (1) authentic and meaningful symbolism as to what a church is and what it has to say in and to our culture; (2) functional, economical and imaginative use of material and technical skill; and (3) manifestation of a living tradition in forms that speak in a positive way to us today."

On Symbolism: " . . . There is no answer to what is most authentic or meaningful about religion today . . . The older symbols no longer speak with authority . . . The church building today cannot compete with office skyscraper, factory, or high-rise apartment building . . . Both architect and churchman are confronted with staggering problems of definition which cannot be easily decoded as they cannot be avoided or evaded. . . . In many areas besides religion and the church, the problem of contemporary life is to know how to affirm positively what is most surely believed. Religion and the church partake of our contemporary confusion and tend frequently to add to our perplexity instead of acting as a beacon of light. . . . Here is the assignment for church architect and building committee; here also is their evident responsibility and the possibility of their religious affirmation in the world today."

On Structures and Techniques: "... The jury felt the need for solutions of more intimate scale and relationship to the religious needs of the individuals.... The lack of proper regionalism reflecting climate and orientation was ever evidenced."

On Tradition: "... The life of a tradition is in the spirit of the forms and not in the particular forms of any past period.... The church, the congregation, the region, should each seek its own expression of its faith and purpose and function."

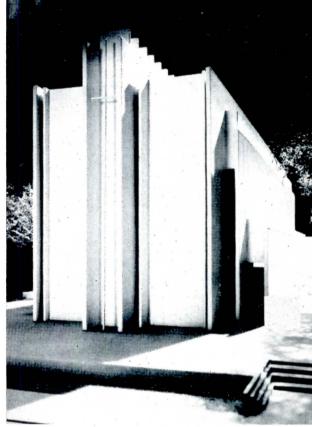

University Reformed Church, Ann Arbor, Michigan Architects: Birkerts and Straub "A simply organized, direct solution to a difficult site problem . . . interesting use of baffled light, good unity of




Westminster Presbyterian Church, Eugene, Oregon Architects: Stewart and Richardson "A fine simplicity of regional materials achieving both dignity and quiet. Excellent use of site . . ."




Community Church, Chesterland, Ohio Architects: Herk Visnapuu and Robert C. Gaede A particularly fine exterior, fitting well into its rural etting, echoing without copying traditional rural forms"




St. Francis Cabrini Roman Catholic Church, New Orleans Architects: Curtis and Davis Inventive roof structure results in interesting interior forms, ighting. An effective integration of spire, roof and altar"

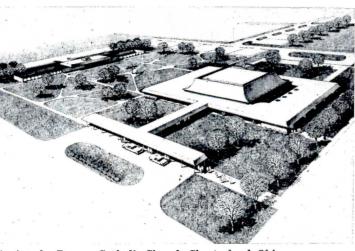


St. Anselm Roman Catholic Church, Chesterland, Ohio Architects: Dalton, Dalton Associates (Quiet, dignified plan echoes certain past forms without archaism . . . clear, simple relationship of parts"

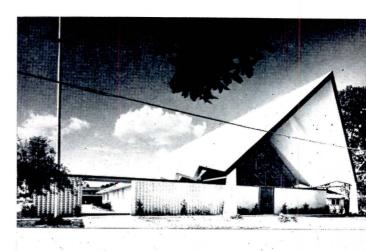

Immaculate Conception Church, Marrero, Louisiana Architect: Curtis and Davis; assoc. architect, Harrison Schouest "A structural expression providing dramatic, functional space . . . quiet, well-integrated chancel and sanctuary . . ."

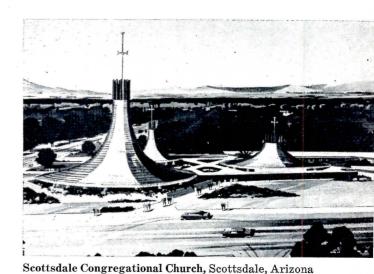

Architect: W. D. Over "An instance of ingenious regional expression which meets the symbolic requirement as well. A pleasant human scale . . ."

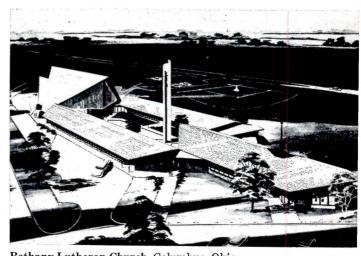

Bethany Lutheran Church, Columbus, Ohio Architects: Wright and Gillfillen "A commendable effort to establish unity among a group of buildings by the use of a continuity of roof form"



out ... permanently leakproof.

FIVE KEY POINTS OF DESIGN SUPERIORITY PRODUCE A SHOWER OF EXCEPTIONAL QUALITY AND PERMANENCE

THE CONTINUANDER

Check the five key values found only in the new *COMMANDER* shower by *Fiat* and you'll find the answer to long-life, good appearance and low maintenance for shower rooms in school, college, club, industry and institution.

Just three factory-fabricated sections (plus headrail) complete the *Commander Cabinet* which erects on the widely used and approved *Fiat PreCast Terrazzo Floor*. Actual tests prove the *Wonderwall Commander* to be many times faster and much easier to erect than any conventional shower. Labor saving drastically reduces total installed cost.

Unlimited design and service requirements are satisfied by three models. Each model available in stainless steel, baked enamel or a combination. For complete information on the Commander write for copy of the new PLAN BOOK, or see Sweet's $\frac{26c}{Fi}$.

COVE CORNER INTERIOR

All four corners have 1" radii with no corner joint, crack or crevice. Can't harbor grime and germs—sanitary—easy to clean.

SANDWICH PANEL

Full inch of expanded polystyrene is permanently bonded between two sheets of rust-proofed metal. Temperat changes, high humidity, boilin water, soaps, alcohol or detergents are daily duties the Commander handles in stride.

STAINLESS
PILASTER CAP
Added service and neat

Added service and neat appearance maintained by factory applied stainless steel cap running the entire length of pilaster.

#5 DEEP TERRAZZO FLOOR


Permanently leakproof and sanitary; high shoulders keep wall joints well above water level. Stainless steel connecting flange and brass drain cast integral.

The rigid, rugged Commander cabinet combines with Flat Dressing Enclosures as single units or in battery arrangements to provide added convenience and privacy. (Enclosures not illustrated.)

MITORY NEEDS...

ALL NEW SANDWICH PANEL, SOUND DEADENED, RIGID WALL SHOWER CABINET ASSURES SATISFACTION & COST-SAVING INSTALLATION



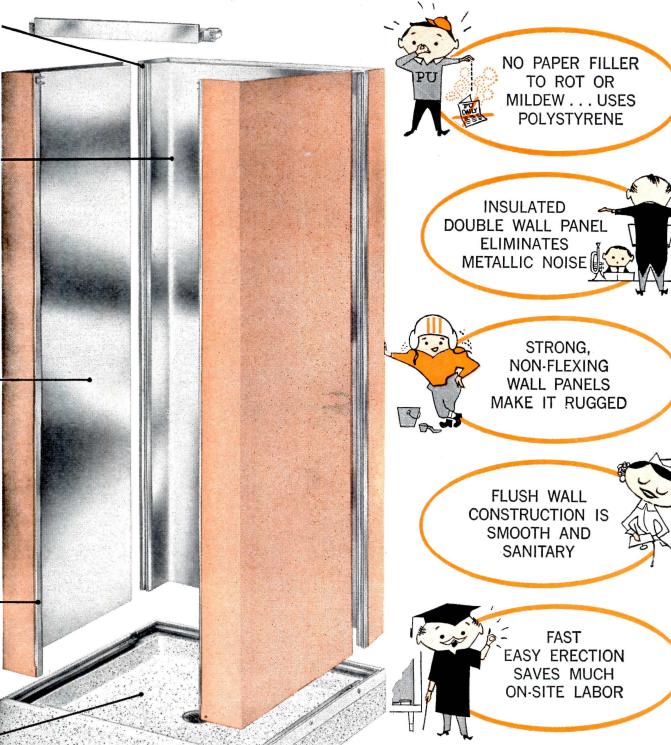

Plainview, Long Island

CHICAGO

Franklin Park, Illinois

LOS ANGELES

City of Industry, Calif.

Albany, George


WHEREVER YOU ARE,




YOU'RE NEVER FAR FROM ONE OF 5 FIAT FACTORIES




Current Trends in Construction

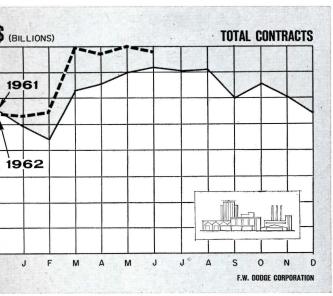

Total contracts include residential, nonresidential, heavy engineering contracts

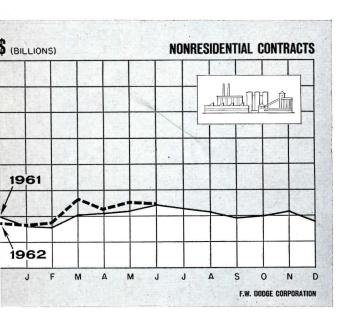

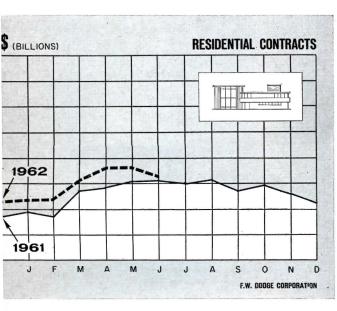

HOSPITALS EXPECTED TO SET NEW RECORD IN 1962

KEEPING UP with our exploding population's need for hospital facilities in the postwar period has been a big undertaking. Since 1945, more than 1600 new hospitals have been added to the nation's stock, and most of the 7800 hospitals then in operation have been enlarged greatly. Much of this building took place in the late Forties when, in an unprecedented spurt of activity, the rate of hospital construction better than quintupled during the first five postwar years. The peak rate set back in 1950 was not reached again until just last year as the second wave of hospital building gathered momentum. With the volume of work contracted for in the first six months of 1962 as a guide, there is every indication that the current year will set a new record by a large margin.

Despite the net addition of over 400,000 beds, as well as a host of diagnostic and treatment facilities, the need for hospital services has kept up with construction in an alarming way. Where in 1946 we had eleven beds for every 1000 persons, today's count shows only ten. This traditional measuring rod is perhaps a bit misleading (for the present, at least) due to the extraordinary growth in the younger segment of our population, where need for hospital services is minimal. Even so, the high birth rates of the Fifties put a severe strain on maternity facilities. By another standard there has been some slight improvement. Compared with 1950, the present proportion of beds to patients is fractionally higher even though the average number of persons hospitalized -currently about 1.5 million on an average day—has climbed steadily. Another important factor, helping to make existing capacity go farther, has been the reduction in the average length of stay at the hospital.

HOSPITAL BUILDING at mid-1962 is almost 20 per cent ahead of last year's record pace. The Western and North Central states are providing most of the current expansion as both these regions topped six-months-1961 contract awards by about 50 per cent The Middle Atlantic states, on the other hand, are lagging behind last year's volume of construction by more than one third.

MANY CONTINUING developments point the way to further expansion of hospital construction in the years ahead. The achieve ments of past years have served well to hold the line against the rapidly expanding need for hospital services. Our increasing numbers and a more intensive use of hospitals made possible by rising real incomes and medical insurance have all but cancelled out the capacity added since the war. Substantial deficiencies con tinue to exist at the present, particularly in the areas of specialized hospitals for mental patients and the chronically ill. Obsolescence is another factor to contend with. It is estimated that no less than 20,000 hospital beds should be replaced each year. The highly predictable growth in the number of persons at advanced ages whose medical needs are twice those of younger persons, will fur ther intensify the per capita demand for hospital facilities. A for the hospitals themselves, the trend toward semi-private car continually requires a greater porportion of floor space per pa tient. To ease the pressure of such inflexible forces will requir continued high levels of hospital construction.

GEORGE A. CHRISTIE, Economis
F. W. Dodge Corporation
A McGraw-Hill Company



add beauty · add comfort · anywhere

The greater beauty of top styling and the greater comfort resulting from peak performance are yours with the exciting new McQuay Lo-Line Seasonmakers, designed to open up new avenues in the use of fan coil systems for year around air conditioning comfort. Offering the architect and engineer more flexibility than ever before for modern building design, these compactly built Lo-Line models (only 14½" high, 12½" deep) fit anywhere—singly, in tandem, or in wall-to-wall installations. Lo-Line Seasonmakers are available in three styles, each in

four sizes—200, 300, 400, and 600 cfm—with tandem installations providing larger capacities. And all three models—the free standing console, the flush wall model, and the basic unit for concealed installations—quietly deliver full rated capacity with the extra high efficiency of McQuay's famous rippled fin coils. Your McQuay representative can tell you more about the quality, dependability, attractive styling, and economy of operation that characterize the Seasonmaker name, or write McQuay, Inc., 1605 Broadway N.E., Minneapolis 13, Minnesota.



MANUFACTURING PLANTS AT FARIBAULT, MINNESOTA • GRENADA, MISSISSIPPI • VISALIA, CALIFORNIA

Construction Cost Indexes

Presented by Clyde Shute, Director of Statistical Policy, Construction News Div., F. W. Dodge Corp., from data compiled by E. H. Boeckh & Assoc. Inc

Labor and Materials: U.S. average 1926-1929=100

NEW YORK

ATLANTA

			APTS., HOTELS,	COMMERC	AL AND	i		APTS., HOTELS	COMMERC	IAL A
	RESIDE	NTIAL	OFFICE BLDGS.	FACTORY	BLDGS.	RESID	ENTIAL	OFFICE BLDGS.	FACTORY	
			Brick	Brick	Brick			Brick	Brick	Bri
			and	and	and		_	and	and	an
PERIOD	Brick	Frame	Concrete	Concrete	Steel	Brick	Frame	Concrete	Concrete	Sto
1935	93.8	91.3	104.7	108.5	105.5	72.3	67.9	84.0	87.1	
1939	123.5	122.4	130.7	133.4	130.1	86.3	83.1	95.1	97.4	
1949	243.7	240.8	242.8	246.6	240.0	189.3	189.9	180.6	180.8	1
1950	256.2	254.5	249.5	251.5	248.0	194.3	196.2	185.4	183.7	1
1951	273.2	271.3	263.7	274.9	271.8	212.8	214.6	204.2	202.8	2
1952	278.2	274.8	271.9	265.2	262.2	218.8	221.0	212.8	210.1	2
1953	281.3	277.2	281.0	286.0	282.0	223.0	224.6	221.3	221.8	2
1954	285.0	278.2	293.0	300.6	295.4	219.6	219.1	233.5	225.2	2
1955	293.1	286.0	300.0	308.3	302.4	225.3	225.1	229.0	231.5	2
1956	310.8	302.2	320.1	328.6	324.5	237.2	235.7	241.7	244.4	2
1957	318.5	308.3	333.1	345.2	339.8	241.2	239.0	248.7	252.1	:
1958	328.0	315.1	348.6	365.4	357.3	243.9	239.8	255.7	261.9	- 2
1959	342.7	329.0	367.7	386.8	374.1	252.2	247.7	266.1	272.7	2
1960	351.6	337.2	377.7	395.8	380.6	259.2	253.3	274.7	282.5	2
1961	362.5	343.0	398.2	422.4	397.0	256.7	249.7	275.8	284.5	
April 1962	369.0	346.8	411.0	437.5	410.0	261.3	254.7	280.0	289.1	
May 1962	369.0	346.8	411.0	437.5	410.0	261.3	254.7	280.0	289.1	
June 1962	370.4	347.4	412.9	440.9	411.2	261.9	255.3	281.1	289.8	:
		9	6 increase over 1	939		% increase over 1939				
June 1962	199.9	183.8	215.9	230.5	216.1	203.5	207.2	195.6	197.5	

ST. LOUIS

SAN FRANCISCO

1935	95.1	90.1	104.1	108.3	105.4	89.5	84.5	96.4	103.7	99.
1939	110.2	107.0	118.7	119.8	119.0	105.6	99.3	117.4	121.9	116.
1949	221.4	220.7	212.8	215.7	213.6	213.0	207.1	214.0	219.8	216.
1950	232.8	230.7	221.9	225.3	222.8	227.0	223.1	222.4	224.5	222.
1951	252.0	248.3	238.5	240.9	239.0	245.2	240.4	239.6	243.1	243.
1952	259.1	253.2	249.7	255.0	249.6	250.2	245.0	245.6	248.7	249.
1953	263.4	256.4	259.0	267.0	259.2	255.2	257.2	256.6	261.0	259.7
1954	266.6	260.2	263.7	273.3	266.2	257.4	249.2	264.1	272.5	267.2
1955	273.3	266.5	272.2	281.3	276.5	268.0	259.0	275.0	284.4	279.
1956	288.7	280.3	287.9	299.2	293.3	279.0	270.0	288.9	298.6	295.
1957	292.0	283.4	295.2	307.1	302.9	286.3	274.4	302.9	315.2	310.
1958	297.0	278.9	304.9	318.4	313.8	289.8	274.9	311.5	326.7	320.
1959	305.4	296.4	315.0	329.8	323.9	299.2	284.4	322.7	338.1	330.
1960	311.4	301.0	322.2	337.2	329.2	305.5	288.9	335.3	352.2	342.
1961	315.1	302.0	329.0	346.8	332.2	308.7	290.2	345.1	362.9	350.2
April 1962	320.8	306.3	338.7	357.7	339.5	313.2	294.2	352.0	369.4	355.
May 1962	323.6	308.9	342.4	361.9	343.3	313.7	294.4	352.7	370.7	356.
June 1962	323.6	308.9	342.4	361.9	343.3	313.7	294.4	352.7	370.7	356.1
- Andrew Constitution		9/	ó increase over 1	939			% i	ncrease over 19	39	
June 1962	193.6	188.7	188.4	202.1	188.5	197.1	196.5	200.4	204.1	205.7

Cost comparisons, as percentage differences, for any particular type of construction, are possible between localities, or periods of time within the same city, by dividing the difference between the two index numbers by one of them; i.e.:

index for city A=110index for city B=95(both indexes must be for the same type of construction). Then: costs in A are approximately 16 per cent higher than in B.

$$\frac{110 - 95}{95} = 0.158$$


Conversely: costs in B are approximately 14 per cent lower than in A.

$$\frac{110 - 95}{110} = 0.136$$

Cost comparisons cannot be made be tween different types of construction because the index numbers for eatype relate to a different U. S. average for 1926-29.


Material prices and wage rat used in the current indexes make allowance for payments in excess published list prices, thus index reflect minimum costs and not necessarily actual costs.


Engineering Excellence stands out...

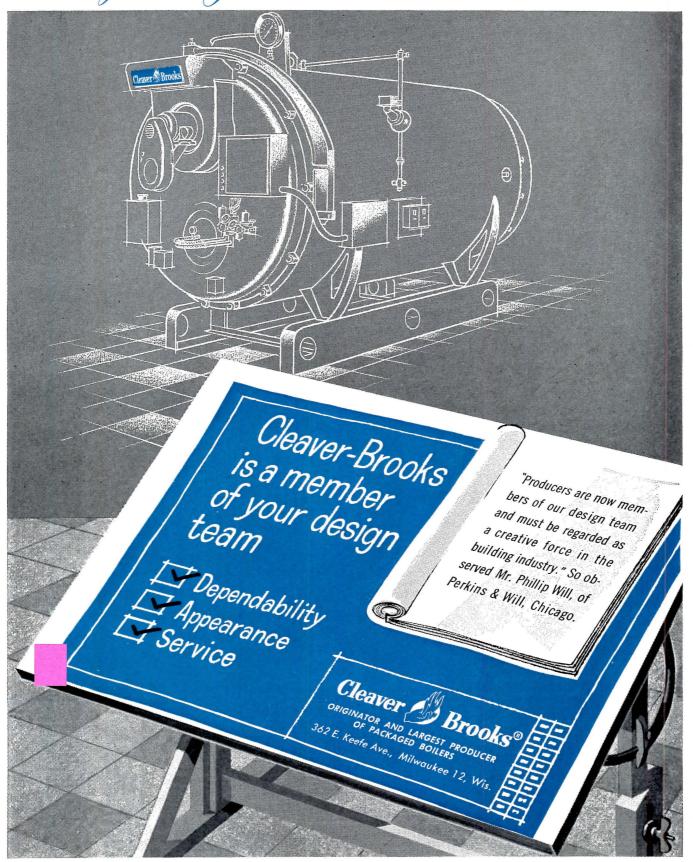


For more data, circle 9 on Inquiry Card

GUARANTEED AIRTIGHT, WATERTIGHT...PERMANENTLY New Twin Dome® Skylight Insulates as it Daylights

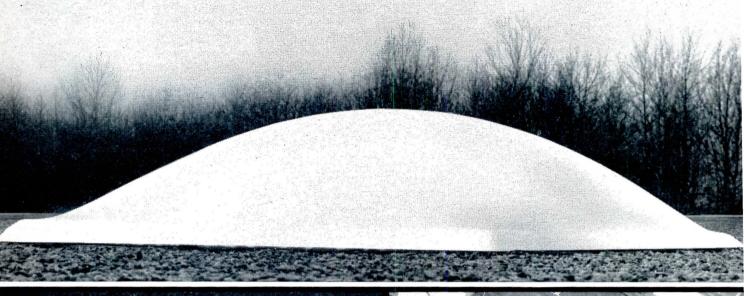

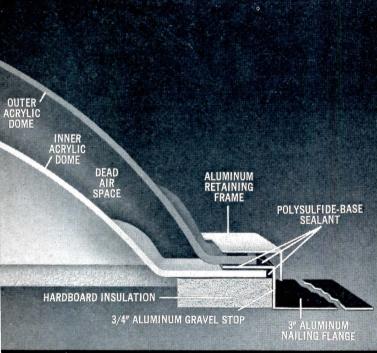

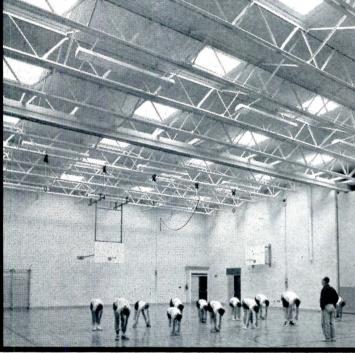

Cutaway Section — New Self-Flashing Wasco Twin Dome


N. Attleboro (Mass.) Jr. H.S.—Arch: Haldeman & Jacoby, Brockton, Mass.

Wasco's field-proven self-flashing Twin Dome acrylic skylights enable the architect to make fuller use of evenly-diffused, glare-free natural daylighting without concern as to heat gain or loss, or condensation.

This first totally-proven dome-within-dome design uses a permanent polysulfide-base sealant to bond an inner and outer acrylic dome to an aluminum nailing flange. The uniform, hermetically sealed 1-inch dead air space between the domes acts as a highly efficient thermal barrier and eliminates condensation. The U-factor remains constant at 0.57 in any geographic area regardless of light level.

A complete range of 19 self-flashing and curb-mounted sizes permits the architect to blend Twin Dome units with any roof design. Choice of clear, white translucent or dense white inner and outer domes allows him to regulate light levels. Twin Dome units are shatterproof, maintenance-free, weather-perfect. The self-flashing model can be installed in 15 minutes. For full details, see Sweet's Architectural File 20a/Wa or write Cyanamid.



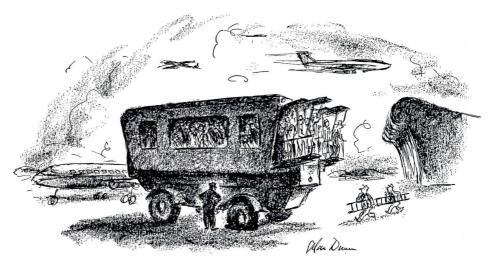

-Drawn for the RECORD by Alan Dunn

ARCHITECTS WANT PENN STATION SAVED, THEIR PICKET LINES HAVE PROVED IT: WHAT DOES PUBLIC INTEREST REQUIRE?

A most remarkable public demonstration of architectural concern over architectural history and its relation to the future of cities occurred in New York during the evening rush hour on August 2, when nearly 200 architects marched in organized picket lines in front of Pennsylvania Station to protest its imminent demolition.

Subway-bound city-dwellers and even the hustling commuters paused to gape at bright red and yellow and blue placards bearing such legends as "Stop Demolition—Save Penn Station"; "Don't Poison Penn"; "Save Your Great Station"; "Ban the Wreckers"; "Save Penn Station"; "Don't Amputate: Renovate"; "Be a Penn Pal"; "Save Face—Keep Penn in Place"; "Preserve Our Heritage"; etc., etc.

The picket lines walked in two long ellipses, and old friends kept meeting and greeting on their rounds, and often falling out for a while to chat; camaraderie joined high purpose, and there was a spirit rather like a Fourth of July combination of dedication and celebration. TV cameras and tape recorders were busy, and two of New York's amiable and noncommittal policemen watched over all.

Not the least remarkable aspect of this unique occasion was the roster of its participants, among them many leaders in the world of modern architecture—architect Philip Johnson, who once so eloquently defined it and now as eloquently creates it; Mrs. Eero Saarinen, one of the most gifted of writers on modern architecture and widow of one of its greatest practitioners; John Johansen of New Canaan; Ulrich Franzen of New York; Arthur Drexler of the Museum of Modern Art; and many others.

The demonstration was organized by the Action Group for Better Architecture in New York ("AGBANY"), an association of younger New York architects recently formed to advance the public purposes of architecture and planning. Not only preservation but prevention, and advocacy as well, are among the ultimate aims of the group, which has made the preservation of Penn Station its first great cause.

To this cause, AGBANY has been able to rally some distinguished support here and abroad. Besides those already named, non-member supporters include critic Lewis Mumford; August Hecksher, White House Special Consultant on the Arts; Chairman Paul Rudolph of Yale's Depart-


ment of Architecture; pioneer modern architect J. J. P. Oud of The Netherlands; and editor Nikolaus Pevsner of the British *Architectural Review*.

For all the distinguished support, and for all the poignant bravura of the demonstration, it seemed possible that AGBANY's first cause would be a lost cause. The hope was for delay, any delay that might permit consideration of "alternatives"—might the Port of New York Authority be persuaded to buy Penn Station?—might the city be persuaded Penn Station should be preserved as the nucleus of a redevelopment area?


But the Pennsylvania Railroad in June had awarded the Turner Construction Company a contract for redevelopment of Penn Station and foundation work for the new Madison Square Garden Center to be built above it; plans for the Center were filed in July by the architect, Charles Luckman Associates; and construction was scheduled to start in early fall.

Only extraordinary political action could save Penn Station now: and only extraordinary evidence of extraordinary public interest could spur such action. What does the *public* interest require?

Special **Jamison** doors meet requirements in modern food processing plant

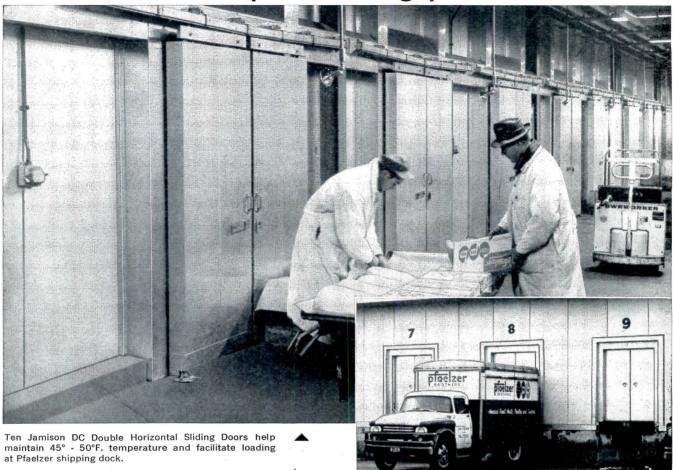

View from outside of shipping dock.

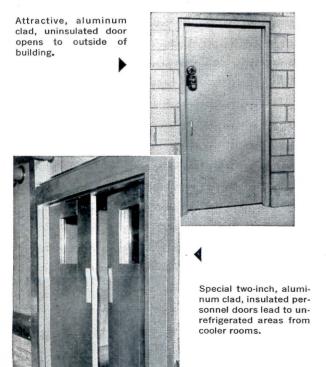

IN PFAELZER BROTHERS new one-story, insulated aluminum panel building in Chicago, Ill., designed by A. Epstein & Sons, Inc., Architects & Engineers, over 60 doors supplied by Jamison are performing a vital service.

From the time product is received until it leaves this new plant, it is constantly refrigerated—and Jamison doors help maintain the precisely controlled temperatures and humidity. This modern plant demonstrates how special Jamison doors can be engineered to meet the unusual requirements of automated mechanized processing. Write today for latest data on Jamison doors to Jamison Cold Storage Door Co., Hagerstown, Md.



For more data, circle 47 on Inquiry Card

For more data, circle 11 on Inquiry Card


think CYBERTRONIC

... and forget costly mechanical maintenance other temperature control systems require.

In the Fischbach and Moore CYBERTRONIC* Temperature Control System only the actuator shaft moves on demand from the thermostat. This advanced concept in controls immediately outdates all other temperature control systems.

The CYBERTRONIC System is a perfect union between quality, solid state devices and simple, dependable circuits.

In this unique new application of modern solid state components, Fischbach and Moore has a CYBERTRONIC Temperature Control System that achieves the reliability, stability and performance you have been looking for.

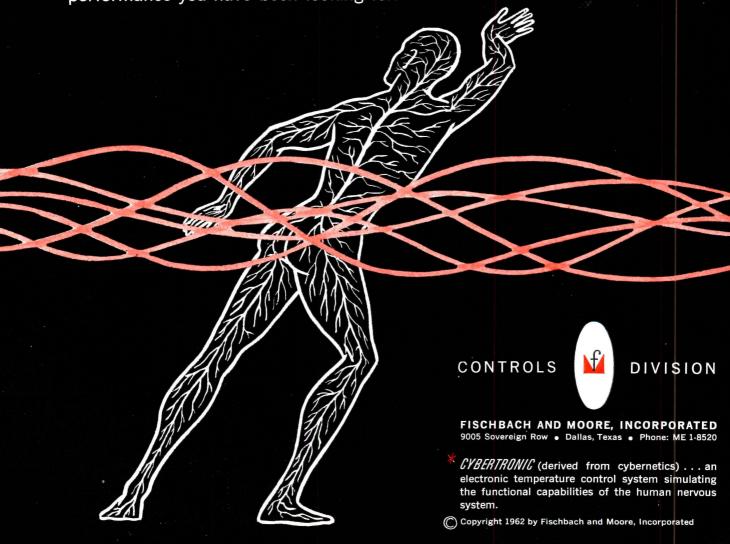

EDUCATIONAL BUILDING CONFERENCE URGES INTERNATIONAL INFORMATION CENTERS

Establishment of an international educational building center and three regional centers was recommended by the International Educational Building Conference held July 25-August 2 in London.

The centers would be focal points for dissemination of technical information and skills needed to implement the world's educational building programs, particularly those of the emerging nations.

The conference was held under the auspices of the United Kingdom National Commission for UNESCO, with advisory and financial assistance from UNESCO. Purpose was to consider how to share among the countries of the world the limited available resources of professional, technical and administrative skill; and to consider also the need for permanent machinery for international collaboration toward the most efficient and economic realization of

educational building programs.

Three architects were on the sixman U.S. delegation headed by John L. Cameron, chief of the School Housing Section of the U.S. Office of Education. Delegates were: Henry L. Wright of Los Angeles, president of the American Institute of Architects; Alonzo J. Harriman of Auburn, Maine, chairman of the Schools and Educational Facilities Committee of the A.I.A.; John A. McLeod, A.I.A. of Washington, D.C.; Carroll W. McGuffey, assistant director of School Plant Administration of the Florida State Department of Education; and Harold B. Gores, president of Educational Facilities Laboratories, Inc., as the representative of the Ford Foundation, which was invited to send an observer.

The conference recommended that UNESCO take the necessary steps, in close consultation with the International Union of Architects, to create machinery "to secure the proj functioning of an international ecational building center."

The regional centers would be up in Bandung, Khartoum and M ico City, and their activities a those of national centers to be estilished later would be coordinated a implemented by the internation center.

A commission studying creation a center to serve Europe and Not America recommended delay until international center was in ope tion, and the conference accepted the recommendation.

U.S. delegates designated a School Housing Section of the U Office of Education as the nation contact in this country with n centers elsewhere until the U.S. I its own national center.

Recommendations of the conf ence will be considered by UNES at its November General Conferen

WORLD CONFERENCE ON SHELL STRUCTURES OPENS SEPTEMBER 30 IN SAN FRANCISCO

Architects and engineers from as many as 50 countries will be gathering this month in San Francisco for the World Conference on Shell Structures, to be held September 30-October 4 at the Sheraton-Palace Hotel.

Architect Oscar Niemeyer of Rio de Janeiro will be entering the U.S. for the first time in many years to speak at the conference. His and four other names were announced last month as additions to an already-impressive roster of speakers.

Additions besides Mr. Niemeyer: O. D. Oniashvili, engineering consultant and theorist on shells, of the Georgian Academy of Sciences at Tblissi, U.S.S.R.; Heinz Hossdorf of Basle, Switzerland, who will describe a radical design for a plastic shell to be built at the Swiss National Exhibition in 1964; Ronald Jenkins of London, member of the engineering

firm for the Sydney Opera House; and Yoshikatsu Tsuboi of the University of Tokyo, to present his analysis for a cylindrical shell structure.

Some 67 speakers altogether are scheduled to present papers at the conference, and their individual and collective eminence is such that it seems certain to become a historic point of reference for later students of shell structures.

The architecture of shells will be the subject of the opening session, "Structure—Form—Architecture," at which Prof. Lawrence Anderson, chairman of the Department of Architecture, Massachusetts Institute of Technology, will preside.

Succeeding sessions will cover Form—Environment—Materials; Construction Methods—Economics; Computers—Numerical Methods— Analogues; Creative Applications (two full sessions); Models—Expermental Studies—Tests; Analysis Examples; and General Theory.

The conference, under the cha manship of Prof. Egor Popov of t University of California, is present by the University of Californ Berkeley; the Building Research A visory Board of the National Aca emy of Sciences-National Resear Council, and the International Ass ciation for Shell Structures, in coo eration with the American Concre Institute, American Institute of A chitects, American Institute of Co sulting Engineers, American Society of Civil Engineers, Associated Go eral Contractors of America, Bui ing Research Institute, Consulti Engineers Council, Prestressed Co crete Institute, Producers' Coun and Structural Engineers Assoc tion of California.

Eliminate Scrap — Reduce Cutting with SQUARE D UNDERFLOOR DUCT!

Exclusive
Modular Design
SIMPLIFIES THE
IOB...TREMENDOUSLY

Actually, we've understated our case — for on jobs involving spans of 21 feet or more (and the vast majority do), there's no cutting and no scrap! Why? Because Square D's Underfloor Duct is furnished in four lengths — 5′, 6′, 10′, and 12′. With combinations of these four, you can meet any footage requirement, from 21′ on up!

Every electrical contractor who has installed an underfloor duct system the old way knows that cutting on the job is a costly timeconsumer. The problem of unavoidable scrap is an equally bothersome headache.

There's a lot of food for thought in the comparison shown below. Look it over and if you'd like the complete story of Square D Underfloor Duct, drop us a line.

Here's a Typical Comparison

THE OLD WAY						THE SQUARE D WAY					
RUNS BETWEEN BOXES		SCRAP PER RUN	NUMBER OF RUNS	CUTS PER FLOOR	PER		CUTS		NUMBER OF	CUTS PER	SCRAP PER FLOOR
27 ft.	2	3′	36	72	108′	27 ft.	0	0	36	0	0
5 ft.	2*	5′	24	48	120′	5 ft.	0*	0	24	0	0
TOTAL CU					r 20%)				ER FLOOP		


*Unbelievable? The clue is in the insert location

write for Underfloor Duct Bulletin Square D Company, Mercer Road, Lexington, Kentucky

SQUARE D COMPANY

wherever electricity is distributed and controlled

For more data, circle 12 on Inquiry Card

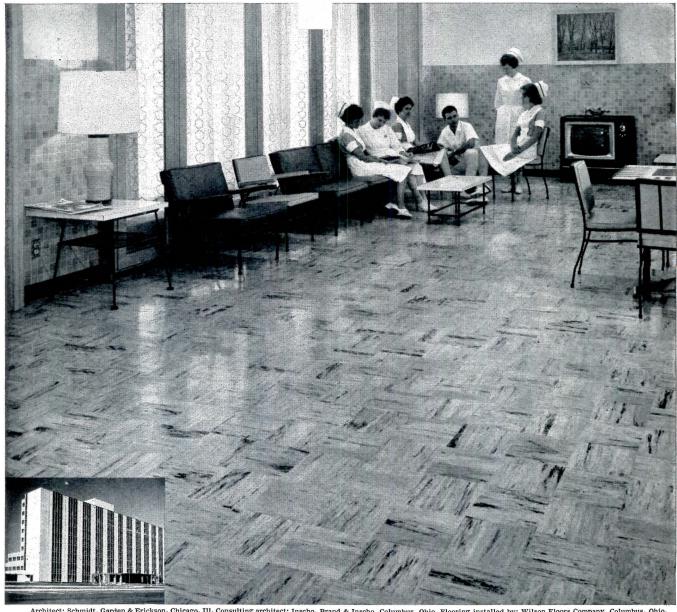

Architect: Schmidt, Garden & Erickson, Chicago, Ill. Consulting architect: Inscho, Brand & Inscho, Columbus, Ohio. Flooring installed by: Wilson Floors Con

Goodyear vinyl floors are paying for themselves in maintenance savings at Riverside Methodist Hospital

More than a year ago this Columbus, Ohio, hospital completed the installation of 130,000 sq. ft. of Goodyear DeLuxe Vinyl Floors.

Today, there's virtually no sign of wear or abrasion. They still gleam brilliantly with minimum care. In fact, the building engineer believes that the Goodyear floors are paying for themselves in maintenance savings.


You can give your clients the same, or even greater, savings with new DeLuxe True Vinyl Flooring. Its solid vinyl quality-and pattern-go all the way through. Its high gloss can be easily maintained by regular polishing with a commercial buffer. It doesn't require waxing. And it's the lowest-priced homogeneous floor on the market.

DeLuxe True Vinyl is available in a range of handsome, new, multiple marbleized colors. In 1/8" gauge for commercial and heavy traffic use and in 1/16" for light traffic areas. Now recommended for on-grade as well as abovegrade. For specifications, see your nearest Goodyear Floors Distributor, or write: Goodyear, Flooring Dept. T-8111, Akron 16, Ohio.



FLOORING PRODUCTS

For more data, circle 13 on Inquiry Card

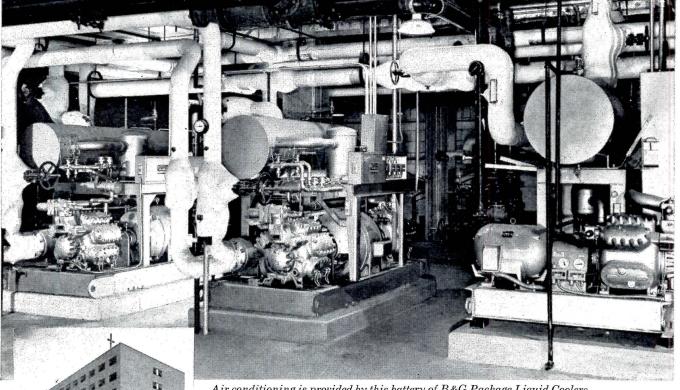

Air conditioning is provided by this battery of B&G Package Liquid Coolers

A complete "Package" of Heating, Cooling and Service Water Supply provided by **B&G** Hydro-Flo equipment



ED



B&G steam-to-water heat exchanger

In the Lutheran General Hospital, Park Ridge, Illinois, the space heating, service water heating and fuel oil preheating are all effected by water heated in B&G Heat Exchangers and circulated by B&G Pumps. For the air conditioning systems, B&G Package Liquid Coolers provide the necessary chilled water.

This installation is an excellent example of the versatility and economy of circulated water for creating controlled comfort conditions within a structure. It exhibits the fundamental reasons for the phenomenal growth of B&G Hydro-Flo mechanically circulated water systems for heating and cooling. Today there is virtually no limit to the height or area of buildings which can be equipped with a B&G Hydro-Flo circulated water system.

The Hydro-Flo System offers unique advantages because of its adaptability to zone control. It can deliver water at any temperature, in any amount, to any zone, at any time and for any size building.

You are invited to send for a copy of "Zone Control with Primary-Secondary Pumping"-a power and fuel saving design method conceived and developed by B&G engineers.



GOSSETT COMPANY

Dept. HG-32, Morton Grove, Illinois

Canadian Licensee: S. A. Armstrong, Ltd., 1400 O'Connor Drive, Toronto 16, Ontario

PUMPS...HEAT EXCHANGERS...AIR CONDITIONING AND PROCESS COOLING EQUIPMENT















Booster Pumps

Package Liquid Coolers Refrigeration Compressors

Centrifugal Pumps


Heat Exchangers

Air Compressors



SHAPES

from the new lighting line by EMERSON-PRYNE

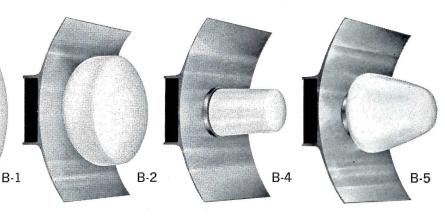

NEW LINE! Over 515 styles, types, fronts and finishes. Everything from recessed to pendants!

NEW IDEAS! Like the beautiful Space Shapes previewed here. Sculptural forms in extruded anodized aluminum. Versatile brackets for wall or ceiling (indoors or out).

NEW CATALOG! Complete specification data. Full-color photos. Everything organized for quick reference.


WIN A CARIBBEAN CRUISE FOR TWO-

ENTER THE BIG EMERSON-PRYNE "SPACE SHAPES" LIGHTING CONTEST.* ALL THE ANSWERS ARE IN THE NEW CATALOG.

*Open only to qualified specifying architects and engineers.

MAIL COUPON NOW!

EMERSON ELECTRIC, 8100 Florissant Ave., St. Louis 36, Mo.	Dept. AR-9
PLEASE RUSH Emerson-Pryne "Space Shapes Preview	" Brochure.
Name	
Firm	-
Street	
CityZone	State







"We'll be selling Marlite to your clients"

Starting October 2, the best home building and remodeling prospects in your city will see dramatic Marlite commercials on America's most popular daytime TV show—NBC's TODAY. Throughout the fall, this powerful campaign will sell Marlite's beauty, durability, and unlimited decorating possibilities to millions of homeowners and businessmen. Nationally advertised Marlite means beautiful maintenance-free interiors, more satisfied customers. It makes good

sense to recommend Marlite plastic-finished paneling for dry wall construction that adds permanent new beauty to any building or remodeling project. Marlite Division of Masonite Corp., Dover, Ohio

plastic-finished paneling

ANOTHER QUALITY PRODUCT OF MASONITE® RESEARCH

MARLITE BRANCH OFFICES AND WAREHOUSES: 204 Permalume Place N.W., Atlanta 18, Georgia • 18 Moulton Street, Cambridge 38, Mass. • 4545 James Place, Melrose Park, Illinois (Chicago) • 8908 Chancellor Row, Dallas 7, Texas • 1657 Powell Street, Emeryville, California (Oakland) • 3050 Leonis Blvd., Los Angeles 58, California • 39 Windsor Avenue, Mineola, L.I. (New York) • 2440 Sixth Avenue So., Seattle 4, Washington

ARCHITECTURAL RECORD

Western Section[®]

including Western Architect and Engineer

WESTERN SECTION EDITOR: Elisabeth Kendall Thompson, A.I.A.

2877 Shasta Road, Berkeley 8, California

Value Analysis: K-I-S-S

"The basic function of a pencil?" queries the instructor.

"To write with," promptly replies the student.

"Not so," says the instructor. "A pencil's *basic function* is to make marks. They can be marks of any kind—writing is one kind of mark. What's a hammer's basic function? To build with? Not necessarily. Its basic function is to hit."

Such back-and-forth is part of a program being used increasingly in some of this country's "frontier" industries—such as nuclear engineering, electronics, missile design and production—as described in a recent issue of the quarterly *Skyline*, published by North American Aviation. This program is called Value Engineering, or Value Analysis, and its goal in industry is to "produce the essential product at the lowest cost."


Applied to engineering production, Value Engineering is a means of "thinking and designing away production and cost troubles before they're manufactured into a product, or of finding a simple way to a desired end. To make the program's aim easier to recall, the letters K-I-S-S are used: "Keep It Simple, Simon." Not a bad adage, in or out of industry.

Applied to architecture, what meaning has Value Engineering? Although something very like value analysis is implicit in the process of design, it is often given the once-over lightly instead of the full treatment it requires if it is to yield the benefits it offers. Value Engineering focuses on the *basic* function first, amplifies it for specifics, and leads into a solution that is suitable, straightforward—and simple.

Today in architecture the same enemies of quality are at work as in these "frontier" industries: Tradition and Time. Tradition because it forms habits of thinking and doing and demands their continuance. Time because it hurries solutions regardless of their value.

Today in architecture, the technological potentials are so many and so varied that here, too, a reminder is needed lest we go over the deep end with techniques and lose the basic concept. "Keep It Simple, Simon" could well read, for architects, "Keep It Suitable, Straightforward, Simple."


E.K.T.

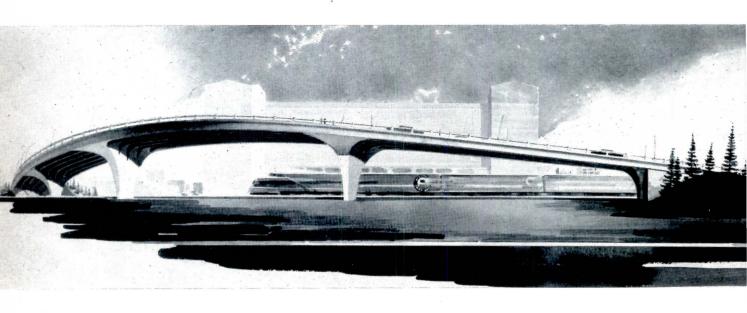


DESIGNED FOR BEAUTY: OVERPASS IN OAKLAND


The graceful sweep of this overpass and the sculptural quality of its design make a clear case for beauty in highway structures. It was designed to be beautiful; in fact, the program required that it be "of outstanding design" as a "stimulus to the early redevelopment of the surrounding industrial area," in addition to providing efficient and safe access—for vehicles and pedestrians—to and from nearby industries. The prestressed concrete girders, exposed beneath the reinforced concrete deck, merge with the four tapered concrete piers to give a strong sculptural feeling to the structure's profile. The curve of the overpass path is effective for its functional purpose but also adds to the over-all grace of the design. The design of light standards and fixtures, both above and below deck, fits into the over-all design and takes into account the curve of the structure. Each span is 165 ft, amply spacious for rail and motor traffic at ground level. On either side of the bridge are landscaped open spaces—actually small parks which form green oases in the blight of the area. Estimated cost is \$830,000.

23rd Street overpass for city of Oakland, California; joint venture of John Carl Warnecke and Associates, architects and planning consultants, and Kaiser Engineers. Lawrence Halprin and Associates, landscape architects; T. Y. Lin and Associates, structural engineers

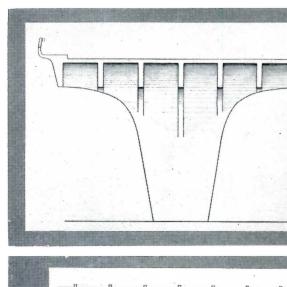

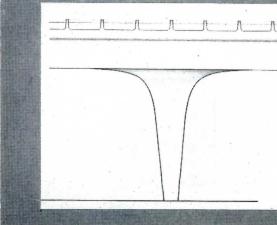


Section and elevation

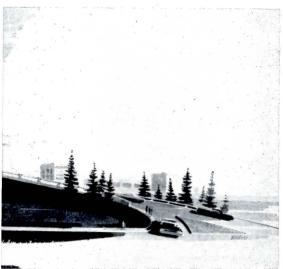


Gabriel Moulin photos

Lights under the deck provide general lighting in vicinity of overpass and accent sculptural effect of structure and grace of its design. All details (lights, railing, etc.) were part of design. Landscaping on each side of structure was part of design contract. Completion date is 1963

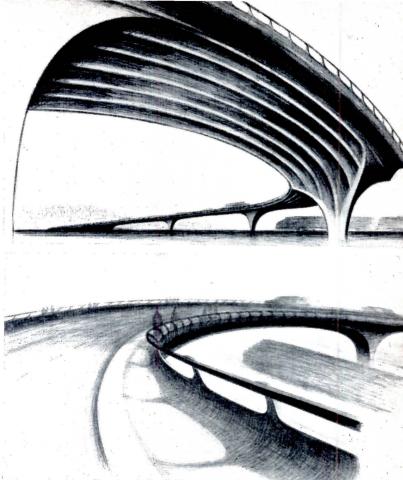

Details of pier and rail

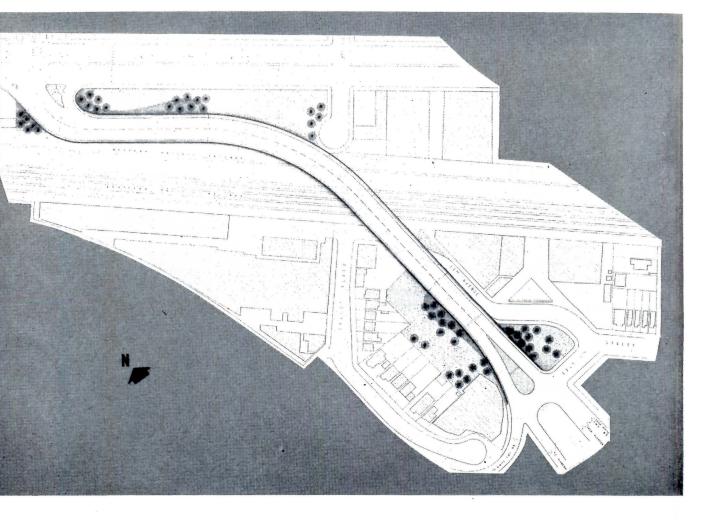



STADIUM DESIGNED AND BUILT IN FOUR MONTHS





design and build a 6,700-seat stadium in four warm, nny months would be an achievement in itself, but to this in winter weather with freezing temperatures and ow, and in the rainy spring months, is a noteworthy hievement. It was possible, the designers say, because uch of the construction used precast elements. All 1,600 these precast members were fabricated and erected ithin a nine-week period. Preliminary designs were bein on December 20; the stadium was occupied on April for the first ball game of the season. The schedule was tight, however, that working drawings were being rned out even while construction was under way. Degn requirements were that the design be simple and raightforward, that there be an unobstructed view from ery seat, and that the structure be fireproof and easily aintained. Precast columns, 12 in. wide, are set at an igle on cast-in-place footings and connected by weld; oan between columns is 20 ft. The prestressed concrete of beam cantilevers 45 ft from the column and varies depth from 4 ft 6 in. at the column to one foot at its iter edge. Precast L-shaped seat slabs fit onto 8-in.-wide, 1-ft-long slotted beams to form the seating. Team rooms re fitted into areas on one side of the main entrance, oncessions on the other.

heney Stadium for Pierce County and the city of Taoma, Washington: Anderson, Birkeland and Anderson Robert Mast, project engineer), designers; E. L. Mills, rehitect for city of Tacoma; Earley Construction Comuny, builders; Concrete Technology Corporation, preressed members






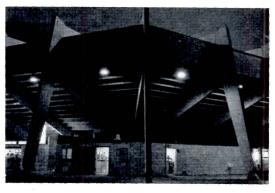

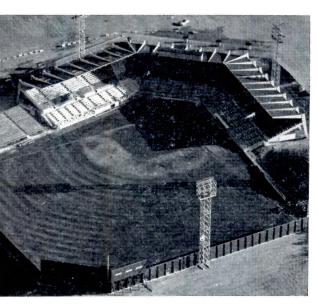



Western Buildings in the News

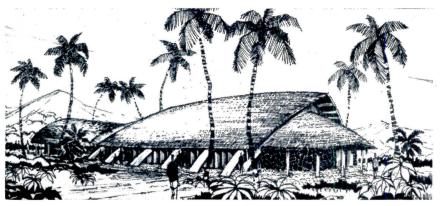


This version of the Samoan "fale" was the scene of the recent important South Pacific Conference held at Pago Pago to discuss problems of health, economics and welfare for the three million inhabitants of the Pacific islands and atolls. The meeting house was completed on schedule in time for the conference, although this had been considered "impossible" by many. Architects for the building were Wimberly, Whisenand, Allison and Tong of Honolulu, architectural consultants to the government of American Samoa. The conference, first held in the Polynesian islands, was the first opportunity for the U.S. to show off results of the rehabilitation program in American Samoa it hopes to complete by 1964









This demountable brick building is the Sermons from Science Building at the Seattle World's Fair. Johnson, Nesland and Sibold were the architects. Filler panels for the walls are of reinforced brick, prefabricated and lifted into place by a vacuum-grip materials handler attached to a mobile crane. The panels are laid up in soldier bond in various sizes, the largest 78 sq ft, the smallest 19.7 sq ft. They are one brick thick and act as exterior and interior walls. For one section of the building, one side was glazed cobalt blue. Panels were cured seven days before moving, and were installed by sliding down between two 6-in. WF columns. Bed joints were shimmed and mortared and a neoprene rubber strip was used for sealing

FALL IS THE TIME FOR CONFERENCES

Western Mountain Region, A.I.A.

Robert F. Hastings of Berkle Mich., O'Neil Ford of San Antoni Robert E. Alexander of Los Angel and Institute President Henry Wright will headline the program the Western Mountain region's a nual conference, to be held this yeat Sun Valley, Idaho, September 2 29. The program's theme is "Arch tecture—Its Influences."

A seminar on "Expanded Practice and one on the new plan for Down town Salt Lake City devised by the local chapter will also be schedule Ashley Carpenter of Salt Lake conference chairman, and Lloyd Snedaker is regional director.

California Council, A.I.A. and California Region

"World Search" is the theme of the program which George Hasslein, hea of the department of architectur engineering at CalPoly, has planne for the 17th annual C.C.A.I.A. co vention at Monterey, Calif., Octob 4-7. The near conjunction of th convention and the World Conferen on Shell Structures offered the o portunity to incorporate some of the latter's speakers in the Californ Council program, enriching it wi such names as Oscar Niemeyer, Fr Otto of Germany, Mario Salvadori Rome and New York, Joseph Alle Stein of New Delhi, India, and Fel Candela of Mexico City. In additio the Producers Council speaker w also be from abroad. He is Sir Hug Casson of London. A panel on E panded Practice will include Per Johanson, Seattle; Donald Lute Springfield, Oregon; James M. Hu ter, Boulder, Colorado; and A. Odell, Charlotte, N.C.

Northwest Region, A.I.A.

Harold Spitznagel of South Dakot Alfred Bendiner of Philadelphia a Philip Johnson of New York are t principal speakers at the Northwe conference at Surftides Reso Oceanlake, Oregon, October 11-14.

Theme of the conference is "T'.
Art of Doing." Robert Wilmsen conference chairman; Robert L. Du ham, regional director.




AMERICAN CEMENT BUILDING: HOME OF RIVERSIDE CEMENT COMPANY, 2404 Wilshire Bivd., Los Angeles 57

IF RIVERSIDE WHITE CEMENT SO LITTLE MORE THAN **OUR OWN BUIL** IG?

Because we couldn't get any, that's why. Our white cement plant wasn't quite finished at the time. Now, however, Riverside White is available to everyone, and we wonder: how would our building have looked in white? (Check the retouched photo above.) How much more would it have cost in white? \$12,000, according

to the contractor—which is only 1/3 of 1% of the total \$3,500,000 GRAY, WHY DIDN'T WE USE IT outlay. Too bad we couldn't wait. Of course we could still paint it white, but that would run just about as much and we'd have to do it all over again every few years. So we think we'll leave it just the way it is. After all, we make a pretty fine gray cement too. .

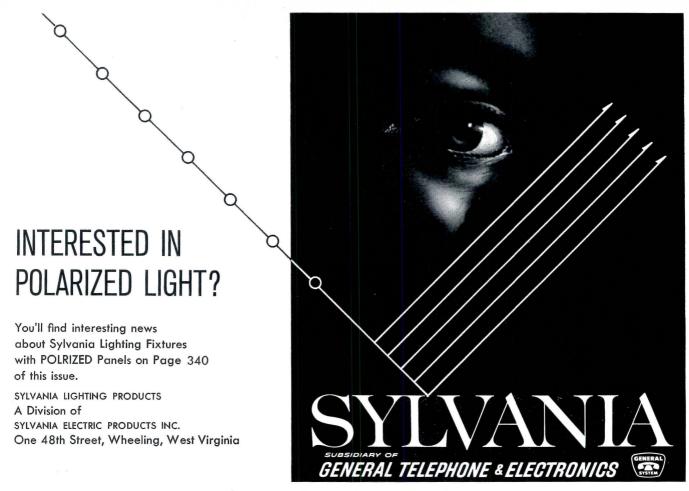

For more data, circle 212 on Inquiry Card



RAIN BIRD ROTOR POP-UPS

Rain Bird Rotor Pop-Ups do a thorough scientific watering job, then quietly disappear—as if by magic—into the ground so they offer no obstruction to the beauty or usability of the turf area. They are unsurpassed for use with automatically or manually controlled underground systems in athletic fields, parks, golf courses, cemeteries, estates and other large turf areas.

Adjustable for local conditions. Also, used successfully on hill slopes. Rubber covered for athletic fields and playgrounds.


SPRINKLERS FOR EVERY IRRIGATION NEED. Rain Bird also makes sprinklers for use on farms, ranches, home lawns and gardens. Sprinkler coverage pattern charts and literature free on request.

Specify RAIN BIRD, your assurance of quality and dependability.



NATIONAL RAIN BIRD SALES & ENGINEERING CORP. 627 N. San Gabriel Ave., Azusa, Calif. Phone EDgewood 4-2931

For more data, circle 210 on Inquiry Card

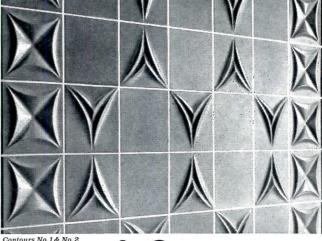

in color and dimensions


...and the most extensive color palette available.




Gladding, McBean's

Gladding, McBean & Co. LOS ANGELES . SAN FRANCISCO SEATTLE . PORTLAND . SPOKANE . PHOENIX . SALT LAKE CITY

For more data, circle 218 on Inquiry Card

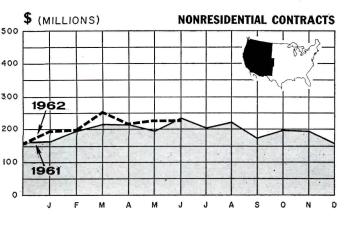

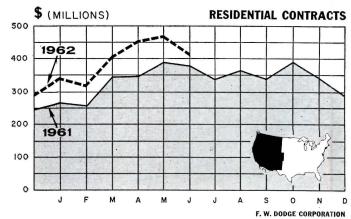

WESTERN CONSTRUCTION TRENDS

(For analysis of construction trends nationwide, see page 18)

After three record-breaking months, the sizzling pace of contract awards in the Western states tapered off in June. Total construction contracts in the eleven states amounted to \$848 million, just about even with the June 1961 value. The cumulative gain over last year skidded back a bit from 10 per cent at the five month mark to 8 per cent ahead for the half-year.

Residential building, which has been providing most of the drive in Western construction since last fall, continued to run ahead of 1961 in June though by a considerably smaller margin than during the previous five months. And this narrow lead in June home building was almost exactly offset by declines in the non-residential and heavy engineering categories.

It is almost certain that the recent work stoppages, tying up most of the building trades in California, adversely affected new contract awards in June. Although another month's data will tell more, it appears that the strikes led to a cutback in Western residential contracts.

Through May, 1962 the monthly gains in the residential category were impressive. Four of these months bettered their 1961 counterparts by 20 per cent or more, while the other was just a shade off that pace. June, by contrast, registered a gain of only 7 per cent. The hardest hit building type in the residential group was apartments which, nationally as well as in the West, had been running a full two-thirds ahead of last year's rate. While elsewhere in the country June apartment contracts chalked up another huge gain, in the Western states they fell back to less than 10 per cent over the previous June total.


In non-residential building, both


commercial and manufacturing contracts fell short of last year's performance for the month. Manufacturing still led 1961 for the six month period, but commercial building has been lagging since February.


Heavy engineering contracts were down from 1961 levels. The biggest decline for the half year was in the utilities, where electric light and power companies showed the only signs of strength. Public works construction (mainly highways, dams, and sewer systems) was little changed from 1961.

With half of 1962 on record, the aggregate value of construction contracts in the Western states amounted to \$4,761,220,000—22.6 per cent of the national total.

GEORGE A. CHRISTIE, Economist F. W. Dodge Corporation A McGraw-Hill Company

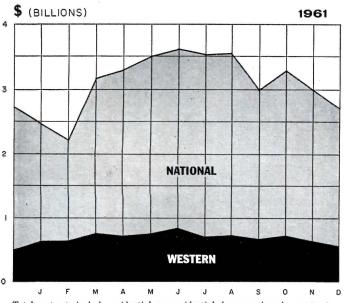



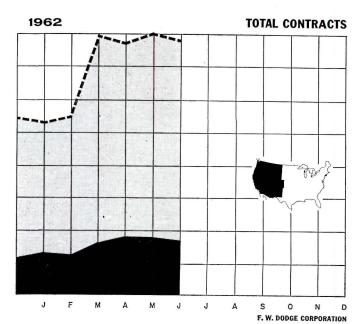

Estimator's Guide: SAN FRANCISCO BAY AREA

The Estimator's Guide alternates monthly among four Western areas. The prices below are compiled from average quotations received by LeRoy Construction Services for commercial work of approximately \$100,000-\$250,000 total value. Except as otherwise noted, prices are for work installed including all labor, material, taxes, overhead and subcontractors' profit. Material prices include local delivery as noted, but no state or local taxes.

EXCAVATION	CONCRETE BLOCKS 4 × 8 × 16"	INSULATION AND WALL BOARD
MACHINE WORK IN COMMON GROUND	6 × 8 × 16" EA .29 8 × 8 × 16" EA .34	FOB Warehouse Per M SF
Large basement	8 x 8 x 16"	FIBER GLASS INSULATION—foil backed 11/2" thick
Trenches	12 x 8 x 16"	21/4" thick
HAND WORK IN COMMON GROUND	AGGREGATE	35/8" full thick 58.00
Large pits & trenchesCY 7.00-11.00	Haydite or Basalite	SOFTBOARDS—wood fiber
Small pits & trimming	All sizes in bulkCY 6.80	3/8" thick
Hard clay or shale, 2 times above rates Shoring, bracing & disposal of water not included		ALUMINUM INSULATION
	DDICK/MODIC AND MARCONING	35# Kraft paper with alum. foil
SEWER PIPE MATERIALS	BRICKWORK AND MASONRY	1 side only
VITRIFIED	COMMON BRICKWORK, reinforced	2 sides
Standard 4"LF .41	8" walls	3%" thick 51.00
Standard 6" LF .71	SELECT COMMON, reinforced	1/2" thick 62.00
Standard 8" LF 1.04 Standard 12" LF 2.23	8" wallsSF 3.05	5%" thick
Standard 12" LF 2.23 Standard 24" LF 8.85	12" walls	HARDBOARDS—wood fiber 1/8" thick, sheathing
CLAY DRAIN PIPE	CONCRETE BLOCK, reinforced 6" wallsSF 1.70	3/16" thick, sheathing 82.00
Standard 6" LF .38 Standard 8" LF .70	8" wallsSF 1.85	1/4" thick, sheathing
Rate for 100 LF FOB Warehouse	12" wallsSF 2.30	1/8" thick, tempered
	BRICK VENEER 4" Select Common	1/4" thick, tempered
CONCRETE & AGGREGATES	4" Roman	CEMENT ASBESTOS BOARD
GRAVEL, all sizesTON 3.75	4" Norman	1/8" flat sheets
TOP SANDTON 4.00		3/16" flat sheets
CONCRETE MIXTON 4.10		/4 1,dl 3116613
CRUSHED ROCK 1/4" to 3/4"	BUILDING PAPERS AND FELTS	ROUGH CARPENTRY
3/4" to 11/2"	BUILDING PAPER	FRAMING
ROOFING GRAVELTON 4.10	1 ply per 1,000-ft roll	Floors
SAND (#1 & 2)TON 5.00	2 ply per 1,000-ft roll	Walls
CEMENT Common, all brands (paper sacks)	Sisalkraft, reinforced, 500-ft roll	Ceilings
Small quantitiesPer Sack 1.40	SHEATHING PAPERS	Furring & blockingBM .3555
Large quantitiesPer BII 4.45	Asphalt sheathing, 15-lb roll	Bolted framing, add 50%
Atlas WhitePer Sack 3.80	Dampcourse, 216-ft roll	SHEATHING 1 x 8" straight
6 sacks in 5-yd loadsPer Yd 15.65	FELT PAPERS	1 x 8" diagonal
CURING COMPOUND	Deadening felt, 3/4-lb, 50-ft roll	5/16" plyscordSF .1924
Clear, 5-gal drumsPer Gal 1.45	1-lb, 50-ft roll	5/8" plywood CCSF .2732
CTEEL MATERIALS	30-lb 216 SF	SIDING 1 x 8" bevel
STEEL MATERIALS	ROOFING PAPERS	1 x 4" V-rustic
SHEETS	Standard grade, smooth surface 432 SF rolls	Bolted framing, add 50%
Hot rolled LB .11 Cold rolled LB .12	Light, 45-lb	
Galvanized	Medium, 55-lb	DAMPPROOFING & WATERPROOFING
GalvanizedLB .12 PLATELB .11	Medium, 55-lb	MEMBRANE
Galvanized LB .12 PLATE LB .11 STRIPS LB .13	Medium, 55-lb	MEMBRANE 1 layer 50-lb feltSQ 9.50
Galvanized LB .12 PLATE LB .11	Medium, 55-lb	MEMBRANE 1 layer 50-lb felt SQ 9.50 4 layers dampcourse SQ 14.50 Hot coat walls SQ 8.50
Galvanized LB .12 PLATE LB .11 STRIPS LB .13 STRUCTURAL SHAPES LB .115 BARS Hot rolled LB .11	Medium, 55-lb	MEMBRANE 1 layer 50-lb felt .SQ 9.50 4 layers dampcourse .SQ 14.50 Hot coat walls .SQ 8.50 Tricosal added to concrete .CY 1.00
Galvanized LB .12 PLATE LB .11 STRIPS LB .13 STRUCTURAL SHAPES LB .115 BARS Hot rolled LB .11 Cold finished LB .15	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50	MEMBRANE 1 layer 50-lb felt SQ 9.50 4 layers dampcourse SQ 14.50 Hot coat walls SQ 8.50
Galvanized LB .12 PLATE LB .11 STRIPS LB .13 STRUCTURAL SHAPES LB .115 BARS LB .11 Hot rolled LB .11 Cold finished LB .15 Reinforcing LB .105	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR	MEMBRANE 1 layer 50-lb felt SQ 9.50 4 layers dampcourse SQ 14.50 Hot coat walls SQ 8.50 Tricosal added to concrete CY 1.00 Anti-Hydro added to concrete CY 1.50
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00	MEMBRANE 1 layer 50-lb felt .SQ 9.50 4 layers dampcourse .SQ 14.50 Hot coat walls .SQ 8.50 Tricosal added to concrete .CY 1.00 Anti-Hydro added to concrete .CY 1.50 ROOFING
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00	MEMBRANE 1 layer 50-lb felt .SQ 9.50 4 layers dampcourse .SQ 14.50 Hot coat walls .SQ 8.50 Tricosal added to concrete .CY 1.00 Anti-Hydro added to concrete .CY 1.50 ROOFING STANDARD TAR & GRAVEL Per Sq
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50	MEMBRANE 1 layer 50-lb felt .SQ 9.50 4 layers dampcourse .SQ 14.50 Hot coat walls .SQ 8.50 Tricosal added to concrete .CY 1.50 Anti-Hydro added to concrete .CY 1.50 ROOFING STANDARD TAR & GRAVEL Per 5q 4 ply .17.00-22.00 5 ply .19.50-25.00
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 57.00- 68.00 Clear, air dried MBM 198.00-231.00 Clear, kiln dried MBM 231.00-264.00	MEMBRANE 1 layer 50-lb felt SQ 9.50 4 layers dampcourse SQ 14.50 Hot coat walls SQ 8.50 Tricosal added to concrete CY 1.00 Anti-Hydro added to concrete CY 1.50 ROOFING STANDARD TAR & GRAVEL Per Sq 4 ply 17.00-22.00 5 ply 19.50-25.00 White gravel finish—Add 2.00-4.00
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50	MEMBRANE 1 layer 50-lb felt .SQ 9.50 4 layers dampcourse .SQ 14.50 Hot coat walls .SQ 8.50 Tricosal added to concrete .CY 1.00 Anti-Hydro added to concrete .CY 1.50 ROOFING STANDARD TAR & GRAVEL Per Sq 4 ply .17.00-22.00 5 ply .19.50-25.00 White gravel finish—Add 2.00-4.00 Asph. compo. shingles .20.00-24.00
Galvanized	Medium, 55-lb 2.50	MEMBRANE 1 layer 50-lb felt SQ 9.50 4 layers dampcourse SQ 14.50 Hot coat walls SQ 8.50 Tricosal added to concrete CY 1.00 Anti-Hydro added to concrete CY 1.50 ROOFING STANDARD TAR & GRAVEL Per Sq 4 ply 17.00-22.00 5 ply 19.50-25.00 White gravel finish—Add 2.00-4.00 Asph. compo. shingles 20.00-24.00 Cedar shingles 24.00-28.00 Cedar shakes 32.00-38.00
Galvanized	Medium, 55-lb 2.50	MEMBRANE 1 layer 50-lb felt .SQ 9.50 4 layers dampcourse .SQ 14.50 Hot coat walls .SQ 8.50 Tricosal added to concrete .CY 1.00 Anti-Hydro added to concrete .CY 1.50 ROOFING STANDARD TAR & GRAVEL Per Sq 4 ply .17.00-22.00 5 ply .19.50-25.00 White gravel finish—Add 2.00- 4.00 Asph. compo. shingles .20.00-24.00 Cedar shingles .24.00-28.00 Ceder shakes .32.00-38.00 Concrete tiles .36.00-48.00
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 57.00- 82.00 Clear, air dried MBM 198.00-231.00 Clear, kiln dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 230.00-270.00	MEMBRANE 1 layer 50-lb felt .SQ 9.50 4 layers dampcourse .SQ 14.50 Hot coat walls .SQ 8.50 Tricosal added to concrete .CY 1.00 Anti-Hydro added to concrete .CY 1.50 ROOFING STANDARD TAR & GRAVEL Per Sq 4 ply .17.00-22.00 5 ply .19.50-25.00 White gravel finish—Add 2.00-4.00 Asph. compo. shingles .20.00-24.00 Cedar shingles .24.00-28.00 Cedar shakes .32.00-38.00
Galvanized	Medium, 55-lb 2.50	MEMBRANE 1 layer 50-lb felt .SQ 9.50 4 layers dampcourse .SQ 14.50 Hot coat walls .SQ 8.50 Tricosal added to concrete .CY 1.00 Anti-Hydro added to concrete .CY 1.50 ROOFING STANDARD TAR & GRAVEL Per 5q 4 ply .17.00-22.00 5 ply .19.50-25.00 White gravel finish—Add .200- 4.00 Asph. compo. shingles .20.00-24.00 Cedar shingles .24.00-28.00 Cedar shakes .32.00-38.00 Concrete tiles .36.00-48.00 Clay tiles .42.00-52.00
Galvanized	Medium, 55-lb 2.50	MEMBRANE 1 layer 50-lb felt SQ 9.50 4 layers dampcourse SQ 14.50 Hot coat walls SQ 8.50 Tricosal added to concrete CY 1.00 Anti-Hydro added to concrete CY 1.50 ROOFING Per Sq STANDARD TAR & GRAVEL Per Sq 4 ply 17.00-22.00 5 ply 19.50-25.00 White gravel finish—Add 2.00-4.00 Asph. compo. shingles 20.00-24.00 Cedar shingles 24.00-28.00 Cedar shakes 32.00-38.00 Concrete tiles 36.00-48.00 Clay tiles 42.00-52.00 SHEET METAL
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 75.00- 82.00 Clear, air dried MBM 198.00-231.00 Clear, air dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 1/4" AB MSF 90.00 1/4" Ext. waterproof MSF 77.00 1/4" Ext. waterproof MSF 77.00	MEMBRANE 1 layer 50-lb felt SQ 9.50 4 layers dampcourse SQ 14.50 Hot coat walls SQ 8.50 Tricosal added to concrete CY 1.00 Anti-Hydro added to concrete CY 1.50 ROOFING STANDARD TAR & GRAVEL Per Sq 4 ply 17.00-22.00 5 ply 19.50-25.00 White gravel finish—Add 2.00-4.00 Asph. compo. shingles 20.00-24.00 Cedar shingles 24.00-28.00 Cedar shakes 32.00-38.00 Concrete tiles 36.00-48.00 Clay tiles 42.00-52.00 SHEET METAL ROOF FLASHINGS
Galvanized LB .12 PLATE LB .11 STRIPS LB .13 STRUCTURAL SHAPES LB .115 BARS Hot rolled LB .11 Cold finished LB .15 Reinforcing LB .105 REINFORCING MESH 6 × 6" #10 × #10 SF .04 6 × 6" #6 × #6 SF .07 2000# FOB Warehouse STRUCTURAL STEEL \$340.00 and up per ton erected when out of mill. \$370.00 and up per ton erected when out of stock. BRICK AND TILE ALL Prices—FOB Plant COMMON BRICK Common 2½ x 3¾ x 81¼" M 55.00 Select ½ x 3¾ x 81¼" M 55.00	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00-98.00 Utility 2x4-2x10 MBM 75.00-88.00 Economy 2x4-2x10 MBM 57.00-68.00 Clear, air dried MBM 198.00-231.00 Clear, air dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 1/4" AB MSF 90.00 1/4" Ext. waterproof MSF 77.00 1/4" Ext. waterproof MSF 77.00 1/4" AB MSF 105.00	MEMBRANE 1 layer 50-lb felt .SQ 9.50 4 layers dampcourse .SQ 14.50 Hot coat walls .SQ 8.50 Tricosal added to concrete .CY 1.00 Anti-Hydro added to concrete .CY 1.50 ROOFING STANDARD TAR & GRAVEL Per Sq 4 ply .17.00-22.00 5 ply .19.50-25.00 White gravel finish—Add 2.00 - 4.00 Asph. compo. shingles .20.00-24.00 Cedar shingles .24.00-28.00 Concrete tiles .36.00-48.00 Clay tiles .42.00-52.00 SHEET METAL ROOF FLASHINGS 18 ga galv steel .SF .70-1.10
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 75.00- 82.00 Clear, air dried MBM 198.00-231.00 Clear, kiln dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 14" AB MSF 90.00 14" Ext. waterproof MSF 77.00 36" AB MSF 77.00 36" AB MSF 95.00 36" AD MSF 95.00 36	MEMBRANE 1 layer 50-lb felt .SQ 9.50
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00-98.00 Utility 2x4-2x10 MBM 75.00-88.00 Economy 2x4-2x10 MBM 57.00-68.00 Clear, air dried MBM 198.00-231.00 Clear, air dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 1/4" AB MSF 90.00 1/4" Ext. waterproof MSF 77.00 1/4" Ext. waterproof MSF 77.00 1/4" AB MSF 105.00	MEMBRANE 1 layer 50-lb felt
Galvanized LB 12 PLATE LB .11 STRIPS LB .13 STRUCTURAL SHAPES LB .115 BARS LB .115 Cold finished LB .15 Reinforcing LB .105 REINFORCING MESH 6 x 6" #10 x #10 SF .04 6 x 6" #6 x #6 SF .07 2000# FOB Warehouse STRUCTURAL STEEL \$340.00 and up per ton erected when out of mill. \$370.00 and up per ton erected when out of stock. BRICK AND TILE ALL Prices—FOB Plant COMMON BRICK Common 2½ x 3¾ x 8½" M 55.00 Select 2½ x 3¾ x 8½" M 62.00 Clinker 2½ x 3¾ x 8½" M 62.00 Clinker 2½ x 3¾ x 8½" M 60.00 Jumbo 3½ x 3 x 11½" M 95.00 FACE BRICK Standard M 75.00 85.00	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 57.00- 84.00 Clear, air dried MBM 198.00-231.00 Clear, kiln dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD DOUGLAS FIR MSF 14" AB MSF 90.00 14" AB MSF 77.00 36" AB MSF 77.00 36" AB MSF 75.00 36" CD MSF 70.00 12" AB MSF 70.00 12	MEMBRANE 1 layer 50-lb felt
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 75.00- 82.00 Clear, air dried MBM 198.00-231.00 Clear, kiln dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 230.00-270.00 Clear Heart MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 14" AB MSF 90.00 14" Ext. waterproof MSF 77.00 36" AB MSF 70.00 36" AD MSF 70.00 36" AD MSF 70.00 36" CD MSF 95.00 36" AD MSF 70.00 32" AD MSF 100.00 32" AD MSF 100.00 32" AD MSF 120.00 32" CD MSF 120.00 35" CD MSF 120.00 35" CD MSF 120.00 36" CD MSF 120.00 36" CD MSF 120.00 36" CD MSF 120.00 35" CD MSF 120.00 36" CD MSF 91.00 36" CD	MEMBRANE 1 layer 50-lb felt .SQ 9.50 4 layers dampcourse .SQ 14.50 Hot coat walls .SQ 8.50 Tricosal added to concrete .CY 1.00 Anti-Hydro added to concrete .CY 1.50 ROOFING STANDARD TAR & GRAVEL Per Sq 4 ply .17.00-22.00 5 ply .19.50-25.00 White gravel finish—Add 2.00-4.00 Asph. compo. shingles .20.00-24.00 Cedar shingles .24.00-28.00 Codar shakes .32.00-38.00 Clay tiles .42.00-52.00 SHEET METAL ROOF FLASHINGS 18 ga galv steel .SF .60-1.00 22 ga galv steel .SF .60-1.00 22 ga aluminum .SF .10-1.60 22 ga aluminum .SF .10-1.60 22 ga aluminum .SF .70-1.12 24 oz copper .SF .200-2.50
Galvanized LB 12 PLATE LB .11 STRIPS LB .13 STRUCTURAL SHAPES LB .115 BARS Hot rolled LB .11 Cold finished LB .15 Reinforcing LB .105 REINFORCING MESH 6 x 6" #10 x #10 SF .04 6 x 6" #6 x #6 SF .07 2000# FOB Warehouse STRUCTURAL STEEL \$340.00 and up per ton erected when out of mill. \$370.00 and up per ton erected when out of stock. BRICK AND TILE ALL Prices—FOB Plant COMMON BRICK Common 2½ x 3¾ x 8½" M 55.00 Select 2½ x 3¾ x 8½" M 62.00 Clinker 2½ x 3¾ x 8½" M 60.00 Jumbo 3½ x 3 x 11½" M 95.00 FACE BRICK Standard M 75.00 85.00	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 57.00- 84.00 Clear, air dried MBM 198.00-231.00 Clear, kiln dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD DOUGLAS FIR MSF 14" AB MSF 90.00 14" AB MSF 77.00 36" AB MSF 77.00 36" AB MSF 75.00 36" CD MSF 70.00 12" AB MSF 70.00 12	MEMBRANE 1 layer 50-lb felt .SQ 9.56 4 layers dampcourse .SQ 14.50 Hot coat walls .SQ 8.50 Tricosal added to concrete .CY 1.00 Anti-Hydro added to concrete .CY 1.50 ROOFING
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 75.00- 82.00 Clear, air dried MBM 198.00-231.00 Clear, kiln dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 230.00-270.00 Clear Heart MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 14" AB MSF 90.00 14" Ext. waterproof MSF 77.00 36" AB MSF 70.00 36" AD MSF 70.00 36" AD	MEMBRANE 1 layer 50-lb felt
Galvanized LB 12 PLATE LB .11 STRIPS LB .13 STRUCTURAL SHAPES LB .115 BARS Hot rolled LB .11 Cold finished LB .15 Reinforcing LB .105 REINFORCING MESH 6 × 6" #10 × #10 SF .04 6 × 6" #6 × #6 SF .07 2000# FOB Warehouse STRUCTURAL STEEL \$340.00 and up per ton erected when out of mill. \$370.00 and up per ton erected when out of stock. BRICK AND TILE ALL Prices—FOB Plant COMMON BRICK Common 2½ × 3¾ × 8½" M 55.00 Select 2½ × 3¾ × 8½" M 62.00 Clinker 2½ × 3¾ × 8½" M 60.00 Jumbo 3½ × 3 × 11½" M 95.00 FACE BRICK Standard M 75.00-85.00 Jumbo M 120.00-140.00 Norman M 100.00-120.00 Norman M 100.00-120.00 BUILLDING TILE 8 × 5½ × 12" M 180.00	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00-98.00 Utility 2x4-2x10 MBM 57.00-68.00 Economy 2x4-2x10 MBM 57.00-68.00 Clear, air dried MBM 198.00-231.00 Clear, air dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 70.00 1/4" AB MSF 90.00 1/4" Ext. waterproof MSF 77.00 3/6" AB MSF 105.00 3/6" AB MSF 105.00 3/6" AB MSF 105.00 1/2" AB MSF 105.00 1/	MEMBRANE 1 layer 50-lb felt
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 57.00- 68.00 Clear, air dried MBM 198.00-231.00 Clear, kiln dried MBM 198.00-231.00 Clear, kiln dried MBM 120.00-130.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 PLYWOOD DOUGLAS FIR MSF 70.00 14" AB MSF 70.00 14" AB MSF 70.00 14" AB MSF 70.00 15" AB MSF 70.00 16" AB MSF 70.00 16" AB MSF 70.00 16" AB MSF 105.00 16" AB MSF 136.00 16" AB	MEMBRANE 1 layer 50-lb felt
Galvanized LB 12 PLATE LB .11 STRIPS LB .13 STRUCTURAL SHAPES LB .115 BARS Hot rolled LB .11 Cold finished LB .15 Reinforcing LB .105 REINFORCING MESH 6 × 6" #10 × #10 SF .04 6 × 6" #6 × #6 SF .07 2000# FOB Warehouse STRUCTURAL STEEL \$340.00 and up per ton erected when out of mill. \$370.00 and up per ton erected when out of stock. BRICK AND TILE ALL Prices—FOB Plant COMMON BRICK Common 2½ × 3¾ × 8½" M 55.00 Select 2½ × 3¾ × 8½" M 62.00 Clinker 2½ × 3¾ × 8½" M 60.00 Jumbo 3½ × 3 × 1½" M 95.00 FACE BRICK Standard M 75.00-85.00 Jumbo M 120.00-140.00 Roman M 100.00-120.00 Roman M 100.00-120.00 BUILLDING TILE 8 × 5½ × 12" M 180.00 6 × 5½ × 12" M 140.00 HOLLOW TILE 12 × 12 × 3"	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00-98.00 Utility 2x4-2x10 MBM 57.00-68.00 Economy 2x4-2x10 MBM 57.00-68.00 Clear, air dried MBM 198.00-231.00 Clear, air dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 70.00 1/4" AB MSF 90.00 1/4" Ext. waterproof MSF 77.00 3/6" AB MSF 105.00 3/6" AB MSF 105.00 3/6" AB MSF 105.00 1/2" AB MSF 105.00 1/	MEMBRANE 1 layer 50-lb felt
Galvanized LB 12 PLATE LB .11 STRIPS LB .13 STRUCTURAL SHAPES LB .115 BARS Hot rolled LB .11 Cold finished LB .15 Reinforcing LB .105 REINFORCING MESH 6 × 6" #10 × #10 SF .04 6 × 6" #6 × #6 SF .07 2000# FOB Warehouse STRUCTURAL STEEL \$340.00 and up per ton erected when out of mill. \$370.00 and up per ton erected when out of stock. BRICK AND TILE ALL Prices—FOB Plant COMMON BRICK Common 2½ × 3¾ × 8¼" M 55.00 Select 2½ x 3¾ x 8¼" M 62.00 Clinker 2½ x 3¾ x 8¼" M 60.00 Jumbo 3½ x 3 x 11½" M 95.00 FACE BRICK Standard M 75.00-85.00 Jumbo M 120.00-140.00 Roman M 100.00-120.00 Roman M 100.00-120.00 BUILLDING TILE 8 × 5½ x 12" M 180.00 6 × 5½ x 12" M 180.00 HOLLOW TILE 12 x 12 x 3"	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 57.00- 82.00 Clear, air dried MBM 198.00-231.00 Clear, kiln dried MBM 198.00-231.00 Clear, kiln dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 PLYWOOD DOUGLAS FIR MSF 70.00 14" AB MSF 70.00 14" AB MSF 77.00 36" AB MSF 77.00 36" AB MSF 70.00 36" AB MSF 70.00 36" AB MSF 105.00 36" CD MSF 70.00 36" AB MSF 105.00 36" AB MSF 105.00 36" AB MSF 105.00 36" AB MSF 105.00 36" AB MSF 136.00 36" AB MSF 136.00	MEMBRANE 1 layer 50-lb felt
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00- 98.00 Utility 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 75.00- 82.00 Economy 2x4-2x10 MBM 75.00- 82.00 Clear, air dried MBM 198.00-231.00 Clear, air dried MBM 198.00-231.00 Clear, kiln dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 14" AB MSF 90.00 14" Ext. waterproof MSF 77.00 36" AB MSF 70.00 36" AB MSF 70.00 36" AB MSF 70.00 36" CD MSF 70.00 36" CD MSF 100.00 36" CD MSF 100.00 36" CD MSF 136.00 36" AB MSF 156.00 36" AB MSF 136.00 36" CD MSF 136.00 36" C	MEMBRANE 1 layer 50-lb felt .SQ 9.55
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00-98.00 Utility 2x4-2x10 MBM 57.00-68.00 Economy 2x4-2x10 MBM 57.00-68.00 Clear, air dried MBM 198.00-231.00 Clear, air dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-130.00 A Grade MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 1/4" AB MSF 90.00 1/4" Ext. waterproof MSF 77.00 3/6" AB MSF 105.00 3/4" AB MSF 135.00 3/4" AB MSF 135.00 3/4" AD MSF 107.00 Cedar #1 Square 17.00-17.00 Cedar #2 Square 14.00-17.00	MEMBRANE 1 layer 50-lb felt
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00-98.00 Utility 2x4-2x10 MBM 75.00-88.00 Economy 2x4-2x10 MBM 57.00-68.00 Clear, air dried MBM 198.00-231.00 Clear, air dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 PLYWOOD (DOUGLAS FIR) MSF 1/4" AB MSF 90.00 1/4" Ext. waterproof MSF 77.00 3/6" AB MSF 105.00 3/6" AB MSF 136.00 3/6" AB MSF 136.00 3/6" AB MSF 135.00 3/6" AB MSF 135.00 3/6" AB MSF 135.00 3/4" AB MSF 135.00 S/6" Plyform MSF 17.00 SHAKES Square 14.00-17.00 SHAKES Square 17.00-19.00 SHAKES Square 17.00-19.00	MEMBRANE 1 layer 50-lb felt
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00-98.00 Utility 2x4-2x10 MBM 57.00-68.00 Economy 2x4-2x10 MBM 57.00-68.00 Clear, air dried MBM 198.00-231.00 Clear, air dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 70.00 1/4" AB MSF 90.00 1/4" Ext. waterproof MSF 77.00 3/6" AB MSF 105.00 3/6" AB MSF 136.00 3/6" AB MSF 136.00 3/6" AB MSF 135.00 3/4" AB MSF 100.01 Cedar #2 Square 14.00-17.00 SHAKES Cedar 1/2" to 3/4" butt Square 19.00-22.00	MEMBRANE 1 layer 50-lb felt SQ 9.50
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 75.00-82.00 Economy 2x4-2x10 MBM 75.00-82.00 Economy 2x4-2x10 MBM 57.00-68.00 Clear, air dried MBM 198.00-231.00 Clear, air dried MBM 198.00-231.00 Clear, kiln dried MBM 198.00-231.00 Clear, kiln dried MBM 120.00-130.00 A Grade MBM 120.00-130.00 A Grade MBM 120.00-130.00 A Grade MBM 120.00-770.00 Clear Heart MBM 120.00-770.00 Clear Heart MBM 260.00-290.00 PLYWOOD DOUGLAS FIR MSF 70.00 1/4" AB MSF 70.00 1/4" AB MSF 70.00 1/4" AB MSF 70.00 1/2" AB MSF 70.00 1/2" AB MSF 105.00 1/2" AB MSF 136.00 1/2" AB MSF	MEMBRANE 1 layer 50-lb felt
Galvanized	Medium, 55-lb 2.50 Heavy, 65-lb 2.90 Mineral surfaced 3.50 LUMBER DOUGLAS FIR Construction 2x4-2x10 MBM 96.00-104.00 Standard 2x4-2x10 MBM 93.00-98.00 Utility 2x4-2x10 MBM 57.00-68.00 Economy 2x4-2x10 MBM 57.00-68.00 Clear, air dried MBM 198.00-231.00 Clear, air dried MBM 231.00-264.00 REDWOOD Foundation grade MBM 140.00-150.00 Construction Heart MBM 120.00-130.00 A Grade MBM 230.00-270.00 Clear Heart MBM 260.00-290.00 PLYWOOD (DOUGLAS FIR) MSF 70.00 1/4" AB MSF 90.00 1/4" Ext. waterproof MSF 77.00 3/6" AB MSF 105.00 3/6" AB MSF 136.00 3/6" AB MSF 136.00 3/6" AB MSF 135.00 3/4" AB MSF 100.01 Cedar #2 Square 14.00-17.00 SHAKES Cedar 1/2" to 3/4" butt Square 19.00-22.00	MEMBRANE 1 layer 50-lb felt SQ 9.50

MILLWORK	LATH & PLASTER MATERIALS	GLASS & GLAZING
All Prices FOB Mill	METAL LATH	SSB Clear
D.F., clear, air dried S4SMBM 220.00-250.00	Diamond 3.4# copper-bearing	DSB Clear
D.F., kiln dried S4SMBM 225.00-275.00 DOOR FRAMES & TRIM	Ribbed 3.4# copper-bearingSY .62	Crystal
Residential entrance17.00 & up	3/8" thickSY .36	1/8" Obscure
Interior room entrance 9.00 & up	METAL 3/4" Standard channelLF .047	1/8" Heat absorbing 1/4" Tempered plate
13/8" hollow core 8.00 & up	1½" Standard channelLF .065	1/2" Tempered plate
134" solid core	31/4" Steel studs	1/4" Wire plate, clear 1/4" Wire plate, rough
13/4" Birch solid core	Stud shoesEA .03	74 Wire plate, rough
WOOD SASH	PLASTER	PAINT MATERIALS
D/H in pairs (2 lts)	Browning, hardwallSack 1.58 Finish, hardwallSack 1.75	All prices FOB
WOOD CABINETS	StuccoSack 2.50	Thinners 5-100 gal
3¼" D.F. plywood with 1¼" plywood backs: Wall hungLF 10.00-15.00	LATH & PLASTER WORK	Turpentine 5-100 gal Linseed oil, raw
Counter12.00-17.00	CHANNEL FURRING	Linseed oil, boiled
EXTERIOR TRIM Fascia and moldsBM .4855	Suspended ceilingsSY 2.80-3.05	Primer-sealer Enamel undercoaters
Birch or maple, add 25%	Walls	Enamel
EINICH CARRENTRY	31/4" studsSY 3.00-3.35	White lead in oil Red lead in oil
FINISH CARPENTRY	4" studs	Litherage
ENTRANCE DOORS & FRAMES Single 60.00 & up	3.4# METAL LATH & PLASTER	
Double100.00 & up	Ceilings	PAINTING
INTERIOR DOORS & FRAMES Singles36.00 & up	Keene's cement finish, addSY .4565	EXTERIOR
Pocket sliding	ROCK LATH PLASTER	Stucco wash, 1 coat 2 coats
Closet sliding (Pr.)	Ceilings	Lead & Oil, 2 coats
D/H sash & frames	WIRE MESH & 1/8" STUCCO	3 coats
Casement sash & framesSF 2.30 & up SHELVING	WallsSY 4.60-5.80 STUCCO ON CONCRETE	Primer-sealer
1 x 12 S4SBM .3152	WallsSY 3.30-3.80	Wall paint, 1 coat 2 coats
³ / ₄ " plywoodSF .41-61	Metal accessoriesLF .2555	Enamel, 1 coat
STAIRS Oak steps D.F. risers	TILE MATERIALS	2 coats Doors & trim
Under 36" wide	FOB Warehouse	Sash & trim
Under 60" wide	CERAMIC TILE	Base & molds
WOOD CASES & CABINETS	41/4" x 41/4" glazed	Old work, ad
D.F. wall hung LF 15.50-20.60 D.F. counters LF 18.50-25.75	Random, unglazedSF .72	VENETIAN BLINDS
D.F. Couriers	6" x 2" cap	RESIDENTIAL
HARDWOOD FLOORING MATERIALS	1/4" round beadLF .18	COMMERCIAL
OAK 5/16" x 2" STRIP	QUARRY TILE 6 x 6 x ½" redSF .51	VERTICAL
Clear M 210.00 Select M 200.00	6 x 6 x ³ / ₄ " red	PLUMBING
#1 Common	9 x 9 x 3/4" red	Lavatories
OAK 5/16" RANDOM PLANK Select & better	6 x 6" cove baseEA .23	Toilets
#1 Common	TILE & TERRAZZO WORK	Bath tubes
OAK 25/32" x 21/4" T&G Select	CERAMIC TILE, stock colors	Sinks
#1 Common	Floors	Laundry trays
MAPLE 25/32" x 21/4" T&G #1 Grade	Cove base LF 1.10-1.35	Prices based on ave
#2 Grade	QUARRY TILE 6" x 6" x ½" floors	and commercial work
#3 Grade	9" x 9" x 34" floors	and excessive pipil
NAILS-1" FLOOR BRADSKEG 18.00	TERRAZZO	HEATING
HARDWOOD FLOORS	Terrazzo floors	Furnaces, Gas F
Select Oak	Precast treads & risersLF 3.60-4.60	FLOOR
Filled, sanded, stained and varnished 5/16'' × 21/4'' stripSF .5055	Precast landing slabsSF 3.00-4.10	
	Trough fallang stable filter than the	25,000 BTU
	WINDOWS	35,000 BTU
5/16" random plant	WINDOWS STEEL SASH	35,000 BTU
5/16" random plant	WINDOWS STEEL SASH Under 10 SF	35,000 BTU
5/16" random plant	WINDOWS STEEL SASH Under 10 SF	35,000 BTU
5/16" random plant	WINDOWS STEEL SASH Under 10 SF	35,000 BTU
5/16" random plant SF .5560 25/32" x 21/4" T&G SF .85-1.00 Maple And grade & better Filled, sanded, stained & varnished 25/32" x 21/2" T&G SF .90-1.05 Wax finish, add SF .10	WINDOWS STEEL SASH Under 10 SF	35,000 BTU
5/16" random plant	WINDOWS STEEL SASH Under 10 SF SF 2.50 & up Under 15 SF SF 2.00 & up Under 20 SF SF 1.50 & up Under 30 SF SF 1.00 & up Under 30 SF SF 1.00 & up ALUMINUM SASH Under 10 SF SF 2.75 & up Under 15 SF SF 2.25 & up	35,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 50,000 BTU Automatic control, add GRAVITY 75,000 BTU
5/16" random plant SF .5560 25/32" x 21/4" T&G SF .85-1.00 Maple And grade & better Filled, sanded, stained & varnished 25/32" x 21/2" T&G SF .90-1.05 Wax finish, add SF .10 RESILIENT FLOORING MATERIALS Linoleum, standard gage SY 2.65-2.85	WINDOWS STEEL SASH Under 10 SF	35,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 35,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU
5/16" random plant SF .55 . 60 25/32" x 21/4" T&G SF .85-1.00 Maple 2nd grade & better Filled, sanded, stained & varnished 25/32" x 21/2" T&G SF .90-1.05 Wax finish, add SF .10 RESILIENT FLOORING MATERIALS Linoleum, standard gage SY 2.65-2.85 Linoleum, battleship SY 2.95-3.10	WINDOWS STEEL SASH Under 10 SF SF 2.50 & up Under 15 SF SF 2.00 & up Under 20 SF SF 1.50 & up Under 30 SF SF 1.00 & up ALUMINUM SASH Under 10 SF SF 2.75 & up Under 15 SF SF 2.25 & up Under 20 SF SF 1.75 & up Under 30 SF SF 1.25 & up Above rates are for standard sections and	35,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 50,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU 95,000 BTU
5/16" random plant SF .5560 25/32" x 21/4" T&G SF .85-1.00 Maple 2nd grade & better Filled, sanded, stained & varnished 25/32" x 21/2" T&G SF .90-1.05 Wax finish, add SF .10 RESILIENT FLOORING MATERIALS Linoleum, standard gage SY 2.65-2.85 Linoleum, battleship SY 2.95-3.10 1/8" Asphalt tile, dark SF .1011 1/8" Asphalt tile, light SF .1416	WINDOWS STEEL SASH Under 10 SF SF 2.50 & up Under 15 SF SF 2.00 & up Under 20 SF SF 1.50 & up Under 30 SF SF 1.00 & up ALUMINUM SASH Under 10 SF SF 2.75 & up Under 15 SF SF 2.25 & up Under 20 SF SF 1.75 & up Under 30 SF SF 1.25 & up	35,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 35,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU
5/16" random plant SF .55 . 60 25/32" x 21/4" T&G SF .85-1.00 Maple 2nd grade & better Filled, sanded, stained & varnished 25/32" x 21/2" T&G SF .90-1.05 Wax finish, add SF .10 RESILIENT FLOORING MATERIALS Linoleum, standard gage SY 2.65-2.85 Linoleum, battleship SY 2.95-3.10 1/8" Asphalt tile, dark SF .10 . 11 1/8" Asphalt tile, light SF .14 . 16 1/8" Rubber tile SF .40 . 44 .080 Vinyl tile SF .67 .70	WINDOWS STEEL SASH Under 10 SF SF 2.50 & up Under 15 SF SF 2.00 & up Under 20 SF SF 1.50 & up Under 30 SF SF 1.00 & up ALUMINUM SASH Under 10 SF SF 2.75 & up Under 15 SF SF 2.25 & up Under 20 SF SF 1.75 & up Under 30 SF SF 1.75 & up Under 30 SF SF 1.25 & up Above rates are for standard sections and stock sizes, FOB Warehouse	35,000 BTU 45,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 35,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU Forced air furnace, add Automatic control, add
5/16" random plant SF .55 . 60 25/32" x 21/4" T&G SF .85-1.00 Maple And grade & better Filled, sanded, stained & varnished 25/32" x 21/2" T&G SF .90-1.05 Wax finish, add SF .10 RESILIENT FLOORING MATERIALS Linoleum, standard gage SY 2.65-2.85 Linoleum, standard gage SY 2.95-3.10 ½" Asphalt tile, dark SF .10 11 ½" Asphalt tile, dark SF .10 11 ½" Asphalt tile, dark SF .14 16 ½" Rubber tile SF .40 44 .080 Vinyl tile SF .6770 .080 Vinyl asbestos tile SF .18 19	WINDOWS STEEL SASH Under 10 SF	35,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 50,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet
5/16" random plant SF .55 . 60 25/32" x 21/4" T&G SF .85-1.00 Maple 2nd grade & better Filled, sanded, stained & varnished 25/32" x 21/2" T&G SF .90-1.05 Wax finish, add SF .10 RESILIENT FLOORING MATERIALS Linoleum, standard gage SY 2.65-2.85 Linoleum, battleship SY 2.95-3.10 1/8" Asphalt tile, dark SF .10 . 11 1/8" Asphalt tile, light SF .14 . 16 1/8" Rubber tile SF .40 . 44 1.080 Vinyl tile SF .67 .70 1.080 Vinyl asbestos tile SF .78 . 82 1/8" Sae, black LF .15 . 16	WINDOWS STEEL SASH Under 10 SF SF 2.50 & up Under 15 SF SF 2.00 & up Under 20 SF SF 1.50 & up Under 30 SF SF 1.00 & up ALUMINUM SASH Under 10 SF SF 2.75 & up Under 15 SF SF 2.25 & up Under 20 SF SF 1.75 & up Under 30 SF SF 1.25 & up Above rates are for standard stock sizes, FOB Warehouse GLASS—CUT TO SIZE FOB Warehouse SSB Clear, aver 4 SF SF .17	35,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 50,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet
5/16" random plant SF .55 . 60 25/32" x 21/4" T&G SF .85-1.00 Maple 2nd grade & better Filled, sanded, stained & varnished 25/32" x 21/2" T&G SF .90-1.05 Wax finish, add SF .10 RESILIENT FLOORING MATERIALS Linoleum, standard gage SY 2.65-2.85 Linoleum, battleship SY 2.95-3.10 1/8" Asphalt tile, dark SF .10 . 11 1/8" Asphalt tile, light SF .14 . 16 1/8" Rubber tile SF .40 . 44 .080 Vinyl tile SF .67 .70 .080 Vinyl asbestos tile SF .18 . 19 1/8" Vinyl tile SF .78 . 82 4" Base, black LF .15 . 16 4" Base, colored LF .26 . 30	WINDOWS STEEL SASH Under 10 SF	35,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 50,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet
5/16" random plant	WINDOWS STEEL SASH Under 10 SF SF 2.50 & up Under 15 SF SF 2.00 & up Under 20 SF SF 1.50 & up Under 30 SF SF 1.00 & up ALUMINUM SASH Under 10 SF SF 2.75 & up Under 20 SF SF 1.75 & up Under 30 SF SF 1.75 & up Under 30 SF SF 1.25 & up Above rates are for standard sections and stock sizes, FOB Warehouse GLASS—CUT TO SIZE FOB Warehouse SSB Clear, aver 4 SF SF .17 DSB Clear, aver 7 SF SF .28 Crystal, aver 16 SF SF .35 1/4" Polished plate, aver 50 SF SF .90	35,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 50,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet ELECTRIC WIRING Per Outlet Knob & Tube Armor
5/16" random plant .\$F .55 .60 25/32" x 21/4" T&G .\$F .85-1.00 Maple 2nd grade & better Filled, sanded, stained & varnished 25/32" x 21/2" T&G .\$F .90-1.05 Wax finish, add .\$F .90-1.05 Wax finish, add .\$F .10 RESILIENT FLOORING MATERIALS Linoleum, standard gage .\$Y 2.65-2.85 Linoleum, battleship .\$Y 2.95-3.10 1/8" Asphalt tile, dark .\$F .10 .11 1/8" Asphalt tile, light .\$F .14 .16 1/8" Rubber tile .\$F .40 .44 .080 Vinyl tile .\$F .40 .44 .080 Vinyl tile .\$F .57 .70 .080 Vinyl asbestos tile .\$F .82 4" Base, black .\$F .15 .16 4" Base, colored .\$F .65 .30 Rubber treads .\$F .160-2.30 Linoleum paste .\$GAL .75 .90	WINDOWS STEEL SASH Under 10 SF SF 2.50 & up Under 15 SF SF 2.00 & up Under 20 SF SF 1.50 & up Under 30 SF SF 1.00 & up ALUMINUM SASH Under 10 SF SF 2.25 & up Under 20 SF SF 1.75 & up Under 20 SF SF 1.25 & up Under 30 SF SF 1.25 & up Above rates are for standard sections and stock sizes, FOB Warehouse GLASS—CUT TO SIZE FOB Warehouse SSB Clear, aver 4 SF SF .28 Crystal, aver 16 SF SF .28 Crystal, aver 16 SF SF .35 1/4" Polished plate, aver 50 SF SF .90 1/8" Obscure, aver 7 SF SF .90 1/8" Obscure, aver 7 SF SF .35	35,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 35,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU 95,000 BTU 40 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet ELECTRIC WIRING Per Outomatic Conduit
5/16" random plant .\$F .55 .60 25/32" x 21/4" T&G .\$F .85-1.00 Maple 2nd grade & better Filled, sanded, stained & varnished 25/32" x 21/2" T&G .\$F .90-1.05 Wax finish, add .\$F .90-1.05 Wax finish, add .\$F .90-1.05 RESILIENT FLOORING MATERIALS Linoleum, standard gage .\$Y 2.65-2.85 Linoleum, battleship .\$Y 2.95-3.10 1/8" Asphalt tile, dark .\$F .10 .11 1/8" Asphalt tile, light .\$F .14 .16 1/8" Rubber tile .\$F .40 .44 1/8" Asphalt tile .\$F .67 .70 0.80 Vinyl tile .\$F .67 .70 0.80 Vinyl tile .\$F .87 .82 1/8" Sase, black .\$F .15 .16 1/8" Base, colored .\$F .26 .30 Rubber treads .\$F .16 .75 .90 FLOORS	WINDOWS STEEL SASH Under 10 SF SF 2.50 & up Under 15 SF SF 2.00 & up Under 20 SF SF 1.50 & up Under 30 SF SF 1.00 & up ALUMINUM SASH Under 10 SF SF 2.75 & up Under 20 SF SF 1.75 & up Under 30 SF SF 1.75 & up Under 30 SF SF 1.25 & up Above rates are for standard sections and stock sizes, FOB Warehouse GLASS—CUT TO SIZE FOB Warehouse SSB Clear, aver 4 SF SF .17 DSB Clear, aver 7 SF SF .28 Crystal, aver 16 SF SF .35 1/4" Polished plate, aver 50 SF SF .90	35,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 50,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet ELECTRIC WIRING Per Outlet Knob & Tube Armor
5/16" random plant	## WINDOWS STEEL SASH	35,000 BTU 45,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 35,000 BTU 50,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet ELECTRIC WIRING Per Outlet Knob & Tube Armor Conduit 110-V Circuit
5/16" random plant .\$F .55 .60 25/32" x 21/4" T&G .\$F .85-1.00 Maple 2nd grade & better Filled, sanded, stained & varnished 25/32" x 21/2" T&G .\$F .90-1.05 Wax finish, add .\$F .90-1.05 Wax finish, add .\$F .90-1.05 RESILIENT FLOORING MATERIALS Linoleum, standard gage .\$Y 2.65-2.85 Linoleum, battleship .\$Y 2.95-3.10 1/8" Asphalt tile, dark .\$F .10 .11 1/8" Asphalt tile, light .\$F .14 .16 1/8" Rubber tile .\$F .40 .44 1/8" Asphalt tile .\$F .67 .70 0.80 Vinyl tile .\$F .67 .70 0.80 Vinyl tile .\$F .87 .82 1/8" Sase, black .\$F .15 .16 1/8" Base, colored .\$F .26 .30 Rubber treads .\$F .16 .75 .90 FLOORS	WINDOWS STEEL SASH Under 10 SF	35,000 BTU 45,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 35,000 BTU 35,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU 95,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet ELECTRIC WIRING Per Outomatic Conduit Armor Conduit 110-V Circuit
5/16" random plant	### WINDOWS STEEL SASH Under 10 SF	35,000 BTU 45,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 35,000 BTU 35,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU 95,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet ELECTRIC WIRING Per Outomatic Conduit 110-V Circuit 220-V Circuit ELEVATORS & ESCA Prices vary according
5/16" random plant	WINDOWS STEEL SASH Under 10 SF	35,000 BTU 45,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 35,000 BTU 50,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet ELECTRIC WIRING Per Outomatic Conduit 110-V Circuit 220-V Circuit ELEVATORS & ESCA
5/16" random plant	## WINDOWS STEEL SASH	35,000 BTU 45,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 35,000 BTU 50,000 BTU Automatic control, add GRAVITY 75,000 BTU 85,000 BTU 95,000 BTU 95,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet ELECTRIC WIRING Per Outomatic Conduit 110-V Circuit 220-V Circuit ELEVATORS & ESCA Prices vary according and ty Consult elevatio Slow speed apartme
5/16" random plant .SF .5560 25/32" x 21/4" T&G .SF .85-1.00 Maple .SF .85-1.00 Maple .SF .85-1.00 Maple .SF .85-1.00 25/32" x 21/2" T&G .SF .90-1.05 Wax finish, add .SF .10 RESILIENT FLOORING MATERIALS Linoleum, standard gage .SY 2.65-2.85 Linoleum, battleship .SY 2.95-3.10 /8" Asphalt tile, dark .SF .1011 /8" Asphalt tile, light .SF .1416 /8" Asphalt tile, light .SF .4044 .080 Vinyl tile .SF .6770 .080 Vinyl tile .SF .6770 .080 Vinyl tile .SF .1819 /8" Yard .SF .1819 Ye" Yinyl tile .SF .7882 4" Base, black .LF .1516 4" Base, black .LF .1516 4" Base, colored .LF .2630 Rubber treads .LF .160-2.30 Linoleum paste .GAL .7590 FLOORS Va" Asphalt tile, light colors .SF .3035 Va" Asphalt tile, light colors .SF .3035 <t< td=""><td>## WINDOWS STEEL SASH</td><td>35,000 BTU 45,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 50,000 BTU 50,000 BTU 85,000 BTU 85,000 BTU 85,000 BTU 86,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet ELECTRIC WIRING Per Outomatic Conduit 110-V Circuit 220-V Circuit ELEVATORS & ESCA Prices vary according and ty Consult elevator</td></t<>	## WINDOWS STEEL SASH	35,000 BTU 45,000 BTU 45,000 BTU Automatic control, add DUAL WALL 25,000 BTU 50,000 BTU 50,000 BTU 85,000 BTU 85,000 BTU 85,000 BTU 86,000 BTU Forced air furnace, add Automatic control, add HEAT REGISTERS Outlet ELECTRIC WIRING Per Outomatic Conduit 110-V Circuit 220-V Circuit ELEVATORS & ESCA Prices vary according and ty Consult elevator

Western Cost Construction Indexes

Presented by Clyde Shute, Director of Statistical Policy, Construction News Div., F. W. Dodge Corp., from data compiled by E. H. Boeckh & Assoc. Inc.

Labor and Materials: U.S. average 1926-1929=100 DENVER

LOS ANGELES

		1	APTS., HOTELS	COMMERCI				APTS., HOTELS OFFICE BLDGS.	COMMERC	
		J	OFFICE BLDGS. Brick	FACTORY	BLDGS. Brick		,	Brick	Brick	Brick
-	DESID	ENTIAL	and	Brick and	and	DESID	ENTIAL	and	and	and
PERIOD	Brick	Frame	Concrete	Concrete	ana Steel	Brick	Frame	Concrete	Concrete	Steel
1948	217.8	218.1	202.7	207.0	206.7	215.9	216.5	205.8	210.0	209.8
1949	215.8	212.9	211.0	215.3	214.6	207.0	203.2	209.9	212.4	210.2
1950	230.0	228.2	218.8	221.3	221.2	224.1	222.8	217.4	219.0	217.5
1951	249.7	246.6	236.5	237.2	238.9	241.0	239.5	235.1	236.9	236.6
1952	253.6	249.4	243.4	245.1	245.6	243.8	241.7	239.8	242.6	241.5
1953	259.6	254.0	255.0	260.9	258.1	250.5	246.5	252.3	258.2	255.3
1954	258.9	252.0	259.1	266.2	263.4	251.0	245.3	257.7	265.7	261.8
1955	266.6	260.9	266.3	273.2	271.7	262.1	256.6	269.3	278.0	273.9
1956	274.9	269.3	275.8	282.3	285.1	272.6	266.7	282.9	292.9	289.3
1957	281.3	272.2	285.4	293.1	296.4	275.4	267.9	292.8	303.3	303.7
1958	282.2	272.0	288.1	295.9	298.8	277.9	286.6	302.6	314.5	316.4
1959	288.7	278.9	295.2	302.9	304.8	288.7	279.1	314.9	326.9	327.6
1960	292.2	282.7	301.3	309.0	310.0	299.8	287.7	329.1	342.7	339.6
1961	294.4	285.0	307.7	316.1	311.9	303.4	288.5	339.4	355.1	347.6
April 1962	298.0	286.3	316.0	326.9	318.4	309.0	294.3	345.8	360.1	354.3
May 1962	298.5	286.6	317.0	327.6	319.5	310.2	294.9	347.4	362.7	355.2
June 1962	298.5	286.6	317.0	327.6	319.5	312.4	296.2	351.0	367.9	359.4
		9	% Increase over 19	/39			%	Increase over 1939	9	
June 1962	166.5	155.7	173.0	178.1	173.1	221.4	216.4	222.9	250.7	238.4

SAN FRANCISCO

SEATTLE

1948	218.9	216.6	208.3	214.7	211.1	216.3	211.4	211.5	216.6	216.9
1949	213.0	207.1	214.0	219.8	216.1	214.2	203.9	220.7	228.5	225.3
1950	227.0	223.1	222.4	224.5	222.6	224.1	213.6	227.1	234.5	230.3
1951	245.2	240.4	239.6	243.1	243.1	245.1	232.7	247.7	255.8	251.0
1952	250.2	245.0	245.6	248.7	249.6	254.3	239.8	258.8	267.7	263.8
1953	255.2	257.2	256.6	261.0	259.7	254.8	239.0	262.7	273.6	269.5
1954	257.4	249.2	264.1	272.5	267.2	253.3	236.1	266.6	279.1	274.0
1955	268.0	259.0	275.0	284.4	279.6	260.6	243.3	273.7	287.3	282.4
1956	279.0	270.0	288.9	298.6	295.8	273.5	254.0	288.5	303.4	299.0
1957	286.3	274.4	302.9	315.2	310.7	275.6	254.0	298.2	313.1	311.2
1958	289.8	274.9	311.5	326.7	320.8	279.9	256.4	306.0	324.0	320.8
1959	299.2	284.4	322.7	338.1	330.1	291.5	267.8	318.8	336.9	331.8
1960	305.5	288.9	335.3	352.2	342.3	298.9	272.4	330.5	351.2	342.9
1961	308.7	290.2	345.1	362.9	350.2	296.5	268.2	335.3	357.6	345.6
April 1962	313.2	294.2	352.0	369.4	355.4	305.5	277.6	345.2	367.4	353.5
May 1962	313.7	294.4	352.7	370.7	356.1	306.1	278.2	346.0	368.0	354.1
June 1962	313.7	294.4	352.7	370.7	356.1	306.1	278.2	346.0	368.0	354.1
		%	Increase over 1	939			%	Increase over 193	9	
June 1962	197.1	196.5	200.4	204.1	205.7	193.2	187.7	190.3	193.7	198.3

Cost comparisons, as percentage differences, for any particular type of construction, are possible between localities, or periods of time within the same city, by dividing the difference between the two index numbers by one of them; i.e.:

index for city A=110 index for city B=95 (both indexes must be for the same type of construction).

Then: costs in A are approximately 16 per cent higher than in B.

$$\frac{110 - 95}{95} = 0.158$$

Conversely: costs in B are approximately 14 per cent lower than in A.

$$\frac{110 - 95}{110} = 0.136$$

Cost comparisons cannot be made between different types of construction because the index numbers for each type relate to a different U. S. average for 1926-29.

Material prices and wage rates used in the current indexes make no allowance for payments in excess of published list prices, thus indexes reflect minimum costs and not necessarily actual costs.



ARE YOU PUZZLED?

Architects and specification writers know that there are Roofing Asphalts available to fit the requirements of all climates and roof deck slopes—but may be puzzled by the selection of proper type because wide local variation in climate is typical of the West.

Asphalt and gravel built-up roofs may be specified for any climate and for any roof slope from "dead-level" to 3" per foot. Maximum service life may be expected if the Asphalt used is of the lowest possible Softening Point (i.e., the softest), consistent with roof deck slope and climate. Simply stated, this means that the Asphalt should be soft enough so that any tiny cracks which may develop through thermal expansion and contraction in the deck, or

through building settlement, will tend to flow together, or "heal," during warm weather; but should not be so soft that it will flow down the roof during a hot spell.

Selection of Asphalt Softening Point may often be done on the basis of local experience. Where such experience records are meager, the following table will serve as a guide for your selection and specification of roofing Asphalt type:

DECK	NORMAL ¹	HOT ²
SLOPE	CLIMATE	CLIMATE
0"-\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	dead-level flat flat flat steep steep	dead-level flat steep steep special steep special steep

1 Not more than an occasional day with air temperature over 95°F.

2 Extended periods with day-time air temperatures over 95°F, with clear sky, bright sun.

Note: Typical Softening Points are:

dead-level,140°F
flat170°F
steep190°F
special steep210°F

Assure your next building of trouble-free, low-cost protection by specifying the proper Asphalt roofing materials. Want more information? Fill out and send coupon.



THE ASPHALT INSTITUTE

810 University Avenue, Berkeley 10, California Gentlemen: Please send me without obligation more information on Asphalt roofing.

NAME	
TITLE	
FIRM	
ADDRESS	

For more data, circle 207 on Inquiry Card



Raise the roof in record time

Sheffield steel roof deck is fast, economical and versatile. Whether you're building schools, office buildings, warehouses, shopping centers or any other type of commercial building, it will pay you to consider all the advantages of Sheffield steel roof deck:

Fast and Easy to Install. Whether you install Sheffield Steel Roof Deck on steel joists, or other construction, you will approach the shortest possible elapsed time for erecting a completed roof. It can be fastened to the structure by welding the deck sheets to supporting

steel members. Use it for flat, pitched or arched roo construction. Best of all, it can be installed even in bad weather.

Lightweight and Strong. Fabricated from 18, 20 or 25 gauge steel. For normal roof load, deck may be spanned up to 10 feet. Type A — with ¾" ribs — comes in 18" and 24" widths, and in lengths up to 30'2" Type B — a stronger deck with 2" ribs — comes in the same widths and lengths. Weight per square foot varie from 1.9 to 3 pounds, depending on gauge and number of spans.



Sheffield steel roof deck

ttractive and Low Cost. Improves appearance of all pes of commercial and industrial buildings. Exposed bs aid in sound diffusion. Usually costs less than

omparable materials. Its light eight reduces dead load—which educes weight and cost of beams, olumns and footings. Insulated

nd permanent.

SHEFFIELD **Steel Roof Deck**

onstruction gives further savings. It's strong, durable

pecial Widths and Accessories. Side closure sheets e available. Also such accessories as clips, cant

strips, hip plates, valley plates, closure plates, and sump pans.

Durable. Sheffield Steel Roof Deck becomes a roof that lasts. This deck has a gray primer protective coating with rust-inhibiting Zinc Chromate Pigment.

Write for Free Specification Brochure.

Gives complete technical details, tables, recommended specifications, other information. Write to: Sheffield Division, Armco Steel Corporation, Sheffield Station, Kansas City 25, Missouri.







For more data, circle 208 on Inquiry Card

Western Buildings in the News



A "dodecagon with a concavital conoid roof," as the architect describes this pavilion at the bus stop in Sausalito, Calif., this little building replaces a ramshackle old—and unattractive—shelter which the city had been trying to get rid of for the past five years. In a recent election campaign the pavilion became a focal point of controversy; but the candidate who attacked it lost the election. Charles Finney, architect

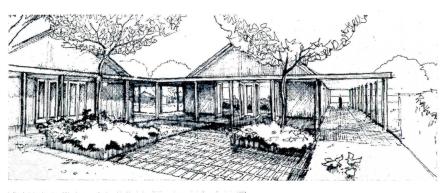



This cluster-plan scheme is for California's first school specially designed to provide for a specific training program for mentally retarded children. Approximately 150 will be accommodated in these buildings on a 10-acre hilltop in San Jose, Calif. The program they will have is designed to fit them for a useful place in society. The buildings are designed in a domestic scale. Del Campo & Clark of San Francisco, architects



Another tall building will join Denver's growing number of skyscrapers when this building, a combination office and apartment building, is completed. The building will have three floors of ramp-type parking, three office floors, and a tower of 24 stories with 145 apartments. The upper floors will have penthouse apartments. Separate lobbies and elevators will serve the apartment and office buildings. Total cost is expected to be approximately \$3 million. Construction on it is to get under way before the end of the year. Donald R. Roark of Denver, architect

ROCKRISE RESIGNS POST AS PLANNING COMMISSIONER

Architect George Rockrise, appointed last year to the San Francisco Planning Commission, has resigned after a brief but voluble career during which he frequently spoke out with considerable strength at threats to San Francisco's beauty. But while he had been something of a controversial public figure, his resignation came because of the "conflict of interest" rule.

Many cities, counties and states have such rules, intended to preserve unbiased handling of public affairs. Rockrise had inquired whether his position as commissioner would prevent him from taking part in a study of downtown San Francisco now under way under sponsorship of the San Francisco Planning and Urban Renewal Association.

It would depend on the wording of the contract, the city attorney told him. In fact, he said, any architect would be up against it if he tried to serve his city as a commissioner and had an active practice in the city, since a job in which he was involved might require a decision by the Planning Commission before a building permit could be issued for it. The mayor regretfully accepted the resignation and appointed Alvin H. Baum, an attorney, to succeed him.

PASADENA TO DEVELOP OPEN LAND AS RENEWAL AREA


A project based on the same unusual provision in the California Urban Renewal Act as used in San Francisco's Diamond Heights is that of South Pasadena, which recently dedicated its first project, a 309-acre plot of open land in its Monterey Hills section. Using the clause which permits qualification for renewal funds if land has been laid out without regard for contours, this hilly section of Pasadena, a city where urban renewal would seem to be without meaning, has been designated a "re-development" project. The land will be broken up into 640 lots of approximately half an acre each, for single-family houses, and eventual development is expected to be similar to that of nearby San Marino or Palos Verdes on the coast.



SINCE THE BEGINNING, MAN'S STRUGGLE TO KEEP WARM





AND KEEP COOL HAS PRODUCED ONE INAPPROPRIATE,

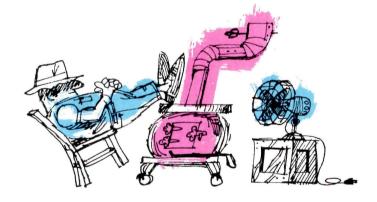

INADEQUATE INVENTION AFTER ANOTHER UNTIL



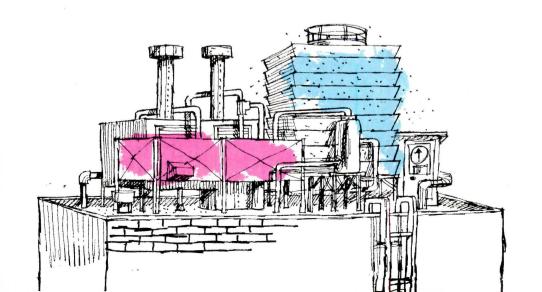

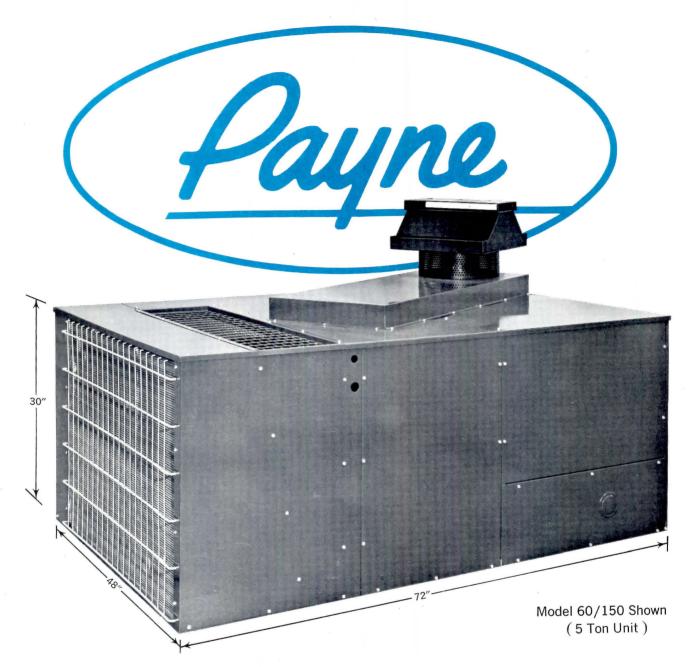

Econoair

HEATS WITH GAS
COOLS WITH ELECTRICITY
INSTALLS OUTDOORS

s much work as units twice its size tree times its weight!

A here's the proof by comparison:

MANUFACTURER*	Overall Height	Overall Length	Overall Width	Weight	Cooling Capacity 000 BTUH	Heating Capacity 000 BTUH	One Piece Const.	AGA App'd for outdoor application	ARI Cert'd.
Payne Econoair Model 60/150	30	72	48	800	60	150	Yes	Yes	Yes
Α	65	153	83	2000	65	100	Yes	No	No
В	49	147	36	1550	59	150	Yes	No	Yes
С	56	154	41	2127	59	150	Yes	No	No
D	40	106	45	1200	61	100	Yes	No	No
E	58	132	44	1970	55.6	150	Yes	No	No
F	381/2	144	47	1880	57	150	Yes	No	Yes
G .	44	128	45	1250	60	96	No	No	No

Comparison of 8 and 10-ton units reveal similar contrasts

Air IS:

neating and cooling—complete air conditioning in a compact outdoor unit.

for shopping centers, motels, churches, schools, nomes, and other light construction.

Air WILL:

neat your building the best way...with economical gas.

cool your building with reliable electricity.

MOAIT WON'T:

require any inside floor space.

require more than normal building insulation.

require unsightly vent pipes.

require refrigerant lines.

EconoAir CONSTRUCTION

- A single, complete unit of proven Payne components.
- Designed and assembled at the factory by experts.
- Ready to install. No charging or refrigerant piping necessary.
- Future service requirements reduced to a minimum.



^{*}Manufacturers' name on request

Here's the proof of reliability

In both controlled laboratory tests and on-the-job field tests, the performance of the Payne ECONOAIR was everything we had hoped for, and more!

In WIND TESTS, the ECONOAIR'S pilot and unique venting systems were undisturbed even though subjected to gale force velocities of 60 mph.

In RAIN TESTS, the ECONOAIR'S operation was com-

pletely unaffected even when deluged by water wh poured at a rate of 12" an hour.

In SUN AND SNOW TESTS — units in the field, on job throughout the country - the ECONOAIR'S perfo ance and dependability were proven through, first scorching summer, and then, through the roughest wir in years. Glowing reports have come back on ECONO units covered by snow for weeks.

Here's the proof of acceptance



2 model 96/220 Econoair units provide the patrons of this new restaurant in Anaheim, California with year around comfort.



58 units on this 2-story building located in Arizona occupied by apartments, various shops, and a restaurant.



9 units, mounted on the roof of a convalescent home, offer patients the maximum in comfort in San Diego.




60 model 24/60 Econoairs recessed in "dormer type" installations for modern Sherwood-Riviera apartments in Orange County, California.



23 units for individual climate control by various shops in this super shopping center on the West Coast.



8 Econoair units installed on rooftop of the First Nazarene Church in Nampa, Idaho advances quiet-comfort for congregation.

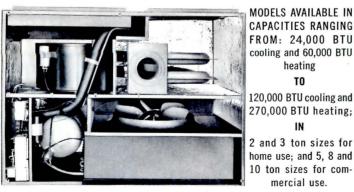

TO 120,000 BTU cooling and 270,000 BTU heating;

cooling and 60,000 BTU heating

2 and 3 ton sizes for home use; and 5, 8 and 10 ton sizes for commercial use.



(Patents Pending)



See it at your Payne distributor's now, or write for full comp information to THE PAYNE COMPANY, 855 ANAHEIM-PUE ROAD, LA PUENTE, CALIFORNIA.



Elegance on a Budget

The unique beauty of Ludowici special shapes shale flooring tile is now practical for your most budget minded client. Because of greatly increased demand, price reductions have been made on all special shape styles. No difference in quality or texture.

You can now afford the world's most beautiful flooring tile.

Provence, Valencia and Renaissance patterns available in brushed or smooth, in red or fire flashed colors.

For complete information and the name of your nearest distributor write:

FLOORING TILE DIVISION-Dept. R.

LUDOWICI-CELADON CO. • 75 East Wacker Drive, Chicago 1, Illinois Manufacturers of quarry tile, the nation's largest producer of roofing tile and NAILON Facing Brick

WEST COAST REPRESENTATIVES: Gladding, McBean & Co., Los Angeles, San Francisco, Portland, Seattle, Spokane, Phoenix

HAWAII REPRESENTATIVES: Lewers & Cooke, Ltd., Honolulu


VALENCIA

RENAISSANCE


Glenn Craft, A.I.A. John C. Murphy, A.I.D. Watson & Boaler VALENCIA FLOOR TILE by

Ludowici-Celadon Co.

This suburban medical office building in Mill Valley, California, designed by Michael Wornum, A.I.A., San Francisco, features Basalite lightweight concrete masonry units in solid and screen-wall combination.

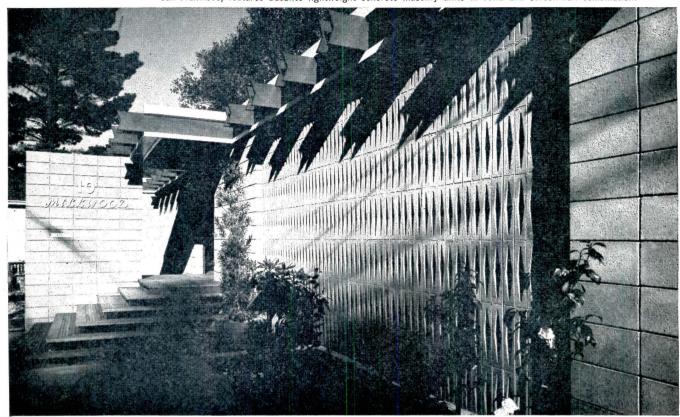

BASALITE COMBINATIONS



BASALITE is precision-made in 155 shapes and sizes, in several colors. Lightweight, expanded shale aggregate yields permanent values: fire safety which affords lower insurance rates, earthquake resistance, natural insulation, and immunity to weather and termites.


The HARLEQUIN unit is also available (on special order) filled in contrasting colored concrete or exposed aggregate particles.

BASALITE lightweight concrete masonry units provide a basic structural material with unlimited design possibilities. A striking effect can be achieved by combining standard and open grille patterns, as in this effective use of Basalite's basic unit and Harlequin screen-wall. *However*, the basic Basalite unit creates dramatic design combinations in contrast with stone, wood, glass or glass block, architectural concrete, stucco, metal skin...in fact with *any* other construction material.

BASALITE

Lightweight concrete masonry units • Products of BASALT ROCK COMPANY, INC. • Napa, California • BAldwin 6-7411

WRITE or PHONE for detailed information on BASALITE standard or screen-wall units.

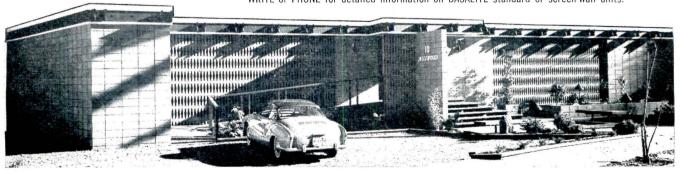


For more data, circle 213 on Inquiry Card



Mediterranean beautyand Basalt quality

TERRAZZO TILE! Basalt's experience and distinctive Western onyx and marble bring you Mediterranean color and texture with the strength of American technology! Basalt's Terrazzo Tile provides beautifully polished elegance, with a wide selection of hues and textures. Easily installed, easily maintained—Basalt Terrazzo is perfect for dramatic effects in residences, institutions or commercial locations. Write for our brochure that tells full rewarding story!



BASALT Terrazzo Tile

made only by BASALT ROCK COMPANY, INC. / Napa, California / BA 6-7411

REBUILDING WESTERN CITIES: RENEWAL MOVES AHEAD

With ground breaking ceremonies for two of the West's largest redevelopment projects—Golden Gateway in San Francisco and Ocean Park in Santa Monica—and Los Angeles' Bunker Hill and San Francisco's Western Addition under construction, urban renewal is well on its way in Western cities.

Besides these more developed—and dramatic—projects, there are many more in various stages of progress, from land acquisition to final sale of land, in smaller Western cities and towns too numerous for listing.

Farthest along in actual development is Sacramento's Capitol area project, where a pleasant group of garden apartments has been in use for the last two years. The West's first redevelopment project to replace a blighted area, the Ann Street section in Los Angeles, with a new industrial area, recently finished selling all its parcels of land to private

investors, and construction will get under way shortly on the first buildings in the area. Portland officials proudly watched recently when ground was broken for the first structure—an office building—in its South Auditorium renewal area, and is proceeding with sale of other pieces of property in the area. A few houses have been occupied in San Francisco's Diamond Heights, and construction is expected to start soon on the apartment group on Red Rock Hill.

In Colorado, progress has been slower than elsewhere, but the Denver Urban Renewal Agency had to go through a court test before it could actually begin work on its first project, Avondale. Officials were disappointed when, last May, they offered their first parcel of land for sale and it drew not one bid. However, competitive bidding for larger parcels in the commercial area and for the choicest piece of land in the areathe apartment house location on the high point of the property-was expected to bring considerable interest when these acreages are put up for

COLORADO UNIVERSITY NAMES DEAN, FORMS NEW SCHOOL

DeVon M. Carlson, professor of architecture and acting head of the department of architectural engineering at the University of Colorado, Boulder, has been named dear of the newly created School of Architecture at the University. Professo Carlson is a graduate of the University of Kansas, University of Colorado and Columbia University, and has been a member of the faculty a Boulder since 1943. He is a member of the Colorado State Board of Architectural Examiners.

The school will offer a five-year curriculum in architecture and an chitectural engineering, with programs in landscape architecture, in terior design, urban planning and an scheduled for students entering i 1963. A statement from the University indicates that freshman an sophomore requirements for professional degrees within the College of Arts and Sciences are prerequisite to entrance.

AIRPORTS EXPAND FACILITIES TO MEET JET NEEDS



SAN FRANCISCO AIRPORT'S existing terminal (1) is being expanded: south terminal (2) is under construction, with north terminal (3) to be built later. Welton Becket & Associates, architects. An 8,000-car garage is soon to be built (4) Edward B. Page, architect; Gould & Degenkolb, structural engineers



MCCARRAN FIELD, LAS VEGAS, terminal will have thin-shell roof. Welton Becket and Associates, architects

The West's big cities—Los Angele San Francisco, Seattle, Portland Oakland, Salt-Lake City-have all re cently undertaken to improve the airports—out of necessity. Ar smaller cities with sharply increase traffic-for many, the plane is the only means of transportation in cer tain directions—are also trying t catch up with the jet plane's require ments and the facilities it makes ne termin Oakland's new (John Carl Warnecke & Associate architects), to be ready this fall, an the new terminals at San Francisc and Las Vegas (Welton Becket Associates, architects), all of which use thin-shell structural concepts f their roofs are indications of a ne awareness of the drama of the mo ern airport and the potential for e pression of this through the archite tural design of an airport's building But as yet airport boards and cor missions generally tend toward th "tried and true" look of earlier ai port buildings.

New colored Pab-Flex brings a bright revolution to exterior siding.



Siding like this doesn't grow on trees.

Saves time!

integral color
no waiting for paint to dry
no waiting for stucco to set
no job delays because of rain

Trouble free!

minimal maintenance cleans with water spray untroubled by sun, rain, wind termite proof

Tough!

won't burn won't scratch or dent won't rot won't blister or peel

Beautiful!

clean, modern appearance ten built-in lifetime colors textured or smooth designed for Western architecture

We've just finished a handsome new booklet explaining the whys and wherefores of Colored Pab-Flex asbestos-cement board. It shows the variety of colors available, where and how to use Pab-Flex, as well as some new exterior decorator ideas using this versatile siding. For your free copy, drop a note to Dept. F Pab-Flex, Pabco Roofing Division, Fibreboard Paper Products Corporation, 475 Brannan St., San Francisco., California.





PREFINISHED DOOR IS MORE THAN SKIN DEEP

Top coats of clear resin are applied and polished to assure lasting beauty; protect warmth and luster of the finish.

Doors are buffed for a smooth, even, "fine furniture" surface.

Door edges are sanded, sealed, polished and painted in compatible colors to face veneers.

Filler and sealer applied for uniformity.

Tinting additive emphasizes natural color-tone of the wood grain.

All surfaces thoroughly pre-sanded. Surface veneers are carefully selected for good appearance and

Solid-core and hollow-core units are specially constructed for greater strength, stability and durability.

uniform grain.

Learn the inside story.
Send for free folders today.

California Wood Products Inc.

P. O. Box 1656 Santa Rosa, California

(Send me your free folders)

NAME	
FIRM	
	· · · · · · · · ·
ADDRESS	

WHAT'S HAPPENED TO:

Portsmouth Square, once the scene of San Francisco's birthplace as an American city, whose redesign as a parking garage with terraced park on top caused a furor two years ago? It was dedicated and opened to use on August 24, 1962, A.D. California Heritage Council's president commented: "Once you dig up historic ground, it's not historic anymore." But not enough people agreed with him. They all had cars to park.

The Joseph Worcester house, built in 1875, on the summit of Russian Hill, San Francisco, destined for oblivion to make way for a 20-story apartment building? Hill residents won a 60-day reprieve for the lovely old shingle house and several others, of slightly later date, also on the block, and a design for a proposal of a master plan for the hilltop is under way to perserve some of the historic buildings and also provide some open space.

Magic Island, the multi-million-dollar development of "made land" off the shore of Ala Moana Park in Honolulu? Henry Kaiser's Hawaii-Kai Construction Company was low bidder on the first part of the first phase of the project—reclaiming eight acres—and is now at work on a seawall and filling operation. Eventually Magic Island will consist of about 300 acres for development of hotels, apartments and parks.

Summit House on Pike's Peak? Delayed by a court suit in regard to issuance of bonds for financing the \$540,000 project, a new summit house is still in the future. But Colorado Springs' City Council took action this summer—spurred by complaints from tourists of the inadequacies of the present Summit house (built in 1882)—to nudge a new building off drawing boards and into construction: it appointed a committee to study ways and means of financing it.

The Air Force Academy Chapel? The Air Force was due to accept the building this month, a year and a few months later than originally anticipated. Visitors to the Academy who have seen the chapel report that its three worship areas are beautiful, each in its own way.

F. H. A. Commitments



The F.H.A. now requires professional quantity surveys with all applications for insurance commitments on multi-family projects.



LeRoy Construction Services is approved by the F.H.A.



LeRoy Construction Services has prepared surveys for projects ranging from framed duplexes to 21 story prestressed concrete towers.




Projects approved on LeRoy surveys are now under construction.

LeRoy Construction Services

Quantity Surveyors & Estimators

768 BRANNAN STREET
SAN FRANCISCO 3 UN 1-2483

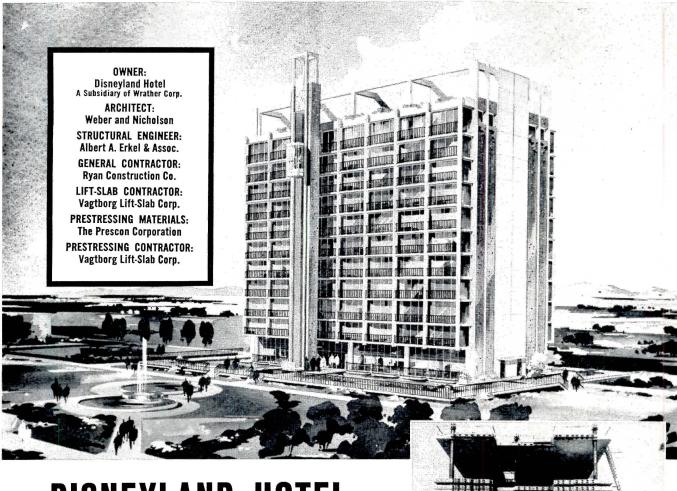

DISNEYLAND HOTEL

. . . working drawings to partial occupancy in 12 months!

LIFT - SLAB CONSTRUCTION, POST - TENSIONED BY THE PRESCON SYSTEM SAVES 6 - 8 WEEKS

of the slabs which are being lifted into position by the Vagtborg Lift-Slab Corp.

The stressing hardware can be seen at the ends

One requirement called for the practically impossible—partial occupancy in June, 1962, and working drawings could begin in July, 1961! The first two floors were ready for guests late in June, 1962. The remaining nine floors required two additional months.

Weber and Nicholson, Architect, and Albert A. Erkel & Associates, Engineer, concluded that only lift-slab construction could accomplish the requirements and meet the deadline. The lightweight post-tensioned flat plate floor system allowed flexible spacing of columns for room and floor planning. Floor to floor height reduction resulted in many material and labor savings; this structural design

concept produced savings in shear wall and foundations as a by-product.

Statistics include: Approximately 100,000 square feet; 11 stories with a height of 125 feet; maximum column spacing, 31' x 31'; slab thickness, 9"; 150 units plus penthouse apartment and cocktail lounge on top floor, and eight conference rooms on the ground floor.

The Prescon System of post-tensioning prestressed concrete offers advantages to owners, architects, engineers, and contractors. Write us for information on uses in lift-slab, poured-in-place, precast structures, or your specific application.



THE PRESCON CORPORATION


P. O. Box 4186 • Corpus Christi, Texas

Albany • Atlanta • Memphis • Dallas • Denver • Los Angeles

St. Louis • San Francisco • Seattle

MEMBER OF PRESTRESSED CONCRETE INSTITUTE

For more data, circle 217 on Inquiry Card

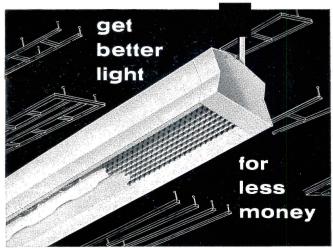

CUTAWAY VIEW

U.S. Patent Nos. 2,932,728 and 2,933,279

perfect vision®

FLUORESCENT LUMINAIRES

- ▶ "Luminous ceiling" comfort at a fraction the cost.
- Uniform light levels up to 250 footcandles to fit need.
- ► Semi-indirect light output. No glare or shadows.
- For 430 MA, 800 MA or 1500 MA Power Groove, SHO or VHO lamps.
- ▶ Easy to clean and relamp. ▶ Pleasing appearance.




Write for Detailed Information

SMOOT-HOLMAN

COMPANY INGLEWOOD | CALIFORNIA

For more data, circle 211 on Inquiry Card



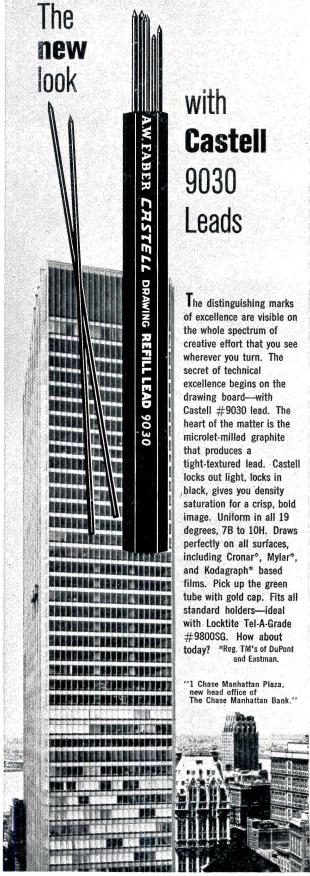

A.W.FABER-CASTELL Pencil Company, Inc., Newark 3, N. J. Starting its third century of service.

For more data, circle 219 on Inquiry Card

For more data, circle 220 on Inquiry Card

Professional News

Awards

Eighteen architects, architectural teams and firms were honored at Architects' Day at the Seattle Fair when medals were presented to them "for their part in making the Seattle World's Fair beautiful": Paul Thiry, primary architect for the Fair and architect of the State of Washington Coliseum; Clayton Young, director of site development and director of liaison between the Fair and the Post-Fair Action Committee; Walker & McGough, Spokane; Robert B. Price & Associates, Tacoma; Seattle architects Waldron & Dietz and Naramore, Bain, Brady & Johanson; Minoru Yamasaki and Associates, Detroit; Seattle architects Durham, Anderson & Freed and B. Marcus Priteca and James J. Chiarelli; Kirk, Wallace, McKinley and Associates; Tucker & Shields; Wendell H. Lovett and Ted Bower; John Graham & Company; Adrian Wilson & Associates, Los Angeles; Richard Bouillon, Seattle; Tokyo architects Kazayuki Matsushita and Kideki Shimezu; John A. Phillips and Harry B. Rich, Seattle.

New Firms

Frederick Noel and John Robert Henderson, architects, have formed a partnership and opened offices at 309 West Cabrillo, Santa Barbara, Calif.

Sol Silver, architect, has opened an office at 1736 Stockton Street, San Francisco, Calif.

Bruce Lionel Johnson, architect and planning consultant, has established an office, with Keplar Johnson as associate architect, at 2426 Taraval Street, San Francisco.

Herman D. Ruth, A.I.P., and Abraam Krushkov, A.I.P., have formed the firm of Ruth & Krushkov, city and regional planners, at 2409 Telegraph Avenue, Berkeley.

Willem A. M. Wils, architect, has opened an office at 1842 South Dahlia Street, Denver, Colo.

Jack Hermann, architect, formerly a partner in the firm of Hatch, White, Hermann and Steinau, has opened his own office at 190 Bon Air Road, Kentfield, Calif. Hatch, White and Steinau continue in their offices at 680 Beach Street. San Francisco, Calif.

John B. Ferguson and John Hutchison, architects, have formed a partnership under the name of Ferguson, Hutchison & Associates, with offices at 14606 Victory Blvd., Van Nuys, Calif.

New Addresses

Architectural Art Services, Paule Anglim, director, has moved to 545 Francisco St., San Francisco.

Hans A. Feibusch, consulting engineer, has moved to 110 Market St., San Francisco.


Joe Davis Allen, architect, has opened an office at 680 Beach St., Suite 20, San Francisco.

Richard T. Crandell, architect, has moved to 939 Grant St., Denver.

Claude A. Nash, architect, has moved to 1869 S. Pearl St., Denver.

Goetz & Hansen, architects, and David S. Johnson, associate, have moved to 3530 Grand Avenue, Oakland, Calif. John Charles Wilson, David Kerr Burton, and Linda Witten Wilson, architects, are now located at 3735 San Pablo Dam Road, El Sobrante, Calif.


Allan & Olsson, architects, have moved to Suite 200, Mayer Central Building, Phoenix 12, Ariz.

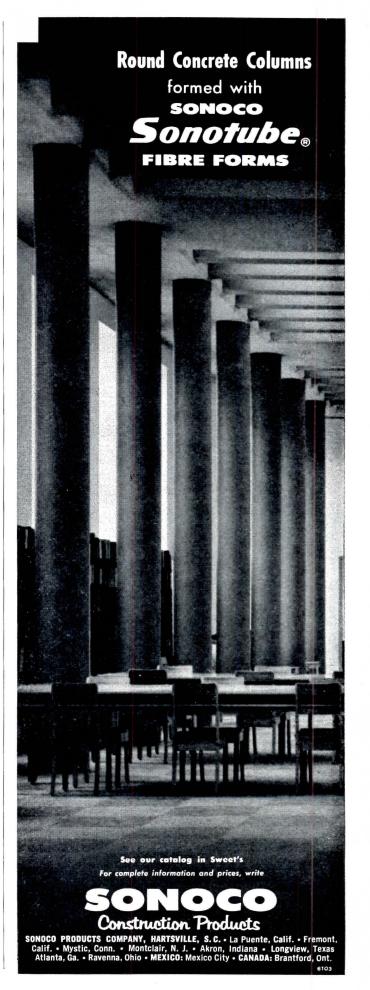

For more data, circle 221 on Inquiry Card

rain-O-mat

SPRINKLERS
ASSURE LAWN
BEAUTY AT
ECONOMICAL
INSTALLATION
COSTS

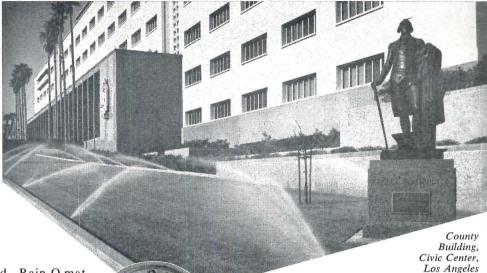

SCIENTIFICALLY designed, Rain-O-mat Rotary Pop-up Sprinklers give deep, health-producing penetration of just the correct amount of water to preserve both landscaping and construction appearance.



Free brochure gives full details with specification data . . . Write for your copy.


some gears, Rain-O-mat Sprinklers are practically maintenance-free, except for occasional and easy cleaning. Cost less too. Take smaller pipe and fittings—less installation labor.

And because they are made without trouble-



11701 E. WASHINGTON BLVD., WHITTIER, CALIF.

For more data, circle 222 on Inquiry Card

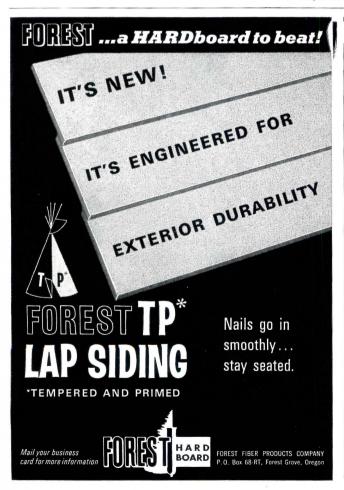




There's a versatility in imaginative use of fine Facebrick that adds excitement to the design of a project. Along with its solid natural virtues Facebrick gives freedom of expression. You can choose from a variety of pleasing textures and an abundance of colors, from white to rich earth tones in a wide range of sizes. You have the scope to design varied shapes and configurations, knowing you can rely on the sturdy robustness of our world-famous Alberhill Clays, kiln-fired to a finish that is virtually maintenance-free. □ The distinction that fine Facebrick gives to walls, decks, facades, and screenwalls makes it a hallmark of the leading trends in the progressive architectural styles of California. For creative architects, builders and designers, Facebrick means grace with strength... esthetic versatility plus permanent value . . . beauty that endures. □ Please mail coupon for your copy of our brochure showing color samples and installations.

2310 E. 7th St., Los A	and Clay Products Co. ngeles 23, Calif.
	nd me your color brochure, with complete line of Facebrick.
name	
firm	
street	
city	zone
state	AF

for color, individuality, compatibility, permanence, CHOOSE

A QUALITY FACEBRICK

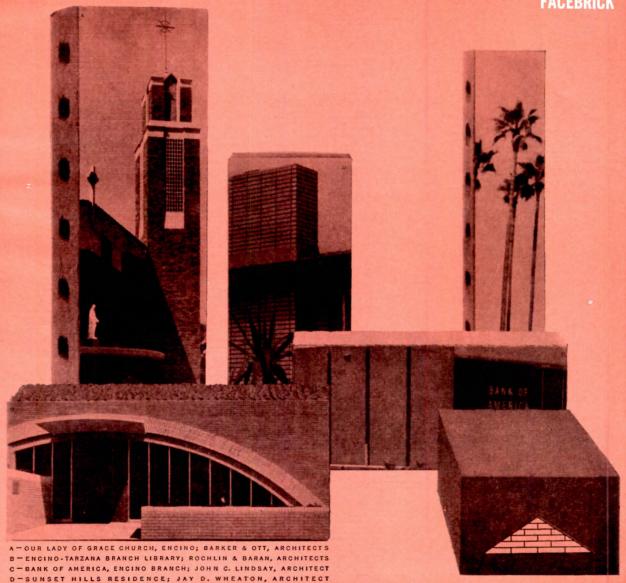

LOS ANGELES BRICK & CLAY PRODUCTS CO. 2310 east seventh street, los angeles 23, california a angelus 8-2691

Professional News

Firm Changes

George S. Gatter, planning consultant, has joined Wilsey, Ham & Blair, engineers and planners, of Millbrae, as head of the city and regional planning department.

Leron A. Hester, architect, has been named an associate in the firm of Blurock, Ellerbrock & Associates, Corona del Mar, where he heads the specifications department.

L. Spencer Smith, architect, has been made an associate in the firm of Dean L. Gustavson Associates, Salt Lake City.

Robert C. Farnsworth, Robert E. Millsap and Gustav H. Ullner have been made associates in the firm of Albert C. Martin & Associates, architects and engineers, Los Angeles.

Douglas M. Merrill, architect, is a new partner in the architectural firm of Gillis, Merrill & Forell, San Francisco.

James A. Willis has been appointed chief structural engineer and associate in the structural engineering firm of Blaylock & Associates, San Diego.

Fred Bassetti and John M. Morse, architects, former partners in Bassetti & Morse, have established independent practices. Fred Bassetti & Company are temporarily located at 1602 Tower Building, Seattle. John M. Morse & Associates have permanent offices at 1610 Tower Building, Seattle.

New Addresses

The Hawaii chapter, A.I.A., and the Honolulu chapter of the Producers' Council have opened a joint office at 1210 Ward Avenue, Honolulu.



For more data, circle 219 on Inquiry Card

Calendar of Western Events

- •September 27-29: Western Mountain Region, A.I.A., annual conference, Sun Valley, Idaho
- September 28-29: American Concrete Institute fall meeting, Olympic Hotel, Seattle
- September 30-October 4: World Conference on Shell Structures, Sheraton-Palace Hotel, San Francisco
- September 30-October 5: American Society for Testing Materials, Fourth Pacific Area National meeting, Statler-Hilton Hotel, Los Angeles
- October 3-7: California Council, A.I.A., annual convention, Mark Thomas Inn and Casa Munras, Monterey, Calif.
- October 4-6: Structural Engineers Association of California, annual convention, Hotel del Coronado, Coronado, Calif.
- October 4-6: Photo-vision '62, Third annual conference, sponsored by American Society of Magazine Photographers, Department of Journalism, U.C.L.A. and Department of Arts and Humanities, University Extension. Miramar Hotel, Santa Barbara
- October 4-7: National Trust for Historic Preservation,
 16th Annual meeting, San Francisco
- October 6: Japan Architects Tour leaves San Francisco and Los Angeles
- October 11-14: Northwest Region, A.I.A., annual conference, Surftides Resort, Oceanlake, Ore.
- October 15: Due date, drawings for National School Fallout Shelter Design Competition

WESTERN SECTION

Index To Advertising

Manufacturers' Pre-Filed Catalogs of the firms listed below are available in the 1961 Sweet's Catalog Files as follows: a Architectural File (green) ic Industrial Construction (blue)

ic Industrial Construction (blue)
lc Light Construction File (yellow)
Page numbers of manufacturers' advertising

Page numbers of manufacturers' advertising elsewhere in this issue shown in italics

A applied Instituto


\mathbf{T}	Asphalt Institute	27-10
	Basalt Rock Company, Inc 32	-22-23
	Boeckh & Associates, E. H	32 - 30
	California Wood Products, Inc	32 - 26
	Faber-Castell Pencil Co., Inc., A. W	32 - 28
	Fibreboard Paper Products Corp	32 - 25
	Forest Fiber Products 32-28, 32-30,	32 - 32
	Gladding, McBean & Co	32-8
	LeRoy Construction Services	32 - 26
	Los Angeles Brick & Clay Products Co.	32 - 31
A	Ludowici-Celadon Co	32 - 21
	National Rain Bird Sales & Engineerin	g
	Corp	32-8

A-IC-LC Sonoco Products Company 32-29 A Sylvania Electric Products, Inc. . . 32-8, 340

Western advertising offices: LOS ANGELES, Robert L. Clark, 1709 West Eighth Street; SAN FRANCISCO, John I. Howell, 255 California Street

29 12

24υ,υυυ οφ. ι ι. Lrecteu in , νays

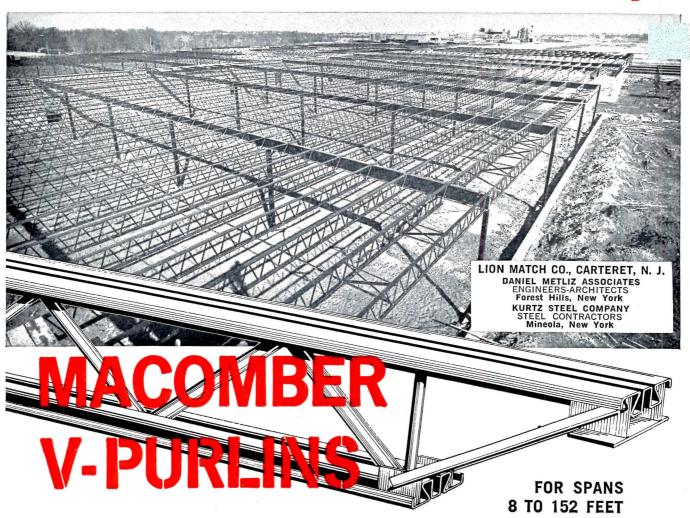

r Strength and Economy

Typical of the cold rollformed strength with lightness engineered and fabricated into Macomber V-Purlins is this enormous steel frame covering 240,000 square feet.

These carloads of open web, nailable steel were erected in 7 working days, further reducing the construction cost.

The design manual opposite is your complete reference source for any steel framing job, 8 to 152 feet. Send for it today.



MACOMBER

ALLSPANS • V-LOK • V-PURLINS • ROOF DECK
BOWSTRING TRUSSES • MACOFORM • STRUCTURAL STEEL

ACOMBER

our Catalog in SWEET'S

Complete 32-page reference manual FREE

- Dimensions
- Properties
- Deflections
- Load Tables
- Bridging

Decking, etc

Please send me your V-PURLIN Design Manual

NAME

COMPANY

POSITION

ADDRESS

ZONE STATE

PAR-29

For more data, circle 34 on Inquiry Card

Machu Picchu, Peru
—from Site Planning

Art Apart from Style

THE SHAPE OF TIME. Remarks on the History of Things. By George Kubler. Yale University Press, 143 Elm St., New Haven 7, Conn. 136 pp. \$3.75.

Much criticism of art and architecture and many histories of art rest upon a substratum of unexamined assumptions that have been accepted for so long that they have come to seem self-evident. One such assumption is "universal style," the concept that at a particular time within a particular locality all artists should be producing work that can be classified under a single heading, epitomized by a single type.

This assumption is a weak frame of reference in which to consider the art of the last two hundred years; but, for some reason, the tendency has been to blame the artists and not to revise the theory. Everyone is familiar with the ingenious formulations that proclaim one classification of art "universal" and castigate the others as "retrogressive," thus transferring the uncertainty of the theorists into an impression of general malaise. The Shape of Time opens a way out of the impasse by subjecting the history of man-made objects to a fundamental analysis. In the process it becomes a very subversive book without in any way proclaiming itself to be one. By calling into question the concept of universal style as it is generally accepted, it undermines much that has been written about the history of art, and does so in language that is understated, distilled, and most felicitous.

Instead of a past neatly stratified and tabulated into historical periods, Mr. Kubler would prefer to look at the history of art in terms of its continuity. He acknowledges that "it is in the nature of being that no event ever repeats, but it is in the nature of thought that we understand events only by the identities we imagine among them." The unit of understanding that Mr. Kubler puts forward, however, is not the historical period, but particular classes of artistic problems, and the sequence of solutions to them, corresponding to the well-known progression from archaic, through "classic," to late work. In Mr. Kubler's view such sequences may co-exist in time, may even co-exist at different stages of development. In fact, a sequence can be resumed after long intervals of space and time, as African primative art was picked up in Europe at the beginning of this century.

Paradoxically, Mr. Kubler attaches great importance to the moment at which the artist makes his "entrance" into the sequence of ideas available to him. In his view, each artistic solution within a given frame of reference inevitably restricts the solutions that come after it. He rejects absolutely the concept, so beloved in the 19th century, of the artist as a Connecticut Yankee who could rewrite the past in terms of subsequent events.

Mr. Kubler's view of the history of art as a continuous thread, whose variegated strands are classes of artistic problems, leads him to reevaluate the extent to which lives of artists define an historical moment and the profit to be gained by considering a work of art in terms of the culture that existed at the time of its production. He is also lead to re-examine the nature of artistic sequence, to define the difference between intentional change and modification through repetition.

The reader may find that there is much in this study that he cannot accept without further investigation; he may also find that there are some things with which he cannot agree. One does not expect otherwise in a philosophical formulation of such wide scope. The significant point is that Mr. Kubler has re-opened a subject too long left closed, and thrown a strong light upon the trivialities which have been multiplying in obscurity. —JONATHAN BARNETT

The Larger Architecture

SITE PLANNING. By Kevin Lynch. The M.I.T. Press, Massachusetts Institute of Technology, Cambridge, Mass. 248 pp., illus. \$8.


Mr. Lynch has successfully met his intention, declared in his preface to Site Planning, of writing "an introduction to the art, an exposition of its principles, and a condensed technical reference." The book will probably give its greatest service to architectural and planning students. At the same time, however, Mr. Lynch's approach and style—direct continued on page 66



Floors and wall of this dramatic lobby in new Kentile Vinyl Travertine. Colors: Off White, Forum Grey, and Natural Beige, with contrasting Hot Canary feature strips. Black Wall Base is Vinyl KenCove®.

New from Kentile! The classic look of costly Travertine marble—in long-wearing solid vinyl tile. Kentile Vinyl Travertine is greaseproof, easy to clean, need not be waxed. Its pitted texture and distinctive veining require minimum maintenance. It is light in weight—no need for floor reinforcing. Six colors. Installed cost in jobs of 1,000 sq. ft. or more: about \$1.00 per sq. ft. over suspended concrete floors. Standard sizes, 9" x 9" and 12" x 12". Thickness, .080". Slightly higher for special sizes and ½" thickness.



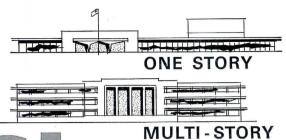

EDUCATIONAL BUILDINGS!

Whatever your requirement! There's a **Bayley** Pre-engineered Window or Curtain-Wall design available in aluminum or steel to fulfill your need with a product that will -

- achieve originality of wall treatment for individualizing the building's appear-
- meet all functional requirements
 provide higher standards of product
 engineering and fabrication
 help your budget
- render maximum years of service with the minimum maintenance costs

Bayley means 82 years of reliability to the building industry. During the early years they were producers of structural steel and ornamental iron. Then they originated, designed, fabricated and erected metal window products especially for educational buildings. This is your assurance of the extra values gained by using Bayley products. Consult us.

BELOW: Princeton High School, Sharonville, Ohio; Archt: Potter, Tyler, Martin & Roth, Cincinnati, Ohio; Contr: Knowlton Construction Company, Bellefontaine, Ohio.
BELOW RIGHT: Ludwig van Beethoven School, Chicago, Illinois; Archt: Perkins and Will, Chicago; Contr: Seco Construction Company, Chicago.









The WILLIAM BAYLEY Co.

Springfield, Ohio Representatives in All Principal Cities

District Sales Offices:

SPRINGFIELD, OHIO 1200 WARDER ST. Area Code — 513 FAirfax 5-7301

NEW YORK 16, N.Y. 280 MADISON AVE. Area Code — 212 MUrray Hill 5-6180

CHICAGO 2, ILL. 105 W. MADISON ST. Area Code - 312 RAndolph 6-5996

WASHINGTON 5, D.C. 1426 "G" ST., N.W. Area Code — 202 STerling 3-3175

ALLS

ALUMINUM and STEEL

For more data, circle 35 on Inquiry Card

Remarkably changeable...
yet steadfast in value

Movable VAUGHAN WALLS*

MOVABLE VAUGHAN WALLS can be moved to new locations so easily and quickly, that you might think they take life lightly. In truth, VAUGHAN WALLS are absolutely unmoving—when it comes to quality and performance.

So, if you are strongly principled about wanting the best, you'll find these ingeniously designed movable walls meeting every demand.

Here is a clinical analysis of the character of VAUGHAN WALLS: they provide one-hour fire rating, 37-decibel sound transmission loss rating, complete movability, virtually 100% salvage, space-saving $2\frac{1}{4}$ " thickness, walls that intersect anywhere, location of service outlets anywhere, and quick job starts... often within 24 to 48 hours (because all parts are stocked locally and no shop drawings are required).

Licensed VAUGHAN WALLS contractors, thoroughly trained and experienced, handle all installations. To learn more about these remarkable walls, see your U.S.G. Architect Service representative, or mail the coupon. In Canada, Canadian Gypsum Company, Ltd., Toronto, Montreal.

*Trademark of Vaughan Interior Walls, Inc.



the greatest name in building

United States Gypsum, Dept. AR-26 300 W. Adams St., Chicago 6, III.

Please send more details on Movable VAUGHAN WALLS*.

Name_____

City_____Zone___State_____

For more data, circle 36 on Inquiry Card

For more data, circle 38 on Inquiry Card >

Address -



ong-life comfort and beauty



Modine cabinet unit heaters for hot water and steam heating systems

Beauty and economy combine with easy installation and maintenance

It's the perfect combination for heating any commercial, institutional or public building. Take beauty! Modine cabinet unit heaters are designed with a wall in mind. They blend into any decor — cabinets available in light gray, tan beige, light green, coral red, light blue, cream yellow and dark gray. And handsome is as handsome does. They provide quick, positive distribution of heated air. No cold spots! No hot blasts! Here's operating efficiency that reduces fuel costs.


Installation? They can be installed easily and economically with or without ductwork.

And if your Modine is partially or fully recessed, exclusive Perma-Lap® neatly frames the unit in the recess . . . snugs up to finished walls or can be used as plaster stop for absolutely flush installation. Maintenance is never a problem — thanks to the Modine time-savers pictured below.

For complete client satisfaction, specify Modine cabinet unit heaters! Full range of types for free-standing, wall, ceiling and recessed applications. Capacities range from 250 cfm to 2000 cfm. For complete information, write for Bulletin 561.



Need oil? Just push a button and the automatic lubrication system sends metered amounts of lubricant to every oiling point.



Need to get inside for servicing? Hinged panels swing open at a turn of key-lock latches. No troublesome screws to remove.



Filter need replacing? No need to remove panels. Filter slides out fast and easy. Slide out the old and slide in the new.



THE MANUFACTURING COMPANY


1510 DEKOVEN AVE., RACINE, WISCONSIN . In Canada: Sarco Canada Ltd., Toronto 8, Ont.

- Steam, Hot Water, Gas-Fired and Electric Unit Heaters
- Contained AlRditioner
- Classroom Heating and Ventilating Units
- Cabinet Unit Heaters, Steam and Gas Blower Unit Heaters
- Specialties
- Radiation Products Convectors,
 Finned Tube, Baseboard

Tied-down cantilever design



Left to right: Jerry Heyman, salesman, Tennessee Coal and Iron; S. S. Kenworthy, structural engineer; Eugene J. Pidgeon, vice-president, Pidgeon-Thomas Iron Company. Auditorium addition: Watkins Overton High School, Memphis, Tenn. ■ Architect: A. L. Aydelott & Associates, Memphis. ■ Structural engineers: S. S. Kenworthy & Associates, Memphis. ■ Structural fabricator and erector: Pidgeon-Thomas Iron Company, Memphis.

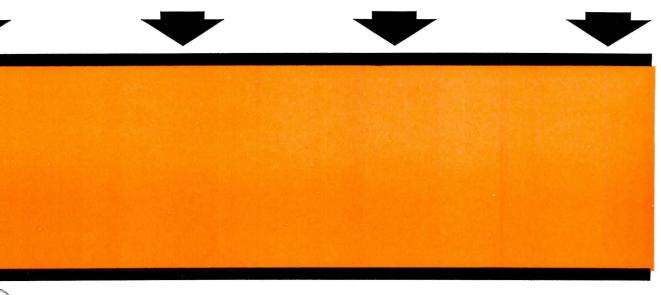

This mark tells you a product is made of modern, dependable Steel.

A36 Steel reduce girder weight 15%

d-down cantilever design with USS A36 Steel uced plate girder weight 15% on this structure, mitting an overall savings in structural steel, and foundations. Upright members (tension columns) hor each girder at the ends. Compression columns, fulcrums, set 8 ft. inside these members, resist and dead loads plus tension column reactions. It is lessens girder deflection and approximates a dend restraint condition in the girders at the comssion columns—using relatively simple column and m connections.

ays structural engineer S. S. Kenworthy, "This nnique, plus the higher strength-to-weight ratio of 6 enabled us to span well over 90 feet with far less of than we normally would've used in A7 steel. The steer structurals gave us a chance to save overall foundations, too, in an area where the ground has stively low bearing soil pressure. Because A36 is welder, we didn't have to bother with the lower strength dable A373 steel. In the end we saved money with 6. I'd say it won't be long before A36 replaces A7 the most commonly used structural steel."

n May 20, 1961, the Tennessee Coal and Iron Division


of U. S. Steel, delivered 150 tons of A36 web plates, flange plates, and wide flange shapes to the fabricator, Pidgeon-Thomas Iron Company, Memphis. In 45 days all structural members were fabricated and at the job site; 15 days later erection was completed.

Watkins Overton School Auditorium structural details. Six plate girders: 48½" deep. Girder web plates: ¾". Bearing plates between columns and girders: 12¾" x ½". Tension columns: 8WF31. Compression columns: 14WF61, set 8 ft. inside tension columns. Clear span: 94'. Complete out-to-out width of structure: 111½'.

Look into the advantages of designing with A36 now. Its favorable strength-weight-cost ratio can save you money, give you complete design freedom. Delivery? No problem. Just call your nearest Steel Service Center or United States Steel district office. Write for our new booklet, "New Steels • New Shapes • New Concepts." United States Steel, 525 William Penn Place, Pittsburgh 30, Pa. USS is a registered trademark.


United States Steel Corporation • Columbia-Geneva Steel Division • Tennessee Coal and Iron Division • United States Steel Supply Division • United States Steel Export Company



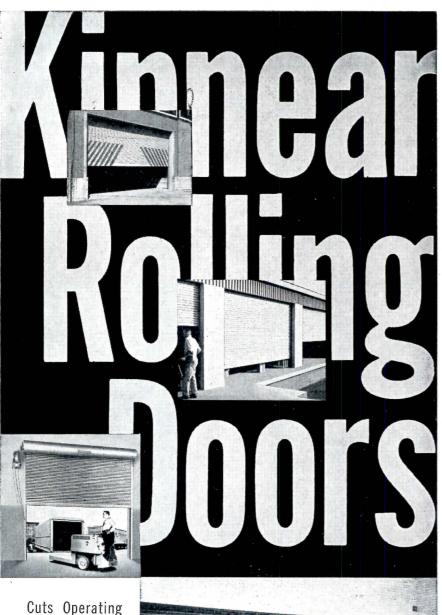

Cuts Operating and Maintenance Costs in Any Size Doorway

LARGE or SMALL

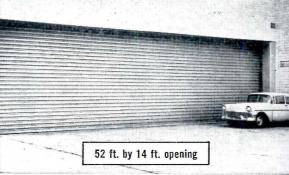

Whether manually or motor operated a Kinnear Steel Rolling Door affords more years of top efficiency. The coiling upward action of *Kinnear Originated* interlocking metal slat door curtain makes all space around door fully usable at all times. When in the closed position it gives maximum protection against wind, weather, fire, intrusion and vandalism. And as to durability; a 60 year record of performance is your best evidence that Kinnear Doors are engineered and built to render dependable service under the hardest daily use. Write today for catalog or recommendations.



The KINNEAR Mfg. Co.

FACTORIES

1860-80 Fields Ave., Columbus 16, Ohio 1742 Yosemite Ave., San Francisco 24, Calif. Offices & Representatives in All Principal Cities

Required Reading

continued from page 58

(even dry), admirably free of professional hokum, and embellished by occasional eruptions of opinion and humor—should recommend it to practitioners who may have forgotten, in the hurly-burly of daily activities, the full possibilities of good site planning.

The book is divided into two sections: Fundamental Technique, being the exposition of principles, and Detailed Technique, being the condensed technical reference. The illustrations include half-tones as well as plentiful and helpful marginal sketches.

The Capital as City

WASHINGTON. Vol. I, Village and Capital, 1800-1878. By Constance Mc-Laughlin Green. Princeton University Press, Princeton, N.J. 445 pp., illus. \$8.50.

Mrs. Green allows, in her introduction, that in this book Washington's "architectural developments net attention only insofar as they marked a change in public interest in the capital." Nonetheless, buildings, city planning improvements and real estate have their place, as do society, politics, education, health and race relations, in her well-knit history of the growth of Washington as a city and as the nation's capital. Washington, with its lack of industry and its unique political structure, is not, of course, typical of other American cities, but Mrs. Green's account, which almost simultaneously describes the city's various civic phenomena, is both generally and specifically interesting.

Paperbacks


SCOPE OF TOTAL ARCHITECTURE. By Walter Gropius. Collier Books, 60 Fifth Ave., New York 11. 158 pp., illus. \$1.95, paperbound.

This is a reprint, in the publisher's World Perspectives series, of Dr. Gropius's writings. The result is apt for the purpose of the series, which continued on page 74



Ginori Tile in Canadian Club, Waldorf-Astoria, New York City. Architects: Ernest Wottitz AIA; Statler Hilton Studios Inc.

in renowned hotels, too the refreshing difference is . . .



by Ginori of Italy

Everywhere . . . in commercial and public buildings, in great hotels and private homes . . . ceramic wall tiles by Ginori of Italy have achieved a dramatic new note in creative design. Available in an extensive selection of unique prints as well as subtly-colored sculptured patterns, these world-renowned Italian tiles can be specified from Zanin, Inc. with the same assurance of dependability, availability and integrity as you would order domestic tiles . . . at prices that will surprise you most pleasantly.

Strike a new vein of inspiration with

GINORI GOLD

ITALY

SINCE 1735

... an entirely new oncept in printed tiles









ZANIN, INC. Exclusive Distributors

Main Offices: 1929 Park Ave., Weehawken, N.J. UNion 5-6600

Consultation Showroom: Ginori Fifth Avenue, 711 Fifth Avenue, N.Y. BR 9-6630 Also at Architects Bldg. 101 Park Avenue, N.Y.

For more data, circle 40 on Inquiry Card



Which client can afford FOAMGLAS Roof Insulation today?


The new thickness and unit size means that quality FOAMGLAS®can be the right insulation specification for most building roofs; an office building, an industrial plant, a hospital, a bank or a research lab.




Nothing but FOAMGLAS Roof Insulation gives a building the constant insulating value that results from an in-

organic, cellular glass composition. It just can't absorb moisture. And, it's available now in a $1\frac{1}{2}$ " thick FOAMGLAS-BOARD **PITTSBURGH** unit—a sandwich of FOAMGLAS covered with kraft laminate paper in a 2' x 4' size. This new thickness and size means a reduced installed cost. Write for your copy of the FOAMGLAS Building Insulation catalog. It includes application specifications, thicknesses, U-values. Pittsburgh Corning Corporation, Dept. B-92, One Gateway Center, Pittsburgh 22, Pa.



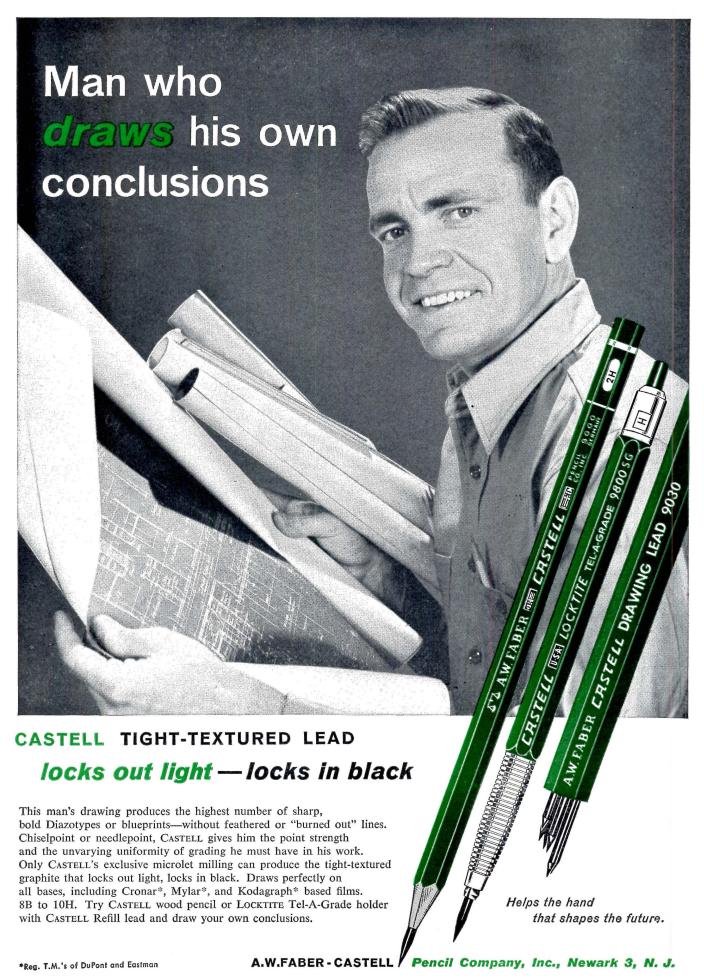

For more data, circle 42 on Inquiry Card

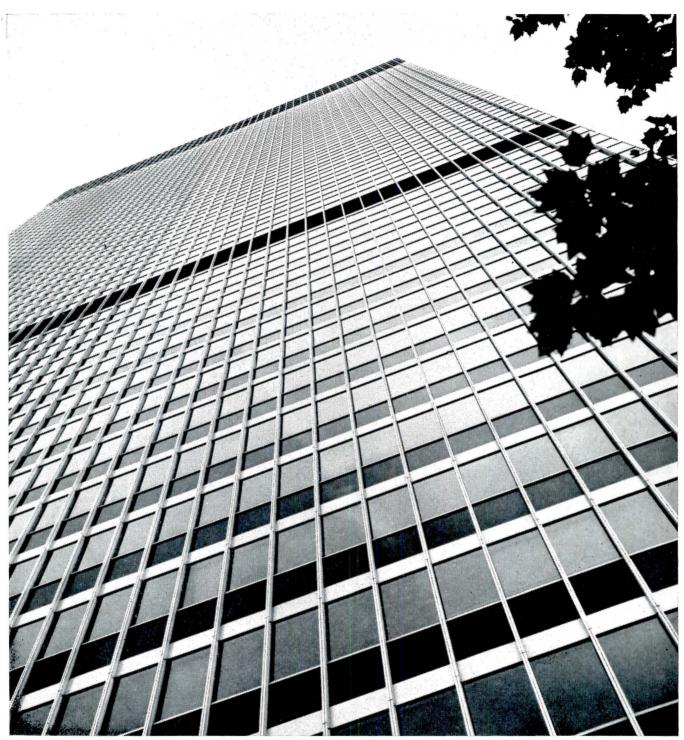

Why were Flexalum Twi-Nighter® venetians chosen for the 8,200 windows of the new Equitable Life Assurance Society Building?


It wasn't just because they submitted the lowest bid

It was because Flexalum offered two unique skyscraper modifications that complement the lines of curtain-wall buildings. How? By not having any tapes visible from the outside (we hide them behind the mullions)... and by limiting the tilt cycle, only the special grey exterior tone is visible from the outside. A special off-white was chosen for the inward side of the slats. (The tapes are also 2-tone.) Flexalum's skyscraper modifications fully integrate the venetians with the design of the building. Flexalum Twi-Nighters seldom, if ever, need repairs, look new longer and don't have to be pampered. They're backed by a 5-year Bonded Guarantee. All things considered, maybe the Flexalum Dealer did submit the lowest bid...by far.

For information on skyscraper modifications, write to Bridgeport Brass Co., Hunter Douglas Division, 30 Grand Street, Bridgeport, Conn.

 $\widehat{\mathit{Hexalum}}_{\scriptscriptstyle{ ext{ iny 8}}}$ Twi-Nighter Special-Purpose Venetians

You're looking into an AUTOTRONIC penthouse. The 'brawn and brain' source. Brute strength of the electric lifting machine. Unlimited 'intelligence' of electronic supervision.

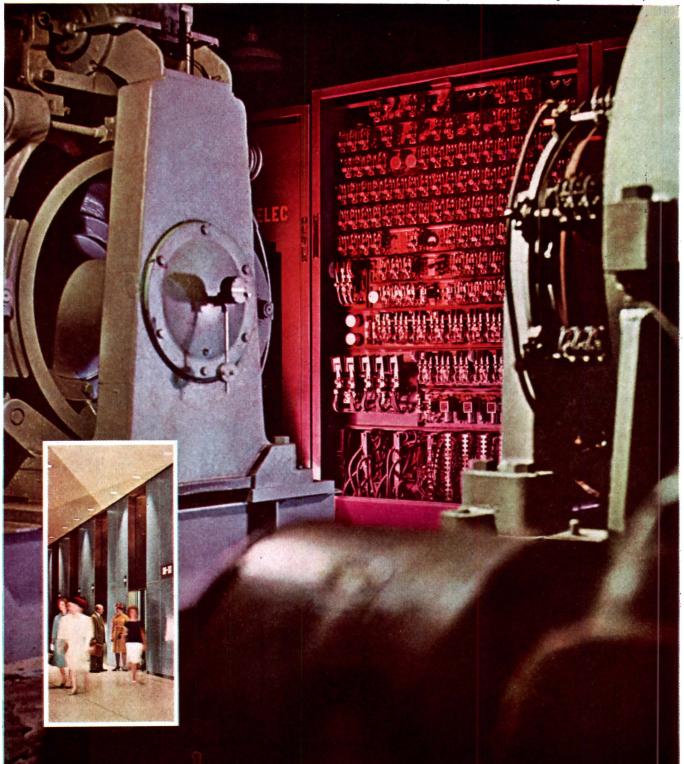

Today it's unlimited elevator automation

—a still further advance in AUTOTRONIC® elevatoring. By the leader in elevator automation—OTIS. It's unexcelled! What does it mean to you? As an elevator rider: Almost instant service. Anytime. Anywhere in the building. As a building owner: Unequalled service. With the least number of cars.



260 11th Avenue, New York 1, N.Y. Offices in 460 cities around the world



Architect: Inscho Brand & Inscho. Consulting Engineer: Schmidt Garden & Erickson. General Contractor: G. W. Atkinson & Son. Mechanical Contractor: The Huffman-Wolfe Compar

Inside it's 'ing the year-round



ecause a Gas-powered Carrier System completely air conditions the new Riverside Methodist Hospiol, Columbus, Ohio. Two 342-ton capacity Carrier Gas absorption units supply chilled water to the hospital. Three more Carrier Gas units, with a total 340-ton capacity air condition the nearby School of Nursing and Tiverside Medical Building. All are operated from the same gas-fired boilers that supply steam for heatorg and hot water. Result: the heating plant runs efficiently on a year-round basis. And economical as is good medicine for hospital budgets. Want more facts? Call your local Gas Company. Or write arrier Air Conditioning Co., Syracuse 1, N.Y. For heating and cooling... Gas is good business

AMERICAN GAS ASSOCIATION

HEXCEL HONEYLITE® MOST EFFICIENT LOUVERALL CEILING YOU CAN SPECIFY!



TRAPS LESS LIGHT— Honeylite has 95% open area, thinnest cell walls to let more light through. Hexagonal cells have 2 more reflecting surfaces than conventional louvers.

EASILY INTEGRATED with air conditioning systems: Honeylite serves as an efficient air directional diffuser, is also proven as an rf shield to eliminate fluorescent lamp "hash".

MORE FOR YOUR DOLLAR—lightweight Honeylite is inexpensive



to install. T-bar grid suspension system of extruded aluminum is furnished for hanging by 12 gage wire. Further economy is assured with Honeylite's efficiency—fewer lumens are required to deliver desired foot-candles to work areas.

VARIETY OF CUT-OFF ANGLES FOR SCREENING electrical and mechanical installations in the plenum. Three cut-off angles offered: 45°, 52.5°, and 60°.

LOW MAINTENANCE—Honeylite's open cell design does not trap dirt and dust, makes cleaning easy. Non-static. Aluminum construction assures longest life.

YOUR CEILING DESIGN LAB TESTED in our own lighting laboratory, to assure maximum efficiency on your jobs.

BEAUTY & UTILITY—Honeylite achieves attractive, flush, continuous ceilings, integrates beautifully with decorative and acoustical materials. Available in standard white, or a full range of decorator colors. Panel sizes: 1′ x 4′, 2′ x 2′, 2′ x 3′, 2′ x 4′, or to your dimensions. Cell sizes: ½″ and ¾″.

For data see our Sweet's file 32a



Strong, light, versatile honeycomb

Executive Offices: 2332 Fourth St., Berkeley 10, Calif.

Plants: Berkeley, Oakland, Calif.; Havre de Grace, Md.

Sales Offices: Inglewood, Calif.; Fort Worth, Texas;

New York, N.Y.; Havre de Grace, Md.

For more data, circle 46 on Inquiry Card

Required Reading

is to promote a synthesis of moder thought. The result is not quite s apt, however, as a study of Dr. Gropius's thought. The pieces included were written over a 30-year perio—1924-1954—but are not arrange chronologically. Some of the chapters, furthermore, are abridgement and combinations of two or more earlier articles, sometimes separate by a number of years. This editorist treatment, with its shifting style may be occasionally confusing to the reader.


This is not to say that it is in possible to follow Dr. Gropius thought; it has, as a matter of face been extremely consistent over the past 30 years—although it is fair to say that his view of man has become less relentlessly socio-statistical, and his expression of the *mystique* of the team more clear.

In any case, these articles originally appeared in a number of magazines, both American and European in other books, and even in Congressional reports, and the convenient of having Gropius, chopped up on the tween two covers is a book one may wish now for a real collection.

THE CITY. By Max Weber. Translate and edited by Don Martindale an Gertrud Neuwirth. Collier Books, 6 Fifth Ave., New York 11. 256 pp illus. \$.95, paperbound.

Weber's germinal sociological hitory of the city, published in 192 was important for its recognition the city as a complex of economissocial, political, and military interelations. But whether the reader 1962 will agree with Mr. Martindale prefatory comment, "The age of the city seems to be at an end," will depend on the acceptance he give Weber's definition of the city. However comprehensive, this definition limited to the city-states of Antiquiand the Middle Ages.

The text is unfortunately marr by careless proofreading and sting punctuation, and further by irritaingly pointless footnotes (surely one requires two sources to bolst the assertion that Thomas Edisinvented the electric light bulb).

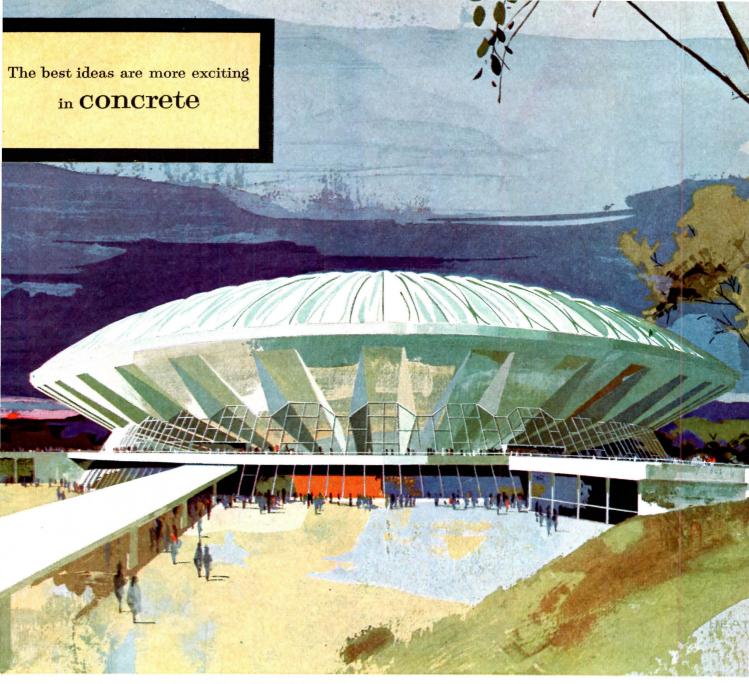

University of Illinois Assembly Hall, Urbana, Illinois. Architects: Harrison & Abramovitz, New York. Structural Engineers: Ammann & Whitney, New York Mechanical-Electrical Engineers: Syska & Hennessy, Inc., New York. University Architect: Ernest L. Stouffer. General Contractor: Felmley-Dickerson, Urbana, Illinoi.


Floating saucer" of folded concrete roofs 3 acres

the e of any supporting columns, the roof of the new University of Illinois Assably Hall will seem to "float" over the spectators. This is the world's largest crete dome, 400 feet across and weighing 5,000 tons. It is borne entirely by peripheral ring of prestressed concrete resting on 48 concrete buttresses. There's an unobstructed view from every seat in the house for sports events, ting arrangements and staging are readily adaptable for theatricals and contast. For insulation and acoustical control, the underside of the roof will be ed with cement-wood fiber panels.

The use of concrete to effect such architectural and engineering achievements een more and more today. Everywhere architects are turning to versatile conte to create designs of outstanding beauty and functionality.

PORTLAND CEMENT ASSOCIATION

A national organization to improve and extend the uses of concrete

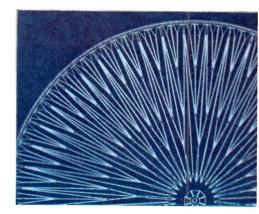

Intricate design pattern of roof is shown in this detail sketch. The webs of the interlacing folded plate segments of concrete are as thin as 3½ inches. The center of the dome is 128 feet above the floor.

How to end up in the

It is certainly possible to design an air conditioning system by specifying a variety of major components made by different manufacturers.

You may even save the owners a few dollars—with refrigeration equipment from one source, cooling and heating coils from another and fans from somewhere else.

But each added source of supply multiplies the owners' problems when they try to fix responsibility for performance. There they are—right in the middle.

Whom will they call if mechanical trouble develops? Which component

needs attention? Where will they turn for service?

The answers come easily when you specify equipment from one responsible supplier of major components—able to keep the equipment in first-class operating condition.

Although not the only air conditioning manufacturer offering a broad line of components, Carrier is best prepared to serve the owner should trouble come. For our company and our dealers maintain the largest and best-trained service organization in the business—over 11,000 men strong.





Open-and-shut case for economical service entries

Milcor Steel Access Doors provide the convenience and economy of a completely prefabricated assembly — no on-site cutting and fitting. You get a better-looking installation — flush with the surface — made of durable steel so it won't warp, crack, swell, or bind. You can select from five styles — each suited to a particular surface — and thirteen popular sizes. Milcor Access Doors have recently been redesigned: new frame construction makes units more rigid; wider flanges afford easier fastening; new prime coats increase protection. For details see Sweet's section 16k/In, or write for catalog 210.

Milcor Metal Lath and Trim Products

Member of the AMAD Steel Family



METAL LATH . CORNER BEADS . CASING BEADS . CHANNELS . STUDS . PARTITION SYSTEMS . ACCESS DOORS . WINDOW STOOLS . METAL BASES

Inland Steel Products Company

DEPT. I, 4033 W. BURNHAM ST., MILWAUKEE 1, WISCONSIN

ML-58


BALTIMORE 5, BUFFALO 11, CHICAGO 9, CINCINNATI 25, CLEVELAND 14, DETROIT 2, KANSAS CITY 41, MO., LOS ANGELES 58, NEW YORK 17, ST. LOUIS 10, SAN FRANCISCO 3



DESIGN FOR A COLLEGE DORMITORY, FEATURING

In planning this college dormitory, the designer has used the decorative and functional qualities of American Olean tile to special advantage. Large size 6" x 4½" glazed tile on interior walls creates a background of quiet color for bright furnishings and accessories in

the busy common rooms and in the dining area. On floors, Murray* quarry tile contributes matchless durability and an appropriately rugged, rustic look which blends most favorably with the surroundings. From a practical standpoint, ceramic tile is the easiest

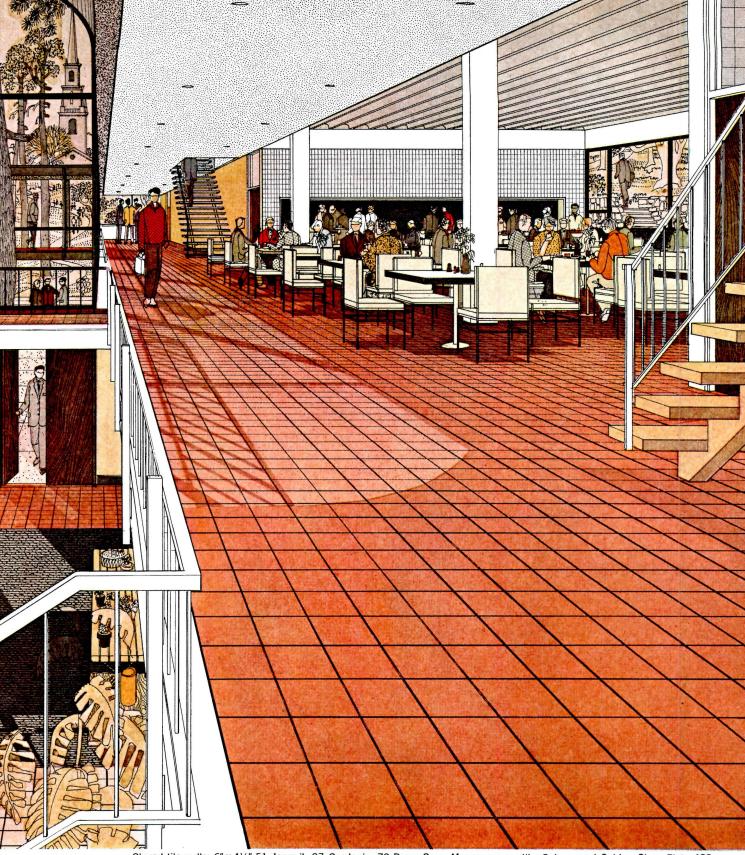


Glazed tile walls: 6" x 41/4" 51 Jonquil, 97 Gardenia, 72 Dawn Gray. Murray quarry tile: Sahara and Golden Glow. Plate 483.

THE NATURAL BEAUTY OF CERAMIC TILE


of materials to clean and its beauty is permanent. It will take endless years of abuse without showing wear . . . reduces maintenance costs to a minimum. Write now for American Olean Product Catalog 212 and Booklet 620, Ceramic Tile for Schools and Colleges.





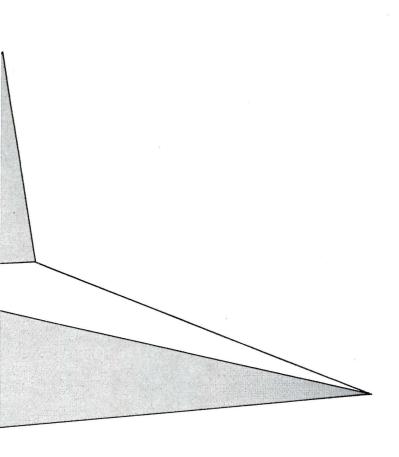


most exciting ideas take shape in fir plywood

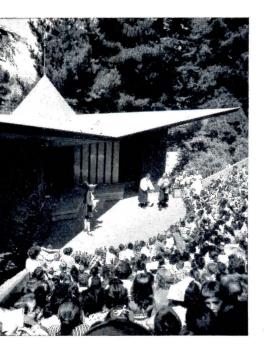

THIS INGENIOUS STAR-SHAPED ROOF demonstrates the remarkable structural forms that can be achieved with plywood. Deceptively simple, the design bears more resemblance to airplane wings than a conventional roof, with interacting plywood and lightweight lumber members forming skeleton and structural skin.

Four plywood I-beams radiate from the center to form the spines of the 22 x 38-foot wings. Trusses cantilever off both sides of the beams and plywood skins form a rigid diaphragm that provides structural integrity for the entire assembly. The roof is supported by only eight steel columns. Components were temporarily bolted together by the fabricator to check tolerances, then trucked to the site for installation.

For further information on plywood and other new plywood structural systems, including folded plates, space planes, Delta structures, components, etc., write (USA only) Douglas Fir Plywood Association, Tacoma 2, Washington.

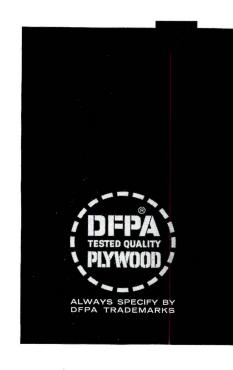

For more data, circle 51 on Inquiry Card

NEWS OF ENGINEERS: JONES WINS A.S.C.E. FELLOWSHIP; N.S.P.E. AWARD TO DRAPER Russel C. Jones, a doctoral candidate and part-time instructor in the department of civil engineering at Carnegie Institute of Technology, has been selected to receive the \$5,000 American Society of Civil Engineers' Research Fellowship. He will devote full time during the 1962-63 academic year to research toward his Ph.D. degree. His work involves using well established dislocation models to predict behavior of materials on a macroscopic scale.

Dr. Charles Stark Draper, found and director of the Massachuset Institute of Technology Instrume tation Laboratory and head of t Department of Aeronautics and Atronautics, received the 1962 National Society of Professional Engineers Award for outstanding servito the engineering profession. I Draper, widely known for his woin fire control and inertial navigation devices, was presented to award—the 12th since its initiation 1949—at the National Society June meeting in French Lick, Ind.

Dr. Robert L. Kondner, assista professor of civil engineering Northwestern University, has w the Alfred A. Raymond Award i his paper, "Bearing Capacity Friction Pile Groups in Cohesi Soils." The award, a \$1,000 fire prize in a national foundation of sign contest, is sponsored (and h been since 1958) by Raymond Co crete Pile, division of Raymond ternational, to build interest in for dation engineering and soil n chanics. Dr. Kondner took a new a proach to designing pile found tions. He used data from model tes then put this in nondimension form suitable for solving all desi problems involving pile groups clays.

Alfred H. Samborn, partner in Sa born, Steketee, Otis and Evans, To do engineers, has been honored the Toledo Society of Profession Engineers for outstanding service the engineering profession, partic larly through his activities in loc state and national engineering so eties. Mr. Sanborn is past preside of both the T.S.P.E. and Ohio Socie of Professional Engineers, has be a director of the national organization tion for the past five years, and h held 21 elected offices and comm tee chairmanships in the thi groups over the past 12 years.

Dr. Roy A. Seaton, dean emeritus Kansas State College, and Dr. L ton E. Grinter, dean of gradus studies at the University of Floriowere awarded honorary memberships in the American Society: Engineering Education. The presentation was slated to be made on Ju 18 during the annual meeting A.S.E.E. held at the U.S. Air For Academy, Colo.

HI-LO COOLERS
Trim wall hung models with convenient child-height bubbler; single cooler available, too, in varying capacities.

Specify



inDES[GNandSERV[CE



"FLUSH-TO-WALL" COOLERS HWF-Series coolers in many capacities; fit flush-to-wall to end cleaning cares;

When you specify HAWS, you are sure of getting the best fountain or cooler for any particular location. For over 50 years, HAWS has set the pace with better materials, fine design and superior workmanship. Why settle for less? See the complete array of HAWS products in the detailed catalog—yours for the asking. Write today.





▲ ENAMELED IRON Model 7X, a rugged classic design in acid resisting enameled iron.



products of HAWS DRINKING FAUCET CO. 1441 FOURTH STREET • BERKELEY 10, CALIFORNIA

bracket.




FIBERGLASS
WALL FOUNTAIN
Model 71, available in choice of colors at no extra cost.




VITREOUS WALL MODEL A Model 61, in smooth vitreous china, features tasteful Haws styling.




RECESSED BEAUTY
Model 73 fits in the wall, smoothly contoured in stainless steel.

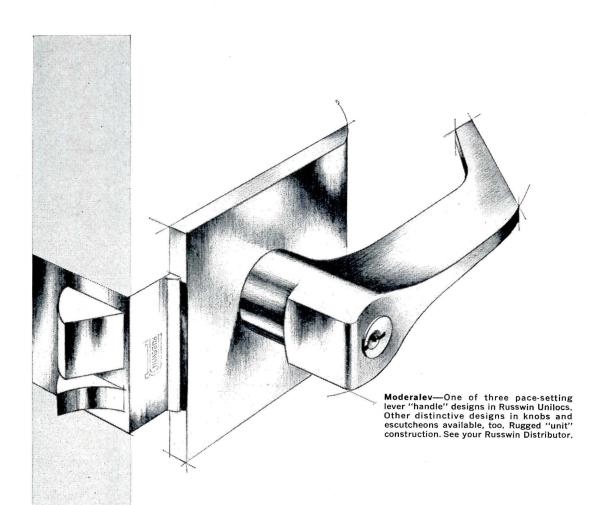

To accent your creative design...



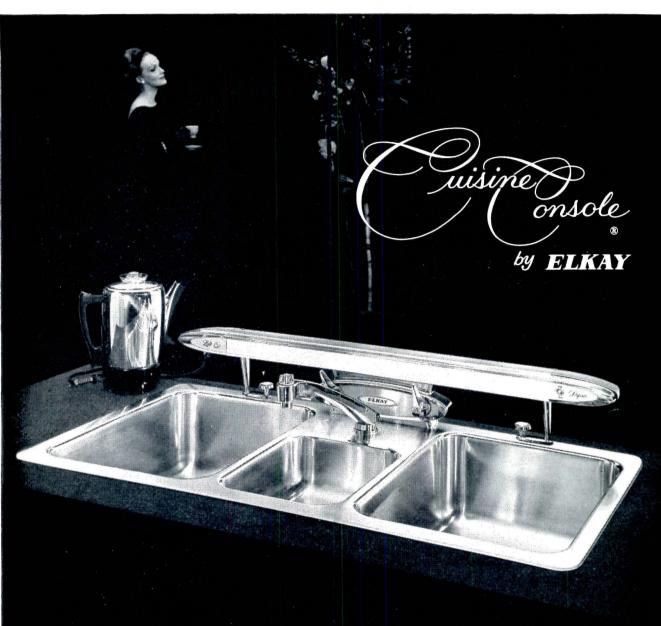

When planning your dream kitchen, consider one of these glamorous servants by Elkay.

The Cuisine Console is the ultimate in fashion and function. An exclusive worklight eliminates shadows (doubles as night light). Compartments drain by remote control. Other advanced features include convenient disposer switch and appliance outlets. Available with two or three compartments. NuTone power unit optional.

Write for free literature describing sinks for all living areas: kitchen, bar, patio, laundry, bath.

ELKAY MANUFACTURING COMPANY • 2700 S. 17th Ave. • BROADVIEW, ILL. ©1962




Available with 2 or 3 compartments. NuTone



Economy model with oversized compartment to accommodate roasting and broiler pans.

compacion

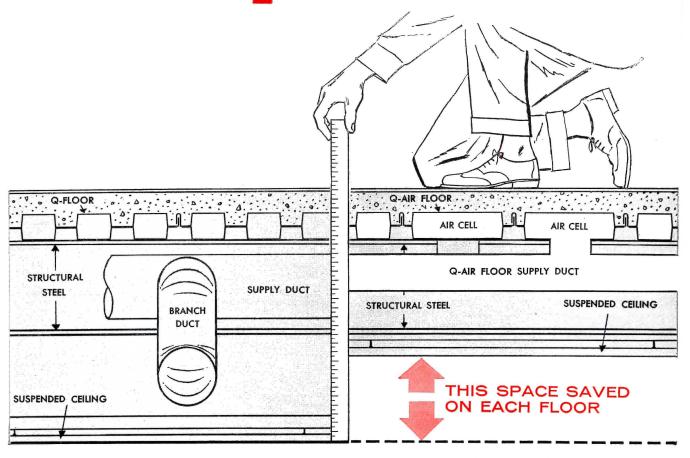

Compaction is the word that describes the space saved in a modern air conditioned building when Robertson Q-Air Floor is used. Because the cellular steel structural floor distributes hot and cold air as well as power and communications wiring, the distance between floor and ceiling below can be reduced as much as a foot. Compaction is assured because the secondary ducts go over the beams. This feature alone can save as much as 5% of the material cost of a building. Use the coupon below to obtain the latest Q-Air Floor Catalog.



H. H. ROBERTSON COMPANY

FARMERS BANK BUILDING . PITTSBURGH, PA.

In England—

Robertson Thain Limited, Ellesmere Port, Cheshire

In Canada


Robertson-Irwin Limited, Hamilton, Ontario



Sales Offices In Principal Cities Throughout The World Plants In: Ambridge, Pa. • Connersville, Ind. • Stockton, Cal.

H. H. Robertson Company 2400 Farmers Bank Bldg., Pittsburgh 22, Pa. I would like to have more information on Q-Air Floor. Please send me your Q-Air Floor Catalog.		
Title		
Firm		2000 (Control of Cont
Address		
City	Zone	State

For more data, circle 55 on Inquiry Card

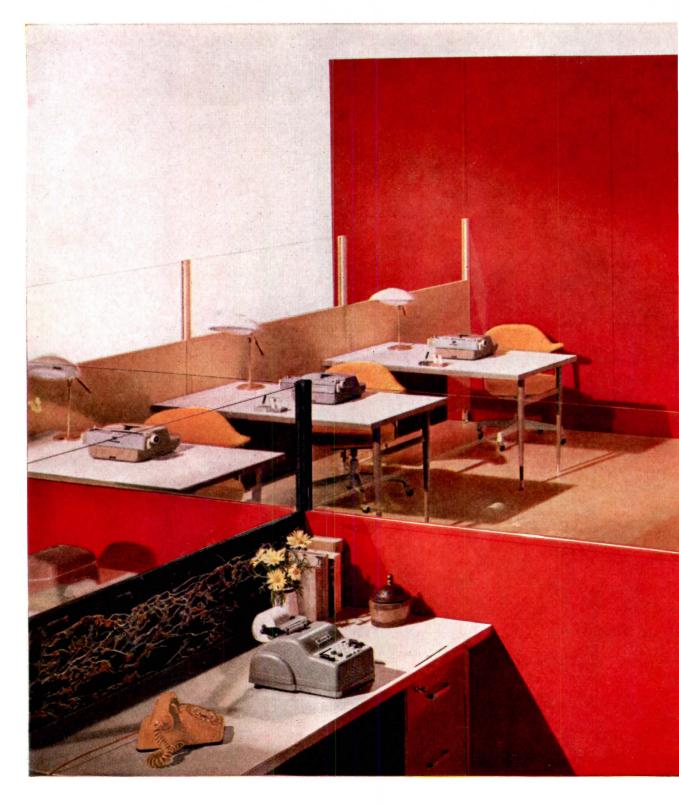

Design unlimited with new J-M *low* walls and J-M *high* walls

These new J-M movable walls acc an unlimited variety of interest finishes. Cover them with a marized pattern, as shown above. Fir them with one of the many new vifabrics. Paint them in bright coor pastel tones. Veneer them v wood. Apply mosaic tile or a l relief.

Or have the asbestos-cement ings integrally colored, a treatm available on special order.

Besides their unusual decora



aptability, these walls offer many er important advantages. They go fast. They are only 1¾" thick, yet y are sturdy in appearance and rdy in service. They can be easily quickly moved, re-using every ce of material. They have an inhustible core. They have asbessheet facings. They have steel ming. They meet most fire codes. J-M High Wall panels fit into tal floor and ceiling channels. se and cornice snap on, to com-

plete the wall in a matter of minutes.

J-M Low Walls have slotted panel frames that engage hooks on the steel posts. Low Walls not only make efficient space dividers, but also can be used to form such special enclosures as the telephone booth you see above at right.


For the quickest way to get more information about these new walls, take the advice of the sign in the telephone booth: call your nearest J-M Representative. Or write to Johns-Manville, Box 158, Dept. AR-9, New York 16, N. Y. In Canada: Port Credit, Ont. Cable: Johnmanvil.

JOHNS-MANVILLE MOVABLE WALLS

this man specifies...assured of

EXPERIENCED ORDER ANALYSI

He knows that his GJ catalog offers a wide variety from which to make his choice. If there is a problem he welcomes the help of his Glynn-Johnson representative—assured of the most effective door control, plus the right finish and material.

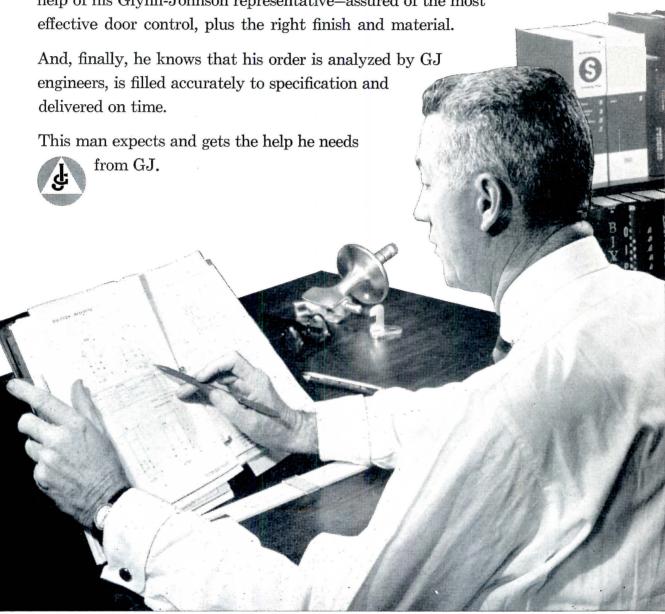

GJ hardware is built to endure . . . and LOOKS it.



GLYNN · JOHNSON CORPORATION / 4422 no. ravenswood avenue · chicago 40, illinois




First Presbyterian Church, Gastonia, N. C.




Simmons College Library, Boston, Mass.

Allstate Insurance Co., Atlanta, Ga.

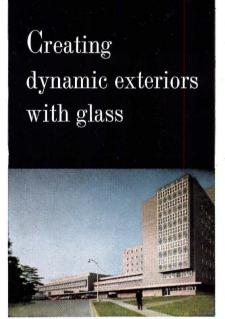

 West Virginia University Medical Center, Morgantown, W. Va.

You can produce innumerable moods, a countless variety of effects with glass. It all depends on how you use it. The smooth hard brilliance of the glass curtain wall has been so successfully exploited that many other personality traits of this versatile material have been neglected. The buildings discussed here are interesting because they use glass dynamically, in active coordination with other building products. None is a "glass building" per se. Yet all use glass as a major design element, exploring its many properties and possibilities to achieve the overall effect.

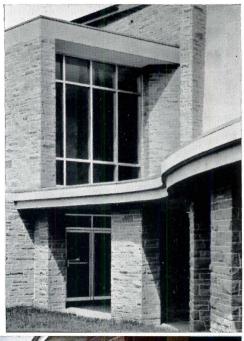


• TO RELIEVE THE FORMIDABLE STONE MASSES of the First Presbyterian Church without disturbing the impression of weight, substance and dignity, clear, heavy sheets of Lustracrystal® are set deep into surrounding masonry, shaded and confined by the heavy slab of the roof.


(Left below) BY FAITHFULLY REFLECTING COLOR and texture of adjacent stonework, even these very large expanses of Lustracrystal® serve rather to complement the building's basic structure than to overwhelm it, or diminish the feeling of solidity and mass.



| Below| LUSTRAGRAY® DRAMATIZES the handsome tapered lines of concrete roof and corner posts in the employees' lounge section of the Allstate building, provides a brilliant contrast around the entire periphery of the framework.

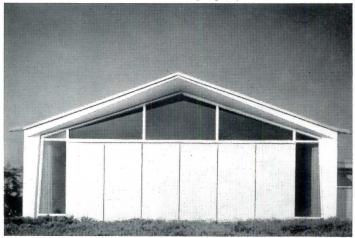

Architect: Stevens and Wilkinson, Atlanta, Ga,

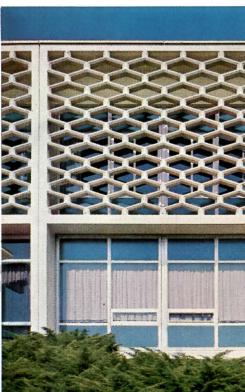

GLASS PLAYS SUPPORTING ROLE GRACE-FULLY at the Allstate building. Ground floor windows of Lustragray® sash and spandrels of horizon blue Huetex® are inset into the surface to emphasize concrete, create a pattern of strong shadows. In the second floor a concrete screen obscures the shape of windows while it suggests their presence. The straightforward structural lines prevail here, too: each panel of the screen is confined on all sides by solid concrete.

Glass is a good mixer The effective

ness of glass in a building exterior need not depend on the actua

• A FENESTRATION PROBLEM was turned into an aesthetic opportunity at West Virginia University Medical Center. Strictly functional planning of teaching, laboratory and hospital facilities precluded a rhythmic pattern of window openings. The solution was to integrate window glazing into a mural of colored, frosted and patterned glasses. Projecting cantilevers or borders, and strong aluminum frames, limit the lively pattern to allow the clean planes of gray speckled glazed brick to assert themselves.

(For right) THE BLUE-GREEN PANELS are Aklo* heat-absorbent glass, patterned and frosted. Light gray areas are frosted Huewhite®. Medium gray areas are Luminex®, frosted and patterned. This construction also includes specially prepared Luminex with dark gray or black enamel fired onto one side, and Feurex® borosylicate glass, polished on one side, with dark gray metallic oxide coating on the other.










TO PROVIDE MAXIMUM DAYLIGHTING without the all-glass look, the windows at Simmons College library are recessed deep into the limestone facade. The resulting waffle pattern throws the masonry into strong relief, emphasizes its mass, color and texture. The extra panel in the corner windows visually supports and confines the rows of windows, much the way a bookcase encloses rows of books. Glarereducing Lustragray® complements exterior color, relieves the uniform facade by reflecting color and movement from sky and landscape, and controls light and heat inside the building without color distortion.



Architect: C. E. Silling and Associates, Charleston, W. Va.; Associate Architect: Schmidt, Garden & Erikson, Chicago, III.

mount of glass used. A discriminating combination of glass with my other building material can produce an overall effect that dislays the best properties of both with equal force.



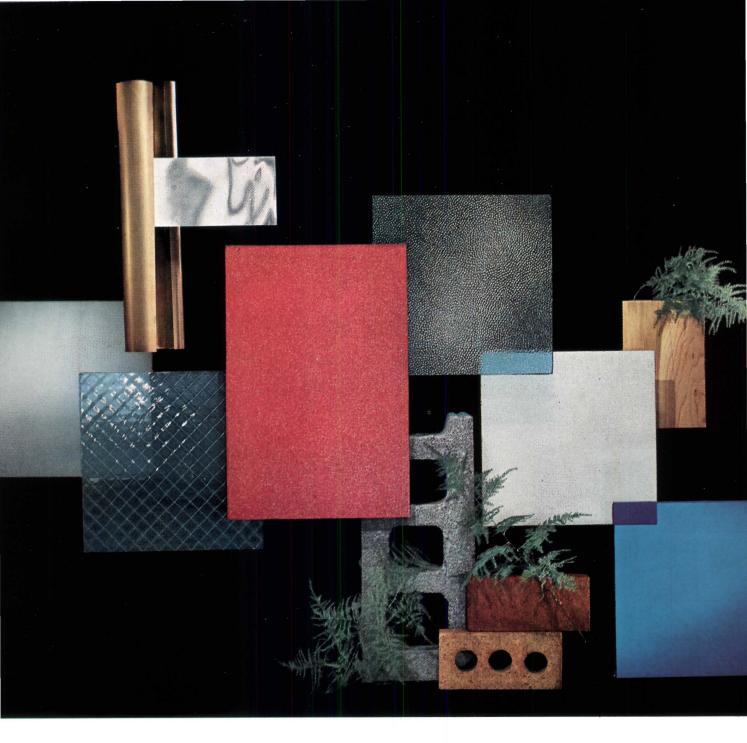

Dynamic

COORdinates

The wide range of plate, patterned and sheet glasses available from American-Saint Gobain permits exceptional freedom in combining glass and other construction materials to create varied and highly individual effects. Here are some combinations of A-SG glass and popular building materials—some exotic, some very businesslike—that suggest a small part of the broad, colorful A-SG line. You can get all these types of flat glass from American-Saint Gobain. Your A-SG glass distributor is listed in the yellow pages. For more information, call the A-SG Sales Office nearest you, or write to American-Saint Gobain Corporation, Dept. AR-9, Kingsport, Tennessee.

AMERICAN-SAINT GOBAIN CORPORATION



particular economies synony-mous with modern aluminum ex-trusions. A low first cost, a long range savings in long life and little upkeep. E-L covers are supplied for 1", $1\frac{1}{2}$ ", and 2" expansion or contraction. Their efficiency is underscored by the design concepts hinted at in the cut-away above. But consider these features too:

At the same time, they afford the

PATTERNS: Plain plate shown; four different patterned plates and special abrasive plates also available.

MATERIALS: All members extruded aluminum. Abrasive plates have aluminum oxide particles embedded in surface. Filler strips of abrasiveresistant extruded vinyl. Aluminum anchors self-locking and adjustable for desired centers.

FINISHES: Mill or beautiful satin finish. An array of color finishes too, selected to harmonize pleasingly with tile or terrazzo.

Our NEW **CATALOG** gives complete datawrite for it! Samples also supplied on request.





NEW SCHOOL OF ARCHITECTURE AT COLORADO U.

A separate School of Architecture has been established at the University of Colorado, Boulder, and Professor DeVon M. Carlson has been named its first dean. Professor Carlson was formerly acting head of the Department of Architecture and Architectural Engineering, since 1952 a division of the College of Engineer-

Offering the Bachelor of Architecture degree and, in conjunction with the College of Engineering, the Bachelor of Science degree in Architectural Engineering. the new school will revise the five-year curricula now taught in the department. Beginning in the fall of 1963, additional programs will be made available in various related disciplines, such as landscape architecture, interior design, urban planning and art.

Prospective students will complete freshman and sophomore requirements for professional degrees with the College of Arts and Sciences or other C.U. colleges before enrolling in the school.

HALLOCK HEADS DEPT. OF ARCH. AT PENN STATE


Philip F. Hallock has been named acting head of the Department of Architecture at Pennsylvania State University. He succeeds Dr. Milton S. Osborne, who retired with emeritus rank on June 30. In addition to his administrative duties, he will continue teaching architectural design and the professional practice of architecture.

Professor Hallock came to the University in 1947 as a part-time instructor, and by 1953 was professor of architecture. A 1935 graduate of Penn. State, he received his M.S. degree in architecture in 1937. He has designed a wide variety of buildings in Illinois, Ohio, New York and Pennsylvania. Since World War II he has been active in committee work in the American Institute of Architects. the Pennsylvania Society of Architects and was president of the central Pennsylvania Chapter in 1956.



Newly styled Brookline Door Pull assures maximum good looks, hard usage and convenience. Half-round material in stainless steel, brass, bronze, chrome or aluminum. 25/8" clearance. Mounted with 2 through bolts if used singly or

mounted back to back with concealed fasteners. O. A. length 8". Positively guaranteed for the life of the building against breakage. Low price.




JJ Same as #792 with addition of 3" x 2" back plate for convenient surface mounting with wood or machine screws.

BROOKLINE

INDUSTRIES, INC.

6800 South Chicago Avenue . Chicago 37, Illinois



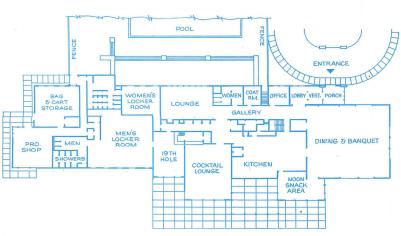

WEST COAST DOUGLAS FOR WEST COAST HEMLOOW WESTERN RED CEDA SITKA SPRUC

WHITE F



Uses WEST COAST LUMBER



An interesting wall pattern is developed with the vertical application of $\frac{3}{4}$ " x 10" West Coast Hemlock bevel siding in the club's cocktail lounge.

A variety of sizes and grades of Coast region West Coast Lumber was used to create a harmoniously rustic atmosphere for this Everett, Washington golf and country club.

Constructed in two stages to meet the club's financial capabilities, the completed clubhouse offers facilities for the membership's family enjoyment of golf and swimming, then serves equally well as a social center for both formal and informal gatherings.

Paneling in the social rooms are of West Coast Hemlock and Western Red Cedar, applied to a hemlock framework. Interesting grain patterns and the natural, beautiful colors of these species provide a warm welcome. Equally important, the ease of upkeep saves time and eliminates the need for redecorating for years to come.

Your design objective is reached easily and simply through the use of a variety of sizes and grades available in Coast region West Coast Lumber. Ask your retail lumber dealer. He is your dependable source for planning information and supply.

Technical West Coast Lumber Information:

Technical West Coast Lumber Information:
Joists: 2" x 10", 2" x 12" West Coast Hemlock.
Wall Framing: 2" x 4" West Coast Hemlock.
Beams: 7" x 17½", 7" x 21½", 9" x 17½", 11" x 17½", 9" x 19½", 5¼" x 13"
glue laminated West Coast Douglas Fir.
Roof Trusses: 64' and 60' widths made of 2"x12", 2"x8" West Coast Douglas Fir.
Roof Decking: 3" x 6" tongue and groove, end matched West Coast Douglas Fir.
4" x 6" tongue and groove Western Red Cedar exposed in dining room.
Panelings: 1"x 6" Western Red Cedar, ¾" x 10" bevel siding, 1" x 10" boards, 1" x 10"
boards with 1" x 3" battens and 1" x 10" reverse board and batten.
Fencing: 1" x 3" Western Red Cedar spaced 1" applied to 2" x 4" West Coast Douglas Fir rails and 4" x 6" posts around swimming pool.
Millwork: Fir and Hemlock.

Millwork: Fir and Hemlock.

Lockers: West Coast Hemlock.

Exterior Finish: Penetrating stain.

Building Area: 86'-8" x 272'-4" (16,570 sq. ft.). Basement: 9,455 sq. ft. Terrace: 8,000 sq. ft. Swimming pool: 30' x 75'.

"Modern Design with West Coast Lumber," full color, 40 pages of building ideas. Write for your personal copy today . . . Dept. 99


WEST COAST LUMBERMEN'S ASSOCIATION

1410 S.W. Morrison Street, Portland 5, Oregon



KAISER CENTER, Oakland, California. ARCHITECTS: Welton Becket & Associates. GENERAL CONTRACTOR: Robert E. McKee General Contractors, Inc.

High speed mail distribution streamlines the paper flow in new Kaiser Center

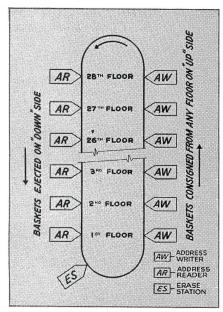

"Magnetic memory" control system has no moving parts, no levers, no between-station wiring . . . nothing to wear out. Diagram shows how address "writers" and "readers" are located between the building's 28 floors. If you are planning a multi-story building where mail distribution can be a problem, get the full details now on fast and efficient Recordlift!

At Kaiser Center's towering new 28-floor office building, mail is distributed every half hour. Yet it's all done without the usual cost and confusion of interfloor mailboy traffic.

Instead, a modern and efficient STANDARD CONVEYOR Recordlift whisks the mail, interoffice correspondence and other vital business records to central dispatching mailrooms . . . rapidly, economically, automatically.

Dispatching is simple, speedy, selective. The operator merely puts the material in the container, pushes the button for the proper floor and Recordlift delivers it in minutes. Mailboy hours are saved . . . speed and efficiency are gained.

If you have a multi-story building project pending, remember Recordlift, the modern mail system. It saves your client the cost and clutter of interfloor mailboys . . . with push-button speed, economy and efficiency!

Write today for illustrated data file . . . or simply clip this ad to your

letterhead and mail it.

Check into these typical Standard Recordlift Installations

- Atlantic Coast Line Railroad Company Jacksonville, Florida
- ate of Minnesota Department of Highways St. Paul, Minnesota
- Ohio Oil Company, Findlay, Ohio
- Ontario Hospital Services Commission Toronto, Ontario, Canada
- Bank of America Service Center Building San Francisco, California Bankers Life Company, Des Moines, Iowa
- State of California Compensation Insurance Fund Building San Francisco, California
- State of Minnesota State Office Building St. Paul, Minnesota
- State of Oregon, Salem, Oregon Western Electric Company, New York, N.Y.
- First National Bank, Minneapolis, Minnesota
- Mutual Service Insurance Company St. Paul, Minnesota State of Texas Employment Commission Austin, Texas

Lincoln National Life Insurance Company Fort Wayne, Indiana

City of Minneapolis, Public Library Division

David Wohl Memorial Hospital Washington University Clinic St. Louis, Missouri

Minneapolis, Minnesota Great West Life Assurance Company St. Boniface, Manitoba, Canada

- State of California, California State
 Teachers Association, Burlingame, California
- Ohio National Life Insurance Company Cincinnati, Ohio
- Research Hospital, Kansas City, Missouri

LISTED IN SWEET'S - SECT. 24d /ST . SALES AND SERVICE IN OVER 40 CITIES-SEE YOUR YELLOW PAGES



Standard onvevor

312-J Second St., North St. Paul 9, Minnesota

Automatic Pneumatic Tube Systems • Recordlift Systems
• Mechanized Dish Handling Systems • Escaveyor Continuous Vertical Conveyors • Custom Engineered Conveyor Systems • Sorting Systems, Automatic and Semi-Automatic • Heavy-Duty Conveyors for Industrial Plants, Factories, Special Applications • Pre-Engineered Handidrive Conveyors and Components • Pallet Stackers and Dispensers • Case Unstackers • Spiral Chutes



An installation of two Stallpack units with standard urinal screens of matching Ozark Grey Veined marble.

Only marble is so durable Only Stallpack® is so easy to specify

SPACEPACK, the ceilinghung Stallpack

STALLPACK, the packaged marble toilet

SHOWERPACK the complete marble shower

ECONOPACK, multi-unit marble dressing room and Stallpack gives you the unique durability of solid marble partitions precut to standard size, predrilled ready to assemble, and offered in a package unit complete with door and chrome plated rustproof hardware. These package units are ready to be shipped immediately.

All you do is indicate water closets 2' 10" on centers on your drawings, then specify Stallpack. With that one easy specification you give the toilet rooms of your building the lasting beauty and trouble-free durability that cannot be had with any material but marble.

Stallpack marble partitions will not rust or deteriorate. They will never need refurbishing. Washing with mild soap and water is all it takes to keep Stallpack marble partitions in perfect, shining condition. Imagine the savings in upkeep expense over the life of a building!

These remarkable partitions are easy to keep clean because they are solid marble. Flush construction with solid marble leaves no inaccessible hollow places around the base of the stiles to breed germs and retain odors.


Stallpack partitions are made of fine Ozark Grey Veined marble. This lustrous light grey marble blends beautifully with any color scheme, stays beautiful as long as your building stands!


Write today for specifications, detail drawings, and prices. Address Stallpack, Dept. R, Carthage Marble Corp., Box 718, Carthage, Mo.

150 IMPORTED AND DOMESTIC MARBLES KEPT IN STOCK FOR CUSTOM MARBLE SERVICE

URINAL SCREENS, standard screens in Stallpack marble



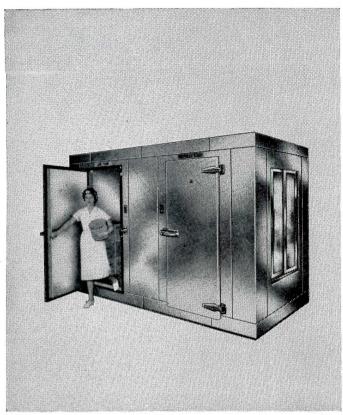

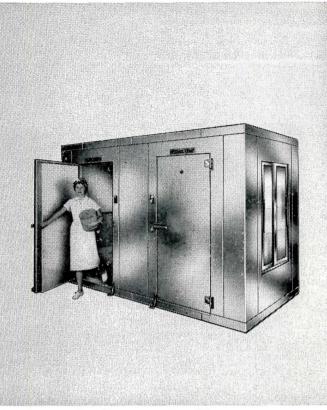

This was the world's most advanced design.

Until we made this one.

Bally Walk-in Coolers and Freezers are now made with science's new wonder insulation . . . Rigid Urethane "foamed-in-place"

The tremendous advantages of this new insulation represent a major design advancement . . . one that obsoletes all conventional insulated Walk-Ins, both prefabricated and built-ins. ◆ With 97% closed cells it cannot absorb moisture . . . maintains forever peak efficiency, indoors or outdoors ◆ Has double the insulating value . . . Bally 4" urethane equals 8½" of conventional insulation. Standard models ideal for use as minus 30° freezers ◆ Urethane, poured as a liquid, foams in place and while rigidizing binds tenaciously to the metal for great strength. Eliminates need for structural members. Replaces that space with highly efficient insulation ◆ Lightweight urethane and new construction reduce weight to one-third for tremendous freight savings . . . make erection fast and easy ◆ Foamed door is extremely lightweight, to open and close with little effort. Unique magnetic gasket provides positive continuous seal ◆Thinner walls increase usable inside space ◆ Fire-retardant.

Your choice of Aluminum or Galvanized as standard finishes. Sections have Bally's patented Speed-Lok for quick and accurate assembly. Easy to add sections to increase size . . . equally easy to disassemble for relocation. Hermetically sealed refrigeration systems eliminate installation problems . . . drastically reduce service costs.

Write for Free Architect's Fact File, complete with new Specification Guide descriptive literature and technical booklet.



Bally Case and Cooler, Inc. Bally, Pennsylvania

laminated plastic



A decorative non-loadbearing wall can be erected quickly and inexpensively to any shape with Formica laminated plastic.

Here we show a double face partition of 1/16" Formica on 34" Formica Flakeboard concave on the picture side, convex to the room behind it. The wall was erected of 4' shop veneered panels with spline joints over conventional two by four studding on 16" centers. A custom satin finish Formica, Teak Z-TK-24 was chosen specially for this decor.

The installed cost of this double-faced partition is 5.50/sq. ft. complete.

Write for form #934A, a catalog of commercial application ideas and technical information. You will also receive the Formica Red Book, a geographical and classified directory of Formica qualified commercial fabricators of laminated plastic.

Architect: Rudolph J. Orgler Designer: Leon Gordon Miller Formica wall panels: Weybrecht Lumber Installation: Roediger Construction

Formica Corporation

Dept. X-4, Cincinnati 32, Ohio


subsidiary of CYANAMID

PRESTRESSED CONCRETE SHELLS add interest to Florida Bank

(Below) The canopy is 200' long, including the decorative extension along the front of the original building. At night, lights behind each column shine upward into the canopy for a striking visual effect.



(Above) With precast columns in place, half-shells are set with minimum difficulty. Note the temporary edge beam and vertical supports which were removed as each completed pair of shells took up the load. Shell units are 48' long, 8' wide, 3" thick and weigh 7 tons each. The precast columns are 44" wide at the top, 16" wide at the bottom. Each is 11'9" long.

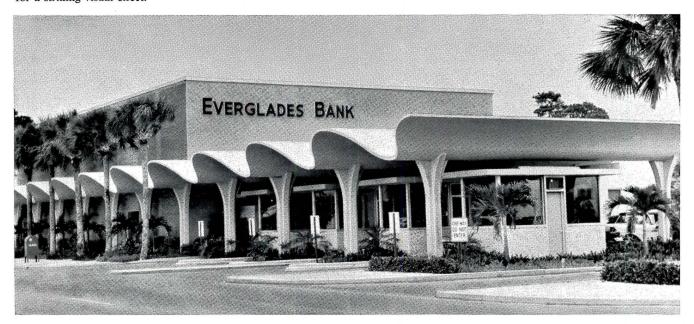

Undulating prestressed roof shells and precast columns make a practical and attractive all-weather canopy for the new drive-in tellers' booths, recently added to the Everglades Bank, Ft. Lauderdale, Fla.

In addition to its interesting and practical effect, the roof was easy to erect. The abutting shell-halves were placed by a single crane. They are supported at the ends of their 48-foot lengths by neat precast columns which also mark the driveway boundaries for each teller's booth. Strength, freedom from maintenance and initial low cost are built-in advantages in this type of roof construction.

In the manufacture of these precast concrete units, Meekins-Bamman Precast Concrete Corp. used Lehigh Early Strength Cement. Here, as in almost any concrete work, this cement helped save time and money — both in quicker re-use of forms and earlier availability of units.

Owner: Everglades Bank, Ft. Lauderdale, Fla.

Architect: Anson & Kerr, Ft. Lauderdale, Fla.

Structural Engineer: Gustav R. Mayer, P. E., Miami, Fla.

Contractor: Caldwell-Scott Engineering & Construction Co., Ft. Lauderdale, Fla.

Concrete Units: Meekins-Bamman Precast Concrete Corp., Hallandale, Fla.

Erection of Units by: Erectors of Florida, Inc., Ft. Lauderdale, Fla.



Lehigh Portland Cement Company, Allentown, Pa.

Amtico floors
another
fine building...
Amtico Vinyl
patterns
and colors
create pleasing
effects in
store decor



Interior architecture and design of the new Gimbels store in Paramus, N.J. are by Copeland, Novak & Israel. Amtico installation by William S. Holmes, Camden, N.J. In the Gifts & Silverware section, an Amtico Vinyl Floor of Marbleized White & Black has rectangular inserts of Marbleized Charcoal.



In selecting Amtico Vinyl, interior designers Copeland, Novak & Israel found . . . "in addition to its durability and ease of maintenance, it affords patterns and colors of sufficient variety and catholicity of appeal to meet the tastes and preferences of the great numbers of people who visit Gimbels Paramus each day." Like all Amtico Vinyls, Amtico Marbleized stands up to heavy traffic and is resilient to walk on. Even lightest colors clean easily. Excellent for residential and commercial installation on wood floors above-grade; concrete floors above-, on-, below-grade; walls. Standard 9" x 9", 12" x 12", 36" x 36" tiles and special sizes. \%" and .080" gauge. Over 200 coordinated colors in Amtico Vinyl. Noted for quality, Amtico also manufactures complete lines of fine rubber, vinyl asbestos, asphalt floorings. See Sweet's Files for complete information and specifications.

A floor of Amtico Vinyl in Marbleized White & Black helps to establish a fresh, airy atmosphere that invites customers at the entrance of the Beauty Salon and Restaurant. In the foreground, strips of Marbleized White & Black Vinyl alternate with Marbleized Taupe.







Manufacturers of the finest in Vinyl, Rubber, Vinyl Asbestos and Asphalt Floorings

AMERICAN BILTRITE RUBBER COMPANY

TRENTON 2, NEW JERSEY

Showrooms: New York • Chicago • Los Angeles
San Francisco • Dallas • Toronto • London, England
In Canada: American Biltrite Rubber Company, Ltd., Sherbrooke, Que.

•	
	4/4
	23/1/20
	₹ (T) E
	7 -

AMTICO	FLOORI	NG DIVI	SION,	Americ	an I	Biltrite	Rubber	Com-
pany, Ti	renton 2,	New Jer	sey, De	pt. AR	-92.			
-								

Please send FREE full-color brochures and flooring samples of

☐ Amtico Vinyl ☐ Amtico Vinyl Asbestos ☐ Amtico Rubber

☐ Amtico Asphalt

NAME	
FIRM	
ADDDECO	


CITY_____ZONE___STATE__
(Please attach coupon to your business card or letterhead.)

For more data, circle 78 on Inquiry Card

IT'S YOUR MOVE!

mate any of these 5 FRAME STYLES...



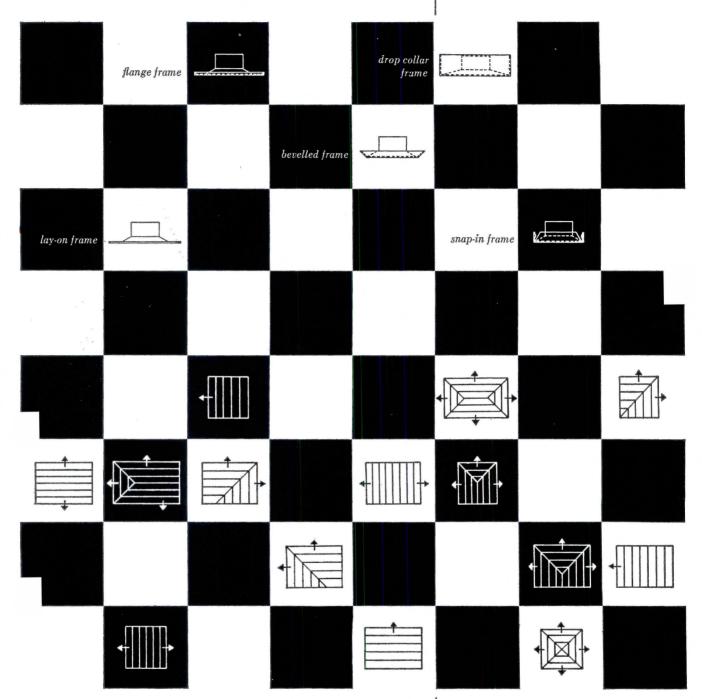

to any of these 14 CORE PATTERNS


...to get matchless diffuser performance in extruded aluminum! These directional diffusers are light, long-lasting, rust-proof. All fourteen core patterns are removable and interchangeable — no mis-matches on the job, plenty of design flexibility. And Waterloo diffusers are performance-proved in the famed Anemostat Air Distribution lab. It's your move...get details from your Waterloo-Anemostat Representative today!

WATERLOO REGISTER COMPANY, INC.

WATERLOO, IOWA

A SUBSIDIARY OF

DYNAMICS CORPORATION OF AMERICA

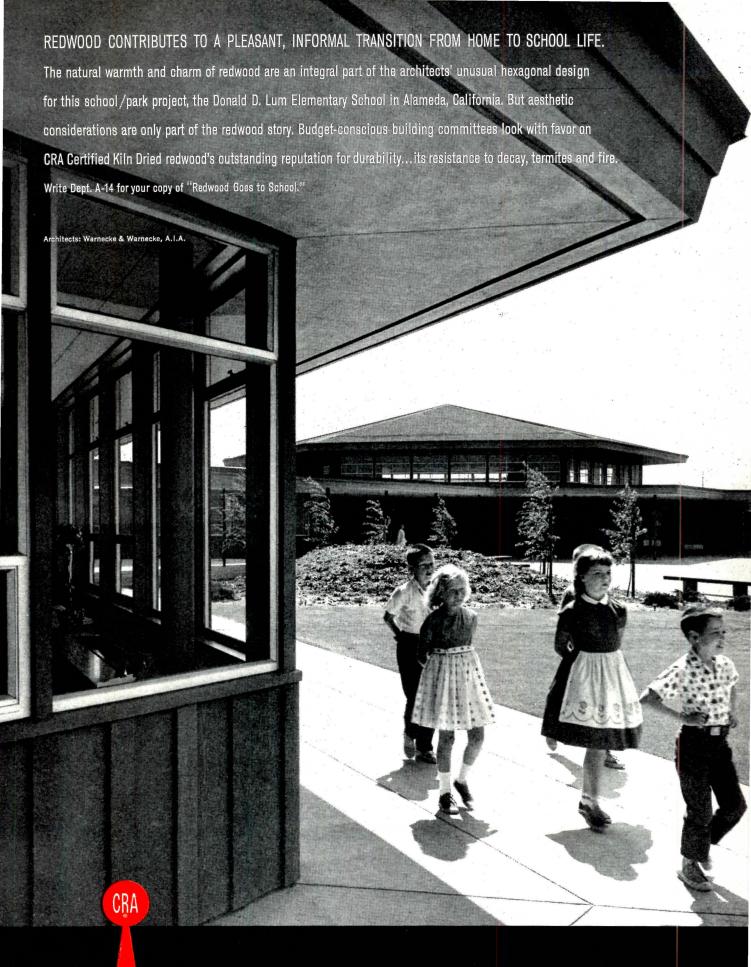

All the wonderful warmth of wood is best expressed in redwood

LIFORNIA REDWOOD ASSOCIATION + 576 SACRAMENTO STREET + SAN FRANCISCO 11

CRA-TRADEMARKED CERTIFIED KILN DRIED REDWOOD

California Redwood Association coordinates the research, forest management and consumer service activities of these member mills: WILLITS REDWOOD
DUCTS CO. • THE PACIFIC LUMBER CO. • GEORGIA-PACIFIC CORP. • ARCATA REDWOOD CO. • SIMPSON TIMBER CO. • UNION LUMBER CO.

PITTCO®

curtain wall framing systems keep water where it belongs ...outside!

DESIGNED specifically for glass-clad curtain wall construction, PITTCO Framing Systems provide reliable protection against water penetration. To achieve this, the components used in every PITTCO System have been individually designed and precision-engineered to accommodate varying temperature, wind and weather conditions, while maintaining over-all design flexibility.

Metal-to-metal joints are weather-sealed with No. 1072 Duribbon®, a special compound developed by our own laboratories for curtain wall glazing. Glass is dry set, with or without Neoprene glazing channels, depending on the system selected. A unique weep-vent system provides the necessary condensation drainage and spandrel ventilation.


In addition, PPG assumes full responsibility for the manufacture, fabrication and erection of the complete curtain wall. For complete details on the patented 82X, 25X, 670 and "900" Series PITTCO Framing Systems, call your PPG Architectural Representative or consult Sweet's Architectural File—Section 3e.







PITTSBURGH PLATE GLASS COMPA

Paints • Glass • Chemicals • Fiber Glass In Canada: Canadian Pittsburgh Industries Limited

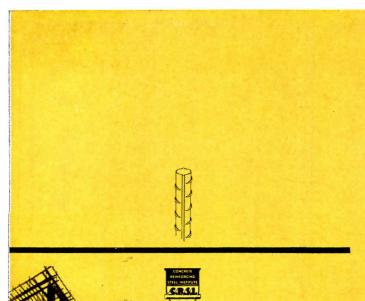

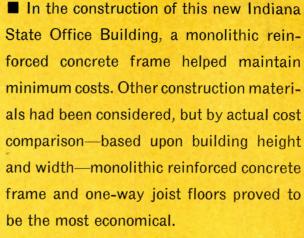

For most types of buildings, monolithic reinforced concrete is the cost-saving structural method. Before YOU design or build, be sure to investigate all the advantages of this superior method including cost, design flexibility, and overall construction time. Write for the new booklet entitled "The Economic Advantages of Reinforced Concrete Building Construction."

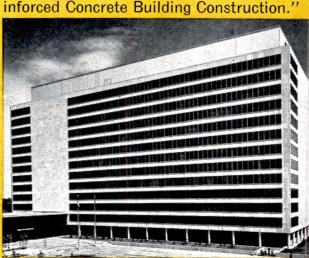

Indiana State Office Building, Indianapolis, Indiana Architect and Engineer: Graham, Anderson, Probst & White, Chicago, Illinois; and Raymond S. Kastendieck, Gary, Indiana

or more data, circle 81 on Inquiry Card

monolithic reinforced concrete holds the line on construction costs

CONCRETE REINFORCING STEEL INSTITUT

38 South Dearborn Street • Chicago 3, Illinois

WHY IS COMFORT CURTAIN® UNIQUE

among classroom ventilating, heating and cooling systems?


It is the *only* system available which provides even distribution of air along the *full length of the exterior wall* to constantly circulate fresh, conditioned air to every corner of the room . . . thus eliminating stale air, odors, drafts, hot and cold spots.

This advanced method of individual classroom thermal control adapts to any building design—in new construction or remodeling. It utilizes any type of warm air heat source—or steam, hot water or chilled water. Bookshelf ducts, in a wide choice of color and finishes, add to the utility and appearance of any room.

Learn all this and more by writing for our 24-page, colorfully illustrated COMFORT CURTAIN booklet on this thoroughly proven concept of better classroom living. Address: LENNOX, 513 S. 12th Ave., Marshalltown, Iowa.



For more data, circle 37 on Inquiry Card

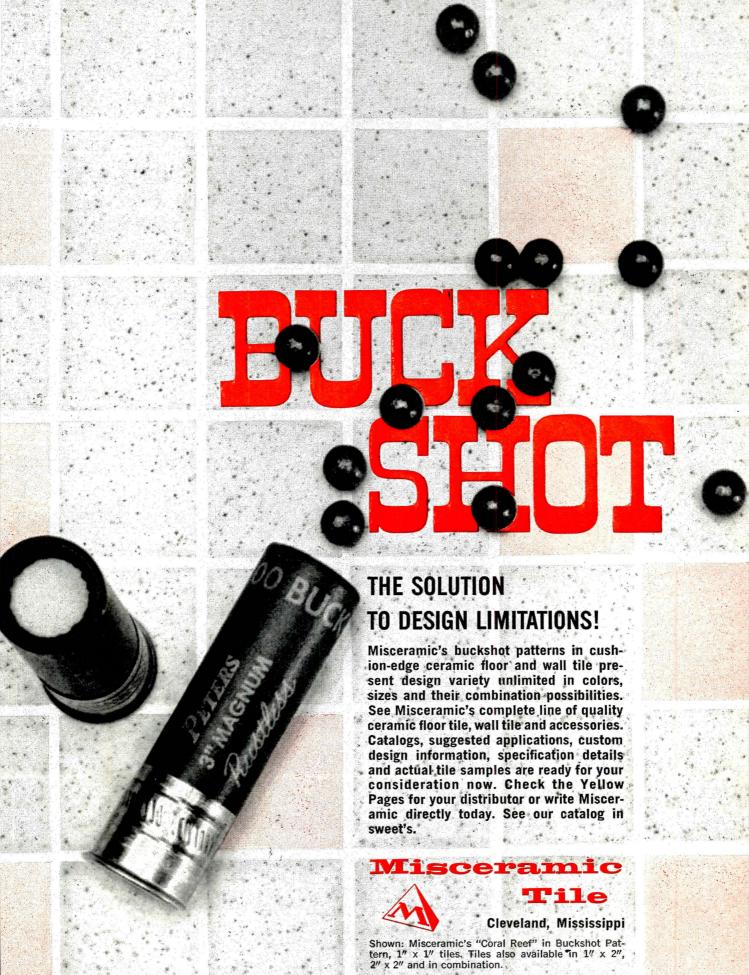





Trenridge Apartments, Lincoln, Nebraska. Architects: Sidney W. Campbell and Reginald E. Davies.

Creative use of Andersen Windows accents entry design of 126-unit apartment complex

Stock window units, proportioned in a two-story panel, combine beauty, comfort and dependability


In the new Trenridge Apartments, Lincoln, Nebraska, combination Andersen casement and picture windows are used to complement distinctive styling while adding extra value for owner and occupants.

For the owner, these extra-weather-tight windows (more than 3 times industry standards) will mean significant savings in heating and cooling costs... and lasting tenant satisfaction. And occupants will like the way Andersen wood windows provide weathertight comfort the year around. (The entire project is equipped with Welded Insulating Glass.)


Andersen's complete line of windows offers maximum design flexibility for your next light construction project. There are 7 kinds of windows, 30 different types, and more than 600 cataloged sizes.

Check Sweet's File or write for Detail catalog and Tracing detail files. Andersen Windows are available from lumber and millwork dealers throughout the United States and Canada.


Andersen Windowals ANDERSEN CORPORATION BAYPORT, MINNESOTA AW

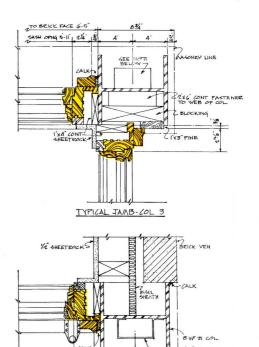

TYPICAL JAMB-COL

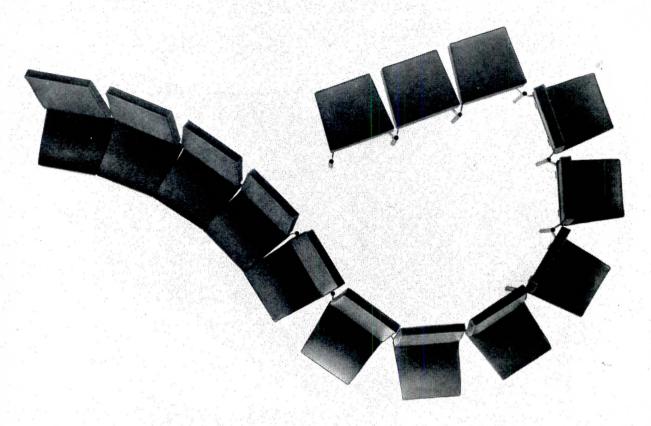

Curves, twists, bends, goes anywhere.

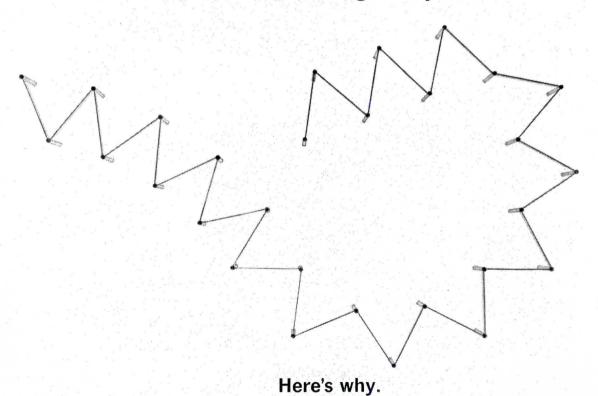


Royalmetal's new Viscount 65 seating is based on an entirely new idea, an entirely new kind of base: one that actually flexes. Viscount 65 can wrap around a column. Turn a right angle. Circle a square. Square a circle. Or hold an arrow-straight line. Think what this means. New freedom to design interiors, to realize ideas that could never



work with ordinary lounge seating. And if you never to Viscount 65 to its full capabilities, you'll still have to most beautiful seating ever designed. The most unique, to since only Viscount 65 has "floating seat" styling. Sou interesting? Write today for full information. ROYALMET CORPORATION, Dept. 10-L, One Park Ave., New York 16, N.

RPORATION, Dept. 10-L, One Park Ave., New York

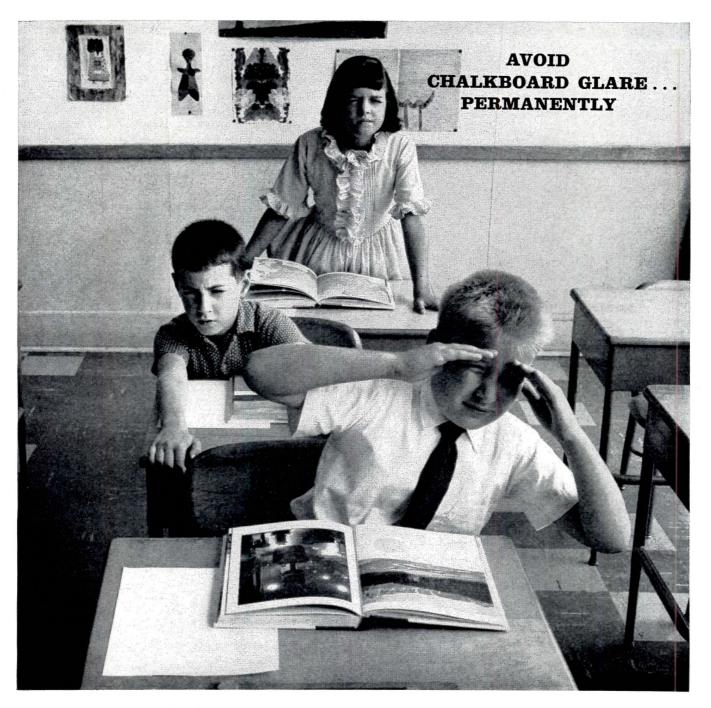

J-M Colorlith won't slick or shine up ... ever


Most chalkboard materials look good when they're new. But, after years of use and abuse, the colors may fade, the surfaces turn slick and shiny and impose a visibility-impairing glare. With Johns-Manville Colorlith®, this can't happen because the color is an integral part of the sheet and retains its soft shade indefinitely.

Available in three eye-pleasing, research-proved shades (Spruce Green, Cameo Brown and Charcoal Gray), Colorlith offers superior

visibility. Made of asbestos and cement, it takes chalk easily providing excellent visual contrast. Further, it erases cleanly without "ghosting."

For full details on J-M Colorlith, write to J. B. Jobe, Vice President, Johns-Manville, Box 14, New York 16, N. Y. In Canada: Port Credit, Ontario. Cable: Johnmanvil.


JOHNS-MANVILLE



For more data, circle 86 on Inquiry Card.




Send for the 1962 Overly Convector Enclosures Catalog

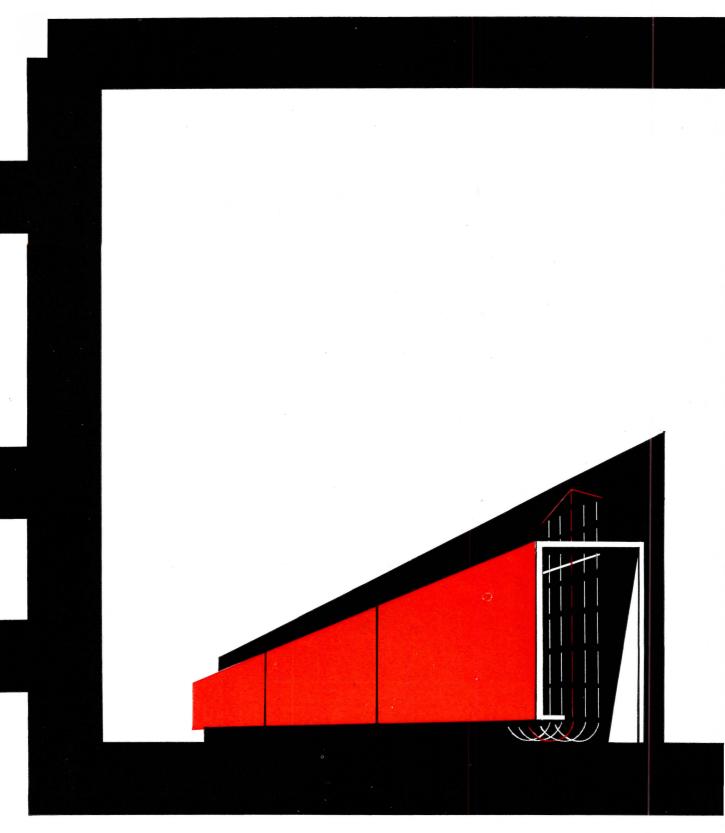



Convectors

For more data, circle 87 on Inquiry Card

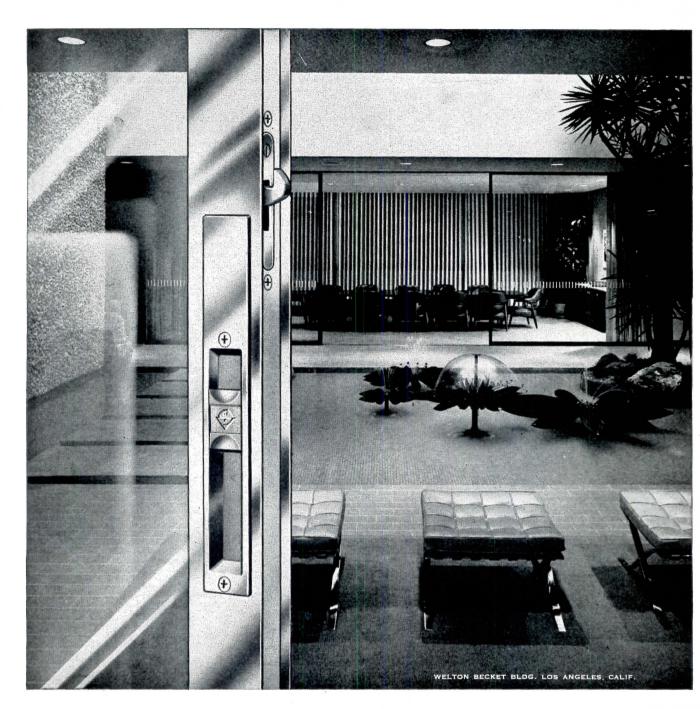

CRISP LINES, CLEAR VIEW, COMMON SEN FLUSH MOUNTED LOCKING UNITS FOR SLIDING GLASS DOORS

The wide acceptance of the sliding glass door results from its visual depth and spaciousness. Hardware which impairs the view or prevents the door from fully opening defeats the purpose. The Adams Rite 4189 and 4190 flush mounted locksets are the first to offer unobtrusive beauty and freedom of movement for these doors. Screens can be by-passed, doors can be "stacked" in pockets, and inside drapes or blinds will not be torn by catching on surface hardware.

The pull escutcheons are designed to accent the vertical lines of the aluminum door frame.


Deeply recessed finger pulls provide exceptional control of door movement. Slide-button operator actuates locking mechanism from inside with simple up or down movement. Key control is provided on 4190 unit by 5-pin cylinder lock in outside escutcheon.



WRITE TODAY For Complete Details and New Catalog



ADAMS RITE
MANUFACTURING COMPANY
540 West Chevy Chase Drive, Glendale 4, California

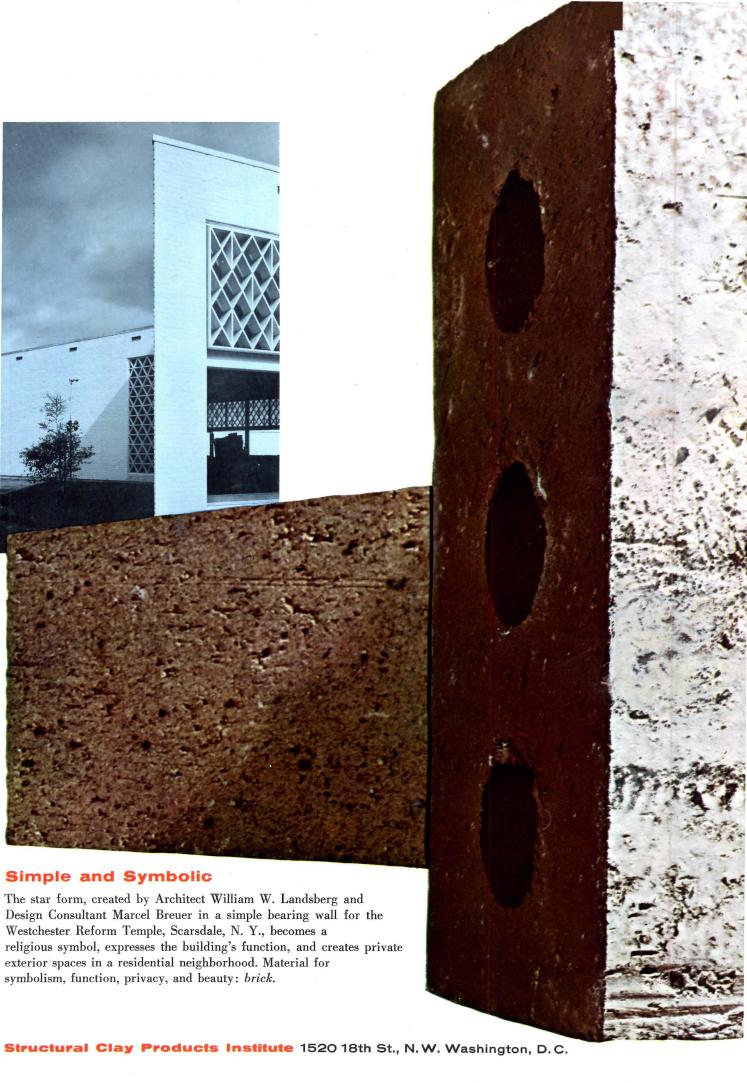

The RUBEROID Co. Announces the 4th Annual

\$25,000 Awards Ruberoid/Matico Design Competition



THE JURY, left to right, James J. Hurley, Taylor-Hurley Assoc., New THE JURY, lett to right, James J. Hurley, Taylor-Hurley Assoc., New York, N. Y.; Prof. Vernon DeMars, A.I.A., Chairman, Dept. of Arch., Univ. of Cal., Berkeley, Cal.; William L. Slayton, Commissioner, Urban Renewal Admin., Wash., D.C.; B. Summer Gruzen, F.A.I.A., Professional Advisor, New York, N. Y.; Ralph Rapson, A.I.A., Head, School of Arch.; Univ. of Minnesota, Minneapolis, Minn.; Edmund N. Bacon, A.I.A., (Chairman) Exec. Dir., Phila. City Planning Comm., Phila., Pa.

"Improved Human Environment through Urban Renewal"

The 4th Annual Ruberoid/Matico Competition was designed to stimulate the interest of architects in urban renewal. The winning submissions, in each group, were most excellent. In the Grand National Award category, the Jury decided to combine the first three prizes and make equal awards. The prize winning plans will be reproduced in a brochure to be available before the end of the year. If you desire a copy write to the Ruberoid Company on your letterhead.

AWARD WINNERS

GRAND NATIONAL AWARDS (3)

Stephen N. Abend, Kansas City, Mo.

Ralph Lewis Knowles, Auburn, Ala.

Stuart Kenneth Neumann, Chicago, III. and Donald L. Williams, Fern Creek, Ky.

NATIONAL MERIT AWARDS (6)

J. D. F. Boggs, Jr., Herman F. Goeters and Robert F. Lindsey, Houston, Texas

Jean-Michel Charnet, St. Louis, Mo.

John C. Dyer, Boston, Mass., Thomas S. Marvel, Puerto Rico and John W. Shenefield, Jr., Cambridge, Mass.

Jan Lubicz-Nycz, San Francisco, Cal.

F. Kempton Mooney, Columbia, S. C. and Joseph L. Young, Clemson, S. C.

Minoru Takeyama, New York, N.Y.

SPECIAL STUDENT AWARDS

FIRST PRIZE

Edward Z. Jacobson, Pittsburgh, Pa. and Kenneth Schwarz, Kew Garden Hills, N.Y.

SECOND PRIZE

Michael Marczuk, Minneapolis, Minn.

THIRD PRIZE

Daniel E. Green and Eugene J. Mackey, La Due, Mo.

STUDENT MERIT AWARDS (4)

H. Stow Chapman and Richard A. DeVine, Champaign, III.

R. Alan Forrester, Tadeusz M. Janowski, Ilmar Reinvald and Donald E. Sporleder, Urbana, III. and Elam L. Denham and Anthony Pellecchia, Champaign, III.

Melvin Leon Ford, Glendale, Cal. Duk Won Lee, Edward Richard Niles and Jay Barton Walter, Los Angeles, Cal.

Terrence Andrew McCormick, Champaign, III. and Ilmar Reinvald, Urbana, III.


The RUBEROID Co. Manufacturers of Ruberoid/Matico Floor Tile and (RUBEROID°) Building Products

733 THIRD AVE., NEW YORK 17, N.Y.





LINCOLN CENTER, NEW YORK

A comprehensive design report on a unique new center for the performing arts, presented as the first unit — Philharmonic Hall — opens

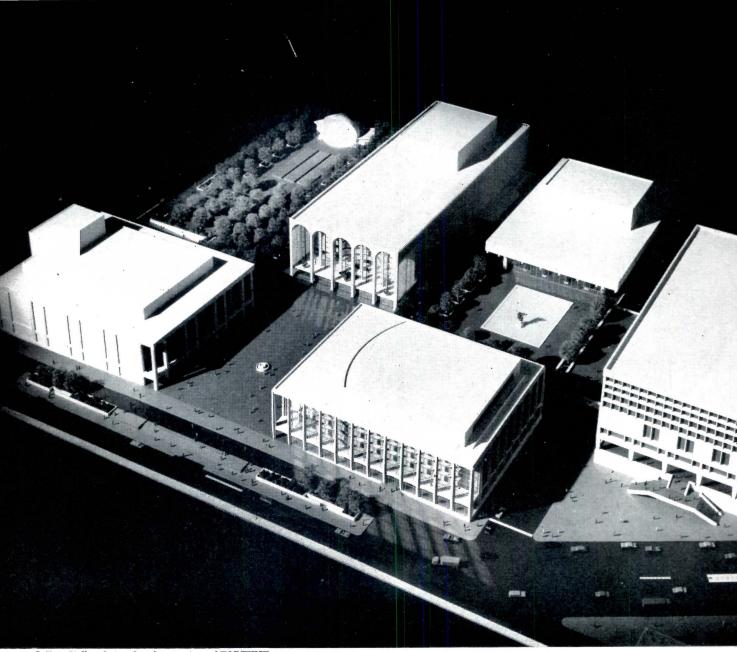

© Ezra Stoller photos; drawing courtesy of FORTUNE

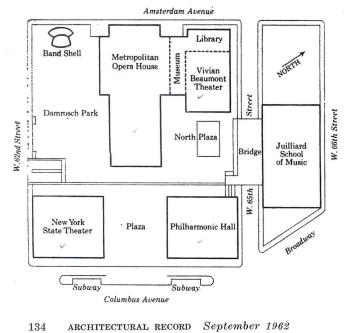

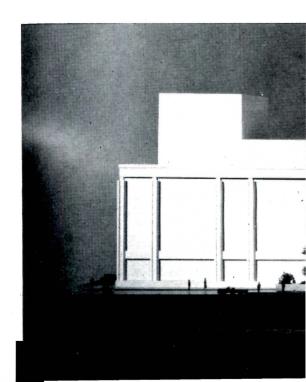



Wallace K. Harrison

Pietro Belluschi Philip Johnson

Max A Eero Saarinen

Max Abramovitz rinen Gordon Bunshaft


CULTURAL ADVENTURE — ARCHITECTURAL CHALLENGE

The story of Lincoln Center is the story of the development and realization of a bold idea: to bring together top flight organizations and performers in opera, symphony, drama, and the dance—and professional training in these arts. The constituents will maintain their autonomy, but will be bound by the common purpose of creating a unique cultural center dedicated to the finest in public enjoyment, appreciation, and service; to the training of talented youth; to the encouragement of creative endeavor.

Six buildings, plus a park-amphitheater, will comprise the \$142 million, 14-acre center. The Metropolitan Opera (Wallace K. Harrison, architect; to be finished in 1965) will dominate the east

plaza, which will be flanked by Philharmonic Hall (Max Abramovitz, architect; opening September 23) and the New York State Theater for ballet and operetta (Philip Johnson, architect; completion 1964). The Vivian Beaumont Repertory Theater (Eero Saarinen, architect; completion 1964) and Library-Museum of the Performing Arts (Skidmore, Owings & Merrill, architects) are in a single building which will face the north plaza, while the new Juilliard School (Pietro Belluschi and Catalano & Westerman, architects; completion 1966) will lie in an adjacent block linked to the north plaza by a pedestrian bridge. Underground, there will be service drives, parking for 732 cars, and pedestrian walkways linking the buildings.



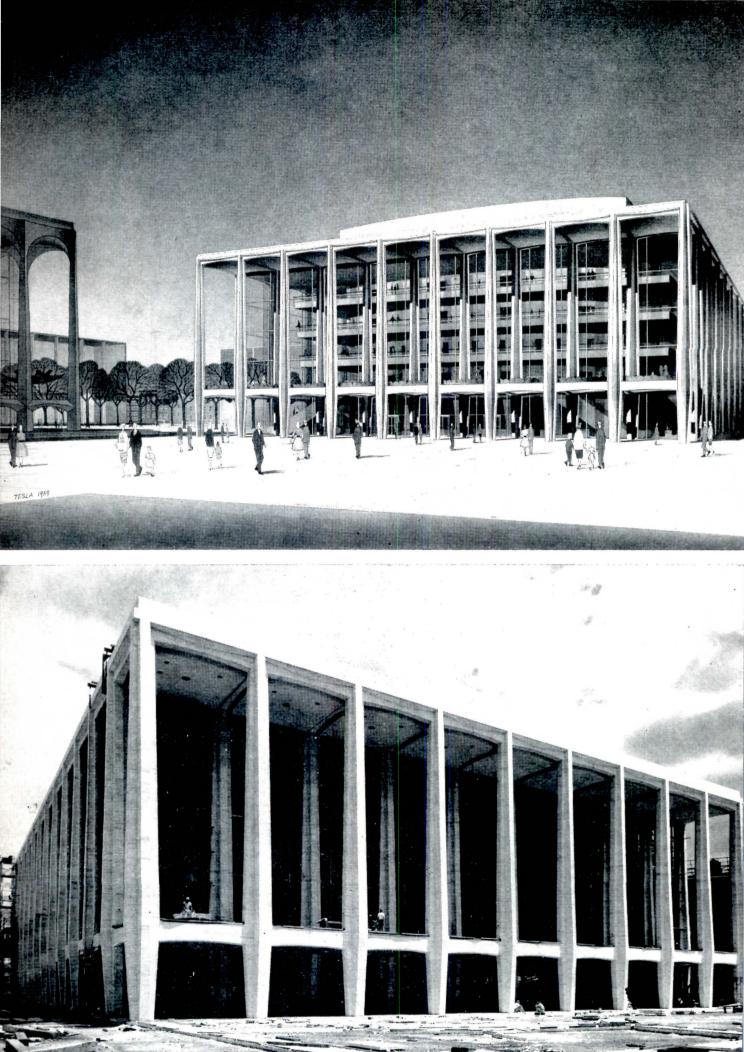


HILHARMONIC ALL

CHITECT: Max Abramovitz
ditional credits, page 148


ne \$15.4 million Philharmonic Hall will at 2,644; will be the permanent home America's oldest orchestra; is the first neart hall built in New York since 1891; d will open on September 23. Every nsideration was made secondary to the ain requirement that the hall should ovide the best possible quality of sound r the listener. Its design was heavily fluenced by the study of great concert lls here and abroad (see article beginng on page 196).

The hall is essentially rectangular in ape, and contains three terrace-balnies which were made very shallow so at there are almost no seats "under balnies." Promenades will encircle the terces on three sides, and look over the aciousness of the great foyer. There ill be 1,384 orchestra seats, 392 in the chestra circle, 454 in the first terrace, d 414 in the second terrace. The cantivered seats are designed for sound abrption equivalent to that of an occuant, and will be upholstered in shades of old. The plaster ceiling and walls will be inted blue; the terrace fascias and sofs will be gold-leafed.


Adjustable acoustical reflectors—also vered with gold leaf—will be suspend-from the ceiling and will create both a nctional and decorative pattern. The ack and sides of the stage will be finhed by screens of vertical wood slats.

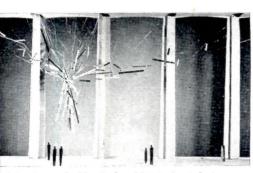



odel of one-half of the Muntz metal (copper d zinc alloy) sculpture by Richard Lippold led "Orpheus and Apollo," created for the eat foyer of Philharmonic Hall. The view is om inside looking toward the large plaza

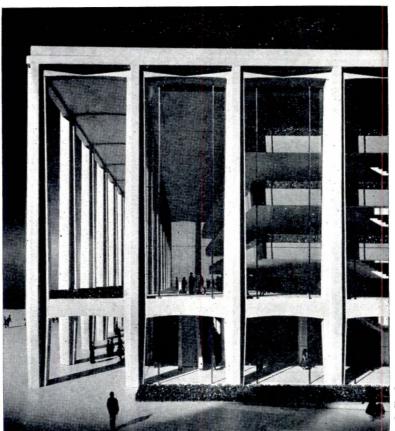



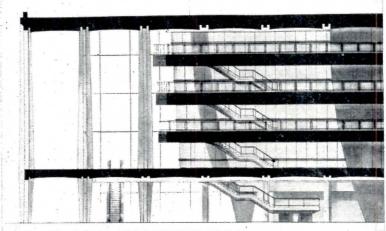

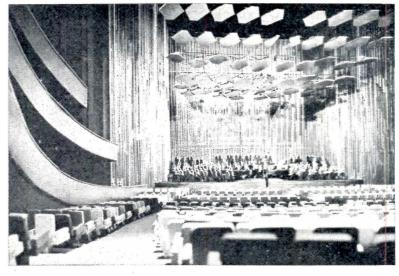

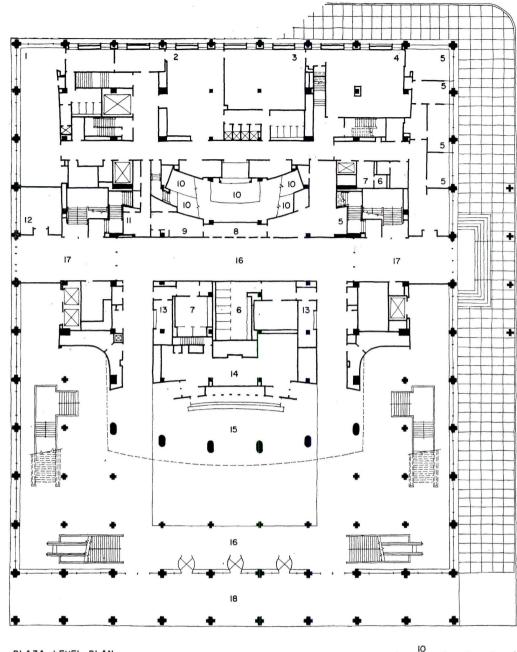


IQ PLAZA LEVEL PLAN

PHILHARMONIC HALL


The patterns of vertical wood slats at the sides and rear of the orchestra platform are acoustically transparent. Adjustable reflectors or absorbents will be placed behind them, dependent upon the program. The 98-rank pipe organ is located at the rear of the stage, and can be concealed or revealed as desired, by means of lighting and a scrim curtain.

The platform is 60 by 40 ft and will accommodate the 120-piece Philharmonic orchestra. Platform elevators will increase its depth to either 48 or 56 ft to handle full orchestra plus chorus of 200, or to provide an orchestra seating for recording.

The orchestra floor can be readily converted to several terraced levels and its seats replaced by tables and chairs for 800 for "pops" concerts. Refreshments can be served from two adjacent pantries. At plaza level, the great lobby extends under a portion of the auditorium and houses a cafe seating 300. The box office, cloakrooms, and a music shop are also located on this level.

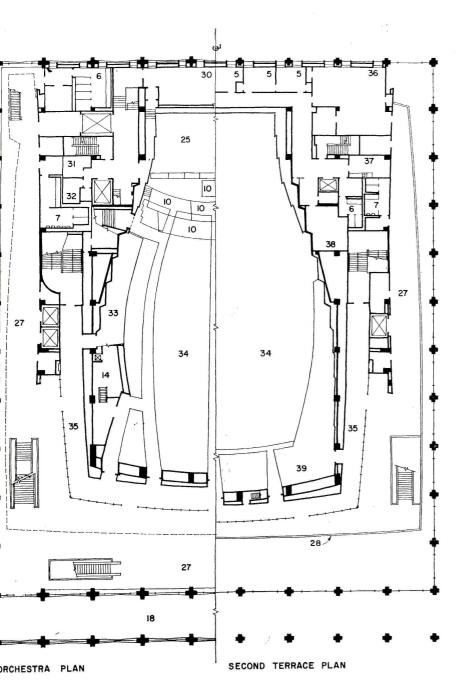

- 1. Women's chorus dressing room
- 2. Visiting dressing room
- 3. Philharmonic dressing room
- 4. Philharmonic lounge
- 5. Office
- 6. Ladies room
- 7. Mens room
- 8. Box office
- 9. Mail
- 10. Lift
- 11. Visiting manager
- 12. Music store
- 13. Coats
- 14. Pantry
- 15. Lounge & cafe
- 16. Lobby
- 17. Vestibule
- 18. Portico terrace
- 19. Projection booth
- 20. Catwalk
- 21. Board room
- 22. Organ chamber
- 23. Pedestrian tunnel
- 24. Fan room
- 25. Platform
- 26. Screen
- 27. Promenade
- 28. Face of first balcony
- 29. Storage
- 30. Tuning room
- 31. Personnel office
- 32. Conductor's retiring room
- 33. Orchestra balcony
- 34. Auditorium
- 35. Emergency passage
- 36. Publicity
- 37. Staff room
- 38. Telephone room
- 39. Second terrace balcony

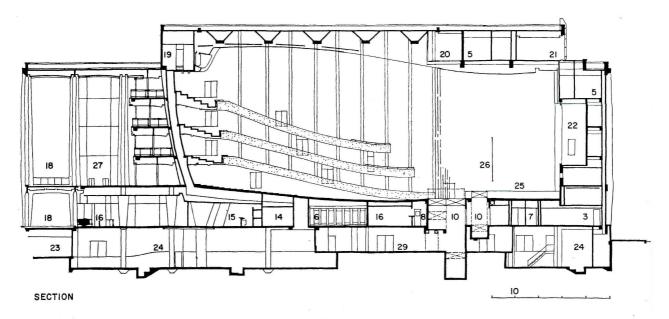





IETROPOLITAN PERA HOUSE

CHITECT: Wallace K. Harrison

dditional credits page 148


he new \$35.4 million Metropolitan Opca House will seat 3,800 and is scheded for completion in 1965. The new opca—as all buildings at Lincoln Centerwill be air-conditioned, permitting car-around operation and "off-season" cheduling of visiting organizations.


Its five great arches of travertine will ecome the focal center of the east plaza, hile its side walls will be of a similar eavertine with a rougher face, bonded precast concrete mullions.

The auditorium proper—which will be arried out in traditional red and gold—ill have nearly parallel sides to reincree the sound, an acoustically transparate rear wall, and an enclosing arched ructure at the stage for sound revergration. Suspended glass panels near the stage will serve as acoustical reflectors and as lighting fixtures. Seats will earranged at four levels: orchestra and oxes, grand tier, dress circle, and family rele. Due to late arrivals, and for ecomic reasons, seats will be in blocks eparated by aisles.

The ceiling will be essentially flat, exept for a large central dome of plastic, hich had to be made very flat for sound einforcement. Side walls will be of wood; ne flooring material is yet to be determined.

The stage and backstage facilities will e as large and as completely equipped as my in the world. There will be four movole stages, so that several productions an be mounted at the same time. The ackstage areas will be a veritable maze of shops, storage areas, dressing rooms, ehearsal rooms, offices, etc. Stage lighters will be complex in nature and of the cost advanced type; there will be an internal TV system with double equipment, and also an internal supplemental bund system.

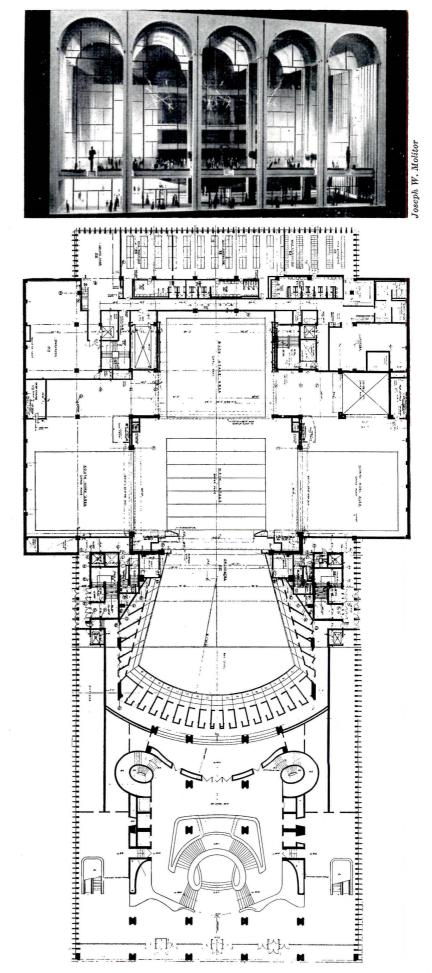

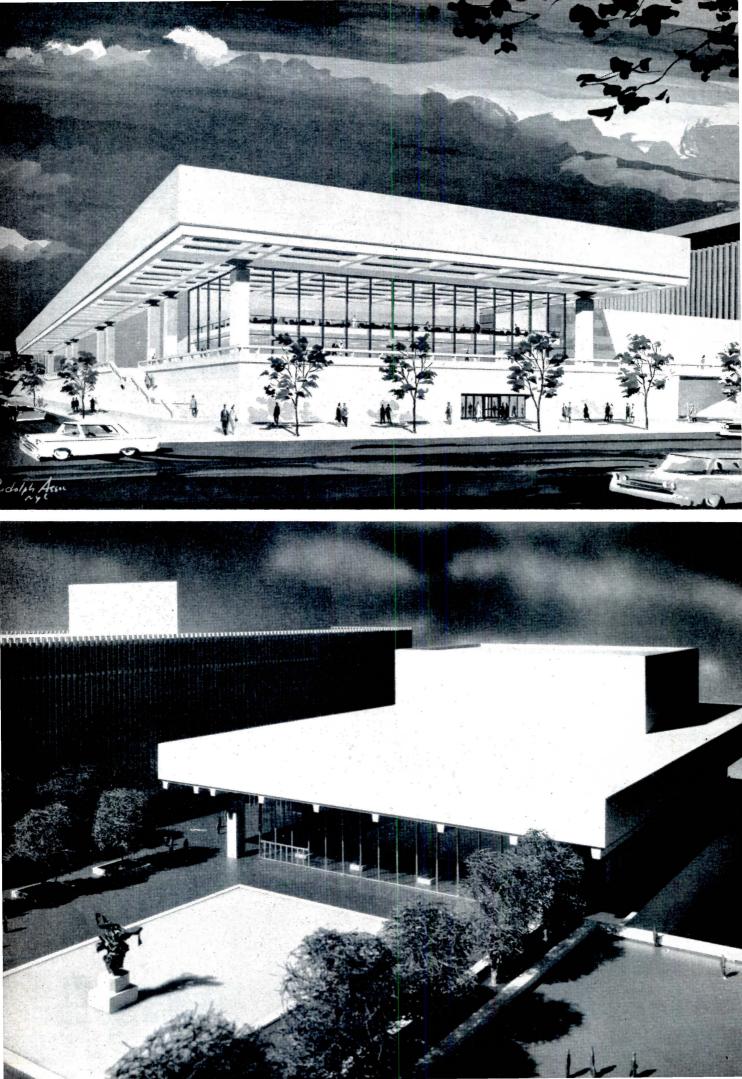


TVIAN BEAUMONT EPERTORY THEATER

RCHITECTS: Eero Saarinen & Associates
PLLABORATING DESIGNER: Jo Mielziner

IBRARY-MUSEUM OF THE PERFORMING ARTS

ACHITECTS: Skidmore, Owings & Merrill dditional credits page 148


ite limitations necessitated combining oth the repertory theater and the lirary-museum in a single building, which rill cost \$15.2 million and be completed early 1964. The two architectural firms orked closely together to coordinate neir respective portions of the building. The circulating library and museum rill surround the theater at plaza level; ne research library will be housed in a olid upper block which is pierced by the tage loft of the theater. The uninterupted theater space is spanned by 18-fteep concrete trusses resting on two rows f free-standing columns 150 ft apart. he research library is contained within ne depth of the trusses; the under-side f the library block is deeply coffered by xposing the bottom chords of the trusses nd beams. The library-museum will inlude 7,000 sq ft of exhibition space, an uditorium, a children's library, and sevral conference rooms—in addition to he public circulating library and reearch library. Exhibits will be combined rith books, sound systems, and related naterials to create expositions on varius aspects of music, drama, and ballet. he library-museum portion of the buildng will be given to the city.

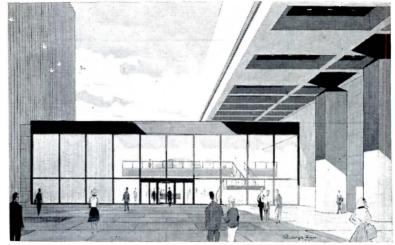









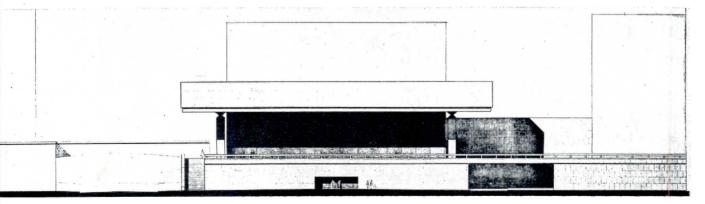


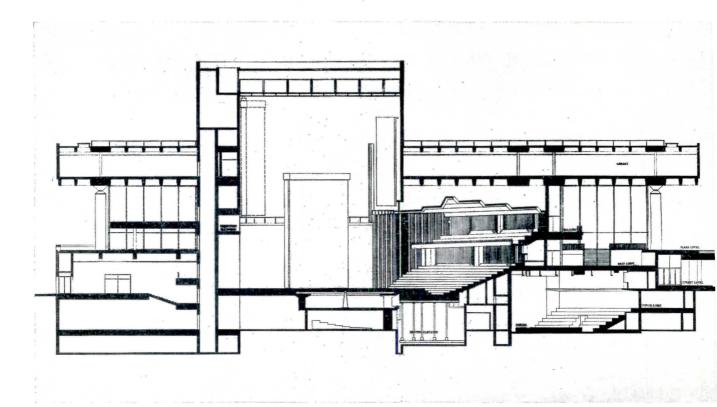

LONGITUDINAL SECTION

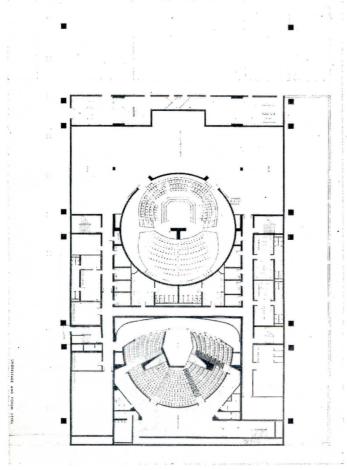

UNDERSTAGE AND FORUM LEVEL

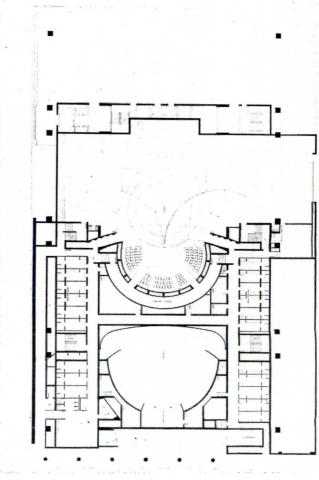


STAGE AND DRESSING ROOM LEVEL


EPERTORY THEATER AND IBRARY-MUSEUM

he main theater will seat 1,100; a lowervel, unelaborate amphitheater—called The orum—will seat 300. The building will be ne home of the newly formed Lincoln Reptory Company.


The main theater can have either a prosenium stage or an open stage of extreme drust, or a combination of the two. The thear will achieve great intimacy between adience and actor; the audience is virtually wrapped around the stage"; no seat is more an 65 ft from the stage. There will be morized scenery facilities, ample shops, and are 11,000 sq ft stage will have an additional 1,000 sq ft for scenery and costume storage.

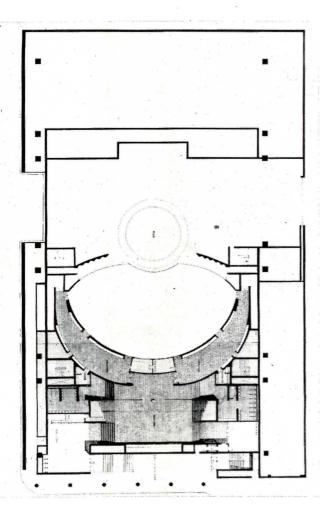


REET ENTRANCE LEVEL

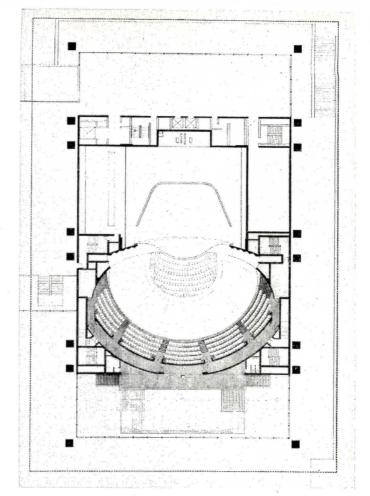

BALCONY LEVEL

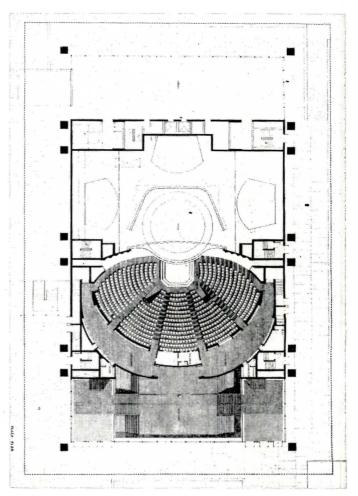

PLAZA LEVEL

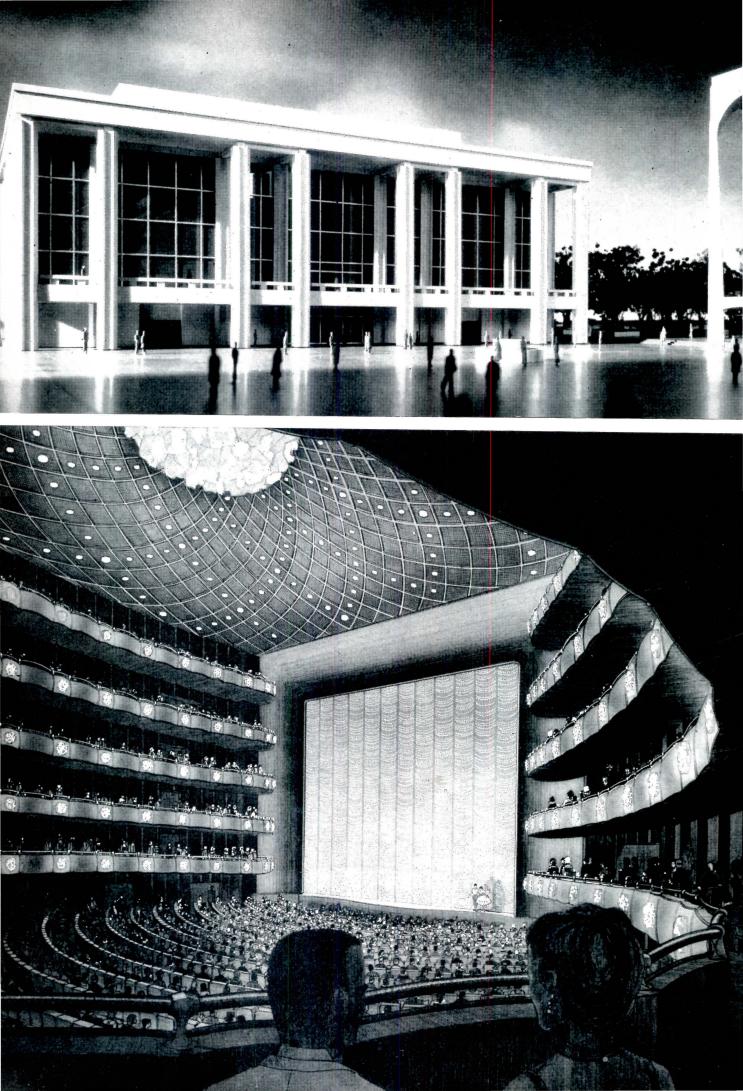


HE NEW YORK PATE THEATER

CHITECTS: Philip Johnson Associates litional credits page 148


e \$18.2 million New York State Theafor the dance, which will seat 2,801, scheduled for completion in early 1964. design is carefully integrated in scale d materials with its neighbors facing plaza—Philharmonic Hall and the tropolitan Opera. Like these, the conste structure will be faced with tanoman travertine. Like Philharmonic all, it will be about nine stories in ight.

The auditorium is horseshoe-shaped d holds five tiers of shallow balconies. ne wide horseshoe plan creates audice intimacy, and the concentric rings ntinue to the proscenium and unify the face—give it visual focus. No seat is ore than 140 ft from the stage. The tallow balconies create an effect the arbitect describes as "peopled walls." The other will have continental seating and no aisles.


The air of elegance and gaiety in the iditorium will be enhanced by color and aterials: garnet red walls and seats; coscenium and balconies off-white with old-leaf linear design; a shimmering age curtain of plastic spangles; and systal lights on the balcony fascias evry six feet. Chains of lights in the dark iling will provide house illumination.

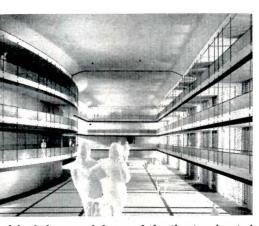


odel of the grand foyer of the theater, located first balcony level. This spacious hall will be ed for exhibitions, official receptions, state and vic banquets, etc. Three tiers of upper promeides look out over the 45-ft-high room

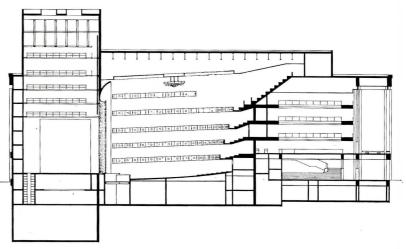


LONGITUDINAL SECTION

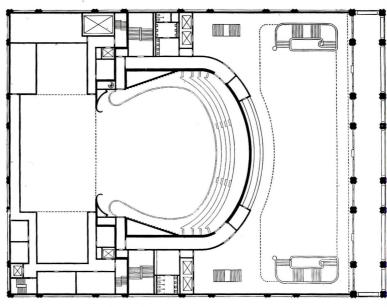

TYPICAL BALCONY PLAN

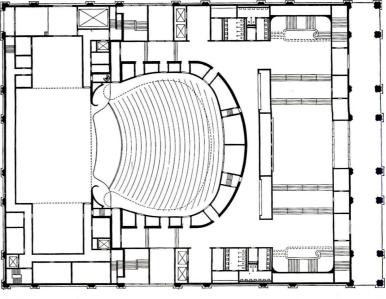

ORCHESTRA PLAN

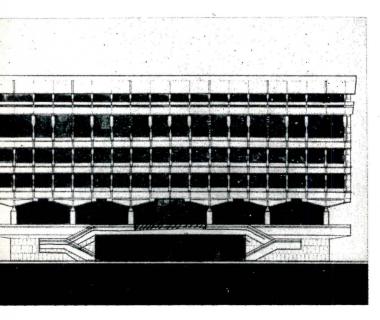

JUILLIARD BUILDING

Scheduled for completion in 1966, the Juilliard Building is still in design; the latest elevation study (subject to revision) is shown above. The school will provide facilities for advanced training in music, drama, and ballet; residence for 200 students; a theater seating 750; a chamber music hall seating 800; a recital studio seating 300; and a drama studio seating 250.



GUGGENHEIM BANDSHELL, DAMROSCH PARK

The Daniel and Florence Guggenheim Bandshell will be built in $2\frac{1}{3}$ -acre Damrosch Park, just south of the Metropolitan Opera House. The open area will seat approximately 3,500; additional seating will be provided under the trees. The shell will seat a full symphony orchestra or band, and will be constructed of concrete, surfaced with an exposed marble-chip aggregate mix.

BUILDINGS AND CREDITS LINCOLN CENTER FOR THE PERFORMING ART

PHILHARMONIC HALL, pages 136-139

ARCHITECT: Max Abramovitz

STRUCTURAL ENGINEERS: Ammann & Whitney
MECHANICAL & ELECTRICAL ENGINEERS: Syska & Hennessy
ACOUSTICAL CONSULTANTS: Bolt, Beranek & Newman
ADVISORY ACOUSTICAL CONSULTANT: Hope Bagenal
INTERIOR DESIGN CONSULTANT: Donald Oenslager
LIGHTING CONSULTANT: Richard Kelly
THEATER SEATING CONSULTANT: Ben Schlanger
THEATER SEAT DESIGN CONSULTANT: Don Wallace

METROPOLITAN OPERA HOUSE, pages 140-141

ARCHITECT: Wallace K. Harrison

STRUCTURAL ENGINEERS: Ammann & Whitney

MECHANICAL & ELECTRICAL ENGINEERS: Syska & Hennessy ACOUSTICAL CONSULTANTS:

Dr. Wilhelm Jordan and Dr. Cyril Harris

STAGE & STAGE EQUIPMENT CONSULTANT: Dr. Walter Unruselating consultant: Ben Schlanger

VIVIAN BEAUMONT REPERTORY THEATER & LIBRARY-MUSEUM OF THE PERFORMING ARTS, pages 142-14 ASSOCIATED ARCHITECTS:

Eero Saarinen & Associates and Skidmore, Owings & Merritheater Collaborating designer: Jo Mielzner structural engineers: Ammann & Whitney mechanical engineers: Syska & Hennessy acoustical consultants: Bolt, Beranek & Newman

NEW YORK STATE THEATER, pages 146-147

ARCHITECT: Philip Johnson Associates

STRUCTURAL ENGINEERS: Severud-Elstad-Krueger-Associates

MECHANICAL ENGINEERS: Syska & Hennessy

ACOUSTICAL CONSULTANTS:

Dr. Wilhelm Jordan and Dr. Werner Gabler LIGHTING CONSULTANT: Richard Kelly THEATER CONSULTANT: Ben Schlanger

STAGE CONSULTANTS: Donald Oenslager and Dr. Walter Unru

THE JULLIARD BUILDING, page 148

ARCHITECT: Pietro Belluschi

ASSOCIATED ARCHITECTS: Catalano & Westerman

STRUCTURAL ENGINEER: Paul Weidlinger

MECHANICAL & ELECTRICAL ENGINEERS: Syska & Hennessy ACOUSTICAL CONSULTANTS: Bolt, Beranek & Newman THEATER CONSULTANTS: Jean Rosenthal and George Izenou

THEATER CONSULTANTS: Jean Rosenthal and George Izeno

GUGGENHEIM BANDSHELL & DAMROSCH PARK,

page 1

ARCHITECTS: Eggers & Higgins

LANDSCAPE ARCHITECTS: Webel & Darling

STRUCTURAL ENGINEERS: Severud-Elstad-Krueger-Associates MECHANICAL & ELECTRICAL ENGINEERS: Syska & Hennessy

ACOUSTICAL CONSULTANT: Michael Kodaris


PLAZAS AND UNDERGROUND GARAGE

ARCHITECTS: Harrison & Abramovitz STRUCTURAL ENGINEER: Jacob Feld

MECHANICAL ENGINEERS: Syska & Hennessy


LANDSCAPE ARCHITECT: Dan Kiley
LIGHTING CONSULTANT: Richard Kelly

THE GENERAL CONTRACT for the entire Center was assumed by Fuller-Turner-Walsh-Slattery, a joint venture of the Turner Construction Co., George A. Fuller Co., Walsh Construction Co., and the Slattery Contracting Company

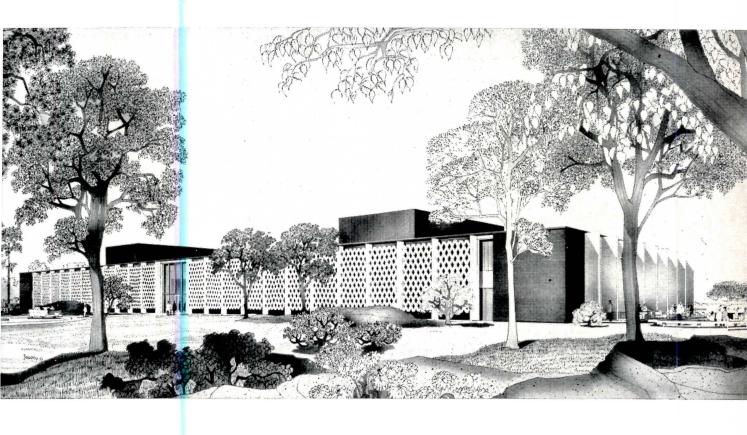

LEXIBILITY KEYNOTES NEW I.B.M. LAB

nerwood, Mills and Smith use a two-foot module to achieve maximum adaptability this very pleasant product development laboratory

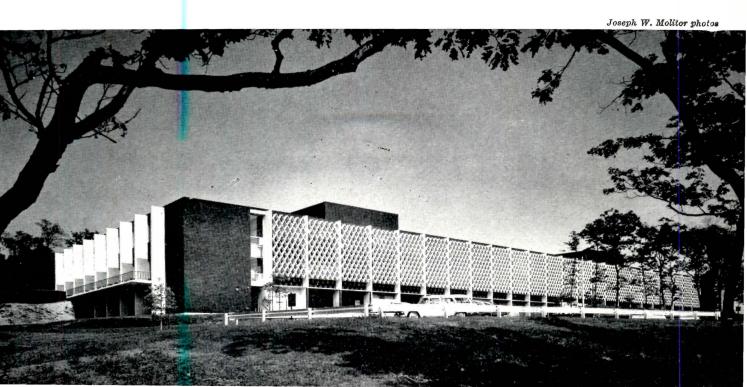






I. B. M. Data Systems Laboratory South Road, Poughkeepsie, New York OWNER: International Business Machines, Corp.

ARCHITECTS: Sherwood, Mills and Smith GENERAL CONTRACTOR: Walter A. Stanley Construction Co.

ENGINEERS: Seelye Stevenson Value and
Knec.


SITE ENGINEER: Jack L. Staunton
LANDSCAPE ARCHITECTS: Green and Ogan
FOOD SERVICE CONSULTANT: Henry H.


Amenities for the employes form a pleasantly conspicuous theme in this laboratory building. The site is park-like (with ample parking space) on a bluff overlooking the Hudson River, north of the main Poughkeepsie I.B.M. manufacturing plant. The building, which will be used for the development of advanced computers and data processing equipment, has a large central laboratory area surrounded by offices. The offices are located at the periphery of the building, and protected by sun baffles, to permit glareless views to the outside. The central location of the labs allows full use of extensive wall areas for installation of equipment. The basic design includes plans for expansion as required.

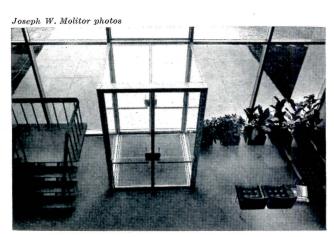


Rothman




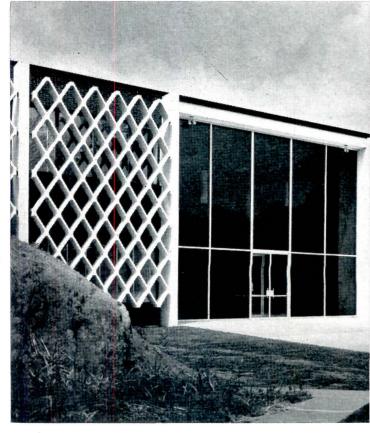

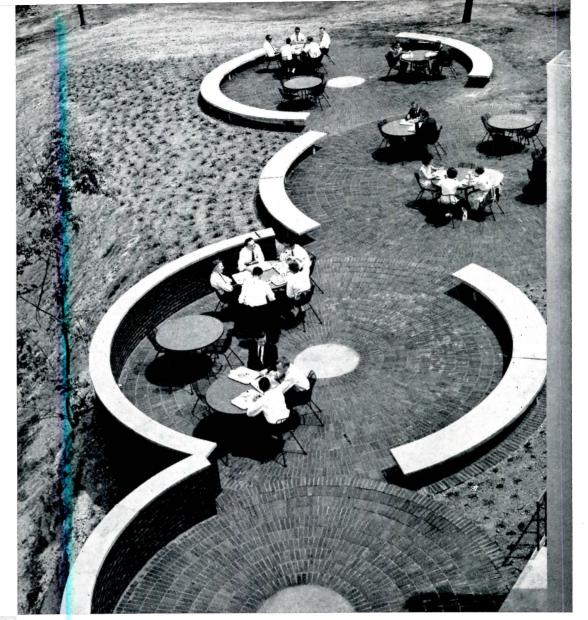





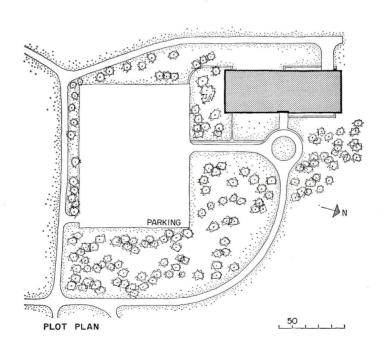


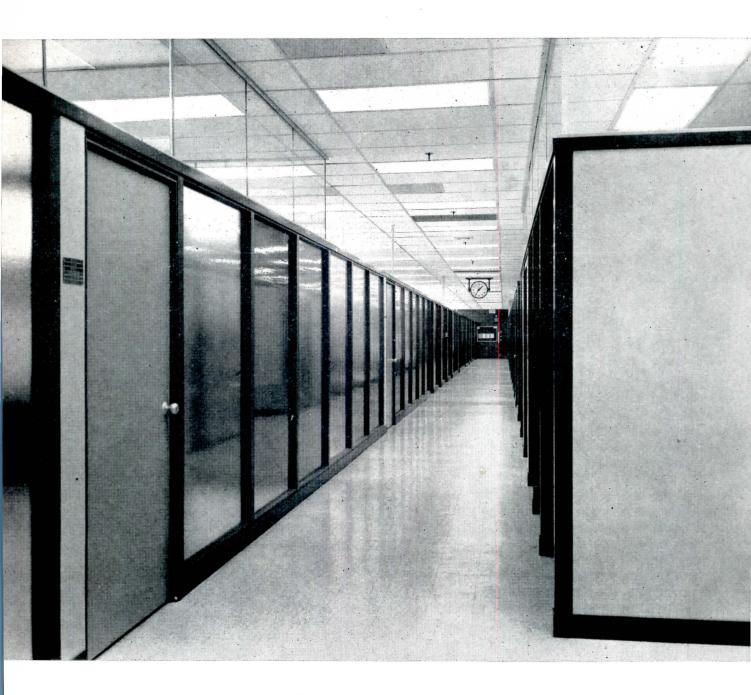



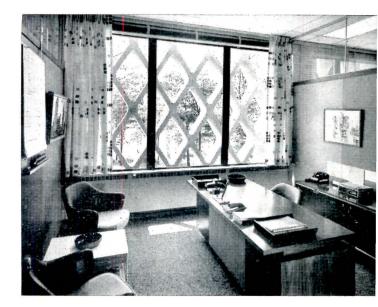

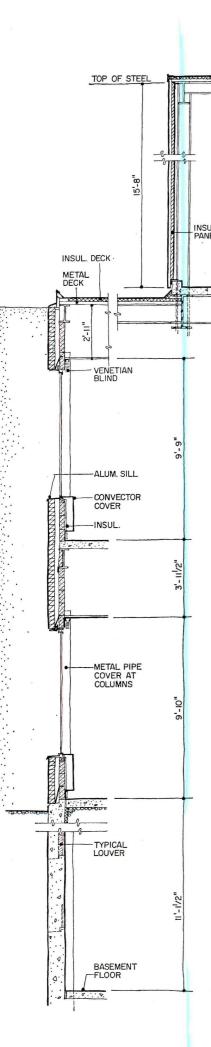


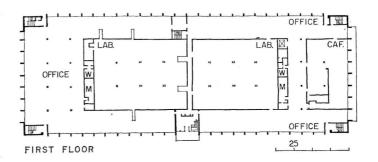


Great flexibility for both office and lab spaces has been provided to make the building adaptable to the various product development projects which may arise. All mechanical, heating, and electrical services are planned to permit partitions to be moved at will on a 2-ft module. The two main floors and the service floor contain 163,000 sq ft of space. Offices are enclosed by a combination of movable glass and steel partitions to provide light or wall space where needed.

The main laboratory area is enclosed with concrete block partitions, and has sufficient acoustical treatment to confine noise to this area. A 12,000 sq ft raised floor area (see detail below) accommodating the applied programming computing systems has been installed in the south laboratory on the first floor. Provision has been made in the design for the installation of a similar arrangement in the first floor north lab, as well as those on the second floor.

The site was selected near enough to the firm's existing South Road Laboratory for utility services to be extended to the new building from the older plant.

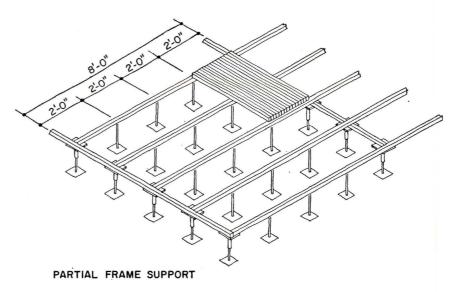


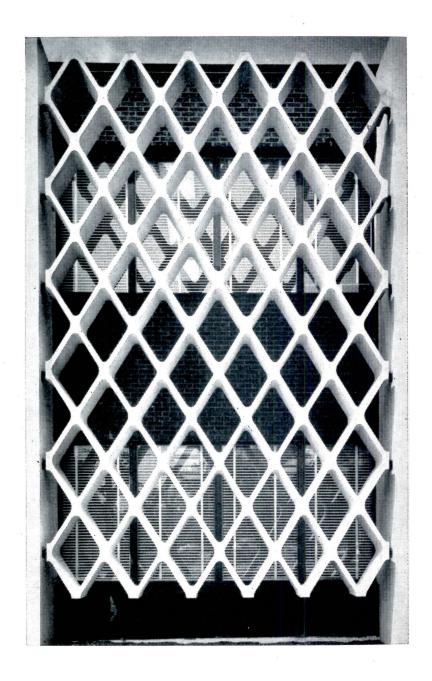




On the exterior, the lab building has a large precast sun screen on the east and west; fin-like baffles protect the other two sides. All are white to contrast with the brown brick walls. The screen is made up of 46 panels, each weighing 5½ tons and measuring 22 ft high, 14½ ft wide and 16 in. deep.

A crew of six men jockeyed the big screen panels into position, with the aid of a 40-ton mobile crane. Each panel was cast with four removable eye bolts in threaded inserts at the top. A steel lift bar secured to the bolts and suspended from the crane raised the panel into position

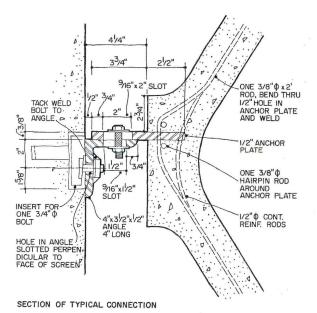



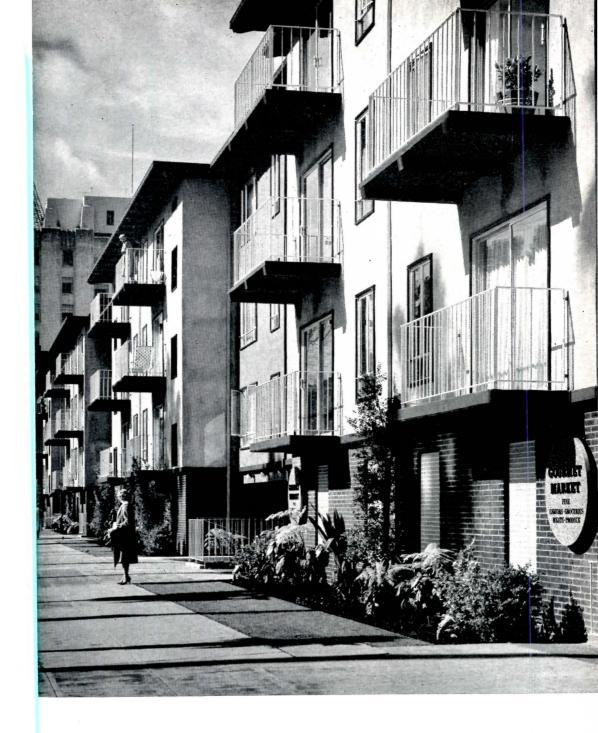

BIG APARTMENT WITH ROW HOUSE LOOK

Wurster, Bernardi and Emmons give an agreeable domestic scale to a 192-unit apartment by use of three courts and varying the mass of the design


Jackson Lake Apartments Oakland, California

OWNER: Gerson Bakar and Associates


ARCHITECTS: Wurster, Bernardi and Emmons


STRUCTURAL ENGINEER: David Welisch MECHANICAL ENGINEER: Daniel Yanow



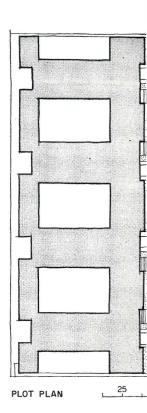





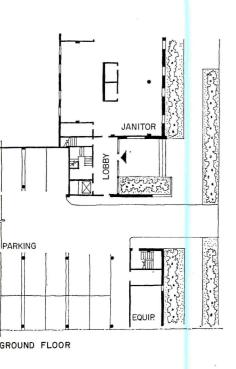

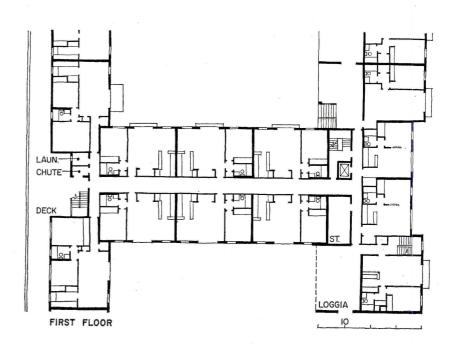



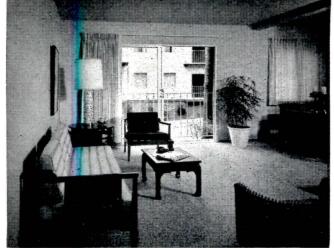

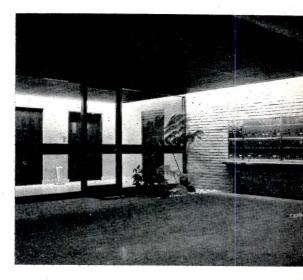


This apartment house, the largest in Oakland's East Bay area, was planned as a low-rise structure to pernit more economical wood-frame construction and ower rents suitable for the area. To get maximum and use, and maximum floor area, the building was lesigned as close to the perimeter of the rectangular of as set-back restrictions allowed. This posed two chief design problems: to minimize the bulk of the building, and to give light and nice outlook for each of the 192 apartments. The use of three courts (two with swimming pools) and balconies for each unit solved the outlook problem. The structure actually


operates as four separate buildings: there are four lobbies, four elevators and four mechanical systems. A typical section is shown as in the first floor plan above.


Parking space for each apartment is at ground level (note partial plan); also on this level are several small shops. A partial fourth story houses eight larger penthouse apartments.

The exterior is painted stucco, interiors are gypsum board. For soundproofing, there are double walls and suspended ceilings between each of the separate apartment units.

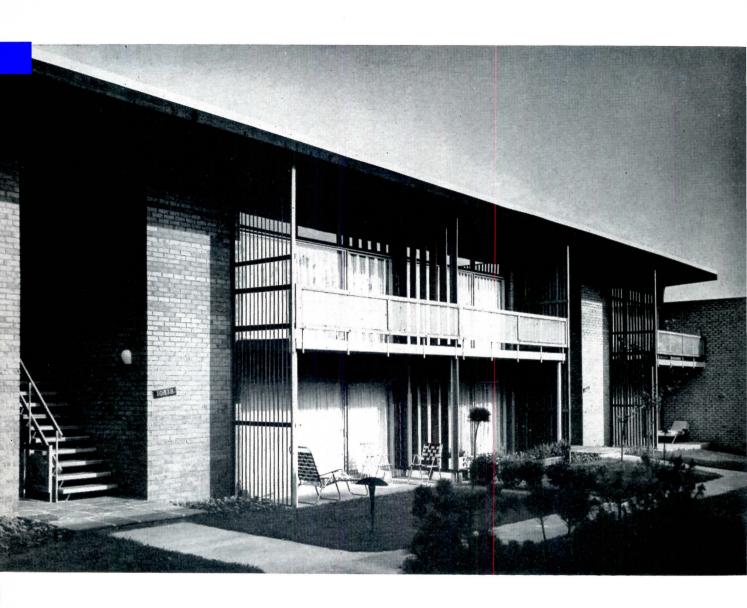



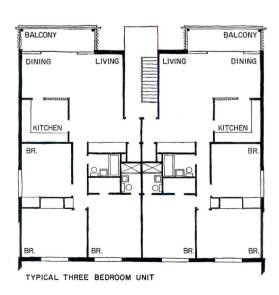

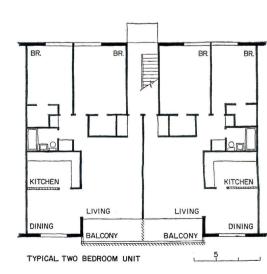

APARTMENTS FOCUS ON BIG GARDEN

Low-rise apartments turn backs to traffic and face wooded grove

A fresh, residential scale and character were given this project by staggering units around the periphery of a sloping site filled with locust trees. Long, typical apartment hallways were avoided by arranging attractive open entries for each group of units, with a flagstone stair and brick walls, and with stairs under cover and protected from the weather. This covered entry leads to individual apartment foyers which have vinyl floor covering.

Good circulation was provided by designing through-units, rather than back-to-back types, and the advantage of cross ventilation for each apartment was also gained. Living-dining areas have a nigher roof height, with wide, 7½-ft overhangs.

The site was developed so that all apartments face onto the inner court via window walls and balconies. All entrances are on the high side of the sloping site; the lowest level of all buildings is a half-basement containing laundry and storage facilities set into the site. At the low side is an apartment at ground level.

Wheaton House Apartments

Wheaton, Maryland

OWNERS: Mr. Maurice Lipnick and Mr. Calvin Cafritz


ARCHITECTS: Cohen, Haft & Associates Contractor: Lipnick Construction Co.


LANDSCAPE ARCHITECT: Thurman D. Donovan

Robert G. Lautman photos







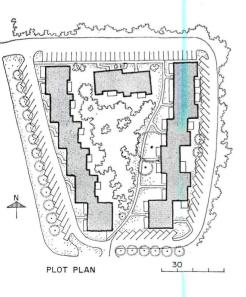

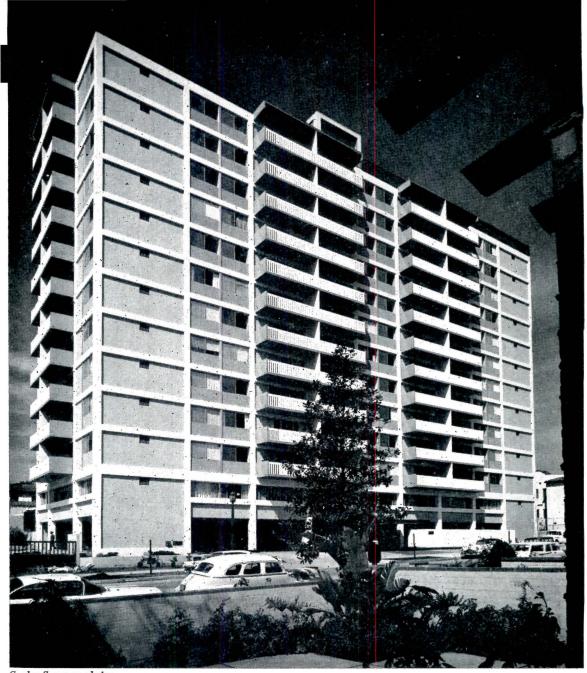

Gordon Sommers photos

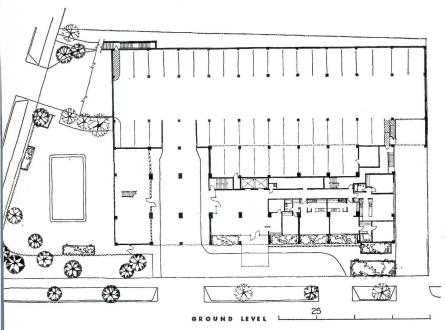

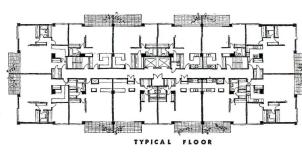


LUXURY FOR SMALL UNITS IN HIGH-RISE

Victor Gruen Associates' new apartment house features sliding walls, balconies, a pool, and a lot of electrical equipment

An all concrete structure, Park Westwood Tower is said to be the first building of its kind in Southern California to obtain FHA financing under Section 207 of the National Housing Act. The building contains 144 units: 96 with one bedroom area, and 48 two-bedroom units, plus two studio apartments.

The units are exceptionally well planned and equipped. Each has a private balcony, reached by sliding glass walls. In most apartments sliding wall room dividers are installed between the living area and one bedroom to allow optional room usage. Each unit is acoustically isolated from the next, and elevators, mechanical equipment and plumbing were engineered for minimum noise level. Most kitchens have a pass-through into the dining area, and are fitted out with built-in ovens and cooking units, dishwashers, and food waste disposers. Heat pumps for heating and cooling are located at the ends of the balconies.


On the roof, which is also used for recreation, a aundry room, with washers, driers and ironers, is available for the tenants use. The structure is built of fireproof materials, with a sprinklered three-level underground garage. Three entrances at different evels eliminate internal ramps in the garage. All equipment in the building is electric. Cost was about 33 million.

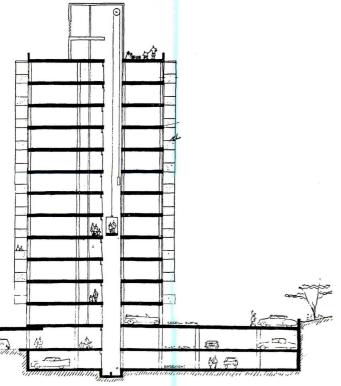

Park Westwood Tower

Los Angeles, California

ARCHITECTS: Victor Gruen Associates

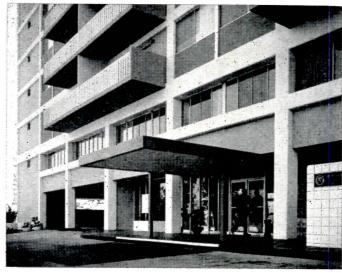






The lobby, top photo, has a handsomely furnished waiting area, with floors of terrazzo, and walls of glazed tile and polished marble. All colors, furniture, planting and graphics were designed by the architects.

A living room and bedroom of a typical apartment are shown at right and below. The interior design is by Herman Guttman, who was partner-in-charge of the entire project for Victor Gruen Associates. Well-planned closets provide ample space for general storage and for out of season clothing. Higher than standard ceilings add to the spaciousness of each room





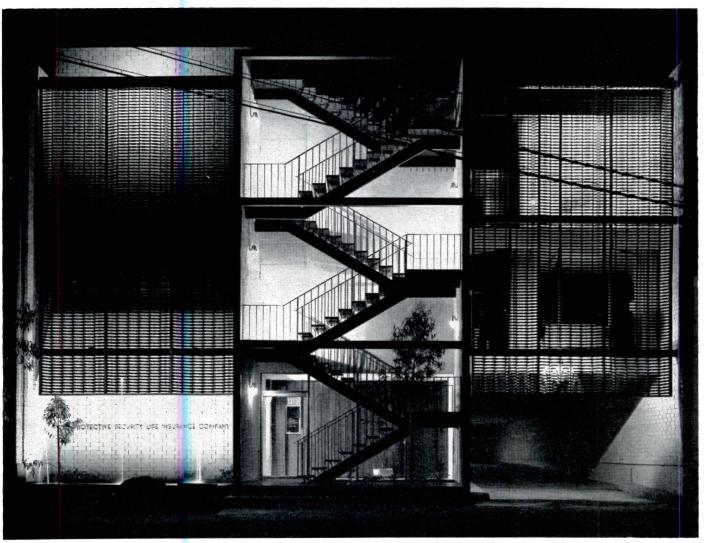

Larry Frost photos

NARROW LOT AND PARKING NEEDS DETERMINE PLAN


Office Building
Beverly Hills, Calif.
ARCHITECTS: Richard Dorman & Associates
STRUCTURAL ENGINEER: Woodward Tom
MECHANICAL ENGINEER: Ira Tepper
ELECTRICAL ENGINEERS: Norman Levenson & Associates
CONTRACTOR: M. Saltman

Two major problems in this building were: (1) how to place an office building on a narrow, 50-ft lot, 217 ft deep and (2) how to provide adequate parking without using up too much space or letting the automobiles obtrude on the habitable area. The architects solved these problems by designing a building with no windows on its long sides, extending completely through the block from the street on the front to another on the rear, providing it with a landscaped court, reflecting pool, and fountains on the front, and placing parking not only on the ground floor, but in an excavated basement below grade. The architects did the interior of the third floor, which they occupy.

The building has a steel frame with wood joists and lightweight fill floors. Exposed stairs at either end of the building are also steel. Exterior walls are brick; flooring is terrazzo or vinyl asbestos tile; ceilings are pneumatically applied plaster, trowelled smooth.

An aluminum and glass store front forms the wall on the ground floor at the entrace. Aluminum sun shields are hung from the building frame outboard of the stairs at the second and third levels.



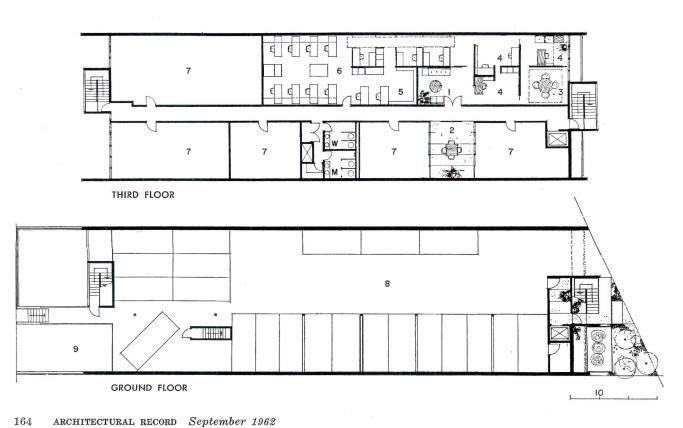





e ground floor and basement the building are mainly deed to parking. The second r is occupied by an insurance npany, the third mostly by the hitects themselves. To proe more natural light and crerelationships with the oute, the architects designed an erior garden patio on the ed floor, as shown in the plan; s providing glass doors and dows for three of the offices this floor. In addition, a led plate skylight was placed the roof over the architecturconference room.

Tot only does the skylight aldaylight to enter through clerestory course, as shown the right, but the added the makes the conference seem considerably more clous. At the right, above, is wn a view of the architect's rate office, giving an indicatof the finishes and furnishused throughout the pripareas of architects' offices

N LEGEND eception atio onference ffice amples rafting ental area arking amp down

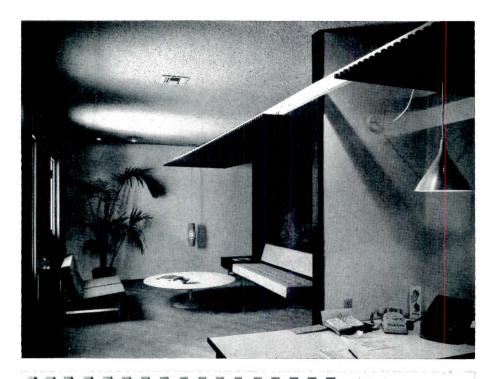


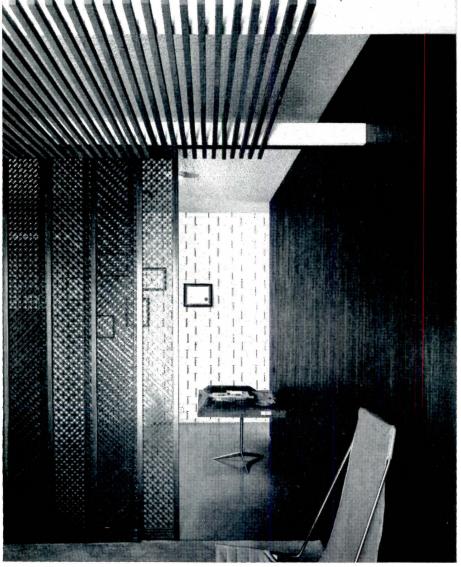

The architectural firm occup about 4,500 sq ft on the floor of the building. Interiors this area were handled by architectural firm. As shown the views at the left, finishes generally sprayed plaster c ings with vinyl asbestos floors or carpeting. Architect al space dividers and hung c ings and grilles are used to fine and break up the spa and to lend interest to the teriors. Walls are either pain plaster, walnut paneling or posed brick with raked joint.

The reception area, shown the left, above, was so placed t positive control of the circu tion of clients could be achie by the receptionist from her d



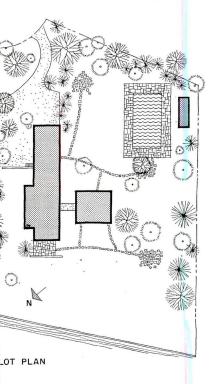

A WATER-FRONT HOUSE OF WARMTH AND CHARACTER

George Nemeny combines the familiar with the new for a large but intimate family home


The Marshall Safir House Kings Point, Long Island ARCHITECT: George Nemeny

ENGINEER: Edward S. Klausner

HEATING CONSULTANT: Edward Simpson LANDSCAPE ARCHITECT: J. J. LevisonINTERIOR FURNISHINGS: Evelyn Jablow





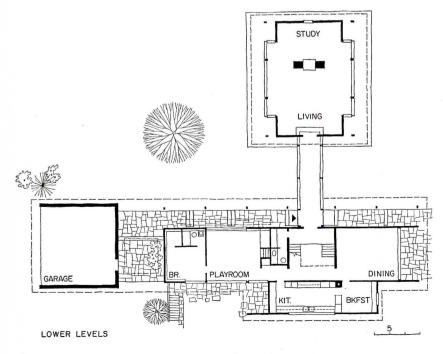

The calm, well-proportioned design of Safir house is worth a bit of reflection in t period of architectural "statements." As citing as the latter can be, the plain fact that they are not suitable as homes for eve one. Nor, on the other hand, are the ecled or drab schemes of too many developmen


In his approach to this design, Nemeny 1 set himself the task of looking afresh at full range of materials and techniques ava able to us today, old ones as well as the ne And with a nice descrimination of cho among them, he has come up with a des that is fresh and full of little surprises, which has a ring of comfortable familiar Arched doorways, shingled roofs and stu walls combine with a bi-nuclear plan, p and beam frame and glare-resistant s lights.


The house was planned for a family w three boys and a live-in maid; the progr called for a scheme suitable for private fan life and for frequent (and simultaneous) tertaining. This was achieved by separat functions into smaller elements within house. A portion of the main block was aside for the children's activities; the ot end, separated by the stair hall, was reser for the parents. Big rooms for entertain are detached completely by a glass corrid and entered at mid-level.

The plan was also organized to creat sheltered garden on one side, and take in view of Long Island Sound on the other



UPPER LEVEL

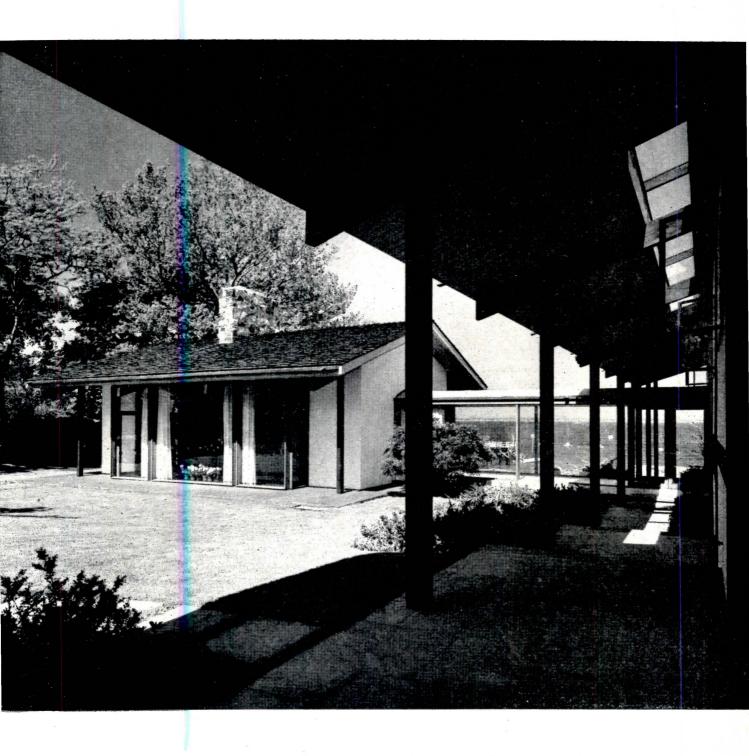

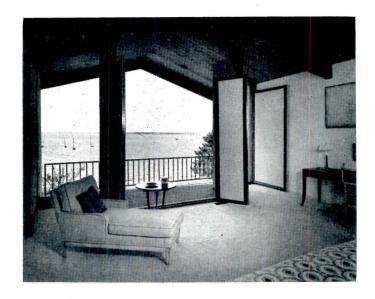



The site is one of sloping contours, with the house set into the slope; it is visible from above when driving in, and from the water below. The stone garage (shown above) was planned to visually anchor the compound to the site. The entrance approach from the parking area is under a roof (see preceding page) between the garage and the service entrance, with first a vista of the garden, then along the covered walk to the glass entrance link overlooking the sound. The view is also shared by the master bedroom (top) which has shutters for an added sense of shelter on stormy days

UILDING TYPES STUDY 311

R

Just as the patient is the focus around which all activities of the hospital should revolve, the central consideration in hospital planning might be said to be the patient care unit.

Accordingly, it is good news for architects when the Architectural and Engineering Branch of the U.S. Public Health Service arrives at the point of publication of a brand-new study of the patient care unit. The results of this study are reported on the following pages. Intended to act as a guide for the planning of new patient care units or additions to existing hospitals, the present study treats, in considerable detail, all of the important aspects of the subject. No attempt is made to direct the design and planning of patient care units; rather the implicit intent of the study is informational. Covered in the study are such subjects as sizes and shapes of patient care units, design of patient rooms, materials and equipment, and engineering data. Also discussed are isolation and security rooms, nurses' stations, treatment rooms, supply facilities.

The story of the master planning and redesign of a complete medical center at Charlotte, N. C. by A. G. Odell Jr. and Associates follows the Public Health Service study. In this building may be seen the application of some of the principles discussed in the patient care unit article, as well as a practical demonstration of how one architectural firm handled the problem of modernizing and expanding an existing hospital—a current problem in many communities. A large neuro-psychiatric hospital completes the present study.

Planning the

PATIENT CARE UNIT IN THE GENERAL HOSPITAL

Prepared by Architectural and Engineering Branch, Division of Hospital and Medical Facilities, U.S. Public Health Service, Department of Health, Education, and Welfare

The original "Elements of the General Hospital" was published in 1946 to serve as a guide in the design of hospital construction under the Hill-Burton program. With changing concepts and practices in hospital care, the "Elements" is reviewed and revised from time to time.

This publication seeks to indicate good current practices and the direction in which developments in the design of patient care units seem to be moving. It is based on findings resulting from current research; visits to general hospitals of all sizes across the country and consultations with many people active in the field of hospital care. Among those consulted were physicians, nurses, administrators, dietitians, pharmacists, technicians, architects, hospital consultants, manufacturers' agents, construction and maintenance personnel, and patients.

The principles are emphasized because their application by architects and others concerned with hospital planning will help to develop increasingly efficient means of implementing patient care requirements.

> JACK C. HALDEMAN, M.D. Assistant Surgeon General Chief, Division of Hospital and Medical Facilities

While hospitals differ in size, complexity, and in details of procedures, they all work to provide the best patient care at the least cost. All departments are designed to serve the patient, either directly or indirectly. Since most patients spend most of their time in the patient care unit, most services are focused here. "Best patient care at least cost" depends in part upon how effective that focus is.

Developments continue in equipment and materials and in administrative, operational, and nursing techniques. These are directed toward improved patient care and better utilization of personnel at all levels. The design of physical facilities must implement these aims and at the same time keep down construction and operating costs.

The extent to which automation can be applied, directly or indirectly, to patient care unit functions is a matter of considerable interest. Efforts are being made in several areas, namely charting and chart handling, food service, medications, and supply. It is reasonable to assume that these and other efforts will result in better utilization of personnel time and improved patient care.

Facilities required for conventional units and for intermediate care units in a progressive patient care organization of in-patient services are substantially the same. However, additional space will be required for conferences,

instruction, medication preparation, laboratory procedures, charting, and similar functions in hospitals having medical, nursing, or other educational programs.

The principles and plans for the patient care unit in cluded in this publication are based on the following as sumptions:

- 1. An efficient administrative department exists to di rect and coordinate the activities of the various depart ments
- 2. The *dietary department*, using a centralized system for food service, will meet the dietary needs of the patien
- 3. Diagnostic facilities, such as X ray and laboratory are designed and staffed to fulfill the needs of the hospita
- 4. A *central service department* is organized to provide in a combination best suited to the individual hospital such services as:
- (a) A *pharmacy*, responsible for filling prescription and maintaining supplies for the medication room on the patient care unit
- (b) A central sterile supply, responsible for all cleaning packaging, and sterilizing of supplies, materials, an equipment
- (c) Housekeeping, responsible for all cleaning, included readying rooms after patient discharge and decontaminating rooms after infectious cases
- (d) A *laundry*, responsible for processing and supply ing required complements of linen and other laundere material (such as mopheads) to the patient care unit an other departments
- (e) Central stores, responsible for the care and availability of supplies, materials, and equipment for the patient care units and other departments. (Purchasing may be here or directly under administration.)
- (f) Central distribution, responsible for the delivery of all required supplies, materials, and equipment to all departments and to patient care units
- 5. A maintenance and operation department, responsible for care of the physical plant and the operation of mechanical equipment.

The plans, shown in figures 1 and 2, illustrate som ways of applying principles set forth here. These example are concerned chiefly with medical, surgical, or medica surgical units, although many of the principles are applicable to other types of patient care units. The planshown are not, by any means, the only solutions to the various problems in planning patient care units, but an intended to serve as guides in meeting the particular needs of individual hospitals.

SIZE OF PATIENT CARE UNITS

In current practice, the patient care unit provides accommodations for patients whose prescribed and routine car is the responsibility of one nurse (head nurse, charg

urse, or other title). In an effort to utilize scarce nursing lent to the fullest, many hospitals are now experimentig with various nurse-staffing patterns and divisions of esponsibilities. At the present time, the question of just ow broad the "span of control" should or can be in the atient care situation apparently has no final answer. owever, the number of patients whose care one nurse in direct and the number of personnel she can supervise ficiently will depend upon: (1) her own characteristics education, experience, temperament, leadership); (2) amber, training, and experience of the personnel workg under her supervision; (3) efficiency of the patient are unit plan and hospital services provided; (4) degree which nurses are freed from duties which can be more opropriately, and economically, handled by ward clerks and the other departments of the hospital; (5) type of paent, rate of turnover, and variety of patient health probms; (6) number of doctors and their standards of pracce; (7) teaching and research programs of the hospital. Information on all of these questions is seldom availole when a patient care unit is being planned. However, ney should be borne in mind because one or more of these actors may affect the size or design of the proposed unit. or example, patient care units in hospitals having stuent-teaching programs generally are smaller than those hospitals having no teaching programs. The greater deands on the nursing staff and the increased number of ersonnel working on such units in teaching hospitals ake the smaller unit desirable. More conference rooms, fices, and such facilities will be required in teaching hositals, however.

Most authorities agree that quality of patient care ased on the real needs of the patient should be the criteron for determining the size of the patient care unit. Altough this criterion is difficult to measure, apparently it closely related to the adequacy of supervision.

In the absence of conclusive data and in the presence of rong convictions among nurses at all levels of adminisation, nursing education, and patient care, and among any physicians and administrators, about 30 to 35 apears to be the maximum number of patients whose care in safely be directed by one nurse even on the most effiently designed unit. Reasons for this are: (1) the head arse must be fully aware of the needs of all of the paents as well as of the staff. When the census of the unit sceeds 30 to 35, the span of control of the head nurse is eakened; (2) staff morale and the quality of patient care re decreased when, because of a large census, head arses are unable to receive and/or assimilate a full reort on each patient or to visit each patient at least once day; (3) relationships between medical and nursing affs are strained when the volume of work is comounded by a large census. The head nurse is unable to ovide the kind of information and observation desired the physician; (4) orientation of new and temporary ersonnel is more difficult with a large census due to the creased "busyness" of the unit.

Each hospital must decide what combination of size and pe of patient care unit and other factors will produce e best patient care at the least cost in its particular situion. Those who plan to exceed 30 to 35 beds per unit ould do so only with full understanding of the staffing, tient care, supply, and traffic problems involved. In any se, the size and design of units in an individual hospital ould be as nearly identical as possible (except for spe-

cialized units such as pediatrics) to facilitate standardization of supplies, equipment, and staffing.

SHAPE OF PATIENT CARE UNITS

Each shape of patient care unit—rectangular (single or double corridor), round, square, cross, or T-shape—has its advantages and disadvantages. The choice of a shape should evolve from a careful study of the site, orientation, types of transportation and distribution intended, number of beds per floor required, hospital program, plans for expansion, relationship to other departments, air conditioning and heating loads, and construction costs. It is clear that no one shape will fulfill the requirements of every situation.

PATIENT ROOMS

Number of beds per room, the desirable number of beds in a room and the proportion of different size rooms on the patient care unit will vary. A unit made up of one-bed rooms offers maximum flexibility of use and maximum privacy for the patient and the physician. However, such a unit is more expensive to construct and, because of greater distances between patients, may result in a reduction in the nurse's time spent in bedside care. A patient care unit made up of multiple-bed rooms has less flexibility and provides less privacy for patient and physician. But, it is less expensive to construct, provides more opportunity for observation of patients, and may save nursing time because the distance between patients is less.

The two-bed room is a compromise among: (1) the administrative need for flexibility; (2) some patients' needs or desires for privacy; (3) privacy for the physician; (4) the need to give patients individual attention; and (5) the over-all need to keep costs down. Like most compromises, it fully satisfies none of these needs. From an administrative point of view, the two-bed room is more flexible than the four-bed room (although not as flexible as the one-bed room). However, many believe that from the nurse's point of view and possibly from the patient's, it is less desirable than either.

Studies indicate that patient preference between the one-bed room and the multiple-bed room is influenced not only by the type and degree of illness and by the cost (which is related to the terms of hospital insurance) but the socio-economic group to which the patient belongs. Some nurses favor the four-bed room over the one- or two-bed room because: (1) "attention of varying kinds can be given by one nurse to more patients simultaneously; (2) there is more room for maneuvering equipment, beds, and stretchers; and (3) more frequent patient observation is possible. On the other hand, some authorities believe that patient demands, as opposed to needs, tend to increase in the multiple-bed room.

Except in special circumstances, however, the two-bed room appears to best meet the fluctuating needs and the cost requirements of the individual hospital. Currently, most patient care units consist of one-, two-, or four-bed rooms in a proportion chosen to meet both medical requirements and community preference as interpreted for each situation.

A minimum of 20 to 25 per cent of the beds on a patient care unit should be in one-bed rooms for isolation and other medical reasons according to information currently available. Special circumstances and local requirements may increase this percentage. The practice of using double

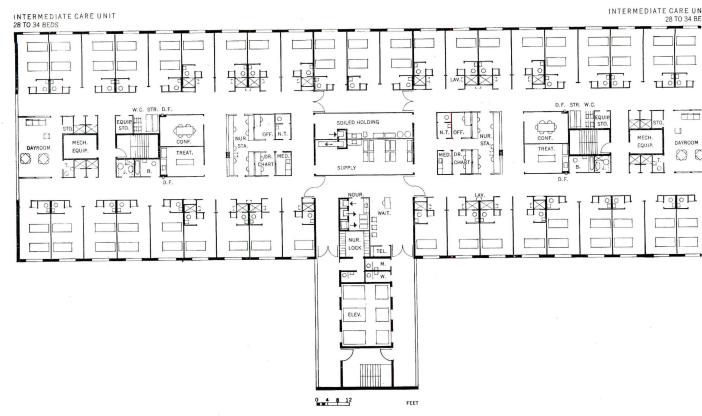


Figure 1. Double-Corridor Patient Care Floor. Consists of one 30-bed and one 32-bed unit, and utilizes centrally located mechanical conveyors for handling of supplies and food tray services

rooms as single rooms, when required, obviously breaks down under a high daily census.

Room design, patient rooms are designed and equipped to meet the physical and psychological needs of the patient and to provide a setting in which required medical and nursing care procedures can be performed. The interpretation of these requirements varies. However, for this country, at this time, certain observations can be made.

Size of room, clearances around the bed should be sufficient to permit the nurse to carry out nursing procedures; to move patients in bed, stretcher, or wheelchair; to accommodate necessary furniture and equipment; and to facilitate housekeeping.

In multiple-bed rooms, each bed should have a side wall clearance of at least 2 ft 6 in. Beds should be at least 3 ft 6 in. apart, preferably 4 ft. A two-bed room should have a minimum width of 11 ft 6 in., preferably 12 ft, for movement of beds and stretchers, and a minimum depth of 15 ft clear, preferably 16 ft. Four-bed rooms should have a minimum of 5 ft between bed ends and a minimum depth of 15 ft clear, preferably 16 ft. In hospitals having medical student or other teaching programs, patient rooms should be large enough to accommodate several students as well as the doctor and nurse around the bed during rounds.

Some hospital authorities believe that because of fewer equipment requirements one-bed rooms on an intermediate care unit may be smaller than on a unit for critically ill patients. However, in many situations a need for flexibility and interchange among patient care units would seem to preclude reducing the size of patient rooms below a size that would permit satisfactory care of critically in patients. For instance, most intermediate care patient could probably be cared for satisfactorily in a bed with its side against the wall. This arrangement, which reduces room widths and consequently corridor lengths would lessen total floor area and walking distance for the nurse; but whether it would accommodate equipment and lend itself to an island bed arrangement, if necessary must be considered for each hospital's requirements.

A full-length built-in locker or closet large enough t accommodate outside coats and clothing on hanger should be provided for each patient. These should be arranged that no patient's locker interferes with the pr vacy of another patient. Each locker or closet should have drawers beneath and luggage storage above, unless these are provided elsewhere in the room. Day storage for ind vidual patient's blankets should also be provided for.

Doors should be fire safe, and measure 3 ft 10 in. to accommodate wheelchairs, stretchers, and beds.

Toilet room and lavatory, each patient room should have a toilet and a lavatory with gooseneck spout for filling basins, blade handles, mirror, and shelf. The lavatory are should be equipped with paper towel holder, soap dispenser, and waste receptacle. Dispensers using soap tissue eliminate contaminated soap bars and stopped-up liquid dispensers. A grab-bar should be provided as well as a emergency call button.

Whether the lavatory should be located in the toileroom or in the patient room will depend upon the hosp tal's attitude toward the relative importance of the lavatory.

tory's availability to the patient for handwashing immediately after using the toilet and for personal hygiene, or to doctors and nurses for handwashing. The location may be compromised by placing the lavatory in the toilet room so that it is visible from outside the toilet room and can be used by doctors and nurses without closing the door. This location encourages handwashing by patients after using the toilet, reduces the problem of the contaminated door knob, provides privacy for the patient while using the lavatory, and permits doctors and staff to observe handwashing techniques. Arrangements whereby the lavatory is in the patient room, but is screened from patient beds, fulfill most of these requirements and is more convenient for use by personnel. Toilet-room doors should not open directly toward patient bed areas.

The decision as to whether floor-mounted or wall-hung toilets are to be installed should be made early in the planning stage, as this may influence the location of fixtures and the design of toilet room areas. The toilet should have a bedpan flushing attachment, located to the right of the toilet, either a foot-operated or a rigid type activated by the toilet flushing handle. Most objections to these devices are traceable to improper adjustment or faulty maintenance, or to insufficient instruction of nursing personnel in handling them.

A single toilet room serving two patient rooms should be considered a minimum facility. This arrangement, however, may create inconvenience for patients and nursing personnel and reduce flexibility of room use, especially in infectious cases. Such an arrangement should have a lavatory in the toilet room and a lavatory in each patient room to fulfill handwashing requirements of patients and staff. In any arrangement, one toilet should serve a maximum of four patients.

Windows, when determining window size and type, the following should be considered: (1) the effect of glass area on air conditioning and heating costs; (2) the problem of maintaining even temperatures throughout multiplebed rooms; (3) the cost and effectiveness of light or sun control by curtains, blinds, and similar furnishings; (4) whether the view from the windows justifies the viewing; (5) window washing and other maintenance costs; (6) safety and ease of operation.

Lighting, lighting the patient room has many aspects, especially where two or more patients must be considered simultaneously. The patient, the nurse, and the doctor each require a different level of illumination.

Lighting levels required in the room range from a fraction of a footcandle for night lighting, up to 100 footcandles or more for examination or treatment. Several steps of lighting levels between these extremes are needed for patients' use and for routine nursing care. These steps should be carefully considered so that lighting requirements will be met while initial and maintenance costs are kept low.

Noise, noises from many sources and following many pathways are disturbing to patients on many patient care units. The sources of most of these noises are known. Steps taken during the planning and construction stages can eliminate or reduce them.

Ventilation, since any patient room may house a known

or unknown infectious case or an odorous case, the ventilation should be so designed that air is *not* recirculated to other patient rooms or areas.

Miscellaneous, electric outlets for equipment should be provided at shoulder height at the head of each bed. Emergency power outlets should be so located in corridors as to be available to any patient room.

Telephone outlets should be provided in each patient room.

All patient rooms should be equipped with piped oxygen and, if possible, vacuum.

Built-in cabinets between, and opening to, the patient room and the corridor are designed to store supplies, thus reducing trips by the nurse to the supply and holding rooms and entries by service personnel into the patient room.

Television and radio, provision should be made for television sets and/or radios in accordance with hospital policy as to whether sets are to be rented by the hospital or from outside the hospital, whether sets are to be remotely controlled and have under-pillow speakers, whether a fixed shelf is to be provided, and whether a central antenna system is to be installed. Since in most areas proper operation of the sets will depend upon a central antenna system, its installation at the time of construction should be considered.

ISOLATION AND SECURITY ROOMS

The type of provisions on the patient care unit for patients requiring isolation will depend upon the frequency with which the problem arises and the techniques employed. Since patients are usually isolated one to a room, it appears that a number of single rooms on each unit should be designed to accommodate the isolation techniques employed in the hospital. The number would be governed by the expected maximum number of isolated patients. It is reported that the number of patients in general hospitals requiring isolation may be as high as 20 per cent under normal non-epidemic conditions.

If the hospital will have only an occasional patient requiring isolation, special arrangements can be made, as needed, on the patient care unit. However, if the hospital will have a number of patients in isolation simultaneously, the unit should be designed to facilitate the carrying out of isolation techniques.

The techniques employed will determine the provisions to be made. For example, if technique requires handwashing after personnel leave the isolated patient room, a convenient lavatory outside the room will be required. Any technique would probably require that items such as clean gowns, masks, and supplies must be stored outside the room. Most fire exit codes, however, do not permit the cabinet or cart in the corridor outside the isolated room.

The most strict isolation technique requirements can be met by an alcove between the patient room and the corridor containing: (1) a lavatory with gooseneck spout, foot- or knee-operated faucets or at least blade handles, and provided with paper-towel holder, soap dispenser, and waste receptacle; (2) space for foot-operated waste can for soiled masks, if technique so requires. (Soiled gowns would be removed inside the patient room and placed in foot-operated waste can with waterproof liner); (3) storage facilities, either on a small cart or on shelves above

the lavatory, for clean gowns, masks, and other supplies.

A lavatory in an alcove off the corridor might be so located that it would serve several rooms used for isolating patients. This would reduce the number of lavatories required.

If isolation technique in the hospital permits final handwashing in the patient room, this can be done at the lavatory provided, and clean supplies, gowns, and masks can be kept on a cart or cabinet in the alcove adjacent to the patient room or in a built-in cabinet accessible from the corridor and the patient room.

Since many isolated patients are ambulatory and may remain in the hospital longer than the average patient, bathing needs can best be met by a shower provided in addition to the toilet and lavatory normally provided for patient rooms.

The problem of handling, cleaning, and storing patient clothing, not normally kept in the isolated room, must be considered.

To provide for proper isolation technique, the ventilation of patient rooms should be so designed that the air is not recirculated to other patient rooms or areas.

Security, most hospitals from time to time need to house, temporarily, a disturbed patient. If the hospital does not have a psychiatric unit and does not provide for these patients in the emergency department, provisions must be made on a patient care unit. At least one room should be constructed so that it can be converted quickly to such use. Such a room should have a door with a view-window cutting off the toilet room and lockers; a detention screen at the window; recessed ceiling light, switches outside the door, and detachable over-bed light; key-operated oxygen and suction outlets; proper hardware on the inner door; and radiant heating or protective covering for the radiator or heating element. For normal occupancy, the room should be converted to a typical patient room.

TREATMENT ROOM

Some treatments and examinations can be carried out with greater safety and privacy for the patient and for the physician, as well as greater convenience for the staff, in a treatment room.

Whether a treatment room is provided will depend upon the type of patient on the unit and upon hospital policy as to where treatments are given. Since both of these factors are subject to change, the treatment room should be arranged so that it can be converted to another function if it is no longer required for treatments. If no treatment room is provided, a conveniently located patient or other room should be designed for possible conversion to a treatment room. This would involve roughing in for a sink and installing additional electrical outlets. An increase in the percentage of single rooms on the unit may (or may not) affect the use of a treatment room. This will depend upon hospital policy.

The treatment room should contain, in addition to space for necessary equipment, a counter sink with gooseneck spout and blade handles for preparations for treatment, rinsing, and handwashing. The sink area should be equipped with a paper-towel holder, soap dispenser, and waste receptacle. Piped oxygen and vacuum should be provided. A bulletin board should be provided.

As a precaution against possible cross-infection, materials should be readily cleanable and procedures for in-

fection-control must be established and followed. The treatment room should not be used for other purposes such as storage or team conferences. Treatment trays, some of which may be used in a patient room, and other general supplies should not be kept here, except such emergency trays required by hospital policy. Treatment trays should be kept in the supply room and soiled materials disposed of in the soiled holding room. An X-ray film illuminator may be installed here, if required.

Doors should be 3 ft 10 in. wide to accommodate wheel-chairs, stretchers, and beds.

BATHS, SHOWERS, AND TOILETS

Each patient shower and each dressing area should be at least 3 by 3 ft to provide room for a stool or wheelchair and for grab-bars. Plumbing fixtures should include a hose attachment for a sit-down shower. Shower rooms need not be segregated by sex but should have a light in the corridor controlled by the switch inside the room to indicate occupancy. The same switch should control mechanical ventilation. Emergency call buttons should be provided in each dressing area, reachable from either shower or dressing space. Floors should be flush with corridor floors, with no raised thresholds, to accommodate wheelchairs. The dressing area should drain into the shower for safety and ease of cleaning.

Opinions vary as to the number of showers required on a patient care unit. The type of patient and community preference will influence the number provided. With scheduling, however, it appears that a minimum of four common showers should suffice on a 30- to 35-bed unit, especially if each single-bed room is equipped with a shower for isolation purposes.

At least one tub should be provided in each patient care unit for treatment and for patients who require or prefer a tub for bathing. Whether the tub should be a raised-island type will depend upon the type of patient on the unit and local preference. A toilet should be provided in the tub-room. This can be used as a training toilet. Some hospitals prefer the fixed-type sitz bath to the portable type. Tub and sitz baths should be installed in separate rooms, each equipped with grab-bars, emergency call, and occupancy light. Each room should be able to accommodate a wheelchair patient.

A toilet and lavatory should be provided for the day room, with nurses' call, grab-bar, mirror, paper-towe holder, soap dispenser, and waste container.

Except in small hospitals each patient floor should pro vide toilets to accommodate doctors, non-nursing person nel, and visitors.

NURSES' STATION

The nurses' station is the communications, administration, and charting center of the patient care unit. It should be centrally located within the unit to reduce distances to a minimum. Although it is desirable for the nurses' station to be so located that activity within the unit may be generally observed, it is not usually considered necessary that the nurses' station command the entrance to the unit or to the elevators except on special units, such as a psychiatric unit. Visitors should be screened and directed at the main lobby and, if desired, by a volunteer stationed a the elevators on the nursing floor during visiting hours. Hospital personnel requiring information can go to the nurses' station.

Charting positions should be provided for nurses and a ork station provided for at least one ward clerk who, is assumed, will among other duties: (1) take incoming lls on the telephone and call systems; (2) handle pneuatic tube system, if provided; (3) make out and process quisitions; (4) obtain and return charts to central cords department; (5) make such entries on charts as espital policy requires; (6) direct visitors and personnel, necessary; (7) operate record imprinter.

The number of charting positions needed will depend the number of patients and on the nurse-staffing patern of the unit. Five or six charting positions and one ard-clerk station are usually adequate for a 30- to 35-tient unit. Ward-clerk stations should be provided hether or not ward clerks are contemplated, since these nctions must be carried out by someone and facilities would be conveniently related to the station.

Counters should be open underneath, where possible, ith drawers placed only where required. This will help scourage the storage of unrelated items. Forms should a kept in a rack at the back of the counter and extra orms should be stored in a special cabinet, in drawers at the station, or in the supply room.

A safe storage place for nurses' purses should be proded in specially designated cabinets, drawers, or purse ckers either at the nurses' station or in a lounge. Adetate bulletin boards should be provided.

A nurses' toilet with lavatory should be provided conenient to, but not opening into, the nurses' station. The vatory should be equipped with blade handles and proded with paper-towel holder, soap dispenser, waste reeptacle, mirror, and shelf. Whether a nurses' lounge is covided on the nursing unit will depend upon hospital olicy.

Because of conflicting responsibilities and the number personnel involved, the staffs for more than one patient nit should not usually operate out of a single nurses' ation, even though the station may be large enough to commodate them. Each patient care unit should have its wn nurses' station and supporting services. Supply, holding, and nourishment areas, however, may serve more than he unit, provided they are located so that they are contenient to all units.

EDICATION ROOM

he medication room is used for the storage and preparaon of medications. This room should be enclosed for quiet, ear-glazed for observation both in and out, and sized to ecommodate more than one person, because with team ursing, students, private-duty nurses, preoperative and ostoperative care, several persons may often work here multaneously. The pharmacy should be responsible for ocking. Minimum requirements for a medication room re: (1) shallow or stepped shelves divided by some means or individual patient medication, with a system for ready changing patient identification; (2) a double-locked arcotics safe, with red warning light to indicate when ne safe is unlocked, installed at eye level above the couner; (3) a counter having drawers underneath for storage f syringes and similar items, but open below without abinets; (4) a bulletin board.

A sink large enough for handwashing, equipped with coseneck spout and blade handles, should be installed a the counter. This area should be equipped with paperowel holder, soap dispenser, and waste receptacle. A sep-

arate waste receptacle for broken glass and other non-burnable items should be provided.

A refrigerator mounted above the counter is more convenient, provides better visibility for drug storage, and allows greater ease in cleaning. An undercounter refrigerator with slide-out, removable tray shelves is acceptable.

Various methods of using automation for greater accuracy and speed in dispensing medications are available or being tested. Some require specially designed areas. The applicability of these systems will depend upon the individual hospital situation.

CHARTING AREA

Patient charts are used by the doctor, the nurse, and the ward clerk. These people should have ready access to the charts and a quiet place in which to work on them. Some authorities believe that a separate charting room should be provided for doctors, with provision for dictating and for passing charts through to the nurses' charting area. An X-ray film illuminator and a bulletin board may be installed in the doctors' charting area. Others believe that doctors' charting should not be separated from nurses' charting because of the need for close cooperative relationship among doctors and nurses. If separate charting areas are not provided, a separate dictating room or booth should be provided. In hospitals having medical student teaching programs, the area required for doctors' charting is greatly increased and should reflect the practices of the individual hospital.

CONFERENCE ROOMS AND OFFICES

One office located adjacent to the nurses' station should be provided for the use of the head nurse and for conferences between the head nurse and other staff members. This office should have clear-glazed walls to permit observation, with draw curtains for privacy.

A conference room, accommodating 6 to 10 persons, should be provided on each unit for reports, team conferences, in-service programs, and conferences with patients or family. Bulletin boards, blackboards, and provisions for visual aids may be installed here. Hospitals having teaching programs will require additional office and conference space, depending on the nature of these programs.

Current experience indicates that hospitals employing a ward or floor manager plan may require an office for the manager. The location will depend upon the number of patient care units for which the manager is responsible and the division of responsibilities with the nursing service.

DAYROOM

The size and location of the dayroom will vary with the type of patient and with hospital policy. If many patients on a patient care unit are ambulatory and are encouraged to leave their rooms for therapeutic reasons, more space is required for a dayroom than if few patients are expected to leave their rooms. If patients are to be served meals in the dayroom, additional space is required and the room should be located as conveniently as possible for food service and removal of trays.

The percentage of patients expected to use the dayroom for recreation and/or dining should be established. This may be 50 per cent or more on some intermediate care units. Twelve sq ft should be allowed as recreation space for each patient or 25 sq ft for each patient served meals.

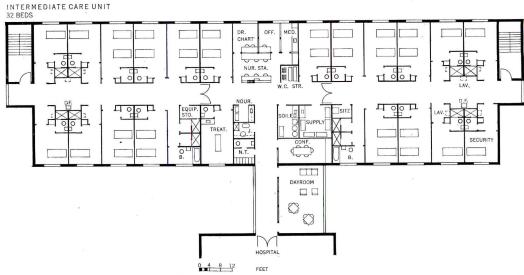


Figure 2. Single-Corridor Patient Care Floor. One patient care unit, utilizing carts for transportation of supplies and food trays to and from unit. This type of unit can be used for additions to existing hospitals, or in modified form wherever single-corridor units are indicated

A toilet and lavatory may be installed near the dayroom for the convenience of patients. A bulletin board should also be installed. If the dayroom is to be used for overflow patients, it should be provided with oxygen, suction, nurses' call, electrical and other necessary outlets, and the toilet should be equipped with a bedpan flushing attachment.

If visitors are permitted or encouraged to use the dayroom or if it is to be used as a television room, it should be located and designed so that the noise will not be disturbing in patient rooms. Locating the dayroom across from the nurses' station is usually objectionable. This location tends to increase noise and traffic in an already congested area and also to reduce the privacy of doctors and nurses in and around the nurses' station.

In any event, the uses to which the dayroom will be put should be determined before it is sized or located.

Additional space away from the patient care unit, such as a roof-deck or penthouse room, may be used to advantage by many patients and their visitors. Such a facility may complicate control but helps reduce traffic and noise on the unit.

SUPPLY ROOM

The supply room is the central storage and distribution point for all sterile and nonsterile supplies used on the unit, including linen, but not including: (1) office supplies and forms usually kept at the nurses' station—but sometimes kept in the supply room; (2) medications; (3) dietary supplies which hospital policy requires keeping in the nourishment room; (4) equipment which is kept in the equipment storage room.

Supplies should be replenished on a complement basis, by central service personnel, and stored on either fixed shelving or shelving on wheels. The latter type has the advantage of: (1) flexibility of available shelf space; (2) visibility, which facilitates locating and replenishing items; (3) convenience of use; (4) greater ease in cleaning the shelves and the room; (5) less handling of materials.

The number of carts required depends upon components worked out by the hospital. Specialized nurs units will require special cart complements. However, carts should be of uniform size with adjustable shelf easily movable, equipped with adequate bumpers at was level and quiet casters.

In addition to storage space in this area for carts counter sink with a gooseneck spout and blade hand should be provided for handwashing and for such sim preparations for bedside use as may be necessary. It sink area should be equipped with a paper-towel dispensions of dispensions, and trash receptacle. A bulletin boshould also be installed.

SOILED HOLDING ROOM

This room is designed for the care and holding of so utensils and materials, except dietary items, await transport to other areas, such as the central sterile s ply or laundry.

Facilities needed are: (1) clinical sink, with foot c trol, for disposal of liquid waste. Wall faucet, with f control or blade handles, for rinsing. Rim of sink sho be 28 to 30 in. above the floor; (2) counter sink, w gooseneck spout and foot or knee control or blade hand for handwashing and for rinsing. Sink area should equipped with paper-towel dispenser, soap dispenser, a waste receptacle; (3) space for carts and hampers soiled articles and linen awaiting return to the cent sterile supply or the laundry. Grossly soiled articles sho be wrapped or bagged. Contaminated articles should specially wrapped or bagged in accordance with hosp policy. Space convenient to the counter should be r vided for storage of wrapping or bags; (4) shelf conv ient to both sinks to hold liquid disinfectants used in t room; (5) space and/or refrigerator for short-time st age of specimens awaiting delivery to laboratory may necessary, depending upon hospital policy; (6) bulled board.

Trash from patient rooms and other areas should taken directly to the incinerator when collected, if po . If it must be stored temporarily, the soiled holding m (not in the janitor's closet) is the place for such rage.

NEN

thorities agree that linen should be handled as few ness as possible to reduce the chances of cross-infection d to conserve personnel time. This indicates the use of its small enough to be returned easily to central service laundry for stocking, parked in the clean supply room the other clean supplies, and moved to patients room ors during routine bedmaking. A 30- to 35-bed patient re unit would usually require two linen carts of the nall size. Bags of soiled linen should be deposited in the led holding room for return to the laundry.

Following patient discharge, the cleaning and preparan of the patient room is usually the responsibility of usekeeping. Packaged linen for discharge beds may be red in the supply room or on a special cart containing necessary equipment for the preparation of discharge oms. This cart may be stored, cleaned, and replenished central service or housekeeping department and ought to the patient care unit when required.

Linen chutes have been found to distribute airborne ntaminating elements to all floors served and are not commended. If installed: (1) linen must be securely gged on the patient care unit; (2) wet or damp linen ast be bagged in waterproof bag or liner; (3) chute or must be located in a well-ventilated soiled holding chute room, not in a corridor or clean area. Because of issue of linen chutes, some hospitals have found it necsary to restrict use of the chutes to designated pernnel.

OUSEKEEPING

ne chief function of housekeeping on the patient care at it is the removal of soil and dust from all surfaces in der to prevent cross-infection and re-infection of parents and to protect personnel. This should be accomished with the least interference with nursing activities and without transferring undesirable elements from one rface to another through poor cleaning techniques. The st for cleanliness in hospitals of all sizes should be the boratory culture, not the degree of shine on surfaces.

Controlled studies indicate that wet-mopping and dampisting (or washing) with a carefully selected disinfectit cleaner employed according to a specific technique give e best results in removing dust and soil. However, cleang agents, cleaning techniques, and the scheduling of eaning operations will vary widely, depending upon the aterials of the surfaces to be cleaned, type of patient, tivity on the patient care unit, and the standards of eanliness set by the hospital.

In order to facilitate the carrying out of proper cleange techniques, the janitor's closet on the patient care unit ould contain: (1) a depressed floor sink with bucket ook on wall-mounted mixing faucets (a hose attachment as be used if a vacuum breaker is provided). The deessed sink permits flushing out the room without proding an additional floor drain; (2) a mop-handle rack er the sink. Mopheads should be removed after use and aced in the soiled holding room for return to the laundry. Siled mopheads should not remain in the janitor's closet; (2) shelves for detergents, disinfectants, cleaning cloths, dother cleaning materials; (4) a rack on the wall for a

ladder; (5) a paper-towel holder, soap dispenser, and waste receptacle convenient to the sink faucets. Handwashing by housekeeping personnel should be an integral part of the hospital's sanitation and safety program.

The floor area should be sufficient for storing mopbuckets on a roller carriage, a wet and dry vacuum machine, and a small floor-scrubbing machine, but should not be so big as to encourage the storage of unrelated items. Floor and wall surfaces should be easily cleaned. Lighter colors for surfaces than are customary will promote cleanliness by making soil more apparent. Adequate mechanical air exhaust is important to prevent the spread of odors and airborne contaminants.

Equipment used for cleaning rooms after patient discharge and for daily cleaning should be kept on special maids' carts in central service or housekeeping and brought to the floor and returned by the maid as required.

All waste receptacles on the patient care unit should have disposable liners which are closed before removal to a wheeled, closed refuse cart for transportation to the incinerator. Trash chutes, even under the best conditions. have been found to distribute airborne contaminating elements to all floors served, to be a fire hazard and a source of vermin. They are not recommended. If installed: (1) chute should conform to the National Fire Protection Association (N.F.P.A.) Regulation 82-A; (2) all trash should be securely bagged (no loose trash); (3) wet or damp trash should be bagged in waterproof bag or liner; (4) chute door should be installed in a well-ventilated soiled holding or trash room, not in corridor, janitor's closet or clean area (5) a seven-day-a-week service for removal of trash from the bottom of the chute must be maintained for fire safety.

Supplies such as paper towels, toilet paper, and dispenser refills of soap tissues should not be stored in the janitor's closet, considered a "dirty" area. These should be kept in the clean supply room.

Dry vacuum machines, if used on the unit, should be equipped with high efficiency filters, should have exhaust blowing upward (not down), and should be usable as wet vacuum when needed for picking up gross spillage and for floor flooding after infectious cases. Whether a machine is kept on each unit will depend upon housekeeping techniques and availability of machines.

If floor maintenance machines are used for corridors, they should be kept in central service or the central house-keeping for proper cleaning, maintenance, control, and availability. As used here, central service refers to over-all service control.

In hospitals employing a ward or floor manager system, a housekeeping equipment room may be provided convenient to the patient care units to be served. Its size and facilities will depend upon the number of units served and the hospital's requirements. Sanitation safeguards should be emphasized both in design and use. A small janitor's closet may be required on each patient care unit to take care of spillage and similar incidents. In some cases, however, equipment for this purpose may be kept in the soiled room, since this cleanup must often be done by nursing personnel.

NOURISHMENT FACILITIES

The hospital dietary department generally employs a centralized system for patient food service.

Food trays may be transported either on enclosed carts,

heated or unheated, to the patient care unit by an elevator, floor-level dumbwaiter, or vertical tray conveyor. These trays may be hand-carried to patients or may be transported on small carts by nursing or dietary personnel.

Food trays may be returned directly to the central dishwashing room by the same method used to service the unit. The speed and efficiency of the system of service will depend upon layout, equipment, and proper utilization of personnel.

In addition to providing three meals daily, other patient dietary requirements must be met. Prescribed nourishments, tube feedings, and deferred meal trays should be centrally prepared and transported to the unit by one of the ways previously mentioned. Distribution on the unit may be made by dietary or by nursing personnel.

Nonscheduled nourishment involves a request for nourishment service other than at appointed hours. Requests made between 7 A.M. and 7 P.M. should be filled by the dietary department, whereas requests made between 7 P.M. and 7 A.M. must, in many instances, be filled by nursing personnel. If the policy of the hospital provides for substantial nourishment, such as tea, soup, and toast in addition to the usual juice, milk and crackers, facilities for storage and preparation become more elaborate. There is a trend in many hospitals toward reducing the variety of available, unscheduled between-meal nourishment. Ideally, the dietary department should make provision for meeting dietary requests at all hours; however, few hospitals are able to absorb the costs for these additional services. A separate facility on the patient unit will provide for the preparation of the occasional dietary request. This nourishment room can serve more than one unit if conveniently located.

Preparation and service of ice water was considered a routine function, until recently. However, since studies on the bedside carafe and the handling of ice for the carafe have revealed both to be potent sources of contamination, hospital management now recognizes the importance of more adequate control of this service. Responsibility may be assumed by the dietary department or by the nursing service. When responsibility is assumed by the dietary department, wide-neck water carafes and glasses are washed in the central dishwashing room; carafes are iced in the dietary department or the patient care unit nourishment room and distributed to patients by dietary personnel. Glasses are placed on the patient's meal tray. If assumed by the nursing service, carafes may be washed in the central sterile supply or in the dietary department, but not on the patient care unit, as an acceptable standard of cleanliness is not apt to be achieved here. Icing of the clean carafe should be done in the nourishment room.

The provision of an ice-making machine on the patient care unit will depend upon the need of ice for treatment and drinking purposes. For example, the use of sealed, plastic freeze packs for treatment and the service of ice water by the dietary department would presumably eliminate the need for an ice-making machine on the unit. In any case, if ice is required, it should be manufactured by a self-dispensing type of machine on the patient care unit, to eliminate the use of a scoop and to reduce the possibility of contaminating the ice. Ice should not be transported in bulk from any other part of the hospital.

In new construction, consideration may be given to the installation of central piped ice water to patient rooms as a means of eliminating the ice-making machine and the u of carafes, thus reducing the possibility of contamination. With the piped system, the use of freeze packs for treatment would therefore be required. Success of this system would depend upon the type of patient and upon hospit policy.

STRETCHERS AND WHEELCHAIRS

The number of stretchers and wheelchairs required on t unit will depend upon: (1) whether surgery, X ray, at other departments send for patients (which is the accepted current practice), whether nursing personnel bring patients to these departments, or whether a central patient transport service is provided; (2) hospital policy on moving patients in beds; (3) hospital policy on use of treament rooms.

One stretcher and two wheelchairs are recommended a minimum for each 30- to 35-bed medical, surgical, medical-surgical unit. These should be stored in an alcooff the corridor.

It is probable that an intermediate care unit in a pressive patient care nursing program will require mowheelchairs than a traditional unit since the critically and self-care patients on a traditional unit would not not mally need them. A minimum of four wheelchairs is reommended for a 30- to 35-bed intermediate care unit.

EQUIPMENT STORAGE

A direct relationship exists between the efficiency of the distribution system within the hospital and the amount storage space required on a patient care unit. If equipme is readily obtainable from central service or central storage in a hospital of any size, minimal or no equipme storage space is required on the unit. This saves expensi space on the unit, helps to reduce the required over-all inventory, and discourages hoarding.

With a reasonably efficient system of distribution in t hospital, the maximum storage requirements on a p tient care unit would include space for the following equipment: (1) inhalation therapy equipment. (If a ce tralized piped oxygen system is installed, the accesso equipment is minimal in size and one set can be kept in t supply room for emergency use); (2) suction equipment (If a central vacuum system is installed, one set of suctiapparatus can be stored in the supply room for emergen use); (3) bedrails. (Storage of these will not be requir if beds have integral bedrails); (4) floor-type intrav nous stands. (Bed-type rods can be stored in the supp room on a wall rack if not permanently attached to beds (5) patient lifter, walker, or similar equipment. (Su equipment may be required on some units for a period time, during which it may be stored here or with whe chairs and stretchers. When no longer needed, it should returned to central service to be cleaned and to be ava able to other units); (6) patients' scales. (These may kept in the treatment room).

LOCKERS FOR NURSING PERSONNEL

Some hospitals provide locker rooms for nursing personel, including practical nurses and aides, on each patie floor. These usually serve staffs from more than one patient care unit. If these facilities are provided, they show be near the elevator or entrance to the floor so that nurs will not pass through a patient care unit on arrival a departure. Individual full-length lockers for each persone.

and a toilet with lavatory are required. A lounge or rest room may be included, depending upon hospital policy.

Advantages of providing lockers are: (1) personnel may report for duty more promptly; (2) coats, umbrellas, and other personal items will not be brought onto the unit; (3) morale of floor personnel may be strengthened by closer association of the group.

Disadvantages are: (1) transfer of personnel to other units may complicate locker assignment; (2) personnel may be tempted to leave the unit more often.

TRANSPORTATION

The movement of equipment, supplies, food, and people to and from the patient care unit has become increasingly complicated and important because of rising costs, scarcity of personnel, new methods, and increased infection rates. The choice of transportation methods will generally be one of the chief determining factors in the layout of the hospital plan and should be established before the physical plan is begun.

Hospital planners should give careful and detailed attention to the methods of transporting and handling all types of material in and out of the patient care unit. Every item, no matter how small, should be accounted for. Planners sould be aware of the relative efficiency and the possibilities of contamination of various arrangements and transportation methods.

Carts, in hospitals of all sizes, the cart has long been used to move supplies. As personnel time and infection rates have become matters of increasing concern, it is clear that supplies, once placed on a cart, should not be removed except by the user. This has led to the wide use of specially designed carts as shelves on wheels. These earts, along with food conveyors and equipment, are usually moved vertically by elevator or, if properly sized by door-level dumbwaiters. Such carts may be used in confunction with mechanical conveyors as a means of storing materials and supplies in the supply room on the patient care unit or moving supplies about the unit without additional handling.

Elevators, elevators should, where possible, be located outside or separated from the patient care unit. They are a source of contamination and of noise disturbing to patients. Because of the many people entering and leaving, and because of air turbulance caused by the action of the car as it moves in the shaft, the elevator car and lobby are nighly contaminated areas. If the lobby is placed within the patient care unit, it should be enclosed, should have adequate air exhaust to reduce the spread of contaminated dust, and should, along with the car, receive special house-seeping attention.

The question of using the same elevator for clean and soiled materials, for food conveyors, supply carts, and for people, is controversial. Consideration should be given to designating one elevator for service and to assuring special housekeeping attention. For hospitals of 200 beds

and over, separate service elevators and smaller highspeed passenger elevators should be considered to speed service and separate traffic. Controls should be carefully designed to accomplish the control of elevators desired in the individual hospital.

Dumbwaiters, either counter-level or floor-level dumbwaiters may be used to advantage, if properly located. The floor-level type often eliminates two handlings of the material being transported, by accommodating a cart which is rolled on at the source and off at the destination. Either type should be installed only where charge and discharge openings occur in areas which are normally manned, and not in corridors.

The counter-level type can best be used where the number of stations is limited, such as between pharmacy and pharmacy dispensing, or where use is limited, such as between the dietary department and the nourishment room on the patient care unit for supplemental between-meal nourishment service.

Mechanical conveyors, vertical and horizontal conveyor systems provide direct and rapid means of transporting either food trays from the kitchen to the patient care unit, or supplies from central service to the patient care unit. The arrangement of the hospital rather than its size is apt to determine the use of such a system. Its use for moving supplies also depends upon a centralized distribution system. Although no precise information is currently available, indications are that clean and soiled food trays, and certainly clean and soiled materials, should be transported in separate shafts.

Responsibilities and techniques for cleaning and maintaining the shafts and equipment must be worked out, understood, and followed in order to provide safe and efficient service.

Pneumatic tubes, the pneumatic tube was originally designed to convey messages. However, in the automatic routing models, it can be utilized for transporting a wide variety of materials. This may include patient records, pharmaceuticals, and laboratory specimens. Its use is limited chiefly by size, packaging methods, and hospital policy. Before a tube system can be intelligently laid out, the interdepartmental relationships and divisions of responsibilities within the hospital must be clear. Such a system can be a valuable aid in hospital efficiency, but only through careful planning for maximum use can its cost be justified. By its nature, the pneumatic tube system generates noise. Positive steps must be taken—by insulating the tubes and padding the stations—to reduce the effects of this noise.

COMMUNICATIONS

A complete discussion of the communications requirements of hospitals was published in the March, 1962 issue of Architectural Record, pages 189 through 192.

References used in the preparation of this study include the following:

1) Thompson, John D. and Pelletier, Robert J. Yale Studies of Hospital Function and Design. (U.S. Public Health Service Grant W-53.) Yale Juiversity Department of Public Health, New Haven, Connecticut, Decemer 1959; (2) Gohr, Frank, R.S., M.P.H. Spotlighting hospital sanitation: Handwashing. Hospital Management, Vol. 91, No. 3 (March 1961), P.38; (3) U.S. Department of Health, Education, and Welfare, Public Health Service. Lighting for Hospital Patient Rooms. Division of Hospital and Medical Facilities, Architectural and Engineering Branch, Washington 25,

D. C.; (4) How to Keep Hospitals Quiet: Summary of a special study on major causes of hospital noise. The Modern Hospital, Vol. 96, No. 4 (April 1961). Reprinted by U.S. Public Health Service, Division of Hospital and Medical Facilities, Washington 25, D. C.; (5) Brown, J. W. Hygiene and education within the hospital to prevent staphylococcal infections. Journal of the American Medical Association, March 8, 1958, pp. 1185-1191; (6) Gohr, Frank, R.S., M.P.H. Spotlighting hospital sanitation. Hospital Management, 91:37-41, (March 1961); (7) Walter, C.W. Aseptic technique in the postdoctorate program. Hospital Topics, April 1956



COMPLETE MEDICAL CENTER REALIZED THROUGH MASTER PLANNING


How to modernize existing hospital facilities? How to provide for current over-all hospital needs? How to project and plan for future needs and growth? These problems—and they seem to exist all over the country—have been met square on by the architects of the Charlotte Memorial Hospital. What has been accomplished here, and what has been learned, should be of benefit to the many communities faced with similar problems and to the architects called on to solve them.

Faced with an existing 350-bed hospital, built over twenty years ago, the architects of the present project found it adequate in many ways, but antiquated in others. Around the main building, other structures had been placed in a somewhat haphazard and inefficient manner Circulation patterns between buildings had become snarled and tangled. Some of the buildings were temporary and the reasons for their existence had long ceased to exist.

The present architects studied the situation, arriving at a program for a total of 800 beds, together with a master plan for all elements of a complete medical center and teaching hospital. Additional needs will be met with satellite hospitals around the perimeter of Charlotte.

Charlotte Memorial Hospital
Charlotte, North Carolina
ARCHITECTS: A. G. Odell Jr. & Associates
CONTRACTOR: Little Construction Company




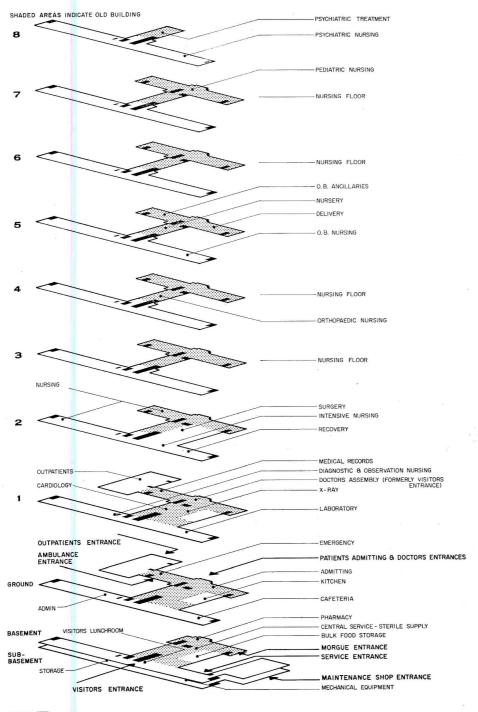





The isometric schematic shown above indicates the old main hospital building and the new additions. The major functions of the building are shown in a manner indicating their prime relationships to each other, as these now exist. The older portions of the hospital have been completely renovated and related to present hospital functions.

The hospital facility now includes the main building, with its connecting laundry building and two-story, out-patient building, and remotely located steam plant. In front of the main building is an existing spastic and rehabilitation center; behind and to one side is the existing home for unwed mothers. A large new nurses' quarters building has been built recently; this building connects with an older nurses' quarters. Future work includes a nurses' educational building, a student union, and apartments.

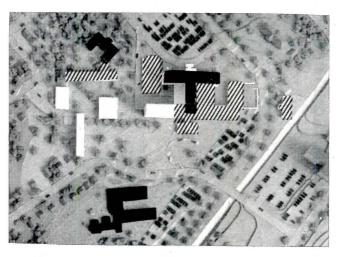

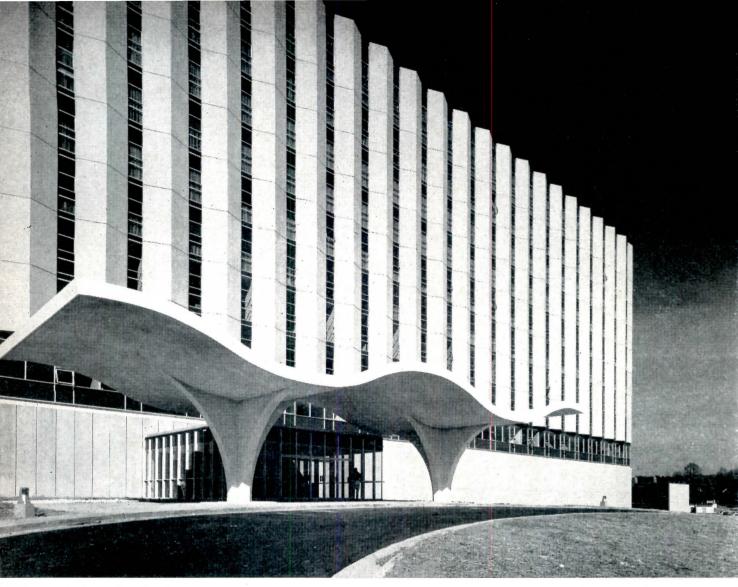


New patient wing and main entrance

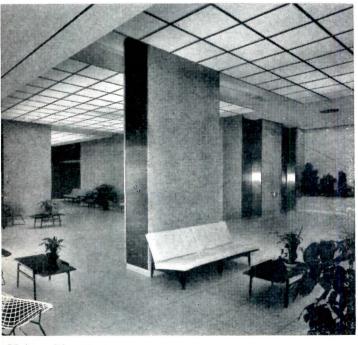


Main waiting room


In the master plan for this hospital, the architects provided for changing the old main entrance to the opposite side of the grounds. In this way, the hospital was reoriented toward a more permanent and major street than that faced by the older building. Also, this made possible better traffic and circulation plans on the hospital grounds and an opportunity to separate hospital circulation into four types. The main entrance has been placed on the basement level of the new hospital wing where visitors and others can enter directly into the waiting room which is shown in the illustration on the left. The old main entrance was closed and a new admission and medical staff entrance placed on the ground floor of the old hospital area; a new canopy was provided to protect this entrance. The emergency entrance was placed at one side of the building, the service entrance at the other.


As may be seen in the illustrations, the exterior of the new portion of the hospital is finished with precast concrete panel with exposed white quartz and white cement, alternating with aluminum curtain wall units. The view, across-page, top, shows the old hospital section at the right, the new at the left; in the foreground is the new laundry building.

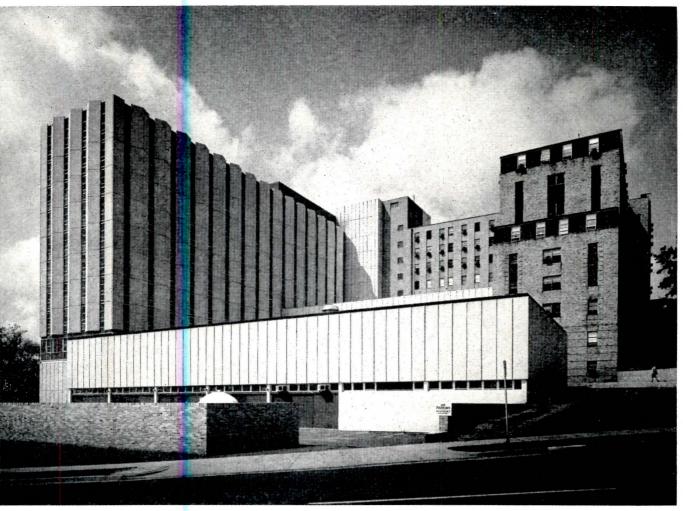

w and old hospital sections, laundry in foreground

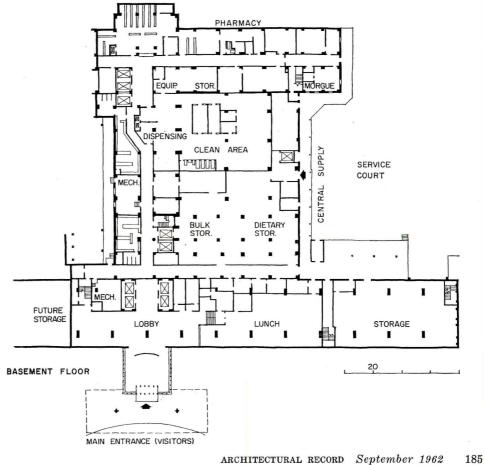

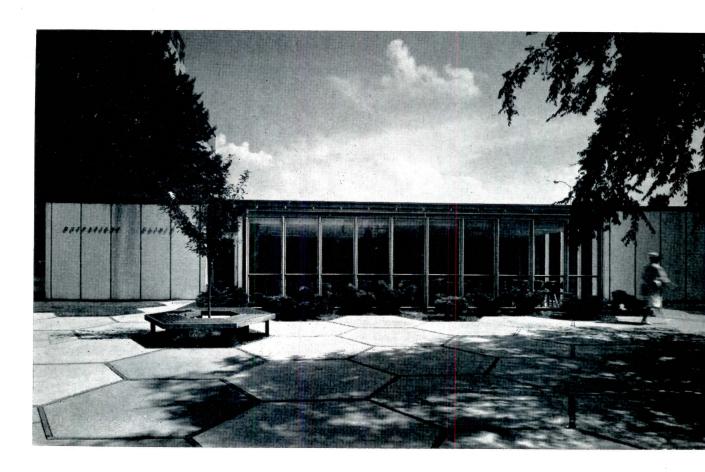

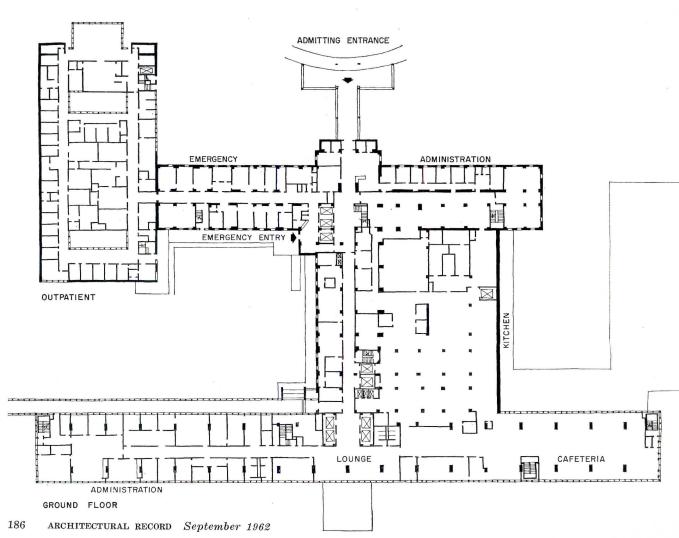


ently completed out-patient building. At the prestime, a second story is being added to this unit, nging its capacity up to 50,000 patient visits per r. As may be seen in the plans, this wing is direct-connected into the hospital proper on both levels. luded in the out-patient building are complete ic facilities of all types. In addition, certain facilis in this building, such as the X-ray department doperating rooms were designed so as to supplete the facilities of the hospital emergency areas, the event of a catastrophe, the entire building can quickly converted into a supplemental emergency ility.

as may be seen in the plans, the ground floor of hospital is mainly devoted to administrative functs and the cafeteria. One wing of the old building been remodeled into an emergency department patient admitting entrance, shown at top, right, the staff entrance are on this level. The old main rance on the first floor has been closed, and the a it occupied converted into a staff assembly room. Her facilities on this floor include administration a records, laboratories and one of the largest and st complete radiology departments in the country. The right are illustrations showing portions of the ply area, center, and pharmacy, bottom







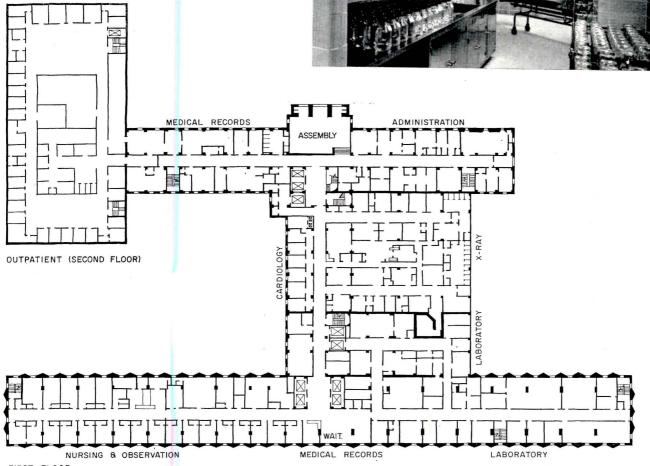


FIRST FLOOR










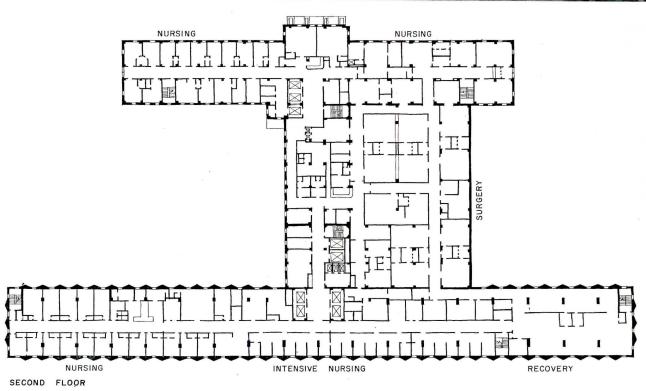


coss-page at the top, are illustrations of a typical rating room and the recovery area. Below these typical single- and double-bed patient rooms. On right are shown: at the top, an information desk, of which is located on each patient floor; middle center, a nurses' station and the utility room ated adjacent to it. This general area is shown bein the enlarged portion of the plan. As may be in the layout of this area was carefully studied, ulting in good relationships between elements and such features as the combined soiled and clean lity area divided only by a low partition.


As shown in the plan, surgeries, recovery area, and gical nursing units—including three 7-bed intence care units—are located on the second floor. The rd, fourth and sixth floors contain general nursing ts; the fifth floor is devoted to obstetrics; the hth to psychiatric care

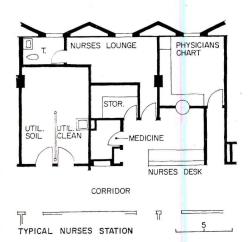







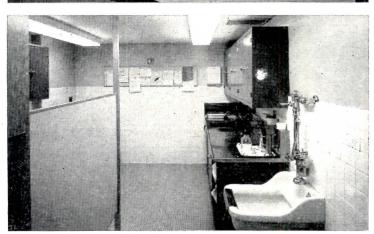

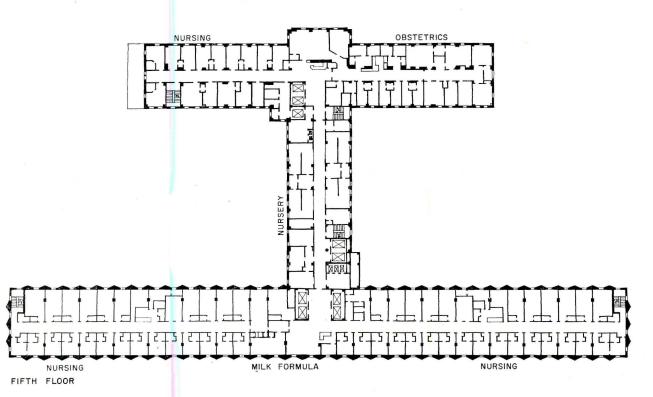

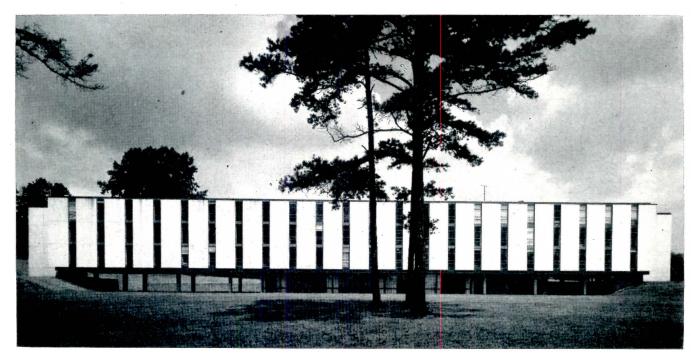


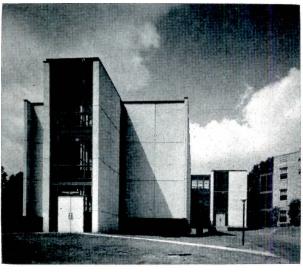



The illustration at the top of the page shows the new student nurses' residence and those below it show the end of this building and its connecting link with the old residence and a view of a typical student nurses' lounge. The building houses student nurses, two to a room, on three floors. There is a lounge, similar to that shown, on each floor. Across from the lounges are shower and toilet rooms. Lavatories are included in each bedroom. The ground floor has been left open, but will eventually be used for a student library. On the right is the new steam plant.

Structure of the new hospital section is concrete frame with flat plate floors, only 10 in. thick in order to allow space for air conditioning ducts and yet allow floor elevations to be the same in both old and new areas. Exteriors are precast concrete curtain wall panels with exposed quartz aggregate and aluminum windows glazed with sheet glass. Other new buildings are of similar construction, except the steam plant which is steel frame and glass

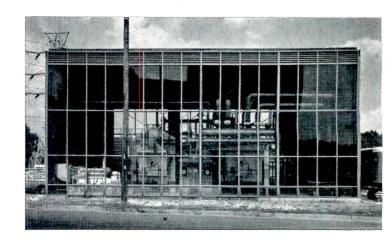



NEURO-PSYCHIATRIC HOSPITAL PLANNED LIKE CAMPUS OF A COLLEGE

The great size of this neuro-psychiatric hospital (1,000 beds), and its complexity and completeness posed major problems in its design. The solution derived by its architects is a 15-building, campus-planned hospital on an 85acre site. The buildings are varied in height, massing, and placement on the site. Walking distances between buildings are at the minimum consistent with elimination of congestion. The whole complex is tied together by careful placement of units in the master plan and by the use, on all buildings, of similar exterior treatment. This consists of alternating strips of light tan exposed architectural concrete and steel windows with Norman brick between. The same brick is used on the ends of all buildings and on the ends of building wings.

The completed building complex operates as a unified and efficient neuro-psychiatric hospital, yet at the same time one that is economical in first and operating costs. And too, the over-all atmosphere is more nearly that of a college campus rather than of a cold institution.

Veterans Administration Hospital Palo Alto, California ARCHITECTS & ENGINEERS: Welton Becket and Assoc.

CONTRACTOR: Robert E. McKee





ARCHITECTURAL RECORD September 1962




The largest building in the VA complex is the General Building shown on these pages. In this building are located the administration offices for the entire complex; a quite complete medical research laboratory occupies the second floor along with the dental and radiology suites. In the basement are the animal research suite, offices, and storage. The third floor houses the surgical areas. Nursing units are located on this floor and the fourth and fifth. Patient rooms vary in size from single-bed rooms, to two-bed, four-bed, and 16-bed rooms.

Other buildings include a medical rehabilitation building for occupational therapy, an infirm building for 200 aged veterans, a disturbed building for 108 patients under restraint, a therapeutic exercise clinic with gymnasium and swimming pool, and a special services building which has a six-lane bowling alley and other facilities for recreation. Also included are a dining hall, with kitchen for 1,000 patients and 1,150 employes, a chapel, and an admission and treatment building with 164 beds for temporary patients, a women's building for 114 patients, a 141-bed neurological building, and utilities buildings

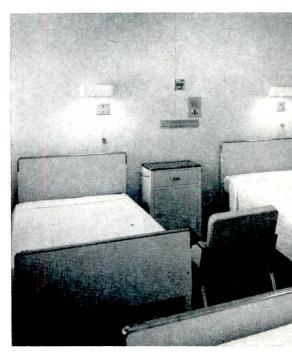

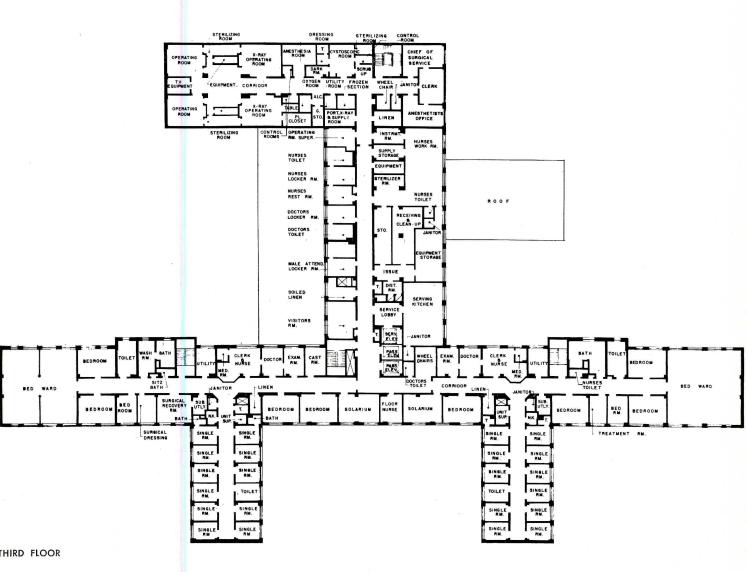




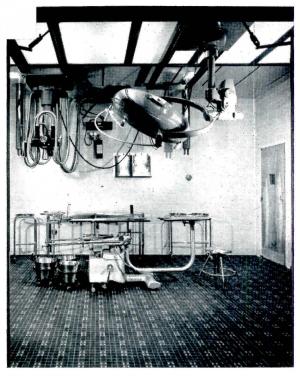


Main Building-typical operating room

The construction of the buildings in the VA complex is reinforced concrete frame with brick and concrete exterior walls. Floors are generally asphalt tile, except in operating and X-ray rooms where conductive ceramic tile is used, and kitchens which have quarry tile. Ceilings are acoustical metal pan. Windows are hollow steel double-hung, except in lobbies where fixed plate glass is framed with aluminum. Lighting is incandescent. Heating is generally two-pipe vacuum, steam system powered by three boilers. Central air conditioning is supplied only to operating and recovery rooms, animal suite, allergy wards, and a few other specialized areas.


The VA complex is an unusually complete hospital for treatment of the neuro-psychiatric disorders of veterans and virtually all medical or surgical ills of those who are hospitalized here

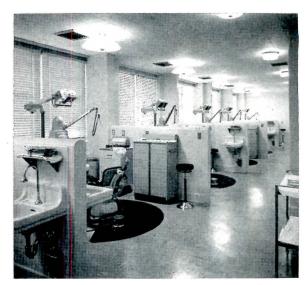

Main Building-dental treatment room

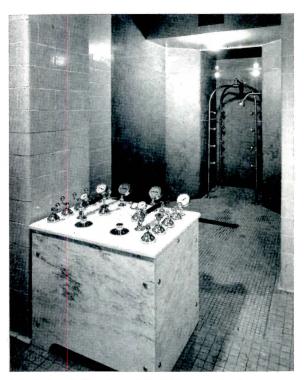

Admission & Treatment Building-tonic shower

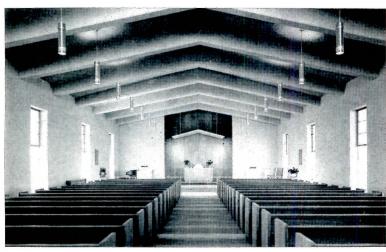

Chapel—seating for 224 persons

Architectural Engineering

Structural Engineering and Architecture Relationship of engineering to architecture, and, consequently, engineer to architect have been greatly discussed. The burden of the discussion seems to be, "Why don't engineers think like architects?" Some reasons why they don't and their implications have been offered by Frank Newby, partner in Felix J. Samuely & Partners in the June-July issue of the *Architectural Association Journal* (London): "Efficiency as a structural technician combined with facility to create structural form does not imply capacity [in the engineer] to create architecture."

The structural engineer is trained to be a two-dimensional stress man or a confirmation man, according to Newby. He is given little or no time or encouragement to carry out creative design, (or in other words, creating the problem to be solved) and is not introduced to the trials of initial design and integration.

"On the other hand, none too many architects have that control of technical skills necessary for design in the present increasingly industrialized building climate. Architects often like to compare themselves with the old master builders without ever really comparing the control a master builder had over his materials and techniques with that of the present-day architect. The architect's tools are his consultants—the all-important thing the architect has to do is to learn how to use them without allowing them to make their own particular mark."

Engineering Research Needs, 1965-1985 All sorts of new terms and concepts are entering the engineer's lexicon—from bionics to magneto-hydronamics. These are but a few of the terms that pop up in a new report by the Engineers' Joint Council on "The Nation's Engineering Research Needs 1965-1985." The study was prompted by E.J.C.'s concern over: (1) the relatively slow recent growth of the U. S. economy; (2) the apparent rigidity of institutions associated with engineering professional societies, engineering schools, research foundations, and industrial and government organizations which are slow in recognizing and responding to changing needs of society; (3) the apparent imbalance in our national technical effort (concentration on military-atomic-space technologies with neglect of other critical needs); (4) steady decline in U. S. engineering enrollments.


A blue-ribbon committee cited several areas that relate to buildings and to their urban environment: (1) the contribution of atomic energy over the next several decades will be influenced by how much of the economy is electrified. By 1985 there may be serious supply limitations on further expansion of oil and gas using devices; (2) in the area of health services, costs might be cut by operations research, facilities layout, work simplification; (3) while technology can contribute to technical teaching aids, there is a danger of over-emphasizing physical technology for improving educational process; (4) modern digital computers and ancillary devices can vastly reduce the routine actions of handling and applying information for design, maintenance and operation, restoring large elements of personal independence and ingenuity into the specialized intellectual manpower of the nation. An edited version of the "Engineering Research Committee Summary Report" can be obtained from the Engineers Joint Council, 345 E. 47th St., New York 17, N. Y.

Trees Cause Foundation Failure Clay soils are known to wreak havoc with foundations when changes in moisture content make these soils swell or shrink. But probably few people would suspect that their favorite shade tree might be an accessory to foundation damage in a clay soil. An article on "Soil Shrinkage Damages Shallow Foundations at Ottawa, Canada," in the July issue of *The Engineering Journal* (Canada) by M. Bozouk, Division of Building Research, National Research Council gives this prescription: (1) lawns and gardens should be watered frequently during summer months; (2) trees should not be planted too close to structures; and (3) foundations should

This Month's AE Section

ACOUSTICS OF PHILHARMONIC HALL, p. 196. HOSPITAL AIR CONDITIONING, p. 205. BUILDING COMPONENTS: Finishes for Cabinet Work, p. 215, Products, p. 217, Literature, p. 218.

be placed at a depth in the soil where seasonal moisture changes are minimal.

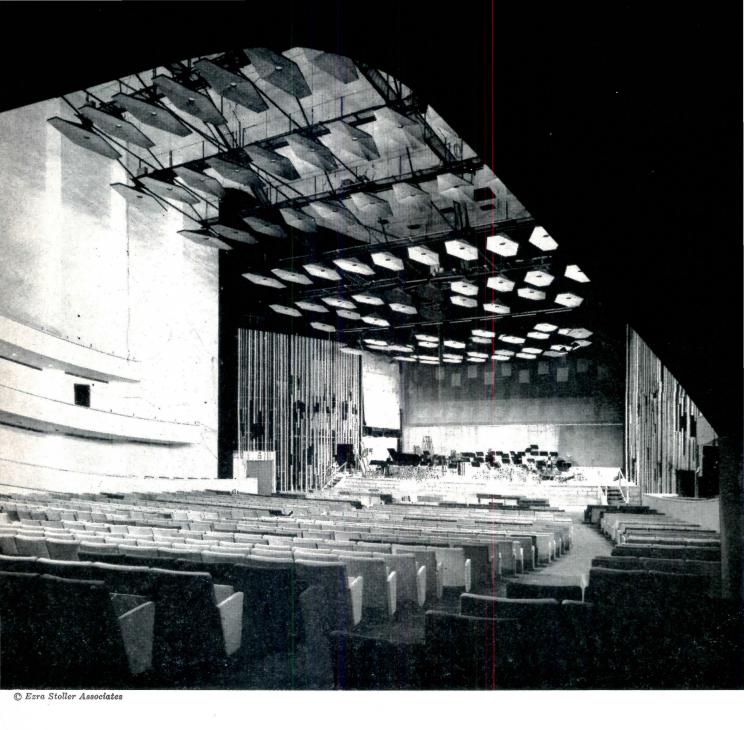



Symphony Hall in Boston illustrates a style of architecture of the 19th century that is compatible with good acoustics. Important features are small audience area, rectangular shape shallow balconies, high ceiling and relatively long reverberation time. The New York Philharmonic Society wanted the acoustics of Philharmonic Hall to approximate those of Boston's Symphony Hall as closely as possible

COUSTICS OF PHILHARMONIC HALL

rtuitous circumstances mainly were responsible for the good concert halls of years past. But today out of the physical characteristics of halls that produce happy acoustics can be predicted accurately. Here characteristics greatly affect twelve attributes of acoustics important to music, according to B.B.N. that they are and how they were provided for in Philharmonic Hall are related here

V Leo L. Beranek,* Bolt, Beranek and Newman, Inc.

ilharmonic Hall is the first hall demed exclusively for concerts in w York City since Carnegie Hall, tich opened in 1891.

The difficulties of achieving good oustical results in the new hall re not underestimated, since, beeen 1900 and 1959, no concert hall more than 2,000 persons had nieved the reputation of first rank. e Royal Festival Hall in London, e Fredric Mann Auditorium in l Aviv, the Alberta Jubilee audiriums in Edmonton and Calgary, chestra Hall in Chicago, the Ford ditorium in Detroit, the Eastman eater in Rochester, the Usher Hall Edinburgh, the Aula Magna in racas, the Salle Pleyel in Parisare said by musicians not to prole the warm, brilliant, live, clear d intimate acoustics of Boston's mphony Hall, Amsterdam's Conrtgebouw, Basel's Stadt-Casino, d Vienna's Grosser Musikvereins-

The scientific literature offered no ective guides to why these large neert halls failed to achieve excelce. The experience with new halls continental Europe during the periof reconstruction following World ar II has not been helpful, because median occupancy of these conthalls and opera houses is about 00 persons, while the median ocpancy in North and South America,

nis article consists of excerpts from a forthing book by Dr. L. L. Beranek, Music, Acous, and Architecture, John Wiley & Sons, Inc., Park Avenue South, New York 16, New York. Ilication date is September 21. The staff of Bolt, anek and Newman, Inc. who participated in design of Philharmonic Hall were L. L. Berk, principal in charge; F. Russell Johnson, ject manager; Laymon N. Miller, subway, airft, and air conditioning noise control; Ronald McKay, building noise isolation; David L. Klepogran location and sound systems; and Theoby. S. Schultz and Howard Hershberger, tuning k activities. Hope Bagenal of Leaside, Engl, was engaged as advisory acoustical conant

Great Britain and Israel is about 3,000 persons.

In 1955, I had already resolved to journey to some of the world's bestknown halls to learn about their architecture, interior finishes and acoustics. This program was accelerated when Philharmonic Hall was proposed. The study was eventually extended to include 60 halls in 20 countries located as far north as Turku and Helsinki, as far south as Buenos Aires, as far east as Moscow and Jerusalem, and as far west as San Francisco. In addition, Russell Johnson and I interviewed in depth about 25 of the world's best-known conductors and about the same number of professional music critics of the United States, Canada, England and Germany to learn their opinions on the acoustics of these halls. Ultimately obtained were detailed architectural drawings, acoustical data, and a subjective rank ordering of 54 halls according to acoustical quality.

ACOUSTICAL ATTRIBUTES

It appears that twelve attributes in the acoustics of a concert hall are important to music and that a rating scale for each attribute can be devised. In relative order of importance these attributes are:

- 1. Acoustical intimacy, which is related to the gap in time between the sound that arrives at a listener's ears directly from the performer and the sound that first arrives after reflecting from a wall or ceiling. The greater this gap, called the "initial-timedelay gap," the less intimate the sound (40 points maximum).
- 2. Liveness, which is related to the reverberation times at mid and high frequencies (15 points maximum).
 3. Warmth, which is related to the reverberation times at low (bass) fre-

quencies (15 points maximum).

- 4. Loudness of the direct sound, which is related to the distance of the listeners from the performers and the nature of the sound-reflecting surfaces at the front of the hall (10 points maximum).
- 5. Loudness of the reverberant sound, which is related to the cubic volume of the room and the reverberation time (6 points maximum).
 6. Balance and blend, which are related to the design of the stage enclosure and the sound-reflecting surfaces at the front part of the hall (6 points maximum).
- 7. Diffusion, which is related to the detailed manner in which the sound is reflected about the room (4 points maximum).
- 8. Ensemble, ability of the performers to hear each other (4 points maximum).
- 9. Freedom from echo (5 to 40 points are subtracted from the total for the presence of echo).
- 10. Freedom from noise (5 to 40 points are subtracted from the total for the presence of noise).
- 11. Freedom from tonal distortion (5 to 20 points are subtracted from the total for the presence of tonal distortion).
- 12. Hall non-uniformity (5 to 15 points are subtracted from the total for non-uniformity of the sound in the hall).

Those attributes that contribute positively to the acoustical quality of a concert hall are, therefore: intimacy (40 points), liveness (15 points), warmth (15 points), loudness of the direct sound (10 points), loudness of the reverberant sound (6 points), balance and blend (6 points), diffusion (4 points), and ensemble (4 points).

A surprising result is that the re-



Serating photo

NTIMACY NITIAL-TIME-DELAY GAP	RATING POINTS 10 20 30 40 170 60 50 40 30 20 0 t _t -Milliseconds
LIVENESS REVERBERATION TIME (R.T.) AT MID-FREQUENCIES (AVERAGE OF R.T.'S AT 500 AND 1000 CPS) OR FULLY OCCUPIED HALL	RATING POINTS STYLE OF MUSIC 0 2 4 6 8 10 12 14 15 14 12 10 8 6 6 10 12 14 15 14 12 10 8 6 6 10 12 14 15 14 12 10 8 6 7 10 12 14 15 14 15 16 17 18 19 20 21 22 23 24 2.5 26 2.7 12 12 12 12 12 12 12 12 12 12 12 12 12
WARMTH AVERAGE OF RT'S AT 125 CPS AND 250 CPS DIVIDED BY RT AT MID-FREQUENCIES	RATING POINTS 3 5 7 9 11 13 15 13 11 9 0.85 0.90 0.95 1.00 105 110 115 120 125 130 1.35 1.40 1.45 (Tizs + Teso) / 2Teoo. 1000 * BASS RATIO

Above: New York Philharmonic tries out to new hall during "tuning week." Splayed pandaround the stage periphery can be adjusted deflect less or more sound toward the musician to control the loudness of certain instrument to shorten reverberation time or to adjust towarmth or brilliance of the music. Only part of the acoustically transparent woods screen is in place. At the back of the stage scrim will conceal the pipe organ

FIG. 1: Rating scales for the acoustical attrutes of intimacy, liveness and warmth. I quantity $t_{\rm I}$ is the initial-time-delay gap. M frequency reverberation time is the average the reverberation times at 500 and 1,000 with full occupancy. Low frequency reverbe tion time is the average of reverberation time at 125 and 250 cps with full occupancy. By ratio is the ratio of low-frequency to mid-f quency reverberation times

rberation times at mid and high equencies (liveness) contribute ly 15 points and that diffusion ntributes only 4 points to a total 100 points for a perfect hall. ere is most of the reason why oustics have been thought to be a atter of chance. These two factors, to positive ones usually emphasized engineers in the past, add up in aportance to only 19 per cent of the tal.

The principal discovery of these searches is the predominant importance of acoustical intimacy in the ting the quality of a hall. Because the main ceiling must be high to eserve the necessary liveness (representation time) in the room, this iding signifies that an excellent ll for music must either be small, rrow, or else have hanging panels low the main ceiling to provide und reflections similar to those that ould occur from the side walls of small hall.

Another discovery is the relatively rge importance that low-frequency eass) reverberation in the hall plays

BIC VOLUMES AND MID-FREQUENCY
VERBERATION TIMES
FOUR EXCELLENT CONCERT HALLS

	Volume	TMID
Name	cu ft	sec
sel, Stadt-Casino	370,000	1.7
nna, Grosser Musikvereinssaal	530,000	2.05
ston, Symphony Hall	662,000	1.8
sterdam, Concertgebouw	663,000	2.0
Median	600,000	1.9

BLE 2

BLE 1

LATION BETWEEN AREA PER SEAT AND E NUMBER OF SEATS THAT CAN OCCUPY ,000 SQ FT

ea per seat* sq ft	Number of seats possible in Philharmonic Hall
(Boston)	3,160
(Vienna)	2,860
(San Francisco	2,770
(Stuttgart)	2,570
(London, Roya	ď
Festival)	2,540
(Buffalo)	2,430
(Caracas)	2,370
(Bonn)	2,120

cludes allowance for aisles up to 3.5 ft wide if uded within the audience seating area or around periphery in contributing warmth to the music. As examples, the rating scales for the three most important attributes of concert hall acoustics are shown in Fig. 1.

Of equal importance was the discovery that audiences absorb up to 50 percent more sound than had been published in standard acoustical handbooks. Thus to achieve a desired reverberation time the cubic volume of a hall must be about 25 percent greater than was previously thought necessary.

GOALS FOR PHILHARMONIC HALL

Lincoln Center, the architect, Max Abramovitz, and the acoustical consultant agreed from the start that the acoustical goals were three:

First, Philharmonic Hall was to accommodate principally the regular repertoires of the New York, Boston, and Philadelphia orchestras. Although other uses were contemplated, it was not to be an "allpurpose hall." A large pipe organ and a sound-amplification system for speech were planned, but the acoustics of the hall for symphonic concerts were not to be compromised in favor of either organ or speech.

Second, the seating capacity of the hall was to be no greater than is consistent with good acoustics.

Third, no effort was to be spared that would enable Philharmonic Hall to assume a place among the best halls in the world—halls like Boston, Vienna, Amsterdam, and Basel.

The views of the New York Philharmonic Society were presented in a letter to the architect from the late George Judd Jr., on April 20, 1959:

Dear Mr. Abramovitz:

I should like to confirm by this letter the Society's position relative to the acoustics of the new Philharmonic Hall.

Not being technicians in the field, we shall not state our desires in figures or formulas but shall relate them to acoustics of halls in existence. . . . In the Society's judgment, the acoustics of the Hall should approximate as closely as possible those of the Boston Symphony Hall when filled, but in no event should the reverberation time be shorter. We feel the reverberation time of London Festival Hall too short, while that of the Vienna Grosser Musikvereinssaal and Amsterdam Concertgebouw may be slightly longer than is necessary. We understand, however, that it is much more feasible to adjust from a longer reverberation to a shorter than vice versa. If this is true, special care should be taken not to run any danger of too short a time. .

We must look to yourself as the architect

and Messrs. Bolt Beranek and Newman as the acousticians to translate these desires into the technical formulas necessary to produce the corresponding best results in the new hall.

George Judd Jr., Manager

DESIGN CONSIDERATIONS

Some of the important design considerations, which were established early and which formed the basis for specific detailed recommendations as the project progressed, are listed here:

Cubic volume. Table 1 gives cubic volumes of four excellent halls that were suggested as appropriate models for Philharmonic Hall. The median of their volumes is 600,000 cu ft. At the time the plans were being considered, no hall whose cubic volume was greater than 850,000 cu ftwhich is Carnegie's size—had impressed any of the conductors or music critics we had interviewed as a satisfactory acoustical model. The musicians spoke of the sound in large halls as "muddy" or "barn-like." There was no question that a cubic volume as small as 600,000 cu ft would accommodate far too few seats for a city the size of New York. We recommended a limit of 850,000 cu ft for the size of the hall, a limit that exceeded by about 40 per cent the median of the four excellent halls in Table 1. We accepted the compromise on cubic volume with the expectations that the application of new principles and techniques could bring about the intimacy heretofore so closely dependent on small size.

Liveness. On the basis of the information on liveness given in Fig. 1 and in accordance with the request contained in the Philharmonic Society's letter, it was recommended that the reverberation time of the hall with full audience at mid-frequencies be between 1.85 and 1.95 seconds. The mid-frequency reverberation times of the four comparison halls, also with full audience, are given in Table 1.

Warmth. The interviews with the musicians established that the best-liked halls are relatively rich in bass. It was recommended that the bass ratio (see Fig. 1) be 1.2, or even slightly higher. In order to achieve this ratio, virtually no thin wood could be used in the hall unless it was cemented securely to a solid backing, with the exception of some wood strips around the stage. The

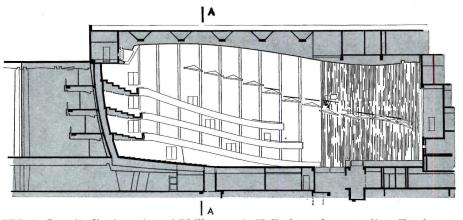


FIG. 2: Longitudinal section of Philharmonic Hall along the centerline. Total seating capacity is 2,644 divided as follows: orchestra (main floor)—1,384; loge (first balcony)—392; first terrace—454; second terrace—414

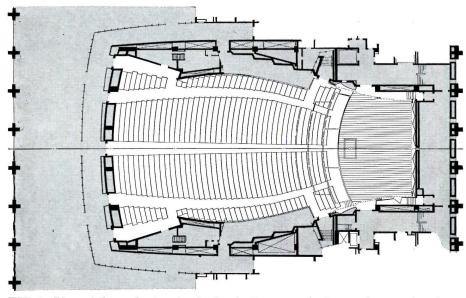


FIG. 3: Plan of the orchestra (main floor). By removal of several rows of seats on the main floor, the stage depth can be increased from its basic depth of 40 ft at centerline to either 48 or 56.5 ft

FIG. 4: Plan of the loge. Television, radio and observers' booths are located behind windows on both sides of the hall, 50 ft from rear wall of the stage

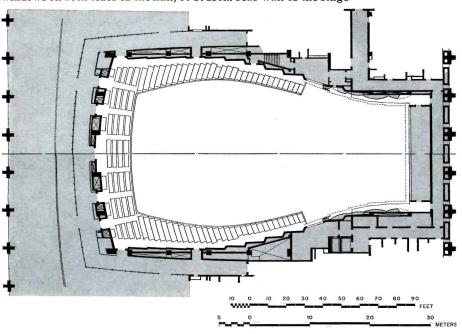


TABLE 3
PHYSICAL PROPERTIES OF THE HALL

	rojected horizon- ront of the 40-ft- the most distant	13
Width of the up		
transverse section between the wo	on A-A measured alls (Fig. 4)	10
Distance between transverse section	-	8
Height of the ceil section A-A (Fig		6
Area of audien aisles up to 3.3 ft-deep stage o	5 ft in width (40-	17,150 :
Width of stage acoustic screen	at rear, inside	5
Width of stage inside acoustic s		5
Width of stage inside acoustics		
Area of 40-ft-dee	p stage	2,050
Area of 48-ft-dee	p stage	2,600
Area of 56.5-ft-de	ep stage	3,100
Volume .		865,000
Number of seats stage (N_A)	with 40-ft-deep	2,
S _A /N _A (area pe 3.5 ft of aisles)	r seat, including	6.5
Row-to-row seat sp	pacing:	
Main floor, cen	ter	33
Loge center Terraces 1 and	2, center	38
Center-seat-arm t spacing:		
Main floor, cen Loge, center	ter	21-2
Terraces 1 and	l 2, center	20-2
Ceiling:	1½-in. plaster on suspended from re	
Hanging panels:	1½-to 2-in. plaste lath	er on m
Side walls:	plaster on solid ce	ement blo
Floors:	rubber tile	
Carpets:	on all aisles of th and loge; none	
Stage floor:	2-in. wood over v	-
Stage height:	42 in.	
Seating:	top of seat botto rest upholstered i hair cloth, over	n porous

polyurethane

springs; underseat is m perforated with six 2-in. h and covered with porous hair. Rear of backrest, so covered with mohair hall study thoroughly debunked myth that "wood is good" in cont halls—the best halls have plasinteriors, the least-liked halls we thin-wood interiors.

Audience area. On the assumpn of a volume of 850,000 cu ft, a
rerberation time of 1.9 seconds at
d-frequencies with full audience,
repet covering part of the aisles,
ne wood strips around the stage,
d seating area for the orchestra of
out 2,000 sq ft, it was recommendthat the audience area must not
seed about 18,000 sq ft.

No specification was made for the mber of seats to be contained in the 1; however, once the allowable toseating area is established within framework of a given acoustical sign, considerations of safety and nfort determine the actual number seats. Table 2 shows the number seats that would fill an audience ea of 18,000 sq ft according to the ea per seat allowed in eight other ls. If the seating could be as wded and the aisles as narrow as neteenth-century standards permitl, then as many as 3,000 seats might ve been squeezed into Philharmonic ll. However, an area per person of out 6.6 sq ft (including aisles up 3.5 ft wide) was considered necesry by the architect and owner for comfort and safety of New York diences. As finally designed, Philmonic Hall seats 2,644 persons th the normal 40-ft-deep stage, and newhat fewer when the stage is exided into the audience area.

'ntimacy. Because the most imtant attribute of the acoustics in oncert hall is intimacy, it was recmended that sound-reflecting panbe hung over the stage and the nt half of the auditorium at such a ght that the initial-time-delay gap sound from the concertmaster's ition would not exceed 23 millionds at the center of the main or (see Fig. 1). It was also recomnded that the hall be as nearly tangular in cross sections and as row as possible. The incorporan of these features in the design uld ensure that the sequence of nd reflections would be conducive clarity, good attack, brilliant nd, and adequate fullness of tone. *Balconies*. It was also recommended t the balconies overhang as little possible. The final architectural ign extends the shallow balconies the sides. This reduces the effective acoustical width of the hall. The rear balcony overhangs do not cover more than four or five rows of seats.

Stage dimensions. In order to assure ample space for chorus and orchestra, without sacrificing good ensemble, balance and blend, it was recommended that the stage be no wider than 55 ft at the front and no less than 48-ft deep at the centerline; it should be extendable to accommodate a large chorus in addition to the orchestra. The stage dimensions finally chosen are somewhat wider and shallower, almost identical to Carnegie Hall's dimensions—in deference to the request of the New York Philharmonic Society.

Stage canopy and side wall design. To assure good ensemble it was recommended that a large reflecting canopy be erected over the orchestra at a height above the front of the 40ft-deep stage of no greater than 27 ft. It was recommended that the height of the canopy and the angles of the individual panels in it be adjustable. It was also recommended that an acoustically transparent but visually opaque screen be constructed about 4 ft inside the structural wall surrounding the stage. Splayed soundreflecting panels were to be installed behind the screen where they would not be seen, both to reflect sound across the stage and to project it into the auditorium.

Additional sound-absorbing materials. No special sound-absorbing materials were to be used in the hall. However, in order to eliminate as far as possible undesirable changes in reverberation time resulting from partial occupancy, fully upholstered seats and carpeting under the seats were recommended. The acoustical recommendation called for no carpeting in the aisles; some carpet was permitted, however, for architectural reasons. In order to reduce the reverberation time for occasions in which clarity of speech or musical drama was essential, it was recommended that draw curtains be provided for the upper spaces at the sides of the stage. For adjustment of balance and blend, a small amount of sound-absorbing material might be added in back of the visual screen behind certain sections of the orchestra. Draw curtains were recommended for this space also. The need for such materials was to be determined during the tuning period.

Ventilation noise. It was recom-

mended that the steady noise from ventilation not exceed the customary NC-15 noise curve at any seat in the hall. Care had to be taken with the mechanical system design to ensure that air supply and return ducts supplying the hall would not transmit the noise from the equipment or any other noise to the hall, and that the air conditioning outlets would not generate an appreciable amount of noise.

Noise from exterior sources. Intermittent noises in the hall from sources outside the hall should not exceed the NC-20 noise curve in the lowest two octave bands, and the NC-15 curve in the other bands. Three important sources of external noise that required careful consideration were outside city noise, the nearby subway, and jet aircraft.

Sound system. A sound system of a quality adequate for radio broadcasting was required for amplification of speech and solo singing voice, and for cinema. No provision was made for amplification of orchestral music or for drama.

THE FINAL DESIGN

The final architectural design of Philharmonic Hall drawn to emphasize the acoustical features is shown in Figs. 2 through 7. The dominant architectural features of the completed hall are the glittering gold leaf of the canopy overhead; the gilded faces of the loge and the two terraces above sweeping downward, like great arms, toward the stage; the gold screen surrounding the stage; the side walls and ceiling of deep blue; and the seats upholstered in four shades of gold. Sight lines and thus "hearing lines" are ideal for all the seats.

Consideration was given to the probability that there will be a continuing evolution of musical tastes and preferences. The reverberation time of the hall can be shortened by the addition of sound-absorbing materials above the hanging panels, or lengthened by the removal of carpets from the aisles—for this reason, the floor beneath the carpet is rubber tile. The stage can be enlarged by means of the lifts to accommodate larger groups of performers. Hearing conditions on the stage can be changed by adjustments in the height and details of the stage canopy and by modifying the sound-reflecting surfaces behind the acoustically open screen at

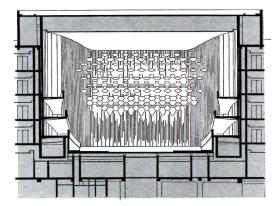


FIG. 5: Transverse section A-A. Note rectangular cross-section of the hall


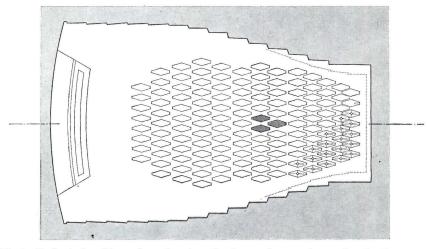


FIG. 6: Reflected ceiling plan showing the lower layer of sound-reflecting panels. These panels are made of hard-white finish plaster over metal lath and colored by gold leaf. Three panels in the center, however, are wire mesh only so that they will be acoustically transparent to the loudspeakers behind them. The loudspeakers are not used by symphonic orchestras, but only as required for dance bands, popular vocalists, public speakers, etc.

FIG. 7: Plan of the upper level of sound-reflecting panels, painted deep blue, and located about 2 ft above the gilded panels

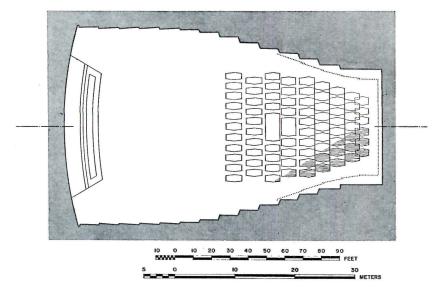

the sides and back of the stage.

Philharmonic Hall is probably the first hall to be designed as a living hall—a hall whose acoustics can changed as musical tastes demand at low cost, without gross or visil changes in the structure.

The basic design features incorporated into the building to contearth-borne and structure-borne so way noise and vibration included to use of lead-asbestos vibration is tion pads under all columns of building, the insertion of a vibratisolation joint in many of the exter and interior walls and partitions or near the basement level, and use of a resilient isolation lay (glass fiber pads plus gravel) around all underground exterior walls on subway sides of the building.

Vibration measurements made 1961 revealed that subway-induced noise and vibration will be of no consider within the main hall. When the vibration levels are compared we recognized criteria for "feelability of vibration and audibility of no radiated by a vibration structure, is found that vibration definit

TABLE 4
REVERBERATION TIME FOR
PHILHARMONIC HALL FULLY OCCUPIED
ESTIMATED BEFORE CONSTRUCTION

Frequency,	Reverberation time, seconds	Estimate accurac of predict seconds
67	2.7	± 0.4
125	2.4	\pm 0.3
250	2.2	± 0.2
500	2.0	± 0.1
1,000	1.8	± 0.05
2,000	1.6	± 0.05
4,000	1.3	\pm 0.1
6,000	1.1	± 0.1

TABLE 5
REVERBERATION TIMES
MEASURED DURING TUNING WEEK

Frequency, cycles per sec	Reverberation time with orchestra without audience, seconds	Reverbera time wit orchestra simulate audience seconds
67	3.3	3.3
125	3.1	3.0
250	3.1	2.6
500	2.9	2.2
1,000	2.6	2.2
2,000	2.4	2.1
4,000	1.8	1.6
6,000	1.3	1.2

I not be felt and that subway se probably will not be heard ine the hall when subway trains pass along Broadway—even during y quiet intervals when no music being played. These results were firmed during the recent "tuning ek" in May.

To exclude aircraft and street noise ceiling of the hall is suspended m elastic hangers, resonant at very low frequency, and the side lls and entrance doors are sepaed from the street by two layers glass.

The ventilation system was quieted a combination of package soundenuating units at the outlets of the us, by duct linings and by adeate closures between the fan rooms of the auditorium. Acoustical measurements were performed on the nufacturer's premises to assure the edom from noise at the grilles of the auditorium diffusers.

The walls of the auditorium are n.-thick concrete block. At each el, surrounding the hall, a glass-lled corridor is provided to exde noise (and smoke in case of e) originating in the lobbies. Care a taken to exclude from the hall a sounds of the tuning of instructs by use of inner floating walls a floors in the tuning rooms behind e stage.

IE TUNING PERIOD

om the inception of the project, was anticipated that certain feaes of this undertaking would benfrom an opportunity for finede adjustment or additions prior the finishing. In the present state the acoustical craft, it is possito predict accurately the reired cubic volume, the area to be owed for the seating, the general ape and basic proportions of the II, the dimensions of the stage, e allowable amounts of carpet and er absorptive materials, and the sic acoustical design for a reflectcanopy above the stage and front rt of the hall. Acoustics have not developed a way to determine, acrately and in advance of the design, fine details—the orientation of reflecting panels above and ound the stage, and the exact ght and proportion of open area the canopy.

"Tuning week" started on Monday, by 28, 1962. The adjustments of acoustics were made with the help of the Philharmonic Orchestra and a group of highly qualified listeners, working together with the acoustical consultant, the architect, and the building contractor. So far as we know, in no major American hall, from the Academy of Music in Philadelphia in 1857 to the Ford Auditorium in Detroit in 1956, have the acoustics been adjusted experimentally prior to its opening.

The orchestra performed at nine rehearsals. The repertoire included selections from all the principal musical periods, and called for various sizes and combinations of instrumental and vocal groups. In all, compositions of 30 different composers were played.

Since the acoustical adjustments would have significance only for the occupied hall, one of the important problems of tuning week was how to provide an "audience" of 2,600 people. The corridors, stairways and approaches to the building were not completed and entry by a large number of people was deemed unsafe. Even if a live audience could have been arranged, there would have been the difficulties of carrying on experiments in a "goldfish bowl" and of keeping a succession of audiences quiet and entertained for a total of 22 hours during the week. It was of no little significance, moreover, that the ventilation and air conditioning equipment was not yet in operation and the hall would have been virtually uninhabitable for an audience on some of the 90-degree days of tuning week. Consequently, a synthetic audience, real only in the acoustical sense, was provided. Each seat could be "occupied" by a flexible, glass fiber mat, 30 by 40 in. and 1 in. thick. An advantage of the simulated audience was that the audience occupancy could be held constant throughout the week, and all the evaluations of acoustical changes were made under exactly similar conditions.

Acoustical measurements were made at nearly every rehearsal during the week. Sound sources included: impulse noises produced by a pistol and a small yachting cannon; continuous and interrupted white noises (i.e., noises of all frequencies) in octave frequency bands; warbled tones; and pulses of sine waves. Measured were: reverberation times at 25 frequencies between 40 and 10,000 cps for empty hall and hall

with simulated audience; initialtime-delay gaps at main floor and first terrace seats; and ratios of direct-to-reverberant sound intensities at several locations in the hall.


Acoustical measurements with electronic instruments alone do not demonstrate all the important acoustical characteristics of a hall. Tests must also be made with the orchestra as the source of sound. In order to include all the frequencies that can be produced by the full orchestra and all in proper balance, special orchestral sounds were needed. It occurred to us that if these sounds were ever to be repeated in the hall with a real audience, they would be better received if they were made part of a composition that in itself would have musical interest.

Bolt, Beranek and Newman, therefore, commissioned composer Daniel Pinkham of Boston to incorporate a special set of chords into a musical composition four minutes in length, to be used as an acoustical test in both empty and occupied halls. Delivered a few days before tuning week, Pinkham's Catacoustical Measures* has proved to be a lively diversion as well as a valuable tool.

Much music performed during tuning week was preserved for later study on a pair of two-channel magnetic-tape recorders, connected to the electrical output of two binaural "dummy" heads. The dummy heads were specially designed to approximate the acoustical properties of the human head, and each of them was equipped with two miniature condenser microphones for ears. The binaural heads were mounted on small boxes and were placed on two seats, one on the main floor and one in the first terrace.

A special listening panel which judged the quality of the acoustics at each phase of the tuning consisted of Leonard Bernstein, music director, three assistant conductors and the manager of the Philharmonic Orchestra; and representatives of Lincoln Center, Juilliard School of Music, Columbia Records, the architect's office and Bolt, Beranek and Newman. From time to time, this panel was joined by Erich Leinsdorf, Leopold Stokowski, Andre Kostelanetz, Bruno Zirato, and several of New York's music critics. The com-

^{*}Webster defines catacoustical as the "science of reflected sounds or echoes." [Webster's New International Dictionary, Second Edition]

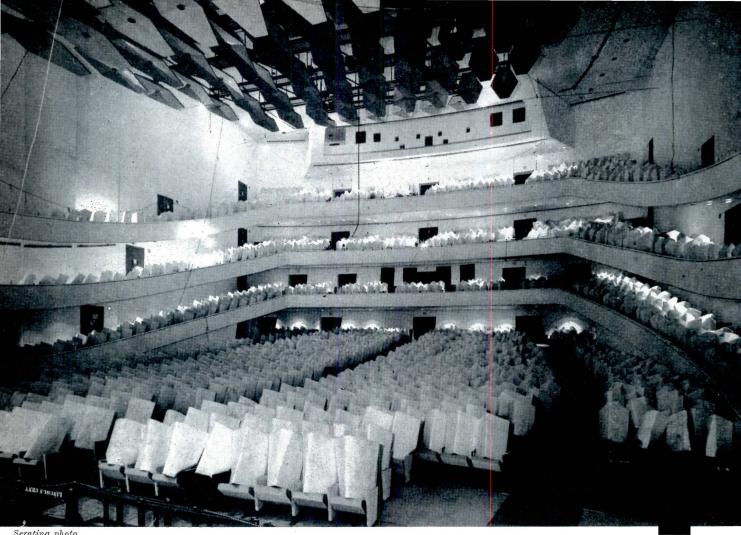

Serating photo

During "tuning week," the seats of the hall were occupied much of the time by "instant people"-30- by 40-in. glass fiber blankets bowed into each seat-in order to approximate the sound absorption of an actual audience

ments of this special listening panel were recorded and used as the basis for the changes made in the hall during and following tuning week.

In addition to the special panel, the members of the orchestra filled out "comment cards" and returned them for tabulation and study.

The experimentation with various arrangements of the orchestra led to recommendations on the number and height of stage risers. The number, height and angles of the elements of the stage and audience canopy were finalized. A small echo from the projection booth was located and removed. The sound-reflecting panels behind the acoustically transparent screen around the stage were experimentally positioned and the required number determined.

It was found desirable to shorten the reverberation time for special concerts, where music for small orchestra is played-say baroque or chamber music-or where opera theater is performed. Accordingly, it was recommended that manually-operated draw draperies be installed in the spaces above the canopy on either side of the stage. Operable draperies were also recommended in the wall beneath the organ at the rear of the stage to control the loudness of the bass and percussion. Also, a solid wall was recommended along the rear right side of the stage to strengthen the double basses. And, finally, in order to ensure the richest possible bass, instructions were issued that no thin plywood was to be used in any part of the final construction.

Tuning week ended optimistically with the feeling that after it had undergone whatever further tuning was suggested by its initial year, Philharmonic Hall would satisfy the goals its planners had set for it.

REVERBERATION TIMES

The reverberation times calculated before construction of Philharmonic Hall are given in Table 4. During tuning week, part of the carpets and nearly all of the wood-slat screen

around the stage were missing. Se eral rows of seats at the front the hall were yet to be installed With these omissions, the reverber tion times were measured for ty conditions: (1) the orchestra stage, auditorium seats empty; a (2) the orchestra on stage, synthet audience in the hall. The results a given in Table 5. It is estimated th when the hall is completed, the verberation times will fall within t range of values given in Table 4.

Thus Saturday, June 2, 1962, t last day of tuning week, ended fi years of sympathetic cooperati among a variety of artistic and e gineering disciplines. Whether h tory will award Philharmonic Hal position among the world's finest vironments for concert music it still too early for us to judge. But understanding engendered amo musicians, architects and acous cians during the 54-hall study leadi to the final result should enrich t acoustical designs of the future a avoid many pitfalls of the past.

IOSPITAL AIR CONDITIONING

ospital layout and design are affected by special conditions temperature, humidity, and pressure required in various areas

y Alfred Greenberg, Consulting Engineer

sign of air conditioning for hospis differs from design for other ilding types in two major respects:

Air circulation and filtration are tical factors in the control of airrne infection. (2) The relative imbility and depressed physical contion of patients impose a demand r close control of temperature, hudity and air movement.

Architects must design the varis hospital areas with reference not ly to traffic and material flow but so to the flow of possible contamition. Air should flow at all times om sterile toward contaminated eas and should be exhausted to the tside as far as possible (at least 5 ft) from the air intake. No air thin the hospital should be recirlated unless it passes through deorizers and filters approaching 100 r cent efficiency. Even then, a small nount of contamination and odor n pass through the filtering sysm. In fact, unless cleaning schedes are faithfully maintained, desits in the system can become a urce of recontamination of the air. certain critical areas, such as opating rooms, this is a chance that ould not be taken. Outdoor air, by tion of sun and massive dilution, ll probably be less contaminated an recirculated air, both given the me degree of filtration.

There are two arguments advanced ainst using 100 per cent outside throughout the building. The first aintains that not all areas are comminated; therefore, complete flushing of the building is not necessary. It is the surface, this premise is valid; the even with the most careful air additioning design, it is difficult to edict air movement at all times in areas. The action of stair wells, vators, vertical conveyors, laundry utes, dumbwaiters and pneumatic per can set up air currents other

than those intended. Opening of just a few doors and windows can completely reverse the desired effect of the most accurately balanced air distribution system.

The second argument is that the use of 100 per cent outside air increases fuel costs for both summer and winter. This is true, but fuel costs must be measured against the following compensating factors:

- (1) First cost of a system using all outdoor air is lower than cost of a recirculating system because of the decreased ductwork, fan systems and controls.
- (2) In many hospitals the ratio of critical sterile area to total area is so great that only 20 to 30 per cent of the total air can be recirculated anyway. This very often is reduced to less than 10 per cent when the layout of spaces is considered in relation to practical recirculating systems.
- (3) Systems for so-called non-contaminated areas almost always are designed with less exacting air filtration than those for contaminated areas. Any accidental pollution of the air in the uncontaminated area will increase the possibility of pathogen colonization on filters, coils, air outlets and elsewhere. Recirculating systems, therefore, should have the same, exacting filters and cleaning schedules throughout. By use of all outside air, this troublesome expense is kept to a minimum.

Although hospitals are normally open 24 hours a day, few departments other than nursing units operate around the clock. It is not difficult to determine the work schedule for most hospital departments and to correlate this with a master air conditioning scheme such that departments having similar time schedules are served by the same air units. These units can be shut down when

the departments are not in use; thereby effecting substantial operating economies.

TYPES OF SYSTEMS

Many air distribution systems¹ are applicable for hospital use. However, the following systems should not be considered for new hospitals:

- (1) Self-contained units because they have poor temperature and humidity regulation, are noisy, have poor air distribution characteristics and low filter efficiencies, and require frequent maintenance.
- (2) Conventional fan-coil units for the same reasons, although these units are a definite improvement over self-contained units.
- (3) Single duct, zone volume control systems because it is necessary to know where hospital air is coming from and going to at all times in order to control spread of airborne contamination. Varying the air volume of different areas at different times defeats this purpose.

Applicable systems are:

(1) Fan-Coil Units With Central Outside Air System. In general, this is the least desirable of the acceptable systems for hospitals, unless 100 per cent outside air is used with high efficiency filters. For proper noise control, units should be sized to carry full design load at the middle of three fan speeds. These filtration and size criteria will increase the cost of the system. One advantage is that individual units can be shut off in any room when it is desirable to do so.

Although the outside air is centrally filtered, each fan-coil unit should also contain a filter for recirculated room air. Filters, coils, con-

¹A résumé of physical and mechanical characteristics of various systems was given in Mr. Greenberg's article on motel air conditioning in the August, 1962, issue

TABLE 1-AIR CONDITIONING REQUIREMENTS FOR HOSPITALS

Area	Temperature ¹ Range, Deg F	Humidity ² Range, %	Relative ³ Pressure	Hourly Air Changes	Hours ⁴ of Use
1. Patients' bedrooms	72-80	40-50	N or B	6-8	24
2. Outpatient clinics	72-78	40-50	N or B	8-12	12
3. Administration	72-78	40-50	P	6-12	12
4. Operating suite	68-85	*55-65	P	18-30	24
5. Radiology	72-78	40-50	N or B	8-15	12
Dark rooms	68-82	*40-50	N	12	12
6. Laboratories	72-78	40-50	И	6-20	12
7. Animal quarters	68-80	40-65	N	12-20	24
8. Morgue & autopsy	68-78	40-50	N	20+	12
9. Pharmacy	72-78	40-50	P	8-12	24
10. Central services	72-78	40-50	P to N	6-12	24
11. Physical medicine	72-90	*30-60	N	6-12	12
12. Maternity	74-82	*40-55	P	6-10	24
13. Service	72-78	40-50	N	8-20	12

¹ First figure is winter setting; second is summer inside design temperature ² *Winter humidities may fall below ranges shown except where marked by asterisk ³ N = negative; B = balanced; P = positive ⁴ These generalized schedules will vary for individual hospitals

densate drain pans and connecting pipes are sources of recontamination unless cleaned and sterilized at regu-

lar intervals.

Units.Although (2) Induction they produce more uniform temperature and humidity conditions than fan-coil units, induction units have about the same noise and maintenance characteristics.

In rooms where infection, odors, radioactivity, fine powders, or chemicals can become airborne, equipment that recirculates any portion of room air should not be used because of the possibility of accumulation of contaminated deposits in recirculated air channels.

(3) Single Duct System. There has been a tendency in the past to design single duct systems in hospitals at very low velocities (800 to 1,000 fpm). This is unnecessary and in part undesirable, because entrained foreign matter can more readily settle out and promote bacteria growth. Systems using standard velocity (about 2,500 fpm) or high velocity (to 4,500 fpm) and designed to maintain moderate noise level (NC-35 in all patient areas) are satisfactory. In general, single duct systems do not require much maintenance except at coils, humidifiers, filters and air outlets. Every few years, depending upon the main filter efficiencies, the inside of the ductwork should be cleaned through access doors provided at suitable intervals to allow easy reach.

(4) Dual Duct Systems. Terminal units of dual duct systems may be placed under windows or in hung ceilings. Maintenance of units under the window is simpler, but that location also is more susceptible to contamination. Access must be provided for regular maintenance and cleaning of the mixing boxes.

This type of system, though about the most costly to install, will produce the best over-all results considering the variety of hospital functions it is called upon to serve.

(5) Radiant PanelWhere it is planned to use a perforated metal acoustical ceiling, an attached pipe grid to provide both heating and cooling may be suitable for areas having low humidity where no moisture can condense on pipes or ceiling. Ventilation air must be furnished by a supplementary system, and in areas requiring large quantities of air, radiant systems are not economical because the treated ventilation air can usually handle the entire load at lower cost.

Contamination of perforated pans by convection air currents seems at least theoretically possible, but available data are insufficient to assess this hazard.

Experience is lacking, also, on cleaning problems possibly associated with ceiling plenum systems which deliver air through perforated or fissured ceiling materials. Such systems seem otherwise attractive when large quantities of air at low velocity are required.

HOSPITAL AREA ANALYSIS

Some of the more common divisions found in hospitals are listed in Table 1, which gives ranges of design conditions for each area. Temperature and humidity ranges encompass the complete variation encountered in the author's experience and research Upper and lower levels are those used (or envisioned as desirable) by medical authorities² for complete flexibility of function. Obviously they do not pinpoint control settings and many hospitals will operate sat isfactorily within more limited ranges. Exact design figures should be ascertained from the hospital med ical advisory staff when the scope of the project is first discussed. Notes pertaining to Table 1 are as follows

(1) Patients' Bedrooms. Most pa tients are quite sensitive to drafts Hence, in patients' areas, air dis tribution should be uniform and air velocity at patients' level from abou 12 to about 30 fpm, with an upper limit at about 35 fpm.

If air is exhausted through pa tients' private bathrooms or toilets makeup air should not be drawn fron the outside through windows, as this will greatly increase control and housecleaning problems. If the cor ridor air is under positive pressure odor-free, and not contaminated by nearby functions, then this air may be transferred through the patients bathrooms for exhaust. Another ad vantage in maintaining the corrido under positive air pressure is that i maintains air motion toward bed rooms and reduces cross-infection.

Patients with contagious diseases however, must be kept out of posi tively pressurized corridors. If the treatment program for infectiou diseases is such that corridors can not be pressurized with respect to individual rooms, architects mus make every effort to provide sufficien ceiling and shaft space for the extra ductwork required for mechanica control of supply and exhaust for all areas including corridors.

(2) Outpatient Clinics and Treat ment Areas. Usually these are designed in a similar manner to equiva lent areas within the hospital. How ever, there are often special labora tories and testing rooms which ma

²The author's work on many hospitals has in cluded study of recommendations of USPHS, VA AHA and other medical authorities

ve specific criteria. These should obtained from the hospital staff or sipment manufacturers.

(3) Administrative Areas. Offices treated in much the same manas an office building. Since option is usually 10 to 12 hours per, offices may be combined with outpatient clinic into one air dispution system, if that is architurally and mechanically feasible.


(4) Operating Suites. There are eral basic schemes, and many modations thereof, around which opting suites (including spaces for gery, delivery, recovery and insive therapy) are designed. From air conditioning point of view, y can all be broken down into rile, non-sterile and contaminated as. By translating this into high, dium and low air pressure areas, pectively, we have developed the sic tool for properly designing the distribution system for this suite. The operating room must be at a her air pressure than any other a connected to it. This also holds e for the recovery room, surgical rses' workroom, anesthesia workom, sterile storage and work areas l special laboratories such as bone d tissue and frozen section. These as are most often interconnected a network of corridors maintained an intermediate air pressure ich allows the sterile areas to ed some air constantly into the ridors. The corridor air is then nausted through the non-sterile or taminated areas. Allefforts ould be made to have the air sysn in each hospital area independly balanced with relation to adjant areas. It must be recognized, wever, that opening of doors beeen any two areas will generally set the balance momentarily. Some ought might be given to air locks air curtains, but no system is a ostitute for careful aseptic techques on the part of personnel.

Humidity levels are kept at 55 to per cent to minimize the possity of static discharges which ght cause explosions of combustle anesthetics. Also, certain types surgery require high levels of hudity. Steam jet or spray humidiers should be used rather than ns, which can grow bacteria.

Although most operations are perrmed at from 72 to 80 F, provisions



Horizontal sun shades cut air conditioning load at U. S. Navy-Marine Hospital, El Toro, California. Welton Becket and Associates, architects

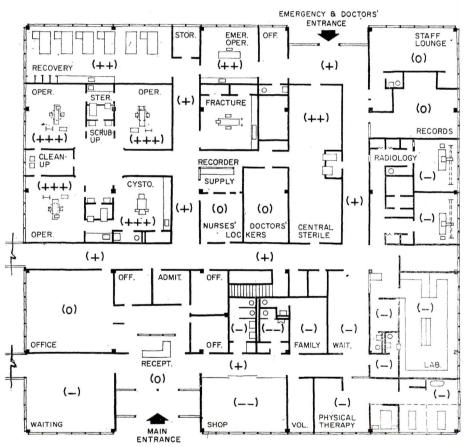


(+) = POSITIVE; (0) = BALANCED; (-) = NEGATIVE AIR PRESSURE


Hospital department areas should be arranged not only for flow of materials and personnel but with consideration of maintaining a flow of air from critically sterile areas toward possible sources of contamination. This layout of a wing attached to a general nursing building shows how positively pressurized areas center on the operating suite at upper left. Corridor doors to control pressure are not shown, but would be secondary in importance to proper design of air supply to each area

should be made in at least one operating room for obtaining substantially lower and higher temperatures.


Each operating room must have individual, explosion proof controls for temperature and humidity. Tempera-

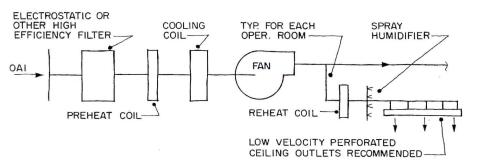

Schematic of a conventional system for operating suite. This arrangement is low in cost and requires less space than modifications shown below. Needs regular maintenance to keep algae under control

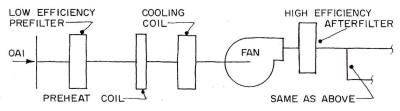

Operating suite system with double filtering provides more definite assurance of clean air, has same algae problem as system above

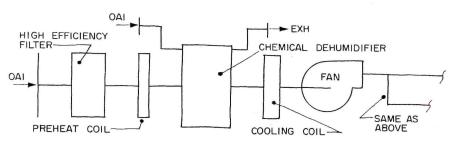

More elaborate system requires additional ductwork and louvers but keeps algae and micro-organisms to a minimum with some increase in operating cost

ture variation can be obtained by means of booster heating and cooling coils or by a dual duct system.

The range of operating room temperatures may lead one to think that individual room systems would be desirable, but this is not so from the viewpoint of balancing pressures in the over-all suite.

Because of the high humidities required, relatively low temperature differentials must be maintained between entering air and room air to prevent condensation on air outlets. Since cooling loads for operating rooms are often substantial, large air quantities (18 to 30 air changes per hour) are normal. This makes good air distribution a necessity in order to maintain no more than 40 fpm air velocity. At this velocity, the air will not pick up and distribute dirt and bacteria. By way of comparison, people walking within the operating room will impart motion to the air of about 40 to 60 fpm. Since 50 fpm has been determined as the apparent threshold at which air currents can dislodge lint particles from a smooth surface, it can be seen that operating room techniques are an important element in bacteria distribution.

Aspirating or induction type ceiling diffusers and side wall registers create too much air motion. Perforated or other wide-area, low-velocity outlets at the ceiling provide much better air distribution.

The wide-area perforated outlet tends to dilute and push down the air within the room in a piston-like action, except at the operating table, where lighting and equipment interfere. About 80 per cent of the air is exhausted through low registers located at the room corners and 10 to 15 per cent into the adjacent corridor and scrub-up room. Over the operating table a ceiling exhaust register vents the hot air from the lights, prevents the collection of anesthetic gases at the ceiling and draws cool

air into the work area. This exhau register needs to eliminate no mothan 50 to 150 cfm depending on t size of the operating lights.

It may be desirable to design t air conditioning system so that t operating suite is partially served each of two systems. Thus outage one system will not shut down air co ditioning for the entire suite.

(5) X-ray and Radiology Sui The air conditioning problems e countered in this suite are fourfol protection against radioactivity, o ordination of duct design with X-r equipment, odor, and equipment hea

The problem of radioactivity most acute in the cobalt and de therapy rooms but must be thoroug ly analyzed in all X-ray and fluor scope rooms. In most instances, of signers should obtain the advice of physicist specializing in radioactiproblems.

In general, any mechanical or electrical facilities that pierce the cocrete or lead walls of the cobalt a deep therapy rooms must be lelined or otherwise shielded to prote adjacent areas within range of tradiation source. Some authoritistill recommend lead lining for cosiderable distances in all ducts whi pierce X-ray rooms, but this practical has been greatly modified by many hospital authorities.

Door louvers, transfer grills or u dercut doors should not be used radiation equipment rooms.

Some X-ray equipment is ceilin supported on structural beams operates on horizontal overhetracks at the hung ceiling. This rquires close coordination in the laing out of ductwork and electric conduit. Ideally, no piping should run in the hung ceilings over tX-ray rooms.

Certain procedures, such as the involving barium enemas and sortypes of malignant conditions, en odors which must be removed by u of the upper limit of air changes (1 shown in Table 1.

Considerable heat is given off the X-ray machines, controls a transformers. In some rooms, flurescent lights cannot be used becauof their afterglow effect upon phographic plates. Therefore, incandcent lighting with its greater heoutput must be used. The extent a intermittent character of the equiment and lighting heat load m varrant some consideration of regularly scheduled cycling of air condicioning in some rooms.

(6) Laboratory and Research Areas. The type and size of hospital vill determine, in general, the kinds of laboratories it contains. The one hing all laboratories have in common is that the suite as a whole should be under negative air pressure, although some rooms, such as those for physiological testing or sterile techniques, may require positive pressurization with respect to others in the suite.

When all the exhaust air goes through work hoods, each hood should be designed with its own duct system and exhaust fan so that, whether or not the hood is being used, the exhaust fan will run. Laboratories without hoods should eliminate at least part of the exhaust air from the floor level in order to pick up stratified odors and fumes from spilled substances.

Special requirements of various kinds of laboratories must be checked carefully with hospital administrators and equipment manufacturers.


(7) Animal Quarters. This area should be isolated from the rest of the hospital by means of a negative air pressure zone in which about 20 per cent more air is exhausted than is supplied.

There are, however, certain relatively clean or odor-free areas, such as animal operating rooms, food preparation rooms, offices, etc., which will be maintained under positive air pressure with respect to all others. Healthy animal rooms should be maintained at a 10 per cent positive air pressure toward infectious animal rooms. Under no circumstances should air from animal quarters be transferred into corridors or other rooms because of the possible spread of odor, hair and bacteria.


To assure draftless air distribution, perforated diffusers or other wide-area panels should be used for the air supply. Exhaust air should be expelled above the highest roof level and far from any intake.

(8) Morgue and Autopsy. Exhaust ducts should be located at the head and foot of each autopsy table. This, of course, fixes the position of each table in the room.

Refrigerated drawer compart-

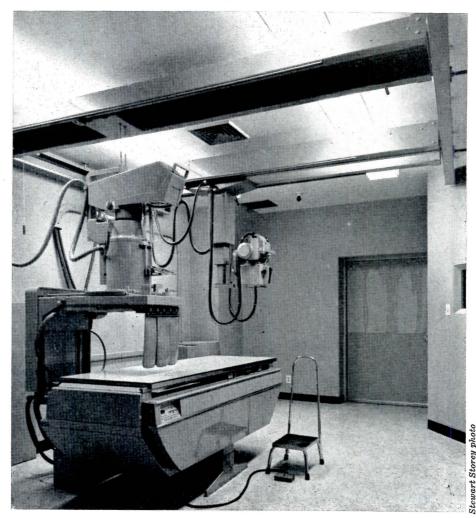

Air supply and return for X-ray rooms must take into account the overhead supporting members and permanent location of X-ray equipment. Room above is at Parkview Episcopal Hospital, Pueblo, Colorado. Fisher and Davis, architects

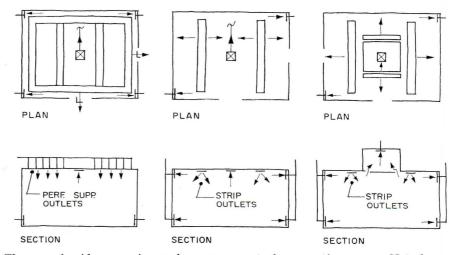


Three good, wide-area, air supply arrangements for operating rooms. Note low exhaust at corners and ceiling vent for heat relief over operating table lights

ments, or, in larger hospitals, refrigerated walk-in boxes, are provided for storage of cadavers. A ventilation rate of 20 air changes per hour will have to be continuously exhausted from the boxes to the highest roof

level or 150 ft from any outside air intake.

(9) *Pharmacy*. This area should be considered as a sterile zone, maintained under a positive pressure,

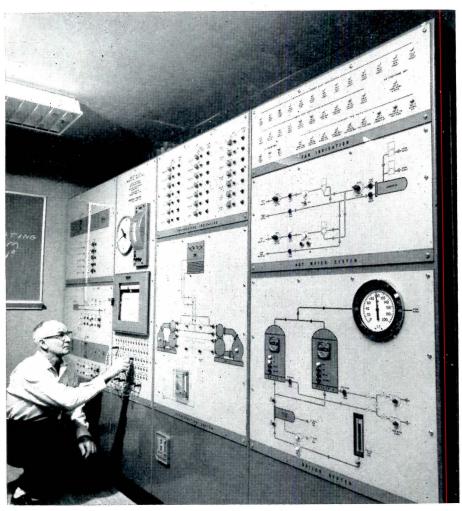

Surveillance and control of conditions throughout the 250-bed West Allis, Wisconsin, Memorial Hospital (Darby, Bogner & Associates, architects) is centered at a single station where one staff member can watch and record operation of the system

with dispensing and work areas at higher pressure than associated storage, compounding, and office spaces.

(10) Central Services. Receiving, disposal, preparation of equipment and instruments, cleaning and sterilization, storage in sterile or nonsterile areas, and delivery of stored items for use are included. Central service departments are designed with the same regard for prevention of contamination by maintaining cleaner areas at positive pressure to keep out contaminants.

(11) Physical Medicine and Rehabilitation. In its simplest form this area consists of a simple exercise room. Hospitals and health centers which specialize in this field may include various types of baths, pools, facilities for manual arts, occupational and physical therapy and special laboratories.

It is desirable to have a separate air handling unit for the pool en-

closure capable of maintaining air temperatures of 80 to 90 F when the water is up to 100 F.

The manual arts room is in effect a machine shop with hoods on machines and a dust collecting system. The occupational therapy room may contain kilns which require hoods.

Certain electronic testing rooms may have to be electrically shielded, and ductwork to them should be indirectly connected by non-metallic methods.

In all treatment and bath rooms, it should be possible to maintain the air temperature as high as 85 F.

(12) Maternity and Nursery. These areas should have a separate system operating 24 hours a day. Incubator rooms, delivery rooms, labor rooms, nurseries and all auxiliary areas require individual temperature and humidity controls. Delivery rooms are treated as operating rooms. Air should move at about 15 to 25 fpm.

(13) Service Areas. These include soiled linen rooms, chapels, kitchens and dining rooms, libraries, bowling alleys, game rooms and auditoriums Air pressure gradients and sound isolation follow the same line of reasoning that has been set forth pertaining to other areas.

MECHANICAL EQUIPMENT

As a rule, hospitals require more mechanical space than most other types of buildings because of the larger number of systems and the higher degree of flexibility. To prevent complete interruption of service, an emergency generator should cut in automatically when utility power fails. Generators should be operated at least once a week to be sure they are functioning properly.

Filters used should be of the direct impingement, dry, replaceable type. Electrostatic filters are not recommended because they build up clusters of particles on the ionized plates which flake off and must be caught by back-up filters.

Scrubbing of the air with an aqueous chemical solution such as lithium bromide will require greater first cost and larger space. Ultra-violet lamps are effective against micro-organisms, but turbulent flow devices are required to make them truly effective. As the lamps get older and collect dust, they become less efficient and require replacement.

Chemical aerosols have a germicidal effect, but none has yet proved to be sufficiently safe for general use.

CENTRAL CONTROL ROOM

Operating costs of the air conditioning systems are a relatively small part of the total operating costs of the hospital. These costs tend to rise as the equipment gets older. It is usually difficult to obtain and keep qualified operating and maintenance personnel. Hospital mechanical and electrical facilities are so diverse, complex and spread through-out the building that the physical observation and checking of all equipment is a task requiring more help than the hospital usually can afford. The in stallation of a central control room in which are contained all control and alarm functions and the means of resetting various control points, wil greatly simplify the building opera tion and maintenance and will gen erally pay for itself in a very fev years.



DRDEN ARCHITECTURAL DECOR PANELS: DECA-RIN

Borden Architectural Decor Panels are finding preference as the modern medium of architectural expression. The decorative, sturdy, lightweight aluminum panels are used for facades, grilles, dividers and many like applications. They are available in several types and innumerable variations of the types.

Shown above is Borden Deca-Ring panel on a multi-level parking facility in downtown Miami. Here Deca-Ring provides safety, ventilation, and a touch of luxury in combination with efficient use of materials. The Deca-Ring screens are the only siding used on an otherwise

stark concrete slab building. Individual panels of Deca-Ring are outlined with Decor-Plank to give added design emphasis.

The circular Deca-Ring pattern is currently produced with $3\frac{1}{2}$ " O.D. rings assembled at $4\frac{1}{2}$ " centers. Depths of $\frac{3}{4}$ " and 1" are available. For more detailed information on Deca-Ring and other Borden Architectural Decor Panels, including Deca-Gril, Deca-Grid, Decor Plank and their many variations and subtypes, write for our new eight-page catalog on Borden Architectural Decor Panels.

another fine product line of

BORDEN METAL PRODUCTS CO.

MAIN OFFICE: 822 GREEN LANE, ELIZABETH, NEW JERSEY • Elizabeth 2-6410
PLANTS AT: LEEDS, ALABAMA; UNION, NEW JERSEY; CONROE, TEXAS

For more data, circle 8 on Inquiry Card

FIGURE 1

How to save by designing with Bethlehem high-strength steel reinforcing bars

By susing Bethlehem high-strength steel reinforcing bars such as A-432 (60,000 psi min yield) and A-431 (75,000 psi min yield) you can save on concrete, steel, or both. Savings in steel can amount to as much as onethird of the materials needed if A-15 grade bars were used.


Look at the comparison diagrams on this page. They show you how to save on both concrete and steel. Still other savings are realized by increasing net floor area, lowering height of structure, reducing dead load, shortening the time needed to place materials.

Bethlehem bars are furnished with certified mill test reports that assure you of their mechanical and physical properties. Bethlehem high-strength bars are easily identified on the job by the numbers rolled right into the bar—"6" for 60,000 psi min vield bars and "7" for 75,000 psi min yield bars.

BETHLEHEM STEEL COMPANY, BETHLEHEM, PA. Export Sales: Bethlehem Steel Export Corporation



Fig. 1 is a basic beam of conventional design having a 30 ft span. Figure 1A utilizes A-432 steel and ultimate strength design for savings of concrete. Fig. 1B shows the savings in steel when the beam size is left constant



ASTM A-15 Intermediate Grade

4 #11 + 1 #9 As=7.24 sq. in. f'c = 2500 psifs=20,000 psi Basic Design

CONVENTIONAL DESIGN

FIGURE 2

ASTM A-15 Hard Grade



-D = 31''

13 #11; As=20.3 sq. in. f'c=3000 psi fy=50,000 psi Basic Design

CONVENTIONAL DESIGN

ROUND COLUMNS


Fig. 2 is a basic round column of conventional design supporting a load of 914 kips. By using bars of A-432 or A-431 steel (Fig. 2A) column diameters are decreased. Maintaining the same column diameter as Fig. 2, Fig. 2B shows the resultant savings in

SQUARE COLUMNS

Fig. 3 is a basic square column of conventional design supporting a load of 352 kips, having an eccentricity equal to 10 per cent of the column size. Fig. 3A demonstrates the savings in steel resulting from the use of A-432 steel bars, with column size unchanged. Fig. 3B shows the savings made using ultimate strength design. A-432 steel offers savings under either method of design.

FIGURE 3

ASTM A-15 Hard Grade




10 #11; As=15.60 sq. in. f'c=3000 psi fy=50,000 psi Basic Design

CONVENTIONAL DESIGN (e=0.1t)

BETHLEHEM STEEL

FIGURE 1-A




ASTM A-432

As=7.24 sq. in. f'c=2500 psi fy=60,000 psi Saving Over Basic Design Concrete=29%

ULTIMATE STRENGTH DESIGN

FIGURE 1-B



ASTM A-432


2 #10+2 #9 As=4.54 f'c=2500 psi fy=60,000 psi

ULTIMATE STRENGTH DESIGN

Saving Over Basic Design Steel=37%

FIGURE 2-A

ASTM A-432



13 #11; As=20.3 sq. in. f'c=3000 psi fy=60,000 psi Saving Over Basic Design

Concrete=18%

ASTM A-431



13 #11; As=20.3 sq. in. f'c=3000 psi fy=75,000 psi Saving Over Basic Design Concrete=40%

CONVENTIONAL DESIGN

FIGURE 2-B

ASTM A-432



11 #11; As=17.1 sq. in. f'c=3000 psi fy=60,000 psi Saving Over Basic Design Steel=16%

ASTM A-431

9 #11; As=14.0 sq. in. f'c=3000 psi fy=75,000 psi Saving Over Basic Design Steel=31%


-D = 31'' -

CONVENTIONAL DESIGN

Spirals omitted from round columns for simplicity

FIGURE 3-A

ASTM A-432




2 #11+8 #10; /.s=13.28 sq. in. f'c=3000 psi fy=60,000 psi Saving Over Basic Design Steel=15%

CONVENTIONAL DESIGN (e=0.1t)


FIGURE 3-B

ASTM A-15



6 #10; As=7.62 sq. in. f'c=3000 psi fy=50,000 psi Saving Over Basic Design: Steel=51% Concrete=43%

ASTM A-432




4 #11; As=6.24 sq. in. f'c=3000 psi fy=60,000 psi Saving Over Basic Design: Steel=60% Concrete=43% ULTIMATE STRENGTH DESIGN (e=0.1t)


for Strength . . . Economy Versatility



Ties omitted from square columns for simplicity

For more data, circle 91 on Inquiry Card

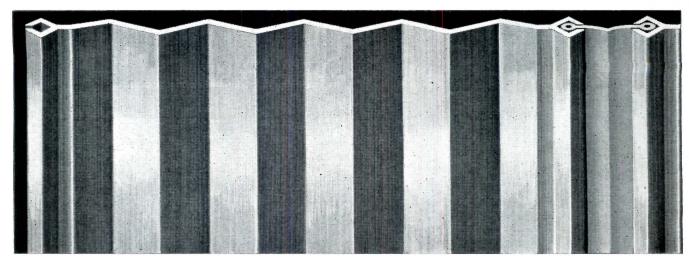

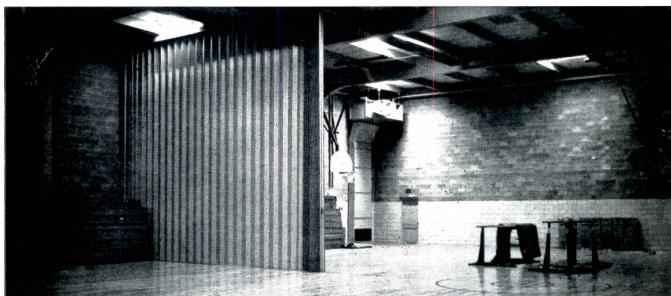

Now...a <u>metal</u> Modernfold for rugged use and beauty

• Few jobs are too rugged for this Splen-door metal partition... the newest addition to the Modernfold line. Even gymnasium abuse won't damage the 6½" anodized aluminum panels you see above. And those silent, pre-stressed vinyl hinges will withstand normal gymnasium punishment.

Yet, despite this strength and sizes up to 30 feet high, the Apex 66 shown here operates easily . . . thanks to ball-bearing trolleys on each panel. Best of all, this Splen-door model stacks in only one inch of space per foot of opening width . . . and costs about

NEW CASTLE PRODUCTS, INC. Dept. A292

New Castle, Indiana

Gentlemen: Please send information on Splen-Door

Woodmaster Modernfold partitions.

NAME

FIRM

ADDRESS

CITY

CO. STATE

40 per cent less than conventional gymnasium partitions.

With the addition of Splen-door, Modernfold now offers complete choice of designs and styles: metal partitions in either roll-formed steel with baked-on enamel finish or extruded aluminum with anodized finish . . . new Modernfold Woodmaster partitions with genuine hardwood panels (two widths to choose from) . . . and the traditional Modernfold models with steel frame and vinyl upholstery, in sound insuated (Soundmaster) and non-sound insulated styles.



NEW CASTLE PRODUCTS, INC. • NEW CASTLE, INDIANA
Manufacturers of "Modernfold" Operable Walls, Partitions and Doors; "Air Doors";
"Modern-Cote" Wall Coverings; "Peabody" School Furniture, and "Pyrox" Sheathed
Thermocouples, In Canada; New Castle Products Canada, Ltd., St. Lambert, Que,

Building Components

Application and Specifications of Materials and Equipment

INISHES FOR CABINET WORK

ecifications Recommended by the National Association of Store Fixture Manufacturers

onclusion. First part of this article appeared in August)

Toner finish for exposed hardod surfaces (continued):

Finish for fine-textured woods
Toner finish—plain*

Apply toner. Spray one light coat allel to the grain of the wood, foled immediately by a second coat even up coloration. The amount of er sprayed should create a uniform or without closing the pores of the

Spray water-white lacquer washt and dry.

Sand lightly with 6/0 opencoat asive paper. Dust off with air jet. oid cutting through to bare wood. In additional to wood should require ch-up with toner and washcoat relication.

Apply lacquer sealer and dry.

Sand with 6/0 opencoat abrasive. st with air jet.

Spray water-white lacquer topt and dry.

Spray second topcoat water-

te lacquer and dry.

Toner-glaze finish.*

Spray toner parallel to grain to form coloration. Dry thoroughly. Spray lacquer washcoat.

Sand lightly with 8/0 opencoat asive paper, parallel to grain, and t off with air jet.

Apply glaze in thin coat over all ed surface. Wipe in circular pate to deposit glaze evenly in small es. Follow by wiping with a clean color parallel to the grain. A unim color should be maintained rall. Deposits of glaze in corners similar places should be removed. Spray lacquer sealer and dry.

Sand sealer with 6/0 opencoat asive and dust with air jet.

Spray topcoat of water-white uer and dry.

either schedule for fine textured woods, if the is one having a high lacquer binder content, coating may be eliminated. Light sanding 8/0 opencoat abrasive paper should be used nooth toned surfaces before proceeding. Any through of toned surface should require reication of toner to match surrounding area resanding with 8/0 abrasive paper

material was prepared by GLENN P. BRUNEAU, rtment of Wood Technology, The University ichigan

- (h) Spray second topcoat of waterwhite lacquer and dry.
- 5. Opaque or pigmented finish for exposed hardwood surfaces:
- A. Opaque finish for coarse textured woods
- (1) Apply paste wood filler according to directions for filling under 1.A. (2).
- (2) Dry thoroughly.
- (3) Apply full wet coat of approved undercoating lacquer enamel. This undercoat shall be an appreciably different color from the finish coat to assure against skips in the spray pattern, and of a proper ground color with relation to the aforesaid finish coat. Dry.
- (4) Sand all undercoated surfaces with 5/0 opencoat abrasive paper or finer, to complete removal of all roughness.
- (5) Apply full wet coat of lacquer enamel. Dry thoroughly and scuff sand with 6/0 opencoat abrasive paper to remove accumulated roughness. Dust off completely with air jet.
- (6) Apply second coat of lacquer enamel. Dry completely.
- B. Opaque finish for fine textured woods
- (1) Follow exact procedure outlined for coarse textured woods (5.A.) but eliminate step (1), the filling operation.

6. Finishing exposed particle board:

- A. Natural finish
- (1) Follow procedure under 1.B.
- B. Stained finish
- (1) Follow procedure under 2.B.
- C. Opaque or pigmented finish
- (1) Follow procedure under 5.B.

7. Opaque or pigmented finish for exposed paper-overlaid particle board:

Follow exact procedure outlined under 5.B., except eliminate second lacquer enamel topcoat.

8. Finishes for exposed fiberboard:

A. Natural—Follow procedure outlined under 1.B. (water-white lacquer shall not be mandatory).

B. Opaque or pigmented finish—Follow procedure under 5.B. eliminating second lacquer enamel topcoat.

RUBBING AND POLISHING

For each wood material used, and each finishing schedule used, the rubbing and polishing method should be selected by the architect from the following systems. He should specify which areas (tops, sides, etc.) will be rubbed and/or polished.

1. No rubbing or polishing:

Unexposed interior areas, drawer sides and interiors, shelving, and similar parts should not require any rubbing or polishing, other than removal by fine abrasive paper of any roughness created by the finishing process used.

2. Steel wool-Dull satin:

A. 3/0 steel wool should be used parallel to the grain of the wood, to remove roughness and create an allover dull satin sheen in those areas specified by the designer.

(or) B. 4/0 steel wool should be used, parallel to the grain of the wood, to remove roughness and create an allover dull satin sheen in those areas specified by the architect. 4/0 steel wool will create a slightly higher luster than 3/0 steel wool.

3. Dull satin:

A. Machine or hand sand, with 320 grit silicon carbide abrasive paper, using a non-blooming lubricant. All rubbing should be done parallel to the grain of the wood. Follow with an even rub in long continuous strokes with 4/0 steel wool. All lubricant and rubbing slush must be removed. Surface shall be clean and dry before waxing.

(or) B. Repeat procedure in (A) above, except use 360 grit silicon carbide abrasive paper in place of 4/0 steel wool.

4. Period satin:

A. Machine or hand sand with 320

or 360 grit silicon carbide abrasive paper, using a non-blooming lubricant, until all orange peel and other irregularities in surface film are removed. Follow this by hand rubbing with 3-F pumice using a soft felt pad, in long continuous strokes. All residual pumice and rubbing slush shall be removed. Dry completely before waxing.

(or) B. Repeat procedure outlined in (A) above, but substitute 500 grit silicon carbide abrasive paper for the 3-F pumice. Rub in long continuous strokes parallel to the grain of the wood. Clean up thoroughly, dry and wax.

5. High sheen satin:

A. Sand, by machine or hand, with 360 grit silicon carbide abrasive paper, using a non-blooming lubricant, to remove all surface film irregularities. Follow with 4-F pumice by machine or hand, with soft felt rubbing pads. If a higher sheen is desired, small amounts of rotten-stone shall be added to the 4-F pumice.

6. High luster:

A. Sand surface, parallel to the grain, by machine or hand, with 320 or 360 grit silicon carbide abrasive paper, using a non-blooming lubricant. Follow with a final sanding with 400 grit silicon carbide abrasive paper to create an all-over fine scratch pattern. Irregularities in flat surfaces missed by these two operations should be rubbed by hand with soft felt pad, using 4-F pumice. Clean the surface so that no abrasive particles or pumice remain. Apply rubbing compound and buff with rotary buffer to all-over even sheen. Clean up excess compound and then polish lightly with rotary buffer and clean lambs wool pad. Care should be exercised in both the compounding and polishing operations to prevent burning or softening of finish by frictional heat.

FINISH FOR UNEXPOSED AREAS

1. Unexposed drawer surfaces:

A. Apply one coat of lacquer sealer on all inside surfaces of drawers and outside surfaces of drawer sides and back. Skips, in corners or elsewhere, shall not be allowed. When dry, hand sand with 6/0 opencoat abrasive paper to remove roughness. Dust thoroughly with air jet.

- 2. Accessible interior parts (shelves, partitions, etc.):
- A. Apply one coat lacquer sealer. Dry.
- B. Remove any roughness by scuff sanding with 6/0 open coat abrasive paper.

UNIFORMING OF COLOR

- 1. Used where noticeable color differences exist on a unit, or between units in the same group.
- 2. Uniforming color should be applied without obvious lap marks or streaks, and shall not obscure the grain of the wood.
- 3. Wherever possible uniforming should be done on the last sealer coat, followed by a protective topcoat.
- 4. Uniforming colors should be formulated to give excellent adhesion to the surface on which they are applied.
- 5. Uniforming colors should have fade resistance equal to that of the entire finish system used.
- 6. Application of uniforming color on the final topcoat, instead of the sealer, should not create a surface roughness or sheen different from that of the topcoat.

FIELD PAINTING

- 1. Large panels and other items which cannot be satisfactorily finish painted in the shop may be painted in the field when specified by the architect.
- A. All such items should be factory primed in a manner appropriate to the selected finish coat.
- B. Finish painting in the field should conform to the appropriate preceding paragraphs presented in this article and the previous one (August).

WORKMANSHIP; PREPARATION

Workmanship Specifications

- 1. All workmanship shall be the very best with all materials evenly and smoothly applied. Runs, sags, bubbles, brush marks, heavy orangepeel, and other detrimental surface effects shall not be allowed. All finishing shall be performed under expert supervision.
- 2. Unless otherwise specified herein, all materials shall be applied in strict accordance with printed directions of the finishing-material manufacturer.

 3. No finish shall be applied over a

preceding coat unless the precede coat is completely dry.

- 4. Doors and other components that are free to warp shall be given a specificient number of coats of finish material on opposite side and educate to equalize moisture gain or loss thus minimize warpage.
- 5. Holes for locks and catch str plates shall be touched up to ma adjoining surfaces.


Preparation for Finishing


- 1. Before any finish is applied, wood surfaces shall be thoroug sanded, by machine or hand sandi A. All sanding shall be done para
- to the grain of the wood.
- B. A succession of grit sizes shall used, each removing in turn all coarser grooves created by the peding grit.
- 2. For all exterior or exposed s faces, a final grit size of 4/0 or fi shall be used.
- 3. Sandthrough at edges, corners other areas of veneered surfaces so not be allowed, except for opa finishes.
- 5. Veneered panels having excess bleedthrough of adhesive due to l or cold-press gluing shall be admit for opaque finishes.
- 6. No cross-grain sanding mashall be admissible for any finish stem on veneered or solid wood mobers.
- 7. For surfaces to be water stain the 4/0 sanding shall be followed an application of glue sizing (part, by volume, hot animal glue to parts water at approximately 140 applied lightly and evenly over sanded surfaces. The sized surfa shall be thoroughly dried and the lightly sanded with 5/0 opens abrasive paper, by machine or ha to remove all raised grain created sizing. Water staining can then r ceed with a minimum of raised gra 8. All knife-edge corners shall carefully eased with 4/0 abras paper.
- 9. All wood surfaces shall be k free of dust, dirt, oil, adhesives, other substances which would in fere with normal finishing proced 10. On surfaces to receive ops finishes, dents, cuts, nail holes similar damage shall be filled, d completely and then sanded f with 4/0 abrasive paper. The fil material selected shall be one givexcellent adhesion to uncoated w surfaces.

Product Reports

For more information circle selected item numbers on Reader Service Inquiry Card, pages 233-234

GLASS FIBER BALCONY SCREENS OFFER PRIVACY AND SAFETY

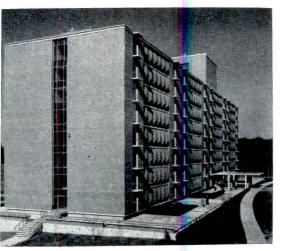



A uniformly textured façade for apartment buildings with balconies provided by screens of *Fiberglas* cloth, held in aluminum frames to form any desired pattern.

Fibers of glass are coated with veather-resistant vinyl to form colored yarns which are woven into a ightweight flexible cloth with a tenile strength of 140,000 psi.

The screens also give privacy and safety to balcony users. While the interior is shielded from outside view, people in the balconies can see outside. The screen panels also provide a safety barrier without the need for railings or bars. Heavy particles of dirt, insects and birds are screened out, while objects on the balcony cannot fall out.

Picture on the left is an apartment house in Atlanta by architects Heery and Heery. Center picture is an outside view of the panels used. Aqua and dark green were used to create a shadow effect. The picture on the right was taken looking out through a different set of panels. Owens-Corning Fiberglas Corp., Toledo 1, Ohio CIRCLE 300 ON INQUIRY CARD

ONE-PLY ROOFING FOLLOWS ALL CONTOURS




Veatherproofing of roofs of any conour, such as curved shells, folded lates and hyperbolic paraboloids, as well as domes and flat roofs, is possile with a one-ply built-up roofing ystem which can be used on any ailable or non-nailable flat or steep oof deck.

Ruberoid's T/N 200 combines asestos fiber with Du Pont's Tedlar

polyvinyl fluoride film. The roofing membrane is produced by forming asbestos fiber into asbestos felt to which *Tedlar* is then laminated.

Conventional application techniques, with either hot or cold adhesives, are used. A pressure-sensitive tape of the same plastic film is used to seal end and side flaps.

T/N 200 has an expected life of up

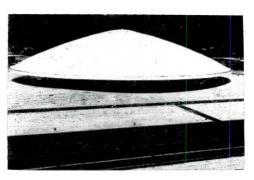

to 30 years. The surface film is resistant to most chemicals and solvents and impermeable to gas and vapors. It remains flexible at temperatures from -50 to 250 F. The Ruberoid Co., 733 Third Ave., New York 17, N. Y.

CIRCLE 301 ON INQUIRY CARD

more products on page 222

Office Literature

For more information circle selected item numbers on Reader Service Inquiry Card, pages 233-234

FIRE STATION DESIGN



Pictures, floor plans and descriptions of more than 90 fire stations from 26 states and Canada are featured in the new edition of "Fire Station Design."

Several combination fire and police stations are included in the 80-page book. The Circul-Air Corp., 565 E. Milwaukee Ave., Detroit 2, Mich.

CIRCLE 400 ON INQUIRY CARD

BUSINESS FURNITURE

Classic 1000 models of executive desks, secretarial desks and consoles are available in oiled walnut or teak with stainless steel trim. There is a range of sizes. General Fireproofing Co., Youngstown 1, Ohio

CIRCLE 401 ON INQUIRY CARD

VINYL BUILDING PANELS

Self-extinguishing, translucent rigid vinyl building panels available in several colors can be used for skylights, siding, roofing, partitions, ceilings, canopies, shelters and other decorative uses. Monsanto Chemical Co., 800 N. Lindbergh Blvd., St. Louis 66, Mo.

CIRCLE 402 ON INQUIRY CARD

PIPE INSULATION

Drawings and explanations of the mechanical systems of nine basic types of air conditioning and refrigeration systems are included in a 26-page booklet which tells what kind of insulation to use and where it should be applied to prevent excessive heat loss or gain and to stop condensation and frost formation. Armstrong Cork Co., Lancaster, Pa. CIRCLE 403 ON INQUIRY CARD

LOW WATTAGE LUMINAIRE

Circlelux Mark I incandescent low wattage luminaire is designed for outdoor residential lighting and lowlevel commercial installations such as motel walks, swimming clubs, etc. Data sheet gives details. Pfaff & Kendall, 84 Foundry St., Newark, N.J.*

CIRCLE 404 ON INQUIRY CARD

WATER COOLERS

(A.I.A. 29-D-42) Thirteen design categories of electric water coolers for offices, plants, cafeterias and other locations are illustrated in a 16-page brochure. Haws Drinking Faucet Co., Fourth and Page St., Berkeley 10, Calif.*

CIRCLE 405 ON INQUIRY CARD

LUMINOUS CEILING PANELS

(A.I.A. 26-A-9, 31-F) Translucent glass fiber reinforced plastic luminous ceiling diffuser panels are available in a variety of patterns. Filon Corp., 33 N. Van Ness, Hawthorne, Calif.

CIRCLE 406 ON INQUIRY CARD

DOOR CLOSERS



(A.I.A. 27-B) Norton Tri-Style line of door closers is described in a 16-page manual which includes photographs, dimensional drawings, sizing charts

and specifications. There are three mounting styles. Norton Door Closer Co., 372 Meyer Rd., Bensenville, Ill.*

CIRCLE 407 ON INQUIRY CARD

STORE LIGHTING

(A.I.A. 31-F-23) Advantages of incandescent and fluorescent lamps are discussed in terms of store lighting needs. This engineering report points out places where either should be used alone and where the two may be combined for good visibility and eye comfort. Holophane Co., Inc., 342 Madison Ave., New York 17, N.Y.

CIRCLE 408 ON INQUIRY CARD

SHOWER SYSTEMS

(A.I.A. 29-D-21) Engineering details and specification data for thermostatically controlled shower systems for residential, commercial, school, industrial and public recreational use. All feature a thermostatic water control which senses and corrects temperature and pressure fluctuations. The Powers Regulator Co., 3400 Oakton St., Skokie, Ill.*

CIRCLE 409 ON INQUIRY CARD

SCHOOL LIGHT FIXTURES



Plug-in lighting fixtures for schools are available for both pendant and surface mounting. Uni-Race the permanently mounted wireway can be installed be-

fore the room is completed with fixtures added after painting is done. Cleaning and repairs can be done in the shop, while spares are used in rooms. Gibson Mfg. Co., 1919 Piedmont Circle, N.E., Atlanta, Ga.

CIRCLE 410 ON INQUIRY CARD

PRECAST ROOF SLABS

Precast concrete roof deck slabs are presented in a catalog which has descriptions and specifications on all lines. Duwe Precast Concrete Products, Inc., Oshkosh, Wis.*

CIRCLE 411 ON INQUIRY CARD

TRIANGLE VENTS

Triangle-shaped vents have arched louvers for extra strength and rigidity and more effective weather protection. Leigh Building Products, Div. of Air Control Products, Inc., Coopersville, Mich.

CIRCLE 412 ON INQUIRY CARD

"CLEAN ROOM" REFERENCE

A bibliography on "Clean Rooms and Contamination Control" and "Sampling and Monitoring Air in Clean Rooms" has references to specifications, reports, articles speeches and books on these subjects Controlled Environment, Inc., 915 Great Plain Ave., Needham 92, Mass

POLARIZED LIGHT


Recommended uses and benefits of polarized light and photometric data on polarizing panels in commercial industrial and institutional lighting are included in an 8-page brochure Day-Brite Lighting Inc., 6261 N Broadway, St. Louis 15, Mo.*

CIRCLE 414 ON INQUIRY CAR

CIRCLE 413 ON INQUIRY CARI

*Additional product information is Sweet's Architectural File

more literature on page 266

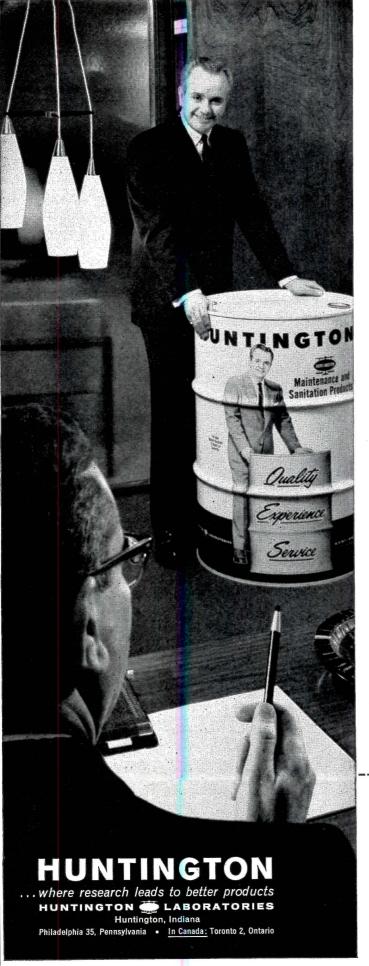

YOU SPECIFY THE FLOORING!

Let him

SOLVE THE MAINTENANCE PROBLEMS

Shoes are murder.

Stiletto-like high heeled slippers. Dress shoes. Work shoes. Day in and day out, they'll pound any flooring you specify... grinding in abrasive dust, dirt, even gravel... robbing it of its appearance and condition... leaving behind the scars of time and traffic.

How do you protect your building and your reputation against these floor-killers? Simple. Just hand over your floor maintenance worries and headaches to the gentleman behind the drum. He'll love it. Solving floor maintenance problems has been his way of life for an average of 19 years.

Your Man Behind the Huntington Drum has the ability and experience to create an *overall* maintenance program: for every area of your building . . . for every flooring material you specify. In his zeal, he'll even supervise the maintenance crews to make sure application is proper.

So why not call in our floor-oriented friend? Discuss with him the flooring you're about to specify, and dump the problem of its care into his lap. You'll lose a headache... and gain an ally.

FILL OUT AND MAIL THIS COUPON -

SEE OUR CATALOG
IN SWEET'S


Huntington Laboratories, Inc.

Huntington, Indiana

Gentlemen: I would like a Man Behind the Huntington Drum to call on me to discuss floor maintenance.

(Ask him to leave his drum outside.)

NAME		TITLE	
FIRM			
ADDRESS			
CITY	ZONE	STATE	

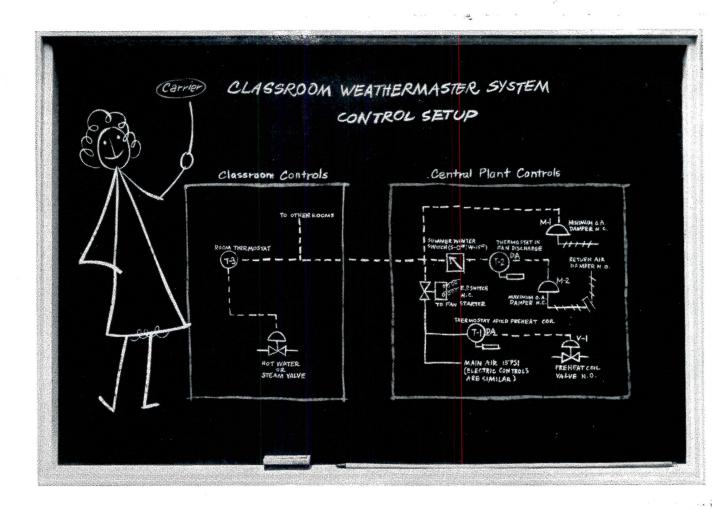

How to provide good control of school climate while greatly simplifying the control layout

Some systems suitable for schoolhouse heating, cooling and ventilation are a lot easier and less costly to control than others. A real jewel in this respect is the single duct, all-air cooling system featuring Carrier Classroom Weathermaster* Units.

This type of induction system requires only one room thermostat and one hot water or steam valve in each classroom. Equally important, the control setup in the central machine room is extremely simple (see above). With or without mechanical refrigeration, this approach assures the best possible automatic control of temperature in the classrooms.

Compare this control economy with other methods. For example, some types of classroom units


require these controls to do the complete job: 1 room thermostat, 1 low-limit thermostat, 1 hot water or steam valve, 2 sets of dampers, 2 damper motors, 1 relay. Multiply this battery of controllers by the number of classrooms and you get the true picture.

Simplicity of control is just one important advantage of the induction system approach to school heating, cooling and ventilation.

For more architectural and engineering facts on Carrier Classroom Weathermaster Units and the system they serve, write today for Carrier Bulletin 36BA86. Carrier Air Conditioning Co., Syracuse 1, New York.

**Reg. U. S. Pat. Off.



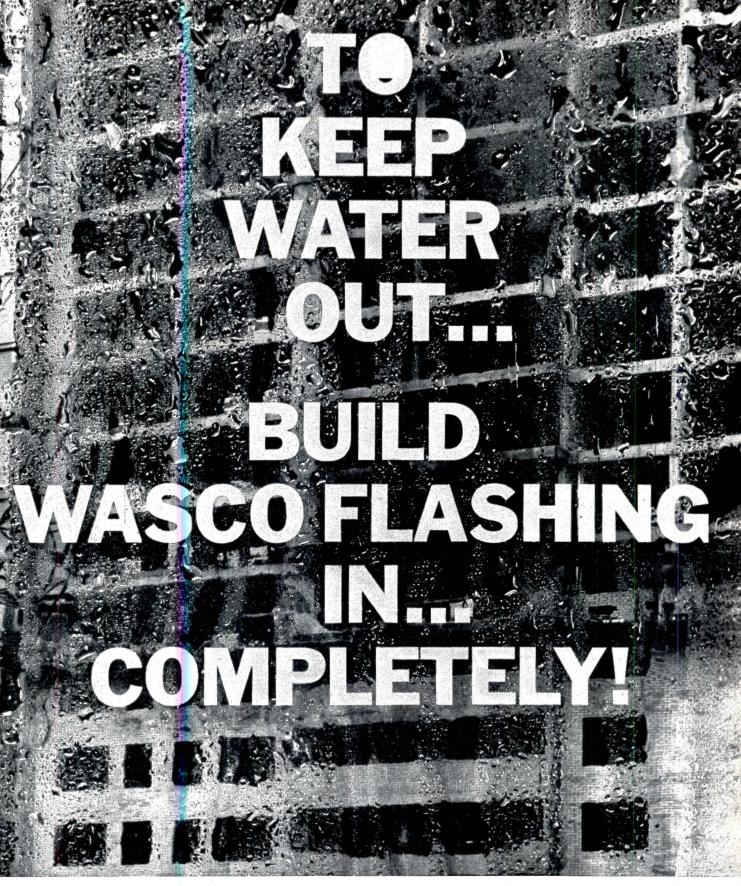

Moisture constantly seeks a point of access into every type of construction. It will never find weak spots if you have the right flashing in all the right places. • WASCO flashing, properly installed, is permanent insurance against water damage. Yet the cost of this complete WASCO protection is

generally less than 1/20 of 1% of total construction investment. ■ Only Cyanamid offers every kind of thruwall and spandrel flashing you need to keep water out — from parapet to




foundation. You can specify 14 types of flashings including copper-fabric, copper-asphalt, copper-lead, fabric, plastic and aluminum. For exceptional flashing problems, you are invited to consult the Cyanamid Engineering staff. For full product details, see Sweet's Architectural File 8g/Wa.

Product Reports

continued from page 217

ALUMINUM AND PLASTIC ROOM HAS RETRACTABLE WALLS

Flexible, clear, translucent plastic reinforced with aluminum rods is used for retractable walls and roofing in add-on family or private rooms or for patio coverings attached to existing




structures. Standardized panels are fire and wind resistant. Disappearing Retractawals operate as window shades manually or automatically. Guaranteed Weather, Inc., 514 Manatee Ave., W., Bradenton, Fla.

CIRCLE 302 ON INQUIRY CARD

WASHABLE FOAM FILTERS FOR SCHOOL VENTILATORS

Available for installation in classroom unit ventilators manufactured by John J. Nesbitt, Inc., are plastic foam filters fabricated from Scott industrial open-pore polyurethane



foam. The filters, washable in lukewarm water with mild detergent, require washing only about every two months in normal use. After being washed, filters are wrung out like a sponge and reinstalled immediately. They require no re-oiling and may be washed as often as necessary without reducing filtering efficiency. John J. Nesbitt, Inc., Philadelphia, 36, Pa.


CIRCLE 303 ON INQUIRY CARD

PRE-FAB FOUNTAINS AND WATERFALLS

Reflection pools and fountains of any size, complete with water sculpture, lighting, recirculating pumps and statuary, are made of lightweight fiber glass and crushed stone. All units are delivered complete and ready for immediate use. A wide choice of finishes and colors is available, including ceramic tile permanently bonded to pools with epoxy adhesives. Jabon Studios, 14847 Bessemer St., Van Nuys, Calif.



CIRCLE 304 ON INQUIRY CARR more products on page 22

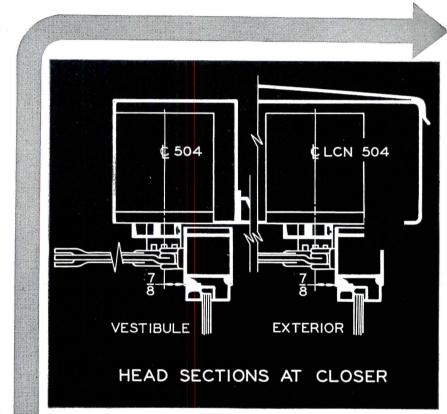

CONSTRUCTION DETAILS

for LCN Overhead Concealed Door Closer Shown on Opposite Page

The LCN Series 500 Closer's Main Points:


- 1. Efficient, full rack-and-pinion, two-speed control of the door
- 2. Mechanism entirely concealed; arm visible on inside of an out-swinging door
- 3. Hydraulic back-check prevents door's being thrown open violently to damage door, walls, etc.
- 4. Double lever arm provides maximum power to overcome wind and drafts
- 5. Arm may be regular, hold-open 90°—140°, h. o. 140°—180° or fusible link h. o. 90°—140°.

Complete Catalog on Request—No Obligation or See Sweet's 1962, Sec. 19e/Lc

LCN CLOSERS, PRINCETON, ILLINOIS

A Division of Schlage Lock Company

Canada: LCN Closers of Canada, Ltd., P.O. Box 100, Port Credit, Ontario

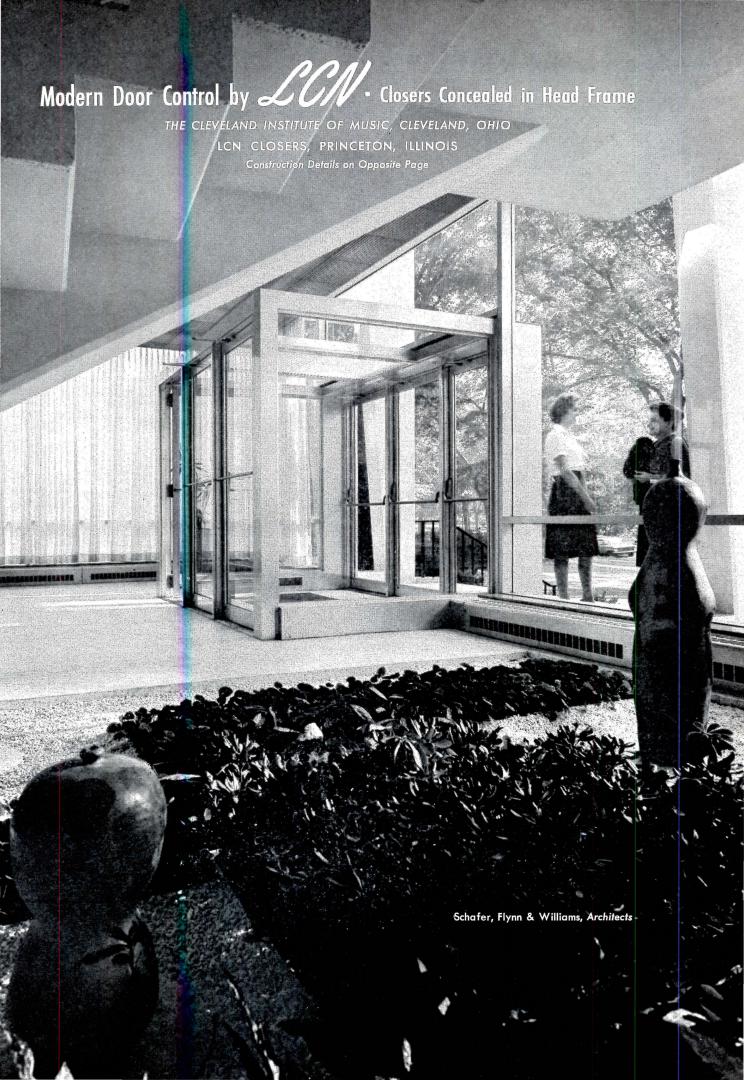

DuKane 🗓

DEPTH OF SERVICE

on-the-spot sound and communication system consultation, installation supervision and follow-up service!

Since 1922, DUKANE has built a coveted reputation for electronic excellence, beauty, dependability and long life in sound and communication systems. DUKANE Depth of Line and Depth of Experience is backed by Sales Engineering Distributor Depth of Service

A call to your local DUKANE Distributor starts the ball rolling. After a consultation with you regarding your sound and communication system needs, the DUKANE Distributor will make his recommendations to provide the most efficient system consistent with requirements and budget.

After specification, he follows and supervises the sound and communication system installation to completion. His training assures you proper installation for complete satisfaction.

Keeping the system operating to your customer's or client's complete satisfaction over the years is a responsibility your DUKANE Distributor assumes in a service contract. He also sees that customer personnel are efficiently schooled in operation and usage of the system.

The proof of his experience is the countless number of DUKANE Sound and Communication System installations which are turning profitable and high efficiency records in hospitals, schools, business, industry, churches, sports and recreation areas, hotels, motels, etc. 300 DUKANE Sales Engineering Distributors nationwide assure "phone call" nearness for consultation and service.

CONSULTATION SERVICE NSTALLATION SUPERVISION FOLLOW-UP SERVICE

assure "phone call" nearness for consultation and service.

WRITE TODAY FOR FULL DETAILS ON DUKANE DEPTH OF LINE IN SOUND AND COMMUNICATION SYSTEMS

NAME_______
TITLE_____
FIRM_____
STREET_____

DUKANE CORPORATION

Communications System Division DEPT. AR-92 / ST. CHARLES, ILLINOIS


BALLET LASTER DE PARIS Bold concepts in design demand skill, imagination and quality materials to transfer them into artistic achievements. Bestwall Gypsum Company provides plastering contractors with Gypsum Lath and Plaster products, reinforced with glass fibers, to create beautiful walls and ceilings with increased resistance to fire and cracks. Bestwall Gypsum Co., Ardmore/Pa. Plants and Offices throughout the U.S.





WHICH WINDOW

WOULD YOU SPECIFY?

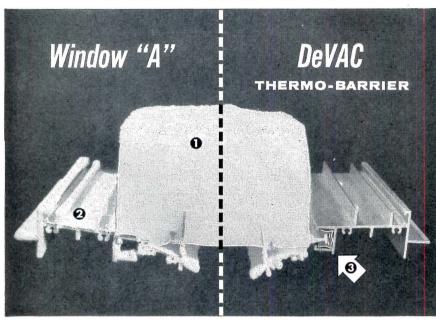

Dry ice is used at -240° to demonstrate conductivity of two aluminum window sections.
 Window "A" without Thermo-Barrier accumulates heavy frost and condensation.
 Thermo-Barrier in DeVAC window halts frost and condensation, keeps inside sill dry and free of moisture.

-240° Dry Ice Test Proves... DeVAC WINDOW IS SUPERIOR!

Why are leading architects and contractors specifying the DeVAC Thermo-Barrier window? This exclusive Thermo-Barrier feature is one reason. Exceptional construction is another.

Available in an extreme range of sizes, the DeVAC Thermo-Barrier window is now being used in a number of buildings ranging from residential to commercial. Available in double hung and glider.

OUR REPRESENTATIVE WILL BE GLAD TO GIVE YOU COMPLETE DETAILS.
WRITE OR SEE OUR CATALOG IN SWEETS

740 RIVER DRIVE. High-rise St. Paul apartment building features DeVAC Thermo-Barrier windows throughout.
Architect: Benjamin Gingold & Assoc.
General Contractor: Kraus-Anderson, Inc.

DeVAC, Inc.

10130 State Hy. 55 • Minneapolis, Minnesota Phone: Liberty 5-0241



For more data, circle 99 on Inquiry Card

Product Reports

continued from page 222

WOOD BRACKETS FOR LIGHTING

Madera, a fluorescent lighting devicto be mounted on either ceiling wall, has oil-finished wood surface and prismatic lens diffusers. Ceiling and prismatic lens diffusers.



model may be surface or stem mounted. Dept. M, Silvray Lighting, Inc. 100 W. Main St., Bound Brook, N. CIRCLE 305 ON INQUIRY CAL

ULTRA-THIN HI-FI SPEAKER

Syl-o-ette, an ultra-thin (4 in. depth) high fidelity speaker syste has low 500 cps crossover, so woofeneed not extend itself to reproduce both bass and mid-range frequencies. Three-dimensional frame cabin comes in walnut veneers and grilfabrics of hand-embroidered pet point, silk-screened neo-classic a and cane. Special hardware and easi removable base permit use on floor wall, horizontally or vertically. University Loudspeakers, 60 South Keisico Ave., White Plains, N.Y.

CIRCLE 306 ON INQUIRY CAN

UP-FLOW, DOWN-FLOW FURNACES

A new series of up-flow, down-flo furnaces in the 200,000 to 750,00 Btuh range are available for cor mercial and industrial building hea ing applications. Up-flow mode designated U-Pak, are designed wi cabinet blower on the bottom as heater on top, return air bein brought in either at lower back from underneath, discharge air take off vertically at a top back duct co nection. On down-flow models, call D-Pak, cabinet blower is on top as heater is on bottom. Discharge air taken off vertically at a bottom ba duct connection. Both models come two sizes. Reznor Manufacturis Company, Mercer, Pa.


CIRCLE 307 ON INQUIRY CA


more products on page 2

LOWEST MAINTENANCE...DURABLE...EXCLUSIVE FINISH...WIDEST CABINET SELECTION

NATIONALLY PREFERRED FOR APARTMENT KITCHENS









From coast to coast, border to border GENEVA is the preferred kitchen for apartments — and with good reason.

LOWEST MAINTENANCE — Cost studies prove Geneva kitchens require far less maintenance than competitive products . . . a consideration extremely important to apartment owners.

DURABLE—Geneva kitchens retain their original beauty for years and years - even when subjected to the severe abuse of renter families.

EXCLUSIVE FINISH...CHOICE OF COLORS— Only Geneva offers IMPASTO, the non-gloss textured finish. Attractive, durable, stain resistant, cleans with a damp cloth. Choice of many fashion colors.

WIDEST CABINET SELECTION — Geneva offers the widest line of standard cabinets . . . permits designing to the specific room dimensions at no price penalty.

EXPERIENCED ASSISTANCE — A factory trained Geneva specialist will be happy to assist you on kitchen design . . . is your right arm on supervising installation.


WRITE FOR LITERATURE — Use the coupon


GENEVA MODERN KITCHENS

Division of Acme Steel Company

	GENEVA MODERN KITCHENS Dept. AR-9-62, Geneva, Illinois Please send me free literature.			
/	Name			_
/	_Address			
	City	Zone	State	


For more data, circle 106 on Inquiry Card

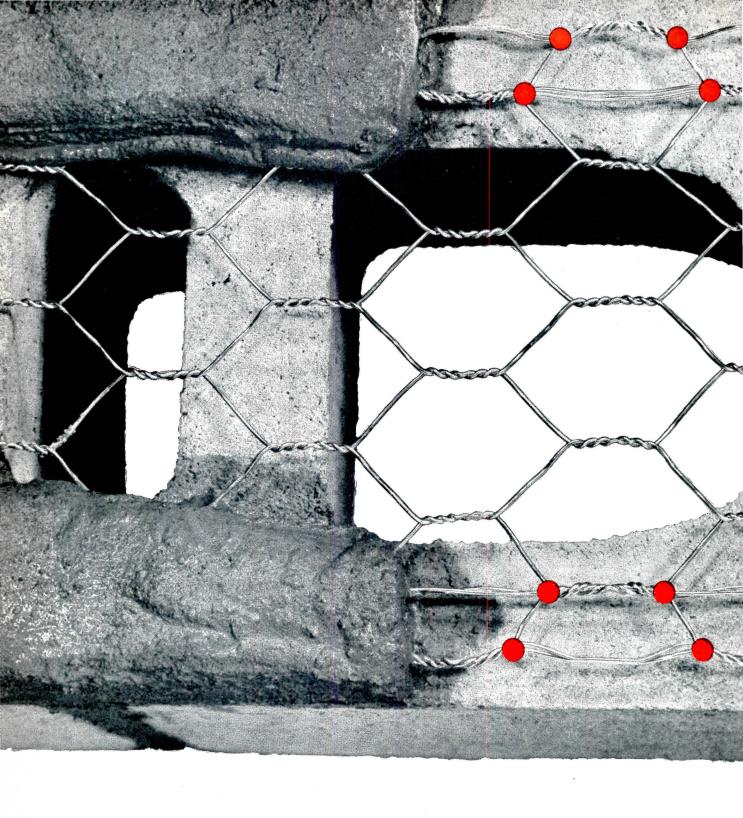

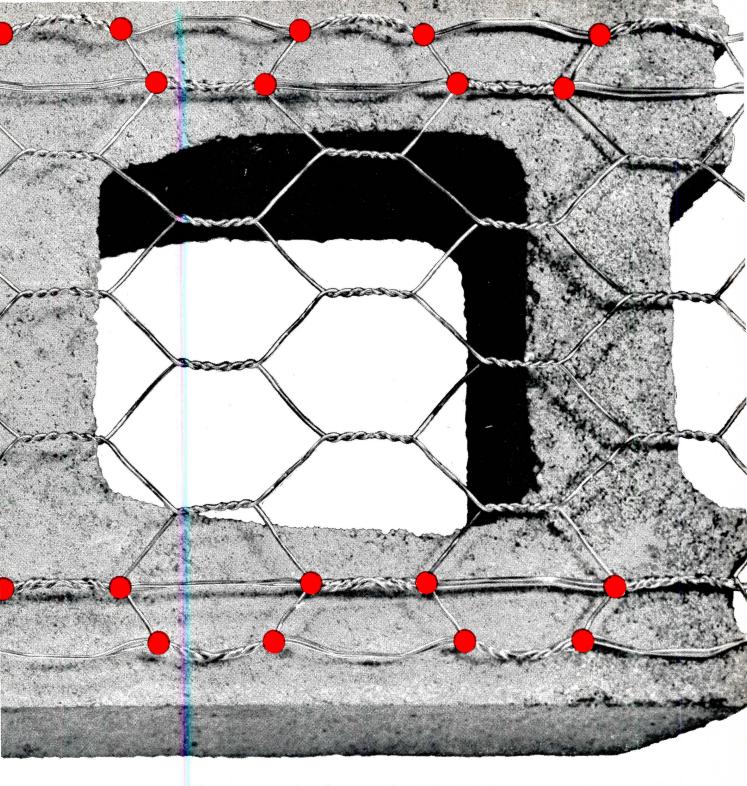

28 mortar locks to the block foot with Keywall reinforcement. The more locks, the more resistance to cracks resulting from shrinkage. Movement is restrained at each of Keywall's mortar locks. No one lock has to restrain more than the movement in 3/4" of block. That's the kind of reinforcement that works.

MORE LOCKS TO THE BLOCK WITH KEYWALL

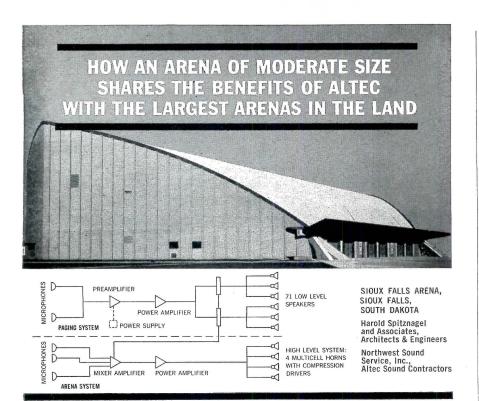

Altee's functional simplicity made it possible for the moderately-sized civic arena in Sioux Falls, population 65,000, to enjoy sound reproduction equal in quality to the largest structures of its type. Thanks to Altec high efficiency speakers, only *two* power amplifiers—both of medium power output—are used. Within the arena, only four Altec multicell horns provide clear voice reinforcement regardless of high ambient noise levels.

The advantages of simplicity—or, in this case, the ability to do the best job with a minimum of equipment—are obvious. Less obvious are the reasons behind Altec's distinctive capability to deliver functionally simple, straightforward systems of highest quality and durability, at or below competitive price. What are the reasons? Here are a few:

CUSTOM "BUILDING BLOCK" SYSTEMS: Altec sound systems are "job assembled" to meet the exact requirements of each installation. Unlike the so-called "multipurpose" pre-packaged systems, Altec offers a selection of services to perfectly fit no more and no less than the actual needs.

SPECIALIZED SERVICES: Altec—with over three decades of experience in theatre and entertainment sound equipment—has translated many new concepts in specialized services. For example, Altec "NOALA" (Pat. Pend.) automatically increases output level to override thunderous cheering of enthusiastic crowds. This device is now considered essential for modern air fields, industrial plants, arenas and stadiums, and other locations where changing high noise levels are common. Altec "SEQUR" (Pat. Pend.) provides the most nearly perfect insurance against power amplifier failure in a system, ending forever the embarrassment of "no sound" and the fear of admissions refund. Altec "REVOCON" (Pat. Pend.), a remote volume control system, is the only device of its type that permits remote control of the entire sound system from any location without affecting sound quality in the slightest.

UNITY OF DESIGN AND PRODUCTION: Each product bearing the Altec label was designed and manufactured by Altec. Hence, only Altec can meet this vital specification: "... all products must be of the same manufacturer."

You can offer your clients the benefits of functional simplicity by specifying a custom Altec sound system. To get started, merely call an Altec Sound Contractor (see Yellow Pages) or write for complete information to Dept. AR-9.

See Sweet's: Architectural File 33a/AL . Industrial File 17f/AL

P.A. by Altec means Perfect Audio



ALTEC LANSING CORPORATION

A SUBSIDIARY OF LING-TEMCO-VOUGHT, INC.

1515 SOUTH MANCHESTER AVENUE, ANAHEIM, CALIFORNIA

For more data, circle 108 on Inquiry Card

Product Reports

continued from page 226


FIRE DETECTION COMBINES WITH HOME INTERCOM

Model 42 residential Detecto-Comprovides around-the-clock fire detection throughout the house and carries two-way voice messages between any number of stations. A three-transistor amplifier is powered by the front door chime transformer and does not need a warm-up. Callers can talk into an outdoor remote station answered from any indoor station. Push-buttons at indoor stations open door. Fasco Industries, Inc., Rochester 2, N. Y.

CIRCLE 308 ON INQUIRY CARD

WALL BRACKETS FOR OUTDOOR, INDOOR LIGHTING

Triangalite, of cast aluminum and anodized finish, is available in 100 and 200 watt sizes. Both will accommodate either triangular glass or




conventional round globe. Cast aluminum guards and vapor-tight wiring boxes are available for all units. A choice of three colors is offered in an epoxy luster finish: satin aluminum brass or copper, or an anodized satin aluminum finish. Moldcast Mfg. Co. 236 South St., Newark 14, N.J.

CIRCLE 309 ON INQUIRY CARI

COMPUTING SLIDE RULE


Deci-lon, a new engineering-science slide rule, built on the principle of the Deci-trig, features 26 scales, extended calibrations, and a redesigned easier-to-manipulate indicator. These features provide greater consistency and faster readings. Keuffel & Esser Co., Hoboken, N.J.

CIRCLE 310 ON INQUIRY CARI more products on page 244

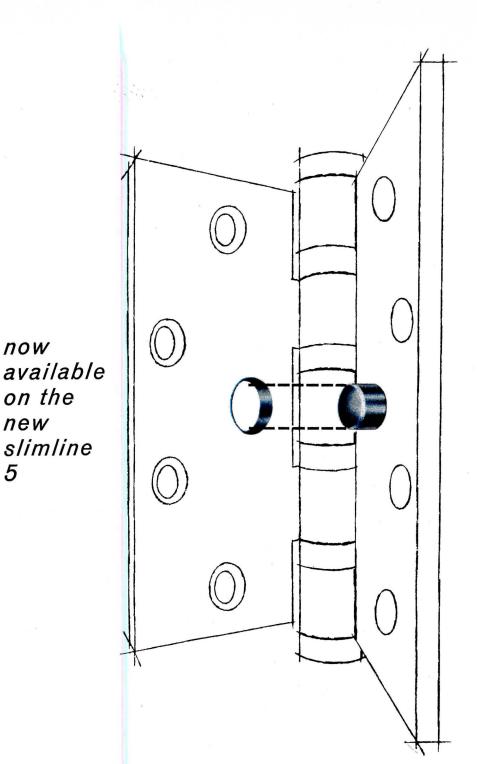

HAGER'S SYNCRETIZED

Brings the beauty and flawless performance of the new Slimline 5 into security job specifications. Drive out the pin! Knock off the knuckles! The Hager Safety Stud stays "buried" beyond the prowler's reach . . . holds fast. The hinge leaves never part until the door is unlocked.



now


new

5

on the

1. Door open. Stud is unnoticed.

2. Door closed. Leaves interlock. Metal stud prevents door movement in any direction.



Five knuckles (greater strength both vertical and lateral)...Four ball bearings (doubles the bearing surface in either hinge position)...Slimline barrel dimension (design preference in today's architecture)

Write Hager, or contact your Hager representative

C. HAGER & SONS HINGE MFG. CO. ST. LOUIS 4, MISSOURI


HAGER HINGE CANADA, LIMITED 61 Laurel Street East • Waterloo, Ontario

Everything hinges on Hager®



For more data, circle 109 on Inquiry Card

* marri

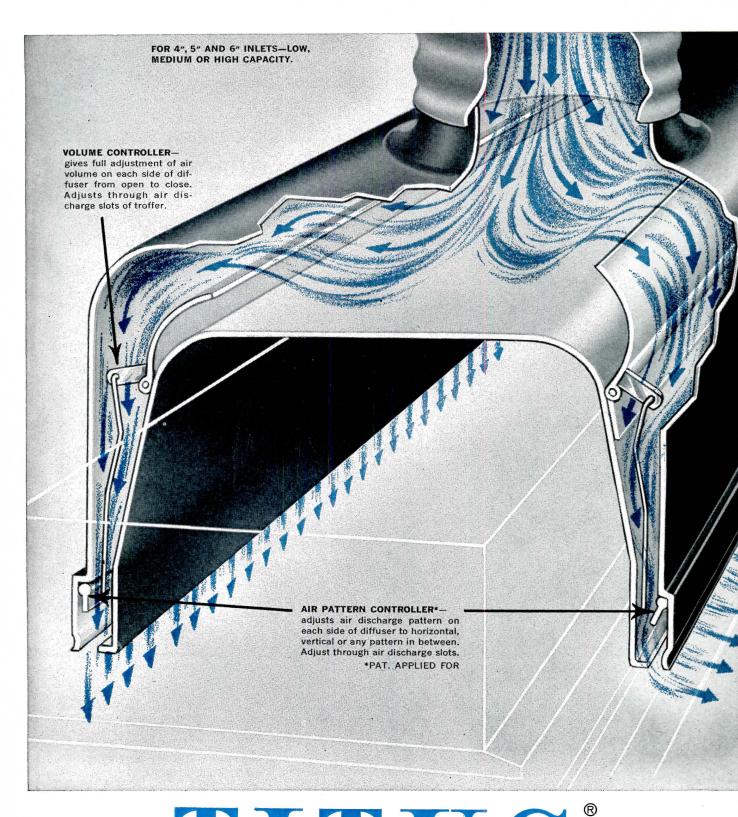

by

World leader in the design and manufacture of air distribution equipment


NEW complete line of CEILING DIFFUSERS

Today's first for <u>unrestricted</u> use with modified light troffers; superior air distribution on any application

Here, for the first time, is a line of air diffusers that can be specified *entirely independent* of the light troffer* selected! This means architects, engineers and contractors can now be sure of the finest air distribution . . . regardless of modified troffer used . . . regardless of ceiling application. *(Contact Titus reps for names of qualified light troffer manufacturers.)

LOOK AT THESE BENEFITS YOU GET ONLY WITH THE NEW TITUS AIR DIFFUSING UNITS:

- 1. Completely adjustable air pattern. The air pattern on each side of each Titus unit can be quickly, easily adjusted to a horizontal discharge, a vertical discharge, or to any pattern in between, to exactly suit the space requirements. Simply adjust pattern controller through troffer air discharge slot for pattern desired.
- 2. Complete air volume control . . . from open to closed position. Adjusts through air discharge

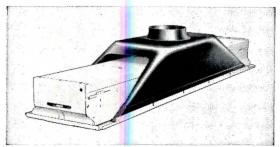


• MODELS LT-14 and LT-24. For 1 x 4 and 2 x 4 troffers. Feed from top. 4", 5" or 6" inlet . . . low, medium or high capacity. Each side has individual, fully adjustable air pattern and air volume control. Use as supply or return units.

slot of troffer. Both air pattern controller and volume controller can be adjusted anytime before, during, or after diffuser installation.

- 3. Diffusers are of one-piece, air-tight construction. This means faster, easier, lower-cost installation—maximum isolation of air diffuser from light troffer. Because diffuser is independent of troffer, heat from troffer is dissipated uniformly to ceiling space—no supply or return air can enter troffer. This assures maximum light output and color stabilization.
- **4. Today's only complete line.** One-piece models to fit every need. Furnished in units that feed air from top, or in single and double units that feed air from side. Models to fit 1 x 4 and 2 x 4 light troffers.


Don't settle for "second best" air distribution ... SPECIFY TITUS DIFFUSERS AND BE SURE OF *THE* BEST ... regardless of modified light troffer you select.

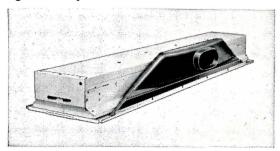

• MODEL LT-10. For use as single unit or double side unit. Individual feed, individual air pattern and volume control. Can be used with both sides supply or return... or with one side supply and other return. Snaps into troffer.

MAIL COUPON FOR NEW CATALOG

TITUS MFG, CORP., WATERLOO, IOWA Branch Mfg. Plants — Hialeah, Fla., Terrell, 7	Texas
() Rush new Catalog on Titus Ceiling Diffus	ers for unrestricted use with light troffers.
() Have representative call.	
NAME	
COMPANY	
ADDRESS	
CITY	STATE

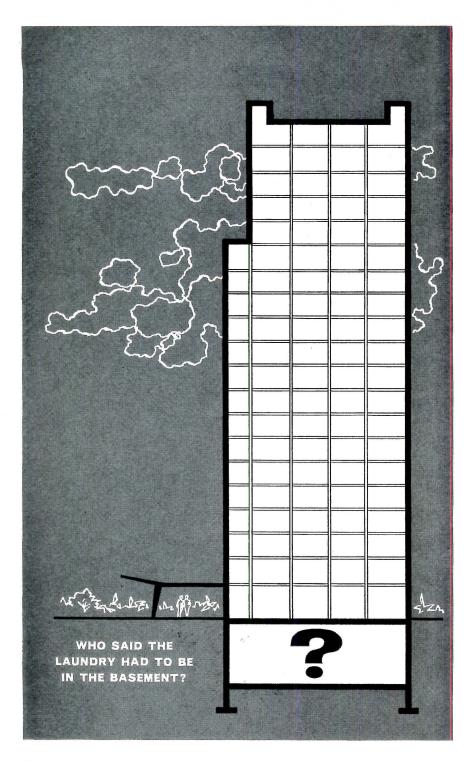

■ If it makes sense to locate a laundry on an upper floor, go ahead. Now Troy® offers an optional torsion bar suspension system for washer-extractors that positively eliminates vibration problems . . . positively eliminates the need for a concrete foundation. Any size Troy WX® Washer-Extractor can be installed on any type of floor that has sufficient structural strength to support the loaded machine.

This is a Troy exclusive—and there are other flexible advantages available only with Troy power laundry equipment. And Troy provides you with complete laundry analysis, planning, layout and specifications. Call your Troy representative . . . write directly to Troy . . . see the Troy catalog in Sweet's.



TROY LAUNDRY MACHINERY

EAST MOLINE, ILLINOIS


For more data, circle 111 on Inquiry Card

Product Reports

continued from page 240

LABORATORY TOPS

Gregg laboratory tops are seamless and fully formed in sections up to 10 ft in length. Longer lengths are manufactured with factory fitted "lock joints" and sealed with chemical resistant caulking. Surfacing of *Chem Guard* is a non-porous material de




signed to withstand all conditions normally present in research, commercial or educational laboratories. Its wearing surface extends through to the reinforcing material, and is free of fibers. Gray tone offers a nonglare working area. A heavy resing overlay insures a long usable life Surface scratches can be sanded on buffed with steel wool. Severe damage is repaired with a color-matched caulking compound. Gregg Laboratory Tops, Nashua, N.H.

CIRCLE 311 ON INQUIRY CARI

RECESSED LIQUID SOAP TANK

Two-gallon liquid soap tank, N. SH-2 for gravity feed systems is recessed in the wall with only the flush mounted, stainless steel front ex-



posed. White enamel tank swings our and is filled from the top; requires no funnels to fill. Soap level indicator is on front of tank. American Dispenser Co., Inc., 860 Broadway, New York 3, N.Y.

CIRCLE 312 ON INQUIRY CARR more products on page 256

Rand microfilm systems in these two pages

Get your copy of the microfilm story of the year

Read the amazing facts about the Remington Rand microfilm system that gives you absolute control of plans, blueprints, and drawings

If you had a dream system for filing the thousands of drawings, plans, and sketches that pile up on architectural jobs, what would it give you?

- 1. Random access to any drawing instantly, where once it would have taken hours of searching.
- 2. Wide distribution of any single drawing—without time-consuming, costly duplication.
- 3. Protection against loss or destruction—with filing of a simply-made film duplicate in a safe, remote place.
- 4. Low cost, high efficiency, tight control.

Remington Rand brings this dream to reality for architectural firms. It's all described and illustrated in our newest brochure, *Absolute Control*. Use the postcard to get your free copy of this microfilm story of the year.



ow to enjoy all the benefits of microfilm without setting up your own microfilm department

When Remington Rand does your microfilm photography, processing and film indexing, you free yourself of microfilm work and enjoy its benefits. Look at the big job Remington Rand can do for you:

- 1. We photograph on microfilm all the records, drawings, and documents you designate—and we do it either in your office or in our lab. (What a great way to get rid of your backlog of material due for microfilming!)
- 2. We process the film, make an extra set—if you wish—for storage in some remote, secure


place, to provide extra protection for your business records against fire, flood, and disaster.

3. Drawing on our decades of experience in data indexing systems, we organize your finished microfilm into indexed reels, aperture cards, or jackets, all ready for instant finding and filing in a compact storage cabinet.


You get all this service for pennies a paper, in any part of the country, from the Remington Rand nation-wide network of photo labs. For more information about our microfilm Photo Lab Service, use the post card.

Remington Rand Office Systems

DIVISION OF SPERRY RAND CORPORATION, 122 EAST 42ND ST., NEW YORK 17, N.Y.

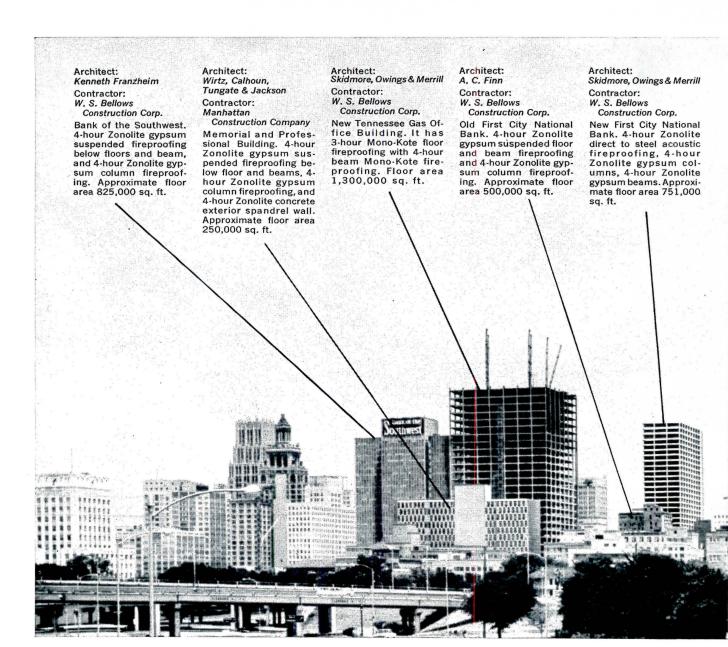

Newest product appearing in Housto

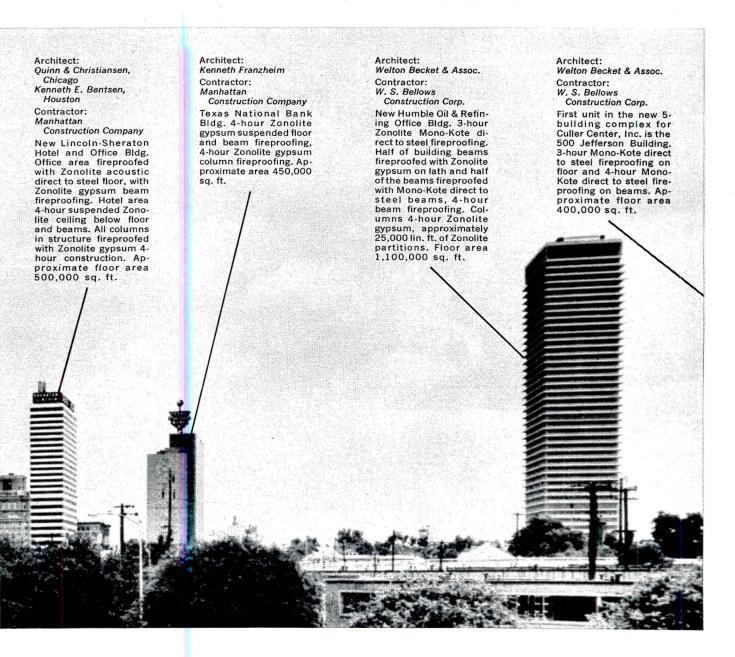

"Zonolite Row:" Mono-Kote fireproofing

A few of the older buildings of Houston's skyline do not have Zonolite products built into them. However, it is doubtful whether many of the future structures will exclude new Mono-Kote, the direct-to-steel, spray-on fire-proofing for floors and beams.

Mono-Kote just makes good sense.

To begin with, the material cost is low. And you need less of it than comparable materials to get the same fire ratings. For example, to get a 3 hour fire rating on beams with other materials, they must be built up

from $1\frac{1}{16}$ " to $1\frac{3}{4}$ " thick. But Zonolite Mono-Kote need be only 1" thick to get the same rating.


Application is faster, too. Mono-Kote builds up thick on the first pass, without drop outs or slides. In minutes it's dry enough for the second pass. And when the job is finished, you'll find that Mono-Kote has dried hard, not punky.

Specifying Mono-Kote just makes sense.

For complete information write us for Bulletin PA-53. Zonolite® Company, 135 S. LaSalle Street, Chicago 3, Illinois.

ZONOLIT

For more data, circle 118 on Inquiry Card

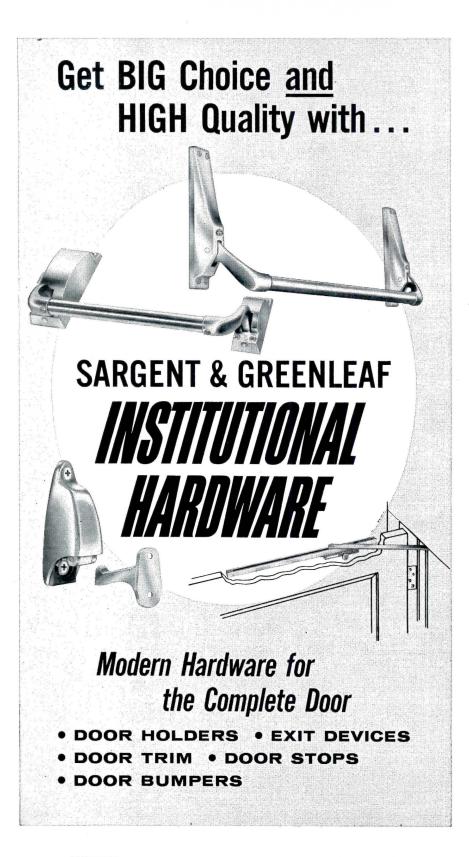

WRITE today for our Full Line INSTITUTIONAL HARDWARE literature kit.



SARGENT & GREENLEAF, INC.

ROCHESTER 21, NEW YORK

For more data, circle 119 on Inquiry Card

Product Reports

continued from page 250

MOVABLE PARTITIONS NEED NO TOOLS TO ASSEMBLE

Office enclosures can be erected rapidly with movable partitions featuring precut panels and posts attached by a speed latch. Called *Mowalco Speed Set Glazed Rails*, the partition system is assembled by screwing extruded aluminum channels to the ceiling and floor and by sliding posts and panels into the channels and fastening them together. Doors and windows may be incorporated at any point in the as sembled wall. *Movable Walls Corp.* 565 E. Edna Place, Covina, Calif.

CIRCLE 316 ON INQUIRY CARI

PRODUCT BRIEFS

Durable coating, called Aroflint 505 forms plastic film which adheres to masonry, metal, wood and other surfaces. Archer Daniels Midland Co. 733 Marquette Ave., Minneapolis 40 Minn.

CIRCLE 317 ON INQUIRY CARI

Residential intercom system car carry six remote units. Lower half of station face plate is a pressure switch. General Dynamics Corp., One Rockefeller Plaza, New York 20, N.Y.

CIRCLE 318 ON INQUIRY CARL

Beam-controlled mercury vapor lamps have their own metallic reflectors built into the bulb, are available in 400-watt R60 bulb and 1000-watt R80 bulb sizes. Westinghouse Electric Corp., Bloomfield, N.J.

CIRCLE 319 ON INQUIRY CAR

Sheet vinyl flooring material, called *Tracino Vinyl Corlon*, has moisture resistant backing to permit installation below grade. *Armstrong Corlompany*, *Lancaster*, *Pa*.

CIRCLE 320 ON INQUIRY CAR

Aluminum fencing system 8-ft-high encloses residential-area electrica substations. Reynolds Metals Co. Richmond, Va.

CIRCLE 321 ON INQUIRY CAR

Electric baseboard convector ha beveled shape which prevents drape or furniture from blocking air intak or discharge. Circle-Air Industries Inc., 244 Herkimer St., Brooklyn 17 N.Y.

CIRCLE 322 ON INQUIRY CAR


ADVAN-guard® is a thermally actuated automatic reclosing protective device sealed in the ballast housing. It is sensitive to voltage and current as well as temperature and protects against excessive voltage supply . . . internal ballast short circuiting . . . inadequate lamp maintenance . . . improper fixture application and eliminates the need for individual fixture fusing.

ADVAN-guard® is preset to trip out automatically whenever the Fluorescent Lamp Ballast operates at abnormal temperatures. When heat decreases to normal operating temperatures, ADVAN-guard® resets automatically and the ballast resumes normal operation. Through this continuous protection the full life of ADVAN-guard® Fluorescent Lamp Ballasts is realized. Only ADVAN-guard® ends premature destruction and unnecessary replacement labor costs.

ADVAN
THERMAL PROTECTION



A /ANCE OFFERS A CHOICE OF BALLAST PROTECTION





Advance FUSE-LINK is a temperature sensitive non-resetting protector built into the fluorescent lamp ballast. It is sensitive to heat and designed to open when the ballast is subjected to high temperature from any internal or external cause. The capacitor utilized in the FUSE-LINK ballast line also incorporates a thermal link which will open whenever the capacitor is subjected to abnormally high temperatures.

FUSE-LINK Fluorescent Lamp Ballasts protect against ballast leakage and end-of-life hazards. When a condition occurs that causes either or both links to open . . . the ballast is destroyed and must be replaced.

That's the protection story, ADVANCE offers a choice!
Your ADVANCE Sales Engineer will be happy to help you make that choice.
Call him or write today.

"The Heart of the Lighting Industry"













the YORK SUNLINE Roventilates...allow



SOLUTION

The York SUNLINE Air Conditioner may be installed anywhere on the roof, not necessarily over the area to be conditioned; unit may also be located on the ground, outside building.

Here's the most advanced way to provide a better business climate store, factory, office . . . any single-story commercial building! It York SUNLINE, a compact, all-in-one Roof Top Air Conditioner provides crisp, dry cooling in summer . . . gentle, even gas heating in v . . . tempered, filtered air in every season of the year.

Complete freedom of design! The York SUNLINE is a single, counit for mounting on the building roof. It may be located anywhere croof—not necessarily over the conditioned space. And it may be inson the ground, outside the building, where a roof top location is n sired. Unit may be installed with or without ducts to meet a wide v of design requirements. No furnace or power room is needed, so the more usable interior space.

Easy to install, the York SUNLINE Air Conditioner is delivered f wired and piped, with all controls mounted. The compressor is herme sealed and rubber mounted for long service and quiet operation. A s





op Air Conditioner that heats, cools, Implete design freedom!


re of the York SUNLINE unit is <u>low ambient cooling</u>: it will provide ag even when the outside temperature is as low as zero—to compenor heavy occupancy during peak business hours.

ahead with York when you plan air conditioning for any type of ing. For over 75 years, York has pioneered major advances in conting air for comfort and process. For complete facts on the York LINE Roof Top Air Conditioner, see your York Representative; or York Corporation, York, Pennsylvania.



ANOTHER
YORK SOLUTION!

A York Heat Pump uses only electricity and air to heat and cool any type of building. May be located almost anywhere, from basement to rooftop; no space-taking fuel storage.

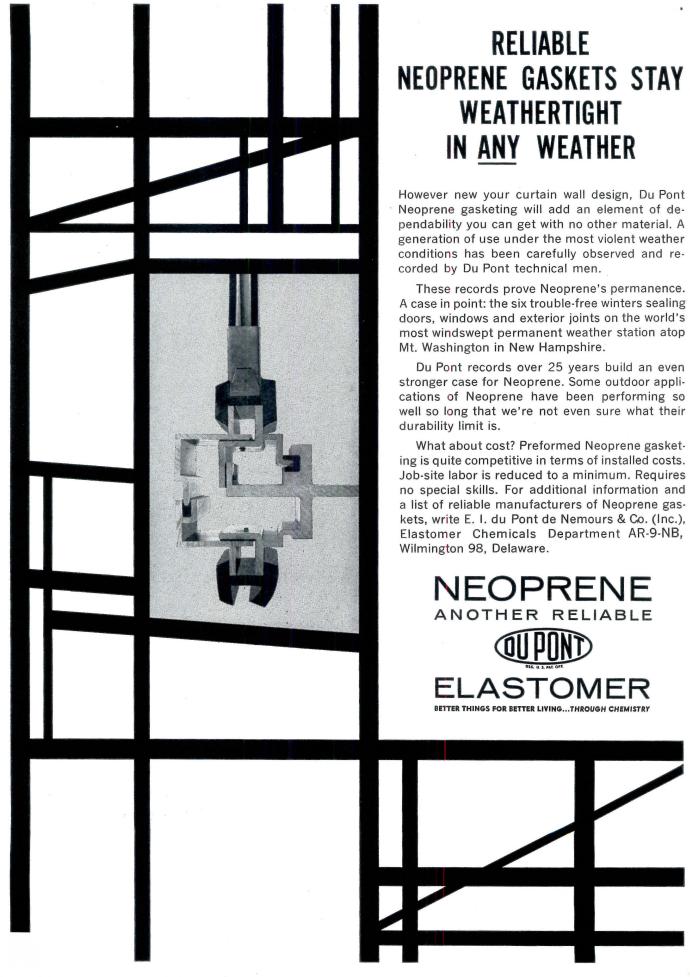


RCHIR CORD TRAVERSE NO. 9041 HAND RAVERSE NO. 9043 HAND RAVERSE NO. 9044 HAND TRAVERSE NO. 9045 CORD TRAVERSE NO. 9040 HAND TRAVERSE NO. 9042 CUBICLE

NYLON CARRIERS

CUBICLE HOOK

BALL BEARING

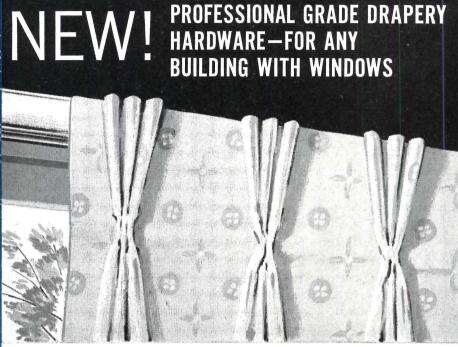

Six designs of rugged extruded anodized aluminum track and parts, for bracket, surface or recessed mounting in residential and non-residential structures.

Beauty of profile and extreme flexibility of application are keynotes of this completely new line of drapery hardware. Kirsch ARCHITRAC was developed for, and in collaboration with, registered architects. Now it is easy—and logical—to include drapery hardware in planning 'most any structure having windows.

Scores of prestige installations in apartment houses, office buildings, hospitals, laboratories, dormitories and fine custom-built homes attest the sweeping acceptance now being given Kirsch ARCHITRAC after three years' development.

Nylon-encased ball bearing pulleys and carriers ensure years of smooth operation, even under humid and salt-air conditions.

Full range of types - for drawcord or cordless operation-for bracket, surface, or recessed mounting.

Clean, simple profile and satinfinished beauty compatible with modern aluminum windows and sliding glass doors. Designed for widespread use in commercial, institutional and residential structures.

Made in America - to highest standards — for professional use — by Kirsch Company, the long-established world leader in the manufacture of high grade drapery hardware.

Nationwide consultation service and product availability

Special illustrated catalog in Sweet's; see it, or write for a copy. Ask for architect's priceestimating information, too.



KIRSCH COMPANY, 737 PROSPECT ST., STURGIS, MICHIGAN

DESTIGN DISTINGUISHED ENTRANCES IN ANY CONTEMPORARY STYLI



Marshall Savings & Loan Association, Riverside, III. B. T. Moravec, Architect

Heavy-duty all-glass HERCULITE Doors are made of shock-resisting PPG Tempered Polished Plate Glass to give strength and durability. They are available in a wide range of standard sizes, in thicknesses of ½ in. and ¾ in.



S&W Professional Building, Coral Gables, Florida. Leroy K. Albert,


Stylish, aluminum-framed TUBELITE Doors is an exclusive interlocking feature to assure rity. Exposed seams and fastenings are eliminable dovetailed, hollow construction. A reinforstructural channel is available when require


aplicity of line and appealing design give Modern Doorways by a the look of distinction and elegance that naturally fits in with ay's varied architectural requirements. An extensive range of sizes styles gives you almost limitless design flexibility.

G offers three basic doorway units—HERCULITE®, WEST and ELITE®—each with distinctive characteristics. A complete PPG brway Package includes frame, all hardware required for installation, —when desired—the PITTCOMATIC® automatic door operator.

complete information, contact your PPG Architectural presentative. Also, see Sweet's Architectural File, Section 16e.

ITH MODERN DOORWAYS BY PPG

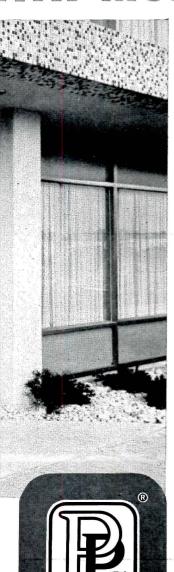

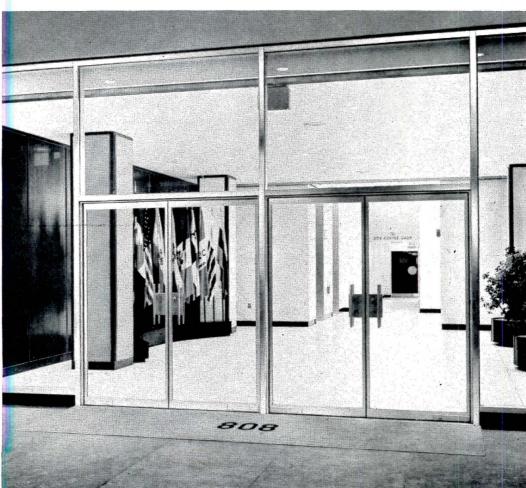

808 Office Building, Washington, D.C. Vlastimil Koubek, Architect

Elegant, slender-framed WEST Tension Doors have 1/2 in. glass held under tension within the metal frame. Result: a strong, serviceable unit that does not sag, rack, or get out of alignment. Available in aluminum, bronze, and stainless steel.

Pittsburgh Plate Glass Company

Paints · Glass · Chemicals · Fiber Glass In Canada: Canadian Pittsburgh Industries Limited

For more data, circle 124 on Inquiry Card

Hammermill-an example of high efficiency air utilization



Consulting Engineers, Daniel, Mann, Johnson & Mendenhall; Air Conditioning Contractor, A. A. Samuels Sheet Metal Co., Inc.

All outside air brought into the new administration building of the Hammermill Paper Company passes through electrostatic then activated charcoal filters to eliminate contaminants. The real efficiency—high percentage recirculated air also passes through the activated charcoal filters thus saving on heating and cooling costs. Building inhabitants breathe fresh, pure air the year round. Barnebey-Cheney activated charcoal purification cells handle 73,500 cfm of air serving all floors of the building.

Write for Bulletin 62-2L or give us the details of your application and we will supply specific data.

Barnebey-Cheney, Columbus 19, Ohio

activated charcoal air purification

Barnebey Cheney

For more data, circle 125 on Inquiry Card

Office Literature

continued from page 218

RESIDENTIAL LIGHTING



(A.I.A. 31-F) Recessed and wall-mounted residential lighting fixtures are described in a 12-page booklet which includes typical installation pictures as

well as complete specifications. Marvin Electric Mfg. Co., 6100 Wilmington Ave., Los Angeles 1, Calif.

CIRCLE 415 ON INQUIRY CARD

REVOLVING DOORS

"The Controlled Air Entrance" has 54 pages on advantages of revolving doors. Included are pictures of installations. International Steel Co., Evansville 7, Ind.*

CIRCLE 416 ON INQUIRY CARD

ANTI-RUST PAINT

Anti-rust paint for use on all metal surfaces can be applied with a minimum of surface preparation. Bulletin 58262-R gives all technical data. Speco, Inc., 3708 Associate Ave. Cleveland 9, Ohio

CIRCLE 417 ON INQUIRY CARD

FORGED IRON HARDWARE

(A.I.A. 27-B) Forged iron hardware for residential interiors and exteriors are displayed in Catalog 13A. *McKinney Mfg. Co., Pittsburgh 33 Pa.*

CIRCLE 418 ON INQUIRY CARL

FOLDING PARTITIONS

Electric and manual folding partitions including the new electric, vertically operated *LeadX* acoustical curtains for school partitioning are shown in a loose-leaf reference file which includes architectural layout sheets, detailed planning data, scale drawings, specifications and color installation pictures. *Torjesen*, *Inc.* 213-25th St., Brooklyn 32, N. Y.*


CIRCLE 419 ON INQUIRY CARI

LOUVERS, VENTILATORS

Louvers, ventilators and other metabuilding products are described in a 20-page catalog. Leslie Welding Co. Inc., 11241 W. Melrose St., Franklin Park, Ill.

CIRCLE 420 ON INQUIRY CARI
*Additional product information in
Sweet's Architectural File

more literature on page 27.

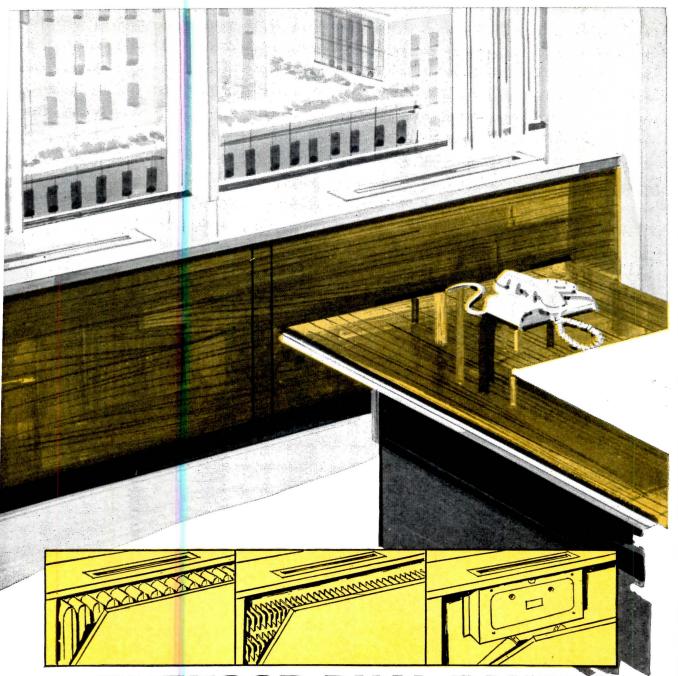

new BUENSOD DUAL PANELS

... UNIVERSAL UNDER-WINDOW ENCLOSURE PANELS AND SILLS

Dual Panels, Buensod's unique approach to under-window enclosure design, have set a fast sales and installation pace. A major reason that these rigid, lightweight panels and sills have been so readily accepted is their universal nature. Dual Panels quickly, and handsomely, enclose convectors, radiators, unit ventilators, fan coil units, induction units and, of course, our own Dual Duct air mixing units. Add to this the flexibility of size, shape, color and finish, plus fast field installation, and you can see what makes Dual Panels "tick." How about your next job? Write for free, colorful brochure, #MP10.

EUENSOD-STACEY CORP. Manufactured Products Division
5 West 18th St., New York 11, N. Y. Subsidiary of Aeronca Manufacturing Corporation





How much automation is practical for your next building?

Central control helped this school to air condition with 40% less cooling capacity

"Centralized controls will make it easy to shift cooling where it's needed, <u>as</u> it's needed—so ou high school requires only a 600-ton plant instead of 1,000 tons. We are using Honeywell Controls in our school."—Dr. Jordan L. Larson, Superintendent of Schools, Mount Vernon, N.Y.

Next time you discuss school air conditioning with a client, it may be useful to know about the experience of Mount Vernon, N.Y., with this problem—and its happy solution.

New Mount Vernon High School, with 320,000 sq. ft. of floor space, is the largest ever built in the U.S. with year-round air conditioning.

Many in Mount Vernon, including Dr. Jordan L. Larson, Superintendent, felt that if air conditioning improves efficiency in industry, it should do so in schools—even in the northern U.S.

And the architects and engineers developed plans that satisfied even the skeptics that air conditioning the new school would be sound and economical


Instead of long-perimeter spreadout construction common to so many non-air-conditioned schools, Architects Sherwood, Mills & Smith, of Stamford, Conn., utilized a compact design that helped to lower building costs and also reduced size of the air conditioning equipment required.

A Honeywell central control panel was used by Engineers Abrams & Moses, of New Rochelle, N.Y., to make an asset, instead of a handicap, out of the constantly shifting loads

common to high schools.

If all the conditioned space wer occupied at one time, it would nee about 1,000 tons of refrigeration. But the Honeywell controls are tied to on main panel, making it easy to shit cooling *where* it's needed, *when* it needed—so the building requires only a 600-ton cooling plant.

So helpful in this instance, centrocontrol is a basic step in automatin any building's mechanical-electric systems to wring maximum efficience from equipment, cut a surprisin waste in manhours, and plug needles leaks in fuel and power costs.

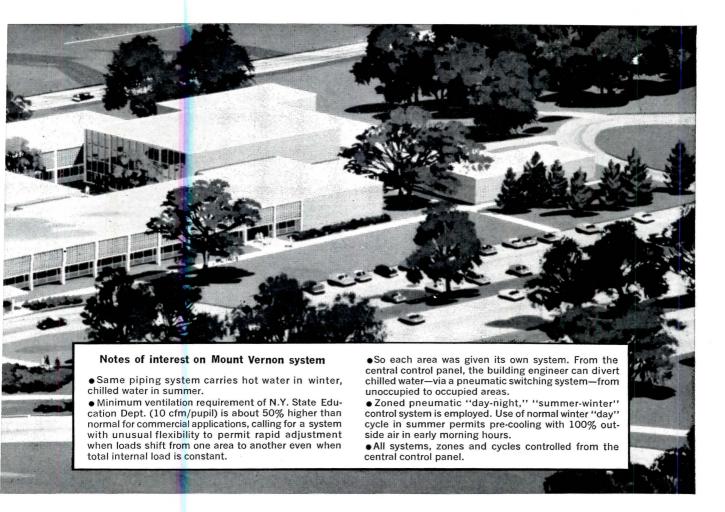

Foday, however, central control is y the beginning of automationiging up to computer-guided robots at digest scores of variables, then tantly allocate the load to equipnt for optimum results at mini-

You'll want to keep abreast of the west Honeywell developments, ny of them offering your clients erational savings through concepts that were unavailable a few years ago.

Honeywell automation specialists will gladly discuss them with you, or work with you to make an automation analysis of any building on your

Phone your nearest Honeywell office, check coupon or write W. N. Wray, Honeywell, Dept. AR9-90, Minneapolis 8, Minn. In Canada, write Honeywell Controls Ltd., Toronto 17, Ont.

Honeywell





H First in Control

7 new planning guides for your clients! Mail coupon today

uthoritative. Latest evelopments automation. luable data.

CONTROL





AIR CLEANING




CLOCK PROGRAMMING

PREVENTIVE MAINTENANCE PROGRAMS


Honeywell, Dept. AR9-9 Minneapolis 8, Minn.	0
☐ Automation Techniques ☐ Automatic Fire Protection ☐ Clock Programming Systems ☐ Preventive Mai	☐ Security and Surveillance
NAME	
TITLE, COMPANY	
ADDRESS	
CITY, ZONE, STATE	

For more data, circle 127 on Inquiry Card

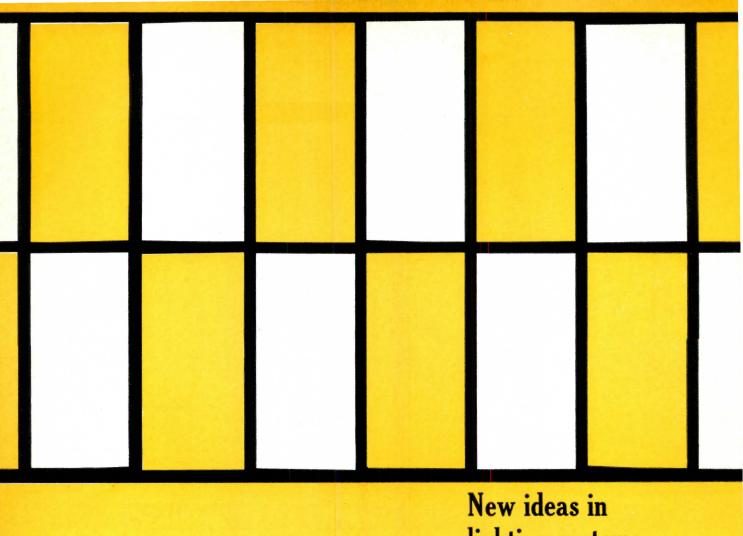




New ideas in lighting systems from Westinghouse

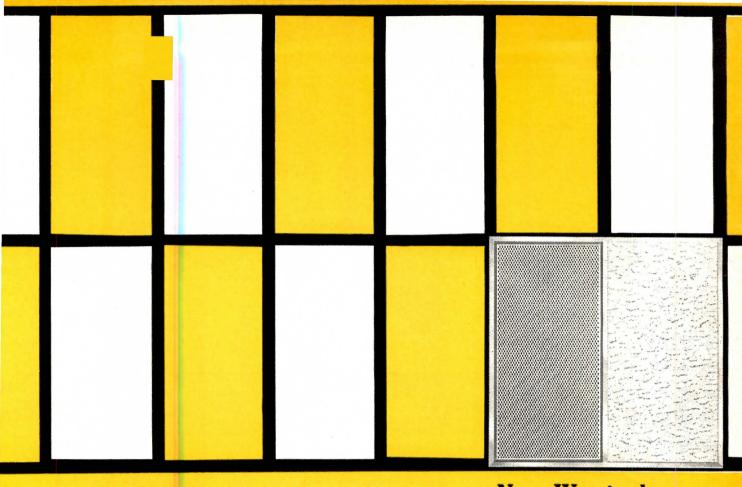

New Westinghouse Colamar Mark controls air, acoustics and lighting


Now you can provide for efficient lighting, adequate ventilation and controlled acoustics-all in one space-saving ceiling system. Westinghouse Colamar Mark 50 gives you complete freedom of design, too. You select the module, specify the ventilation, the desired sound attenuation, the color and the foot-candle requirements. Westinghouse will deliver the complete Colamar ceiling package, tailored to your design in every detail. A unique feature of the Colamar system is an infrared shield that reduces heat radiation into occupied areas. Lamp efficiency is 10 to 15 per cent greater than ordinary lighting systems. For complete facts, write Westinghouse Electric Corporation, Lighting Division, Edgewater Park, Cleveland, Ohio. You can be sure . . . if it's Westinghouse.

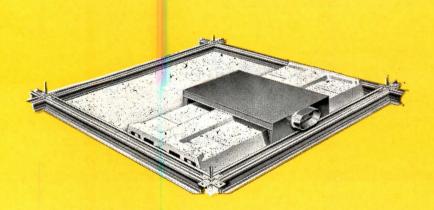

Westir Jus



EXPOODS

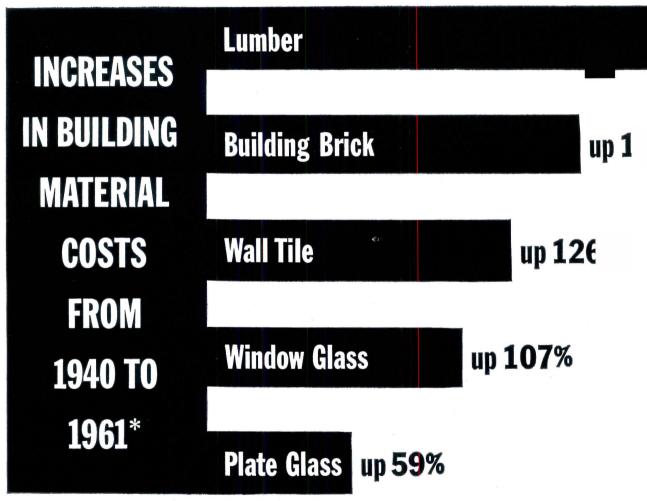

*SOURCES: U. S. Bureau of Labor Statistics. Costs for plate and window gla: 1940 to 1961, based on company records of wholesale prices.

Libbey · Owens · Ford Glass Compan 811 Madison Avenue, Toledo 2, Oh

...a popular misconception

up 38%

When some people see beautiful, modern buildings with friendly, open expanses of clear glass, they jump to false conclusions. Somehow they confuse expansiveness with expensiveness.

You, of course, know better. Glass is not expensive, just looks it. In fact, with glass you are getting the *one* wall construction material that has been least affected by spiraling building costs. See chart at left.

When you consider building costs, consider also operating costs. Nothing brings in more *free* illumination (daylight) than clear glass.

And glass can contribute to heating and air-conditioning economies:

Thermopane® insulating glass cuts heat loss through windows to about half that lost through single glazing to reduce heating costs.

L·O·F Grey Plate Glass (there are several thicknesses) greatly reduces solar heat gain in buildings to reduce air-conditioning equipment requirements and operating expense. It also subdues glare.


Engineering studies conducted at Southern Methodist University by Prof. J. W. Griffith, international authority on daylighting, show that heat generated by abnormal wattage needed for lighting a windowless school usually creates a need for more expensive air-conditioning equipment—and makes it more costly to operate—than in a school where daylighting supplements normal artificial illumination.

For technical information on glass, call your L·O·F distributor or dealer, listed under "Glass" in the Yellow Pages. Or write to L·O·F, 2102 Libbey·Owens·Ford Building, Toledo 2, Ohio.

DE IN U.S.A.



a Great Name in Glass

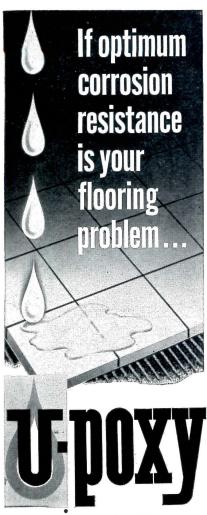

is your answer!

Revolutionary New Epoxy Grout and Setting Compound Makes Joints as Impervious to Corrosion as the Tile Itself!

Ideal for dairies, packing plants, canneries, bakeries, breweries, distilleries, food processing plants — wherever corrosives are encountered. Forms a dense, tight joint of phenomenal strength. For new installations or re-grouting existing floors. Only water is needed for clean-up. Details in Sweet's or write for a descriptive catalog.



Office Literature

continued from page 266

VISUAL COMMUNICATIONS

Visual communication equipment and materials including overhead projectors, transparency-making material, photo-copying and diazocopying equipment, and art and letter materials are illustrated in a 48-page catalog. Tecnifax Corp., 195 Appleton St., Holyoke, Mass.

CIRCLE 421 ON INQUIRY CARD

OUTDOOR LIGHTING

Delta 7 exterior wall bracket of cast aluminum can be used for commercial and residential outdoor lighting. mcPhilben Mfg. Co., Inc., 1329 Willoughby Ave., Brooklyn 37, N. Y.*

CIRCLE 422 ON INQUIRY CARD

ROOM HEAT CONTROL

(A.I.A. 30-C) SelecTemp heating for new and existing buildings where inexpensive individual room temperature control is desired, such as motels, apartment houses, colleges and institutions. Iron Fireman Div., Electronic Specialty Co., 3299 W. 106th St., Cleveland 11, Ohio

CIRCLE 423 ON INQUIRY CARD

STEEL DOORS

Complete product information and application suggestions on standard steel doors and frames are available in a four-page brochure. Amweld Building Products, 100 Plant St., Niles, Ohio.*

CIRCLE 424 ON INQUIRY CARD

COLORED GRAVEL STOP

Embossed aluminum sheet gravel stop is available in three anodized finishes and 12 color coatings. A complete line of door louvers is furnished in the same color coatings. Construction Specialties, Inc., 55 Winans Ave., Cranford, N. J.*

CIRCLE 425 ON INQUIRY CARD


HYDROGEN-PROOF LIGHTING

Quartz-iodine floodlighting equipment which is safe for use in hazardous locations containing hydrogen is illustrated in Bulletin 659. The Pyle-National Co., 1334 N. Kosner Avenue, Chicago 51, Ill.

CIRCLE 426 ON INQUIRY CARD *Additional product information in

Glidorama ...A VERSATILE APPROACH TO BEAUT LOW-COST BUILDING

Commercial • Institutional
Residential

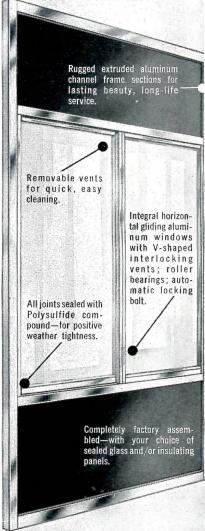


Custom fabricated to meet your specific design requirements, Glidorama Window Walls permit easier erection . . . provide more useable floor space . . . reduce labor, material and maintenance costs. Available for both monumental and light construction applications—in single and multiple story units.

Write for Technical Bulletin GL-12. Glidorama, Division of Whizzer Industries, Inc., 350 S. Sanford St., Pontiac, Michigan.

Glidorama Custom Aluminun WINDOW WALLS

"Admitted product information in Sweet's Architectural File

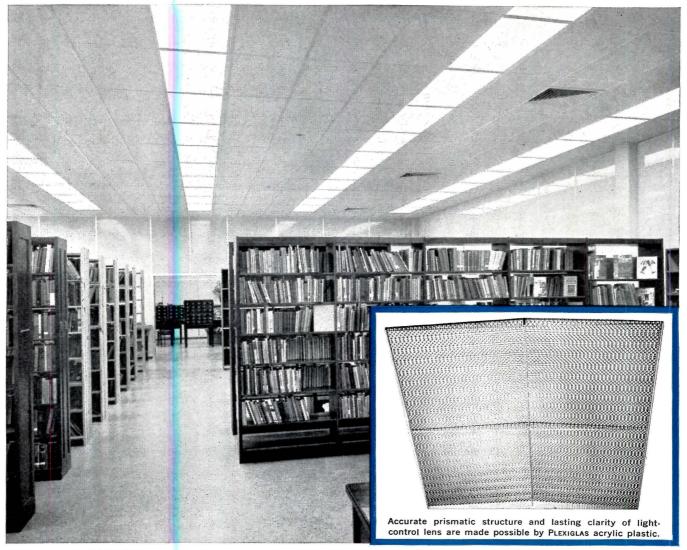

Control lenses molded of Plexiglas mounted in continuous rows in library of County of Sonoma school administration building, Santa Rosa, California. Architects: Steel & Van Dyke, Santa Rosa.

Plexiglas...for lighting that stands out and stands up

When lighting equipment includes control lenses molded of PLEXIGLAS® acrylic plastic, the result is illumination of the highest quality. This is because PLEXIGLAS makes possible a precisely designed optical element that directs light to the area where it is required and, at the same time, minimizes the surface brightness of the lens as seen from normal viewing angles.

In addition, lenses of PLEXIGLAS remain free of discoloration even after years of exposure to fluorescent light. They are strong and rigid yet light in weight, resulting in safety overhead and ease of maintenance. And the crystal clarity of PLEXIGLAS assures full utilization of light.


Full details on the use of PLEXIGLAS as a lighting material are contained in our 40-page technical bulletin "PLEXIGLAS for Lighting". We will be glad to send you a copy.



In Canada: Rohm & Haas Co. of Canada, Ltd., West Hill, Ontario

PLEXIGLAS

For more data, circle 132 on Inquiry Card

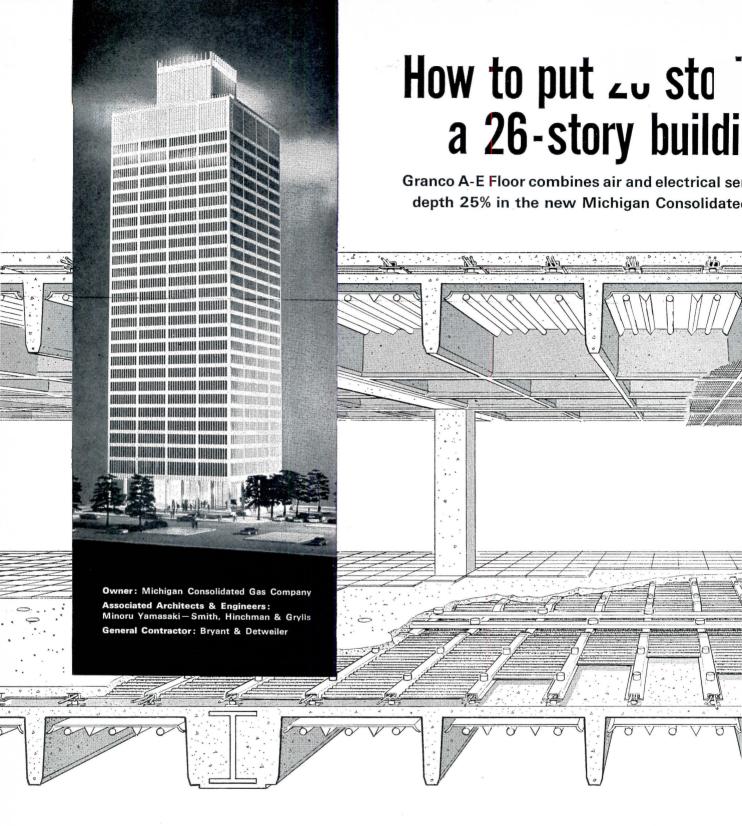

One of the hardest-working, compact floor systems now available is incorporated into the new headquarters office building of the Michigan Consolidated Gas Company in Detroit—GRANCO A-E (Air-Electric) FLOOR.

Hard-working because it combines architectural objectives with the needs of the mechanical, electrical and structural engineer:

- 1. Distributes conditioned air to interior and exterior zones through a 3-inch plenum, thereby eliminating a considerable amount of horizontal ductwork.
- 2. Provides horizontal and vertical wiring flexibility through large capacity cells fed by headers originating at the central electrical shaft.

Compact because it helped reduce total floor depth to only 3 fee compared to 4 feet or more in most office buildings—saved a estimated two stories in the 28-story building.


A Floor System That Doesn't Grow Old—Granco A-E Floor provide a "tool" for achieving the highest-quality combination mechanic and electrical system—has built-in assurance against obsole cence by facilitating easy expansion of these comfort, power ar communications services as required. A-E Floor can be used with any type construction—remodeling or new.

Optimum Air Capacity and Control—Basically, the A-E systel consists of a finish floor supported by the main structural slal This floor rests on adjustable steel supports, creating a plenul for conditioned air to be carried to floor and ceiling diffuser




to ight

luces floor pany Building



"Granco A-E Floor, in conjunction with structural all-welded frame and waffle slab system, permitted us to achieve a luminous ceiling, underfloor air distribution and ideal electrical flexibility in a floor depth of only three feet. The reduced building height led to a considerable saving in structural steel and other materials." Frederick J. B. Sevald, Vice President, Smith, Hinchman & Grylls and Administrator for the Joint Venture.

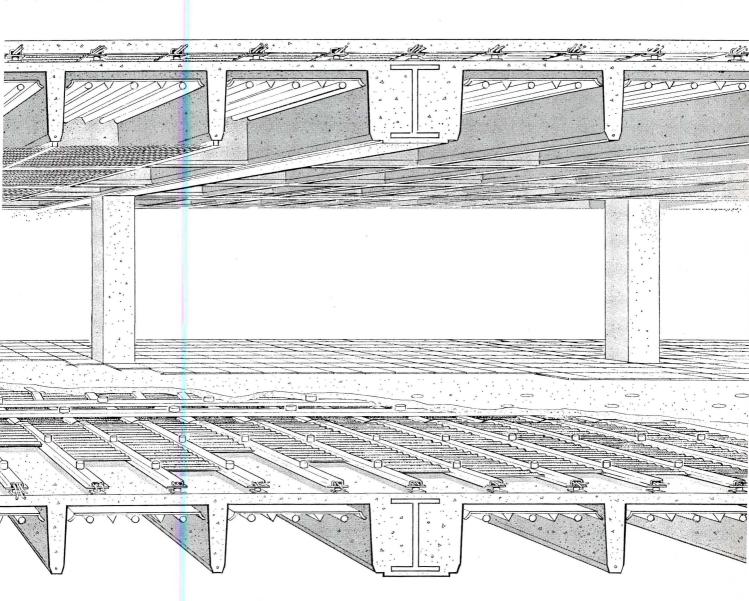

The plenum can be varied in height to meet any capacity requirement. Baffles zone air to desired areas. Adjustable supports assure level finish floor, compensating for dead load deflection and irregularities in structural slab.

Electrical Flexibility—Conventional header ducts feed large capacity cells that carry wiring to factory-installed pre-set inserts and standard electrical fittings. Pre-set inserts provide ready access for adding telephones, intercoms, lighting, and electrical service. No costly drilling is required to expand future service.

For additional information, see our catalog in Sweet's or write for A-E Floor catalog No. 99-B62 (A.I.A. File No. 4-E-6). GRANCO STEEL PRODUCTS CO., 6506 N. Broadway, St. Louis 15, Mo. A Subsidiary of Granite City Steel Company.

A·E FLOOR

a floor system providing air and electrical distribution

GRANCO

San Francisco • Tampa • DISTRICT REPRESENTATIVES: Greenville, S.C. • Little Rock • Washington, D.C.









EGGERS QUALITY

"TOPS"



FAMOUS LEOPOLD FURNITURE



The Leopold Company of Burlington, lowa, is respected throughout the world for fine furniture. Its reputation is based on quality of design, of workmanship, of material. The Leopold people know quality plywood, and demand it for their furniture. Their fine veneer panels and tops have come from Eggers of Two Rivers for over twenty years.

Eggers produces wall paneling and doors to blend with furniture species for true custom décor. On your next project, specify this fine furniture quality that has made Eggers of Two Rivers a leading Custom Architectural Plywood and Solid Core Door producer since 1884.



EGGERS PLYWOOD COMPANY Two Rivers, Wisconsin Telephone 793-1351



See Sweet's File No. $\frac{16c}{EG}$




FELLOWSHIPS AVAILABLE FOR STUDY ABROAD

Students of architecture and city planning may apply for U.S. Government grants for advanced study abroad during the 1963-64 academic year. Eligible are U.S. citizens having a Bachelor's degree, working knowledge of the language of the host country, good health, a good academic record and demonstrated capacity for independent study or research. Preference is given applicants under 35 who have not previously lived or studied abroad. Requests for application forms must be postmarked by Oct. 15, 1962. For information, students should consult their campus Fulbright Program Advisers; at-large applicants should write: Counseling Division, Institute of International Education, 800 Second Ave., New York 17.

U.S. Government grants under the Fulbright-Hays Act are available to fine arts graduate students during the academic year 1963-64. Qualified painters, sculptors and graphic artists may enter competitions for awards in 13 countries. Eligibility requirements are the same as those for U.S. Government grants for advanced study abroad for architecture and city planning students (see above). Students should consult their campus Fulbright Program Advisers for information; at-large applicants, the Counseling Division, Institute of International Education, 800 Second Ave., New York 17. (Deadline to request application: Oct. 15, 1962.)

A limited number of fellowships for mature students and artists capable of independent work in architecture, landscape architecture, painting, sculpture, history of art are being offered by the American Academy in Rome. Fellowships will be awarded on evidence of ability and achievement and are open to U.S. citizens for one year beginning Oct. 1, 1963. Applications and submission of work, in the form prescribed, must be received at the Academy's New York office by Dec. 31, 1962. Details may be had by writing the Executive Secretary, American Academy in Rome, 101 Park Ave., New York 17.

the most important "detail" in meeting rooms...

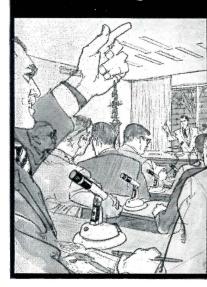



TOTAL COMMUNICATIONS

In hotels, motels, schools, churches—any where, the meeting room is first and fore most functional. Lighting, ventilation, any ublic address facilities are co-equal necessities—yet, too often the P.A. system get minimum attention. Take the matter of microphone placement . . . it's safe to say tha 19 out of 20 meeting rooms don't havenough of the right kind of microphones to adequately cover meeting rooms for today' "open' discussions. True, microphone placement is "tricky"—and because of that Shure has prepared a guide to Total Communications which explains the fundamental of the strategic placement of microphone for meetings:



8-PAGE FOLDER ON MICRO-PHONE PLACEMENT

For use by your staff, or with clients. Non-technical discussion of the role microphones play in today's meetings. Valuable suggestions and ideas based on years of practical experience.

WRITE ON YOUR LETTERHEAD TO SHURE BROTHERS, INC. 222 Hartrey Ave., Evanston, Illinois Dept. AR-I

Manufacturers of highest quality microphones for all applications, high fidelity components.



GUARANTEE

The laboratory sinks which we manufacture is corrosion-proof. Their resistance to all corrost the glazed surfaces. Both the glaze, and the proof materials. Thus, there is practically no cand that of the sink body.

We, therefore, make the following gua We guarantee, for the life of the building destroyed by the action of corrosive as surfaces are exposed to corrosion.

We also guarantee that this sink will changes or mechanical stresses encoudinstallation or due to heavy impact, not hydrofluoric acid. Natural and artificial if such acid is emptied into sinks, the to prevent damage to the glaze.)

Under the terms of this guarantee we will refails to meet the service warranty above. We sink, freight collect. The laboratory sinks which we manufacture from chemical porcelain are completely impervious and corrosion-proof. Their resistance to all corrosive agents (except hydrofluoric acid) is not limited to the glazed surfaces. Both the glaze, and the sink body itself, are made of the same basic corrosionproof materials. Thus, there is practically no difference between the corrosion resistance of the glaze

We, therefore, make the following guarantee:

We guarantee, for the life of the building in which it is installed, that this sink will not be destroyed by the action of corrosive agents, regardless of whether glazed or unglazed


We also guarantee that this sink will not be damaged or destroyed by temperature changes or mechanical stresses encountered in normal laboratory usage.

(This guarantee does not include mechanical damage due to gross carelessness during installation or due to heavy impact, nor does it include etching of the sink surface by hydrofluoric acid. Natural and artificial silicates are attacked by hydrofluoric acid, and if such acid is emptied into sinks, the sinks should be flushed with water immediately


Under the terms of this guarantee we will replace without charge, freight prepaid, any sink which fails to meet the service warranty above. We reserve the right to request the return of the defective

CHEMICAL CERAMICS DIVISION



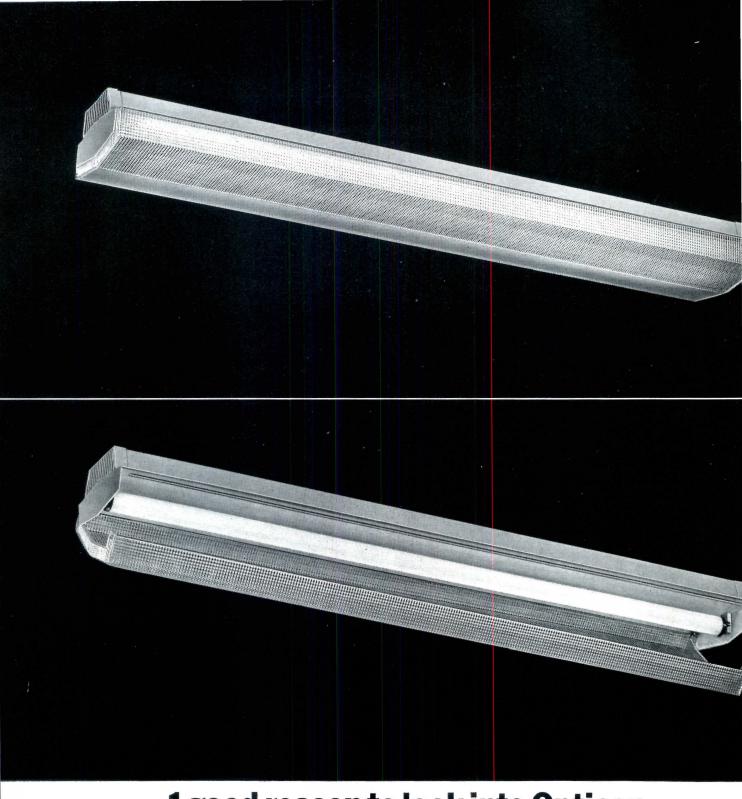

1 good reason to look into Opticon...

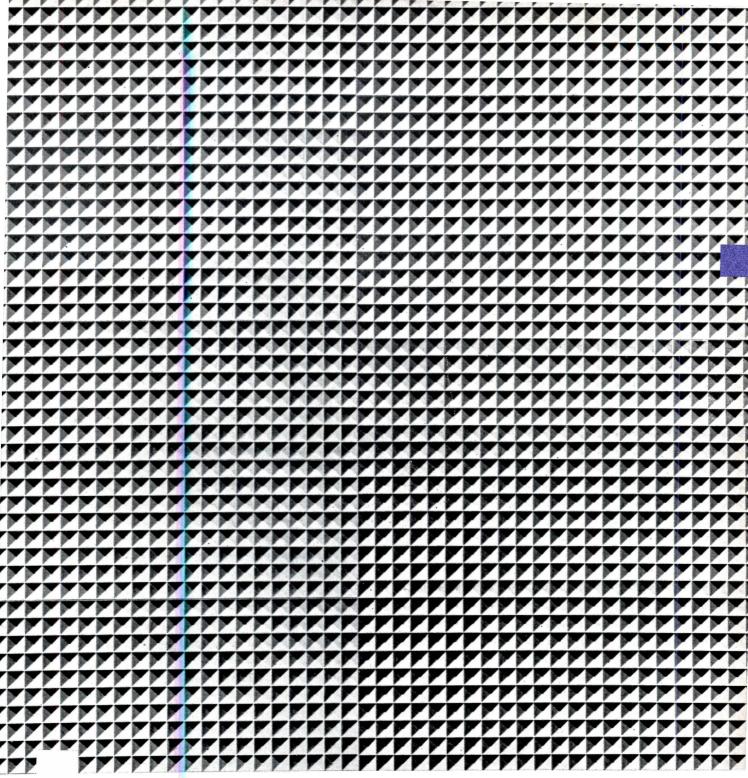

or 16,792*

Opticon® lens—sides, ends face—is a single crystal-clear ction-molded unit four feet. Each is comprised of more 16,000 individual, optically enered prisms. *16,792 by our t. The precisely molded, resed bottom prisms provide langle, glare-free task light, the the prisms on the side are trined inside and out at cross ctions to throw softly diffused oberal lighting on ceiling areas ow brightness contrast.

Equally important is Lightolier's ability to design and produce this fixture at a low budget price while maintaining its respected standards of performance, aesthetics, and quality construction.

There <u>are</u> two catches to it (on each side). Press either side and the entire lens swings away on safety hinges for swift relamping without tools.

Other Lightolier touches: interlocking ends for straight, continuous runs (without dark joiner straps), slim 4½" depth, completely enclosed construction to keep fixture clean longer. Opticon is available in one- or two-lamp models, 48" or 96" length, stem or surface mounted. For more information on Opticon, write today to Lightolier, Jersey City 5, N.J., for Dept. AR 9-33.

LIGHTOLIER

Showrooms: New York, Chicago, Dallas, Los Angeles.

Opticon is stocked by the Authorized Lightolier Distributors listed on page 282

LIGHTOLIER®

fixtures are stocked and sold by the following Distributors:

ALABAMA Birmingham: Mayer Elec. Sup. Co. Mo-bile: F. E. Smith Elec. Co.

ALASKA Anchorage: Northern Sup. Co.

ARIZONA

Phoenix: Brown Wholesale Elec. Tucson: Beacon Ltg. Fix. Co.

ARKANSAS Little Rock: Adcock Ltg. & Sup.

Little Rock: Adcock Ltg. & Sup.
CALIFORNIA
Bakersfield: San Joaquin Whlse. Elec.
Co. Fresno: Electrical Suppliers, Inc.
Los Angeles: Gough Industries, Inc.
Palm Springs: Tri-County Elec. Whlsrs.
Riverside: Tri-County Elec. Whlsrs.
Sacramento: Capital Whlse. Elec. Co. San
Bernardino: Tri-County Elec. Whlsrs.
San Diego: Sunlight Elec. Sup. Co. San
Francisco: California Elec. Sup. Co.

COLORADO Denver: Central Elec. Sup. Co.

Denver: Central Elec. Sup. Co.
CONNECTICUT
Bridgeport: B. M. Tower Co., Inc. Hartford: Beacon Light & Sup. Co. New
Haven: Grand Light & Sup. Co. New London: United Elec. Sup. Co. South Norwalk: Klaff's Inc. Stamford: Marie Co.
Waterbury: Starbuck Sprague Co., Suburban Supply Co.
INSTRICT OS COLUMBIA

DISTRICT OF COLUMBIA
Washington: Maurice Elec. Sup. Co.,
National Elec. Wholesalers

FLORIDA Miami: Farrey's Whise. Hdwe. Co.

GEORGIA
Atlanta: Atlanta Ltg. Fix. Co., Electrical
Wholesalers, Noland Co. Augusta: Hart
Elec. Sup. Co. Columbus: P. & W. Elec.
Sup. Co. Macon: Noland Co.

HAWAII Honolulu: Hawaiian Light & Sup. Co.

Honolulu: Hawanan Light & Sop.

ILLINOIS
Champaign: Tepper Elec. Sup. Co., Chicago: Efengee Elec. Sup. Co., Englewood Elec. Sup. Co., Harlo Elec. Sup. Co., Hyland Elec. Sup. Co., Metropolitan Elec. Sup., Steiner Elec. Co., Wholesale Elec. Sup. Co. Elgin: Fox Elec. Sup. Co. Joliet: Joliet Elec. Sup. Rockford: Englewood Elec. Sup. Co. Springfield: Springfield Elec. Sup. Co.

INDIANA
Ft. Wayne: Mossman-Yarnelle Co. Gary:
Englewood Elec. Sup. Co. Indianapolis:
Farrell-Argast Elec. Co. South Bend:
Englewood Elec. Sup. Co.

IOWA Des Moines: Weston Lighting, Inc.

KANSAS Kansas City: W. T. Foley Elec. Co. Wichita: Architectural Lighting, Inc.

KENTUCKY Louisville: Henry J. Rueff Co.

LOUISIANA Baton Rouge: Electrical Wholesalers, Inc. New Orleans: Interstate Elec. Co.

MAINE Bangor: Standard Elec. Co. Portland: Holmes Elec. Supply Co.

MAINE

Holmes Elec, Supply Co.

MARYLAND

Baltimore: Baltimore Gas Light Co., Dominion Elec, Sup. Co. Hagerstown: Noland Co., Tristate Elec. Sup. Co. Salisbury: Artcraft Elec. Sup. Co.

MASSACHUSETTS

Boston: Boston Lamp Co., Mass. Gas &
Elec. Light Co., Henry L. Wolfers, Inc.
Pittsfield: Carr Supply Co. Springfield:
M. W. Zimmerman, Inc. Waltham: Standard Elec. Worcester: Benjamin Elec.
Sup. Co.

MICHIGAN

MICHIGAN

nton Harbor: West Michigan Elec. Co Benton Harbor: West Michigan Elec, Co., Detroit: Madison Elec, Co., Michigan Chandelier Co. Flint: Royalite Co. Grand Rapids: Purchase Elec. Sup. Co. Jackson: Electric Wholesale Sup. Co. Kalamazoo: West Michigan Elec. Co. Lansing: Michigan Elec. Sup. Co. Muskegon: Fitzpatrick Elec. Sup. Co. Pontiae: Standard Elec. Sup. Co. Saginaw: Schmerheim Elec. Co., Standard Elec. Sup. Co.

MINNESOTA

Duluth: Northern Elec. Sup. Co. Minnesota

polis: Freeman Elec. Sup. Co., North

Central Elec. Distr. Co., Northland Elec.

Sup. Co., Terminal Elec. Corp. St. Paul:

Lax Elec. Co.

MISSISSIPPI Jackson: Stuart C. Irby Co.

MISSOURI SUBJECT TO THE MISSOURI KANSAS City: Glasco Elec. Co., Rossner Elec. Sup. Co. St. Louis: M. K. Clark, Glasco Electric Co. Springfield: Southern Materials Co.

MONTANA Great Falls: Glacier State Elec.

NEBRASKA Lincoln: White Electric Supply Co. Omaha: Electric Fix. & Sup. Co.

NEVADA Reno: Western Elec. Dists. Co.

NEW HAMPSHIRE Portsmouth: Mass. Gas & Elec. Light Co.

POTISTIOURN: MEDICAL PROPERTY AT A STATE OF THE PROPERTY AT A STATE OF THE PROPERTY AS A STATE OF THE PROPERTY AS

NEW MEXICO Albuquerque: The Lighting & Maint. Co.

ABUQUERQUE: THE Lighting & Maint, Co. NEW YORK
Binghamton: Freije Elec. Sup. Co. Buffalo: Buffalo Incand. Light Co. Inc.
Nanuet (Rockland Co.): Rockland Lighting. Niagara Falls: Hysen Supplies Inc.
Poughkeepsie: Electra Sup. Co. Schenectady: American Elec. Sup. Co. Syracuse: Superior Elec. Corp. White Plains: Wolar Lighting Corp.

NORTH CAROLINA NORTH CAROLINA
Asheville: Electric Sup. Co. Charlotte:
Independent Elec. Sup. Co. Durham:
Noland Co. Greensboro: Elec. Sup. &
Equip. Co. High Point: Electric Sup. Inc.
Kinston: Kinston Elec. Raleigh: Electrical Equipment Co. Winston-Salem:
Noland Co.

NORTH DAKOTA
Fargo: Border States Elec. Sup. Co.,
Northwest Elec. Sup. Inc.

OHIO
Akron: The Sacks Elec. Sup. Co. Canton:
Electric Sales Co. Cincinnati: B. & B.
Elec. Co., F. D. Lawrence Electric Co.,
Richards Elec. Sup. Co. Cleveland: The
H. Leff Electric Co., Midland Elec. Co.
Columbus: Elgee Elec. Co., The Loeb
Elec. Co. Dayton: Duellman Elec. Co.
Lima: State Elec. Sup. Corp. Springfield:
The W. W. Elec. Co. Toledo: Gross Elec.
Fix. Co.
OKLAHMMA 0110

ΠΚΙ ΔΗΠΜΔ

Oklahoma City: Elec. Sup. of Oklahoma, Hunzicker Bros.

OREGON Portland: Baker-Barkon Co., Malloy Robinson Co.

Robinson Co.

PENNSYLVANIA
Allentown: Coleman Elec. Co. Erie:
Kraus Elec. Co. Harrisburg: Fluorescent
Sup. Co., Schaedler Bros. Hazleton:
Power Elec. Co. Inc. Lancaster: GrayBil's New Gastle: Midwestern Elec. Co.
Norristown: Norristown Elec. Sup. Co.,
Logan Elec. Sup. Co., Linc., PyramidElec. Sup. Co., Linc., PyramidElec. Sup. Co., Inc., PyramidElec. Sup. Co., Inc., PyramidElec. Sup. Co., Inc., PyramidElec. Sup. Co., Pitsburgh: Allied Elec.
Sup. Co., Argo Lite Studios, Brown &
Green, Wally Elec. Sup. Co. Reading:
Coleman Elec. Co. Scranton: Lewis &
Green, Wally Elec. Sup. Co. Reading:
Coleman Elec. Co. Scranton: Lewis &
Reif, Inc. Uniontown: Ploneer Electric
Dist. West Chester: West Chester Elec.
Sup. Co. Wilkes-Barre: Anthracite Elec.
Williamsport: Lowry Electric Co. York:
Graybill's
HHODE ISLAND

RHODE ISLAND
Pawtucket: Major Elec. Sup. Co. Providence: Leavitt Colson Co., Tops Elec.
Sup. Co.

SOUTH CAROLINA
Columbia: Capital Elec. Sup., Noland Co.
Greenville: Sullivan Hdwe. Co.

SOUTH DAKOTA Watertown: J. H. Larson Elec. Co.

TENNESSEE

TENNESSEE
Chattanooga: Mills & Lupton Sup. Co.,
Noland Co. Knoxville: The Keener Co.
Memphis: Belvedere Lighting Co. Nashville: Nashville Elec. Sup. Co.

wille: Nashville Elect, Sup. Co. Dalas: Rogers Elec. Sup. Co. Ft. Worth: Anderson Fixture Co., Cummins Supply Co., General Industrial Sup. Corp. Houston: Anderson Lighting Co., Guif Coast Elec. Sup. Co., Inc., Marlin Associates, Worth Elec. Sup. Co., Son Antonic: Electrical Distrib. Co., Southern Equip. Co., Straus-Frank Co., Worth Elec. Sup. Co. Waco: Dealers Elec. Sup. Co. Waron Dealers Elec. Sup. Co.

UTAH Salt Lake City: Artistic Lighting

VIRGINIA Arlington: Dominion Elec. Sup. Co. Inc., Noland Co. Lynchburg: Mid-State Elec. Sup. Co., Inc. Richmond: Atlantic Elec. Sup. Co., Roanoke: Noland Co.

WASHINGTON Seattle: Seattle Lighting Fix. Co.

WEST VIRGINIA
Bluefield: Bluefield Supply Co. Charleston: Capitol Light Co., Goldfarb Elec.
Sup. Co. Wheeling: The Front Co.

wisconsin Appleton: Moe Northern Co. Eau Claire: W. H. Hobbs Supply Co. La Crosse: W. A Roosevelt Co. Milwaukee: Electri-Craft Lighting, Lappin Electric Co., Standard Elec. Sup. Co. Racine: Milch Elec. Sup.

Edmonton: Alberta Elec. Sup. Ltd. Mon-treal: L.D.G. Products, Inc., Gray Elec. Co., Union Elec. Sup. Co. Ltd. Toronto: Revere Elec. Dist., Toronto Ltg. Studios, Union Elec. Sup.

PUERTO RICO San Juan: Sole Electric

See new solutions to current lighting problems at the Lightolier Architectural Displays, 11 E. 36, N. Y. 16. Come in anytime from 9-5. For "Start-to-Finish" responsibility, specify

AUTOMATIC TUBE SYSTEMS

Standard Conveyor

Standard Conveyor takes full responsibility for your automatic tube system from start to finish. Standard Conveyor has over 40 years of experience in the pneumatic tube business.

Call your local Standard Conveyor representative . . . he's listed in the Yellow Pages of major cities under PNEUMATIC TUBES. Or, call our main office listed below for information.



312-JT Second St., North St. Paul 9, Minn., Telephone: SPring 7-1355

For more data, circle 137 on Inquiry Card



Everyone in the family will enjoy the comfort, convenience, and peace of mind this system provides. From any room in the house you can...

- Listen-in on baby, children, or sick room.
- · Answer outside doors without opening door to strangers.
- Talk to anyone-upstairs and downstairs, inside and out.
- · Enjoy radio in every room with the simple flick-of-a-switch.


Distinctively styled. Beautifully finished in richly blended gold, polished and satin silver tones. Easily installed in any home. Built-in and surface-mounted models available. Write for complete information.



World Honored for Style, Quality, and Dependability. TALK-A-PHONE CO. Dept. R-9 5013 N. Kedzie Ave., Chicago 25, Illinois

File No 31-i-51

For more data, circle 138 on Inquiry Card

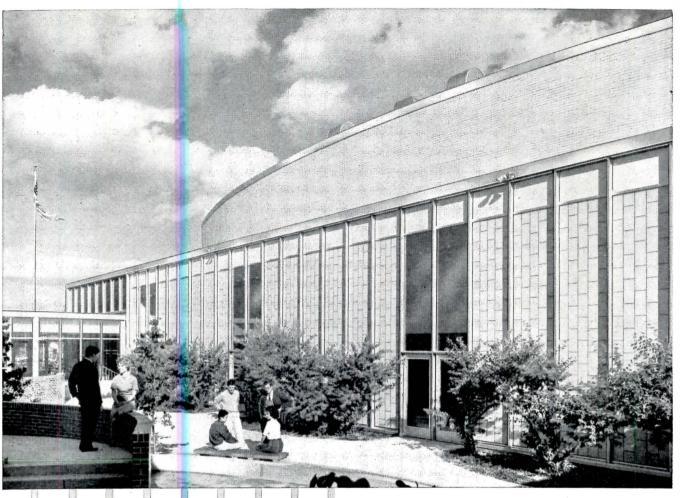

MORE THAN JUST A WALL...

This Translucent Paneling System By

Provides Glare-Proof Natural Lighting

Striking . . . the word for the new Rippowam Senior High School in Stanford, Conn., a brilliant concept of modern design conceived by Architects Urbahn, Brayton and Burrows. Its clean, classic lines are enhanced by 1,200 Sanpan translucent panels forming the basic structural walls . . . the largest installation of its kind to-date.


Before installation, the amount of translucency in each Sanpan structural plastic panel is predetermined by increasing or decreasing the pigment in the translucent skin. As a result, harsh glare and excessive light transmission are effectively reduced, facilitating maximum indoor natural lighting. Sanpan panels boast exceptional insulating qualities equivalent to that of a 12" masonry wall, providing protection against moisture penetration from the outside and heat loss on the inside. Sanpan panels also permit significant economies in construction and maintenance. Extremely lightweight, they are designed for simple screw connection.

Investigate the potential of Sanpan in New Construction and Modernization projects. For further specifications and descriptive literature, write:

Panel Structures

45 Greenwood Avenue, East Orange, New Jersey

For more data, circle 139 on Inquiry Card

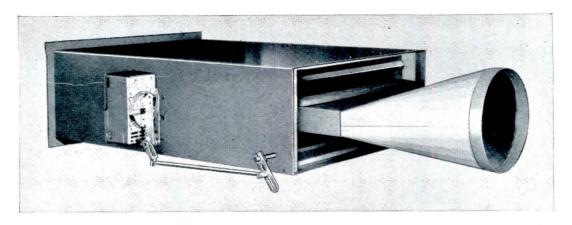

NEW from BARBER-COLMAN

Single inlet

... for better, lower cost

High-velocity induction mixing units draw warm air from ceiling plenum to temper cool primary air supplied to single inlet unit ... and eliminate the need for separate hot air ducts or reheat coils

*Patent Pending

New Barber-Colman single inlet mixing units reduce the costs and simplify the design of conditioning systems for multistory office buildings and other structures, in interior zones that demand yearround cooling.

Individual room or zone temperature is controlled by providing more or less cooling. To meet a demand for less cooling, the units reduce the amount of cool primary air entering the mixing box through the single inlet. Simultaneously, the amount of secondary air drawn in from the ceiling plenum is increased in an equal amount. A demand for more cooling reverses the procedure. This unique operating principle can reduce cooling capacity of the units by more than 60% . . . the volume of air delivered remains essentially constant.

New system layout and installation is simpler



air mixing units*


interior zone conditioning

and less expensive with single inlet mixing units. Less space is required because units eliminate hot air ductwork or reheat coils with their piping. Less sheet metal and insulation are needed throughout the system. Terminal units are less expensive.

Single inlet mixing units also simplify adding air conditioning to existing buildings . . . can be used with any type of properly controlled perimeter heating system.

Six Model SI single inlet mixing units are available with capacities from 100 to 3200 cfm. All are controlled by a single operator and are adaptable to any control system — electric, electronic, or pneumatic.

Get the facts — call your Barber-Colman Air Distribution field office for complete details or write to:

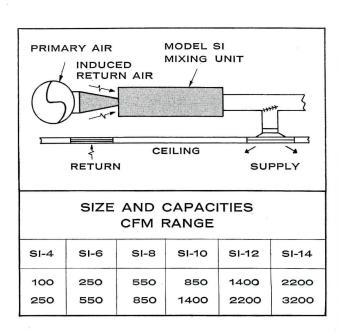



BARBER-COLMAN COMPANY

Dept. I, 1104 Rock Street, Rockford, Illinois

...where originality works for you

For more data, circle 140 on Inquiry Card

Put



Protection

in the plans

It makes sense for architects to specify ADT automatic protection systems before construction.

Devices and wiring can be installed more economically and with a minimum of exposure to public view.

Burglary, vandalism and fire will be minimized from the day of occupancy.

Under an ADT service contract, protective systems are fully maintained, tested and inspected—freeing your client from these responsibilities.

Architects and engineers are invited to call the ADT office listed in the Yellow Pages for free consultation and catalog information. Or see Sweet's File, Section 34-a.

COMPLETE PROTECTION through AUTOMATIC DETECTION

ALARMS FOR:

Fire Burglary Sabotage Holdup Smoke Intrusion

SUPERVISION OF:

Sprinkler Systems
Industrial Processes
Heating Systems
Pumps and Power
Watchmen and Guards

AMERICAN DISTRICT TELEGRAPH COMPANY 155 Sixth Avenue, New York 13, N.Y.

FORD GRANTS AWARD CREATIVE ARTS STUDIES

The Ford Foundation is offering a limited number of fellowships, the fourth group of awards since June, 1960, to assist persons not regularly associated with academic institutions to undertake or complete studies in the creative arts. Letters of application should be submitted before Oct. 31, 1962 to the Ford Foundation, Fellowship Program for Studies in the Creative Arts, 477 Madison Ave., New York 22.

Fellowships are for research and study involving any one of the creative arts, not designed to support study or training for an academic degree nor to support the artist in his capacity as painter, novelist, poet, etc.

TILE COUNCIL GIVES GRANTS TO 15 SCHOOLS

The Tile Council of America, trade association of 25 domestic manufacturers, has recently set aside \$33,750 in new funds for architectural education. Aimed at aiding talented and needy students and encouraging high standards in the teaching of courses in building materials, the program makes available \$750-a-year, three-year grants to 15 accredited architectural schools. Of the \$750, \$500 is used for student grants or loans; \$250 to improve courses in building materials.

Schools selected for the grants this year, bringing to 42 the number of institutions benefitted since the program's inception several years ago, are: the Catholic University of America, University of Cincinnati, Harvard University, University of Kansas, Massachusetts Institute of Technology, Miami University, Montana State College, University of Oregon, University of Pennsylvania, Rensselaer Polytechnic Institute, Rhode Island School of Design, Texas Technological College, Tulane University, University of Virginia and Washington University (St. Louis).



WEINM PUM

In today's buildings it is most important to have water on time and in the right quantity to insure even continuing of the air. That's why you find Weinman Pumps so often specificated the can be depended upon a winter and summer and summer and summer with economy and efficiency.

Here is a list of outstanding new buildings previewed Architectural Record. They a have one thing in common. Weinman Pumps were specific

South Park High School
Beaumont, Texas
La Fonda del Sol
Time and Life Building
Rockefeller Center
New York, New York
Texas Institute for
Rehabilitation and Research
Houston, Texas
Fort Stockton High School
Fort Stockton, Texas
The Lovett School
Atlanta, Georgia
Highland Hospital
Beacon, New York
Robert E. Lee Senior High School
Tyler, Texas
Tulane University Center
New Orleans, Louisiana

Whenever you design...consult yo Weinman Pump Specialist for the a vice of experience. You'll find hi listed in the Yellow Pages. Or, if y would prefer, write directly to us.

THEWEINMAN
PUMPMFG. CO.
290 SPRUCE STREET
COLUMBUS 15, OHIC
CENTRIFUGAL
SPECIALISTS

For more data, circle 141 on Inquiry Card

For more data, circle 142 on Inquiry Card





For year-round learning comfort and creative teaching help...

Nesbitt 600 Line

... contemporary lines and colors
by Designer Paul McCobb

The most practical system for the control of all the thermal factors in a classroom is the fully automatic Nesbitt Unit System

Beauty and utility
are important adjuncts of
year-round comfort with
the Nesbitt 600 Series of
Classroom Unit Ventilators
and Storage Cabinets




he comfort conditioning of school and college buildings is, as you know, a singular assignment, with uncommon demands. The buildings may be used part of the day, or day and night; part of the year, or all year round. Some classrooms will be occupied, others not; the number and activities of the occupants will vary greatly. There will be need for heating many days of the year, more in some localities, less in others; but at least for morning warm-up, during recesses, overnight, and week-ends. Rooms with certain exposures or large windows may need independent cold surface and downdraft radiation. At the same time, most occupied classrooms will need cooling; and when the outside temperature is below 60°F this can be had for the low cost of introducing outdoor air. But in the spring and fall—and most certainly in the summer—mechanical cooling and dehumidification will be needed. And always, of course, the control of heating, ventilating and cooling must be on an individual room basis—learning productivity depends on the proper thermal environment.


Thus, everything about a school's thermal comfort requirements calls for a unit system. More unit systems are used in schools than all other kinds; and more of the units have been made by Nesbitt than by any other manufacturer.

Plan to use Nesbitt Year-Round Syncretizers in your next school. They will do what you want—winter and summer—and for the life of the building! The Nesbitt record over the last 45 years attests to that. Will you let us prove it?

SEND FOR PUBLICATION 11-3







UNIT SYSTEM
HEATING, VENTILATING AND AIR CONDITIONING

Made and sold by John J. Nesbitt, Inc., Philadelphia 36, Pa. Offices in Principal Cities



MARCO ILLUMIGLO FOR SOFT LIGHTING...LOW BRIGHTNESS


Illumiglo is the newest addition to the Marco line of recessed lighting. A versatile design, it provides a soft-glowing, evenly diffused light without glare for use in hospitals, schools, offices and all commercial installations. The effect is pleasant and soft, satisfying any mood. Significant of Marco quality and diversity, the Illumiglo is still another indication of what Marco offers from a wide line of specialized designs. Marco also provides custom design service for special purpose lighting. Write for the name of your local representative and for literature on the complete line...or tell us your special needs.

IN AVE. # LOS ANGELES 1, CALIF.

DOORWAY TO TIME CONTROL



How to save more man-hours with

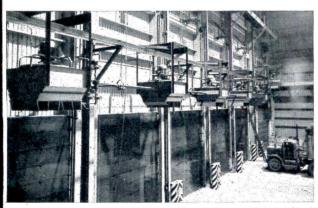

Bank of five steel "OVERHEAD DOOR" installations at Midwest Steel Division plant converts factory sidewall into a "movable wall," and provides control of traffic, time, space and climate.


The saving of man-hours can be a function of "overhead door," just as surely as it helps contraffic, space and climate through its "movable was function.

Motorized, push-button doors contribute important to this time-saving. And completely automated do operated electronically, can contribute even more. example, a fork-lift driver may take 75 seconds to o and close an industrial door. At an average of opening-and-closing per half-hour, 16 cycles per day door, and a \$2.25 wage rate, driver downtime alone cost industry \$183 per door per year!


cost industry \$183 per door per year!

When you multiply \$183 by many doors, you see the yearly savings possible with the automation of the control of the c


Besides man-hour savings and weather protect both motorized and electronic "OVERHEAD DOOR"

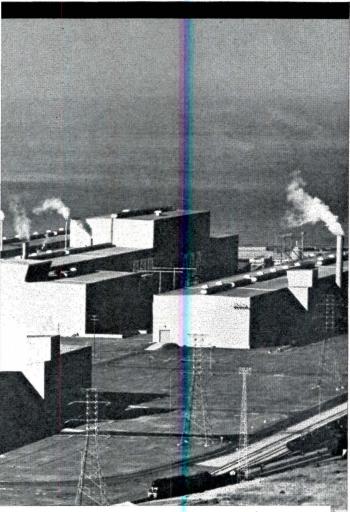

At its ultra-modern new plant on the south shore of Lake Michigan at Portage, Indiana, Midwest Steel Division of National Steel Corporation utilizes 38 motorized units of The "OVERHEAD DOOR." All doors are 16-gauge steel, built to withstand 150-mph winds. Architect: Swindell Dressler.

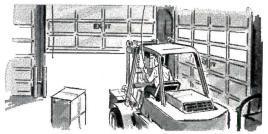

Driver has pulled cord, and "OVERHEAD DOOR" is moving up in Air Express building at Atlanta's new airport. Immediate door operation permits tractors to pull package-laden carts into and out of building, quickly and efficiently, saving many man-hours.

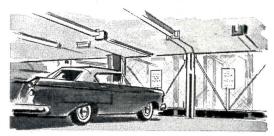

Automatically-operated, upward-acting, expanded-metal gates by "OVERHEAD DOOR" are used in this pigeon-hole parking structure at Columbus, Ohio. Representing the newest in car-park automation, this driverless "file system" depends on The "OVERHEAD DOOR" for swift, automatic handling.



Industrial truck and fork-lift operators need never leave their vehicles as they approach an automated "OVERHEAD DOOR" installation. At the touch of a dash-mounted electronic button, powerful lift mechanism raises the door, or outer gate, speeds traffic flow, eliminates stop-and-go man-hours.


motorized "OVERHEAD DOOR"

illations can provide unlimited ingress and egress at affic-flow arteries; control strategic expansion or conement of given shop areas and functions; and safeard the welfare of employees by closing to preserve rmth in winter, opening to provide full ventilation summer.

GET THE COMPLETE STORY NOW

For detailed information, call your local distributor, ted in the white pages. Or write Overhead Door reporation, the company that engineered and pioneered or automation—and originated upward-acting seconal doors for industry, commerce and residential ilding. General Office and Manufacturing Division: artford City, Ind. Manufacturing Distributors: Dallas, x.; Portland, Ore.; Cortland, N.Y.;

llside, N.J.; Lewistown, Pa.; Nashua, H. In Canada: Oakville, Ontario.

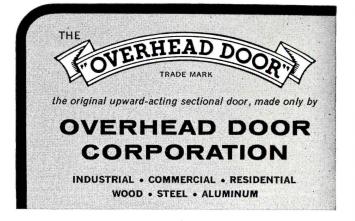

For more data, circle 145 on Inquiry Card



hospital is more than just a buildi

... an efficient machine of doctors, nurses and technicians backed by modern functional equipment. More than 40 hospital projects being completed in 1962 chose **Remco Hospital Casework** as an integral part of this vital equip-

ment...standard and customed designed units sensible prices.

Write for Remco's new Hospital Casework Manual #6 ... just what the doctor ordered.



HOSPITAL CASEWORK

101 New Laredo Highway, San Antonio 11, Texas

STRUCTURAL STEEL TUBING AVAILABLE WITH 36% HIGHER MINIMUM YIELD STRENGTH!



	ASTM A-36	
60,000 to 75,000	Tensile strength, psi.	60,000 to 80,000
33,000	Yield point, min. psi.	36,000
24	Elongation in 2 in., min. per cent	23
	to 75,000 33,000	to 75,000 Tensile strength, psi. 33,000 Yield point, min. psi. 24 Elongation in 2 in.,

NEW REPUBLIC SPECIFICATION ST-101

		Grade A	Grade B	Grade C
	Tensile strength, min., psi.	45,000	52,000	60,000
ROUNDS	Yield strength (.2% offset), min., psi.	33,000	42,000	50,000
	Tensile strength, min., psi. Yield strength (.2% offset), min., psi. Elongation in 2", min., per cent	25	25	20
			60,000	70,000
SHAPES	Yield strength (.2% offset), min., psi.	33,000	45,000	60,000
	Tensile strength, min., psi. Yield strength (.2% offset), min., psi. Elongation in 2", min., per cent	25	25	10

Use this Bonus Strength to cut material requirements!

With Republic's new, high strength structural steel tubing, you spend less money to get needed strength in columns, posts, lintels, spandrels, and other structurals.


Republic has increased guaranteed minimum yield strength of square and rectangular structural steel tubing shapes by 36 per cent over ASTM Specifications A-7 or A-36 without increasing cost.

(Continued next page)



STRUCTURAL STEEL TUBING AVAILABLE WITH 36% HIGHER MINIMUM YIELD STRENGTH!



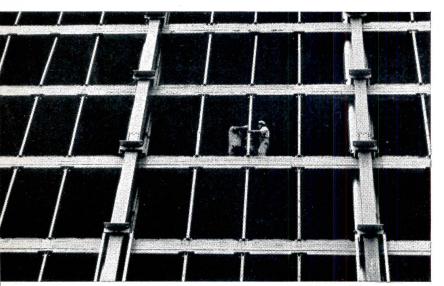

SUPPORTING EXTERNAL CURTAIN WALL SIDING: 1,300 pieces of Republic's Rectangular Tubing, $4'' \times 3''$, in lengths from 10' 4'' to 15' 11'/2''. Building is New York Life Insurance Company's new headquarters in New York City. Architects: Carson, Lundin & Shaw. Structural engineers: Edwards and Hjorth.


(From preceding page)

Detailed in Republic's new ST-101 Specification, the higher strengths can bring about significant savings in overall material requirements and costs. ST-101 is the first specification ever written for structural steel tubing.

In replacing other materials, steel tubing combines the efficiency of hollow, thin-wall sections with a trimness of line that integrates with other elements and materials. Tubing cuts weight of structures. Easily joined by mechanical methods or by any of the conventional welding processes, structural tubing is ideally suited to off-site fabrication.


Republic ELECTRUNITE® Structural Steel Tubing is available in rounds to 6 inches O.D., squares and rectangulars in peripheries to 20 inches and wall thicknesses including .250". A new Republic booklet contains complete information including elements of sections for structural steel tubing. Mail the coupon.

EFFICIENT COLUMNS: The light weight and ease of fastening structural steel tubing simplifies erection. Photo shows preliminary column work at the Otter Creek Elementary School in North Terre Haute, Indiana.

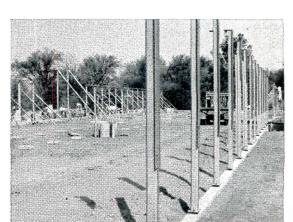



CONJUNCTION WITH GRANITE PANELS: Republic Structural Tubing, sizes $31/2^{\prime\prime}$ x $2^{\prime\prime}$, used for mullions at the new Buffalo & Erie County Public Library, uffalo, New York. James William Kideney & Associates, Paul Hyde Harbach & Elon B. Clark, Jr., Associated, architects. Contractors Ornamental Steel Comany, Buffalo, New York, steel tubing erection.

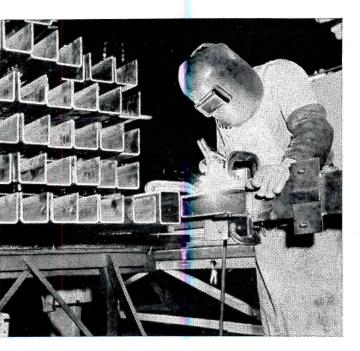

OFF-SITE FABRICATION: Welding heavy steel angles for structural steel anchoring to both sides and ends of Republic Rectangular Steel Tubing. Tubing used at New York Life Insurance Company's new headquarters in New York City. Tubing fabricated by General Bronze Corporation, Garden City, Long Island, N. Y.



PUBLIC STEEL


Cleveland 1, Ohio

REPUBLIC STEEL CORPORATION **DEPT. AR-4604** 1441 REPUBLIC BUILDING . CLEVELAND 1, OHIO

City_

Please send a copy of the booklet, Republic Electrunite Steel Tubing For Structural Use as Columns and Beams.

Name	Title	
Company		
Address		
City	ZoneState_	

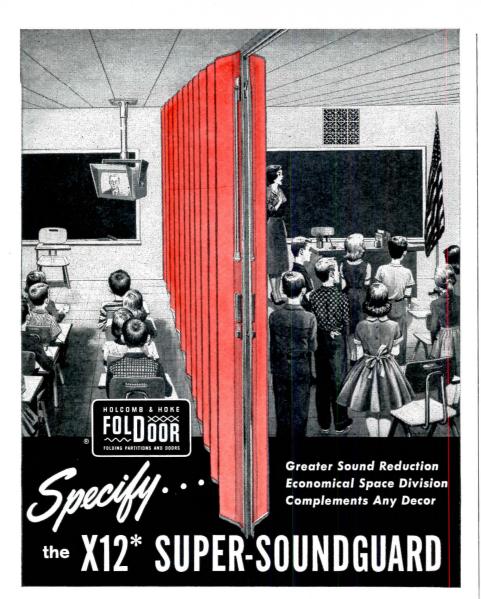

Superior sound retardency . . . stronger frame . . . easier operation . . . greater economy . . . more decorative beauty. Foldoor's new X12 Super-Soundguard folding partition solves every architect's sound and space separation problem . . . where space partitions must remain flexible.

Easy operation is assured for the X12 Super-Soundguard as a result of exclusive design superiority. Engineered track is contoured to minimize friction... provide precision tracking. Strong intermediate trolleys on every other hinge pair prevent any possible sagging. Track is warranted for life of original installation... hinges, trolleys and trolley pins for 10 years.

Wide selection of Peacock, Americana and 45 oz. Titan decorator fabrics... most complete warranty in folding partition industry... and exclusive "downward-pull" safety draw latch are added advantages of the new X12 Super-Soundguard

Write today for the new X12 Super-Soundguard catalog or see your nearest Foldoor distributor. See Sweet's Architectural File 16+XHO for information on other Foldoor partitions.

\$12" profile, requiring less stack space than smaller profile partitions.

FiliGrille

A dramatic new concept in styrene grillework for seethrough space dividers and screens . . . factory

fabricated with customized framing ready to install.

ready to mistair.

۰				-	-	-	-
	HOL	COMB	& HO	KE M	FG., (CO.,	
			ın Stre	et, Ind 4	lianap	olis	7,

Please send me data on:

Foldoor X12 SUPER-SOUNDGUARD

Other Foldoor doors and partitions
FiliGrille Grillework
Have job in planning; please call

NAME		-	
FIRM			
ADDRESS			
CITY	ZONE	STATE	

For more data, circle 148 on Inquiry Card

← For more data, circle 147 on Inquiry Card

On the Calendar

September -

2-9 Biennial Congress of the International Federation for Housing and Town Planning; theme, "Habitat et Civilisation"—Paris, France 6-11 World Congress, International Council for Building Research Studies and Documentation; theme, "The Influence of Changing Requirements and Developments in Materials and Components on Design and Construction"—Cambridge, England

9-14 National Technical Conference, Illuminating Engineering Society—Statler Hilton Hotel, Dallas 10-14 Industry conference on building codes, National Association of Home Builders—National Housing Center, Washington, D.C.

10-17 Third congress meeting, Inter-American Federation of the Construction Industry—Rio de Janeiro, Brazil

17-20 64th annual meeting, American Hospital Association; feature, architectural exhibition of nursing homes and long-term units—McCormick Place, Chicago

19-21 Annual convention and Chapter President's conference, Producers' Council, Inc.—Commodore Hotel, New York

19-22 Institute on Information Retrieval, sponsored by the University of Minnesota Library School and Center for Continuation Study—Univ. of Minnesota, Minneapolis

23-26 National Planning Conference, sponsored by the Community Planning Association of Canada—Hotel MacDonald, Edmonton

23-28 Eighth annual national convention, Prestressed Concrete Institute—Roosevelt Hotel, New Orleans


24-26 Midyear meeting, Associated General Contractors of America Governing and Advisory Board— Denver

27-29 Western Mountain A.I.A. Regional Conference—Sun Valley, Idaho

27-29 National annual meeting and Second National Symposium, Industrial Designers Institute; theme, "U.S. Design for the Competitive Market"—Detroit

28-29 14th fall convention, American Concrete Institute; theme "Concrete Construction in Aqueous Environments"—Seattle, Wash.

continued on page 303

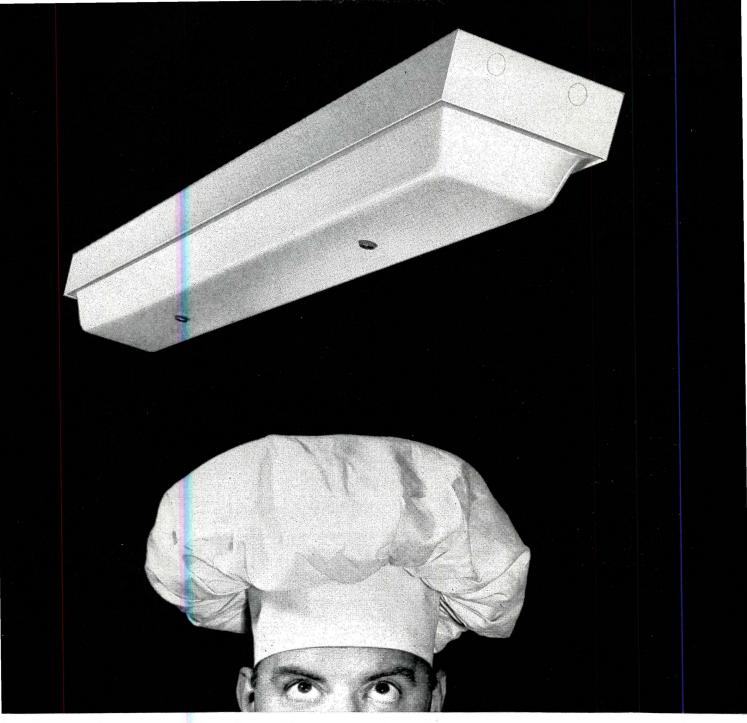

the fixture to forget!

Once installed you can forget about Wheeler's Clean Lite except for an occasional wiping of the exterior surface with a damp cloth. This maintains light output. Clean Lite is the ideal fixture wherever food is processed or prepared.

Architects and consulting engineers have been specifying the Clean Lite in many building programs for food service areas. In particular, food processing areas, bakeries, school and college cafeterias have installed Clean Lite fixtures to meet exacting sanitation and maintenance demands. The performance and maintenance reports are very gratifying.

No danger of lamps accidentally dislodging into food

batches — no worry about cleanliness. Its smooth exterior will not harbor vermin attracting accumulations. The clear or white acrylic cover will withstand most atmospheres especially those where dust, moisture, fumes or strong drafts are common. Clean Lite is the fixture to use when these factors may affect proper operation of lamps, cause deterioration of the reflecting surface, create high maintenance costs or actually shorten fixture life.


In the Clean Lite, cleanliness is second only to light output. For more details and specifications, write to Edmund Quintiliani, National Sales Mgr., Wheeler Reflector Co., Hanson, Mass.

WHEELER REFLECTOR CO., INC.

HANSON, MASSACHUSETTS



The Clean Lite is available in 4' or 8' lengths in painted, porcelain enamel finish or aluminum and is ideal for the following locations: • FOOD PROCESSING • PARKING GARAGES • BAKERIES • LAUNDRIES • BREWERIES • CHEMICAL PLANTS • CANNERIES • KITCHENS • SERVICE STATIONS • WASH ROOMS • WAREHOUSES • PRINTING PLANTS • LOADING PLATFORMS • LOCKER ROOMS • DAIRIES • DRY WORKS • PACKING PLANTS • ENTRANCES AND EXITS • PLATING PLANTS • BOILER ROOMS • COOLING ROOMS • TRAIN PLATFORMS • PASSAGEWAYS • STEAM ROOMS.

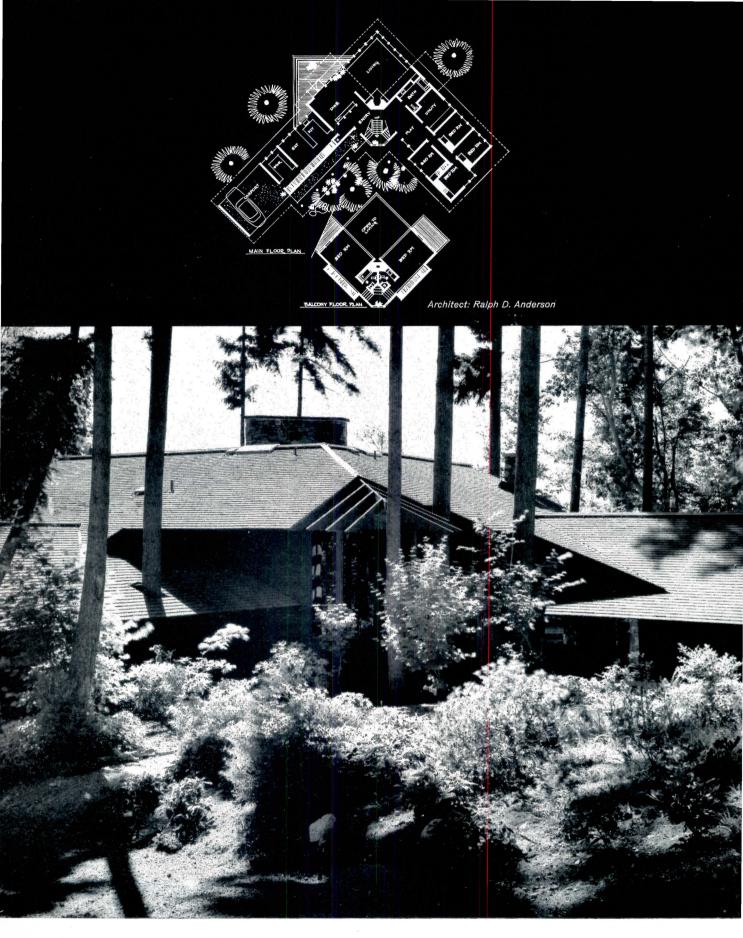

Red Cedar Shingles age gracefully

The roof above is 5 years old. It will continue to gain beauty and character for years to come. Rugged, durable, storm and wind resistant, a Red Cedar Shingle roof weathers beautifully and lasts well over 20 years. For detailed information


about specifications or application of this classic material: write, wire or call: Red Cedar Shingle Bureau, 5510 White Building, Seattle 1, Washington. (In Canada: 550 Burrard Street, Vancouver 1, British Columbia) **RED CEDAR SHINGLES**

GIFFELS & ROSSETTI, INC., specified precast white concre

nels for the curtain walls of the plant, administration building, employees' facilities building and boiler house in this Maryland manufacturing complex. Made of ATLAS WHITE portland cement and exposed quartz aggregate with a lightweight aggregate backup, some 75,000 square feet of paneling was anchored to the steel framework by clips, angles and bolts. Installation was fast. For example, 400 panels were anchored on the manufacturing building in 20 working days. The interior side of the units was troweled and left exposed. □ Today, more architects are taking advantage of the design versatility and construction economy of precast concrete. It can be cast in a great variety of sizes, shapes, colors and textures. Ask your local precast concrete manufacturer for details.




For a 32-page brochure titled "White Concrete in Architecture," write Universal Atlas, 100 Park Avenue, New York 17, New York.

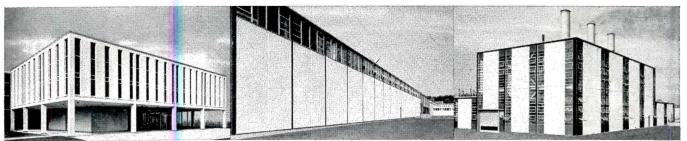

Offices and plant, Mack Trucks, Inc., Hagerstown, Md. Architects and Engineers: Giffels & Rossetti, Inc., Detroit. Contractor: Darin & Armstrong, Inc., Detroit. Precast Concrete Panels: "Marzaic," by Marietta Concrete Division, Martin Marietta Corporation, Marietta, Ohio-



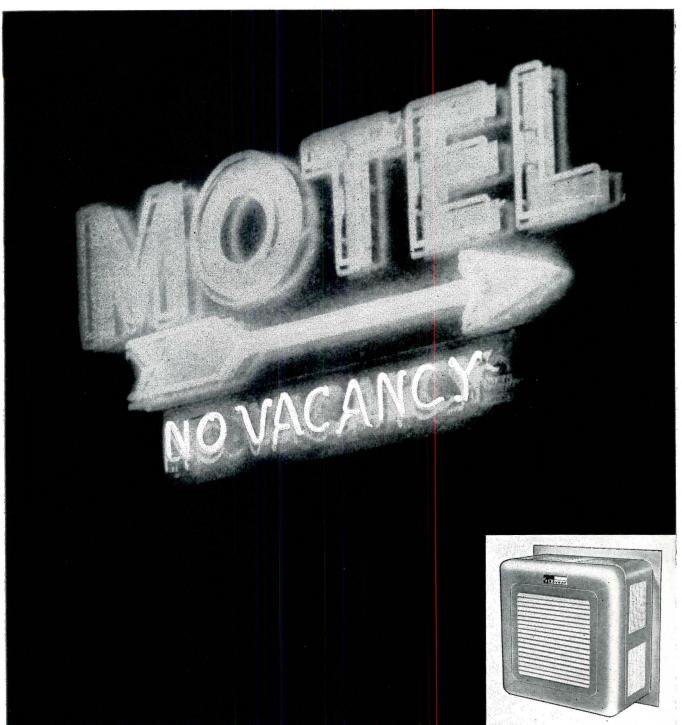

Visit the spectacular Gas Pavilion at the Seattle World's Fair.

one sign of a profitable motel business


Another sign: Suburban Novent-Dynavent Gas Heaters. And they are profitable! These compact gas units give you the comfort of central heating at a fraction of the cost. You save on installation—no flue, no chimney, no ducts needed—adaptable to just about any location. You save about 30% on already low gas fuel costs... because no heat is wasted. A powerful blower circulates gentle, gas heat from the floor to the ceiling. Uses outside air...burns no room oxygen. Want to heat almost any building at lowest cost? Call your Gas Company. Or write Suburban Appliance Co., Dept. AR-962, Morristown, N. J. For heating... Gas is good business

AMERICAN GAS ASSOCIATION


MAGIC UNDER THE ROOF

AND IN IT

In his Arena Stage, as one critic commented, Harry Weese "has produced a handsome structure, both simple and spare, creating an ambiance which suggests . . . that magic is made, after all, in a working place." We wholeheartedly agree, and are indeed proud that this distinguished architect should have chosen terne roofing for so notably distinguished a building, merely adding (however diffidently) our not unselfish belief that there is also some slight element of magic in a material which can provide so much form, color, function—at such relatively modest cost. Whether architect or prospective builder, we will be very happy to

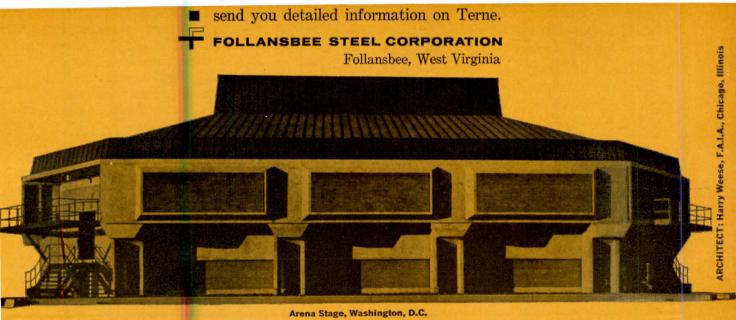

Follansbee is the world's pioneer producer of seamless terne roofing

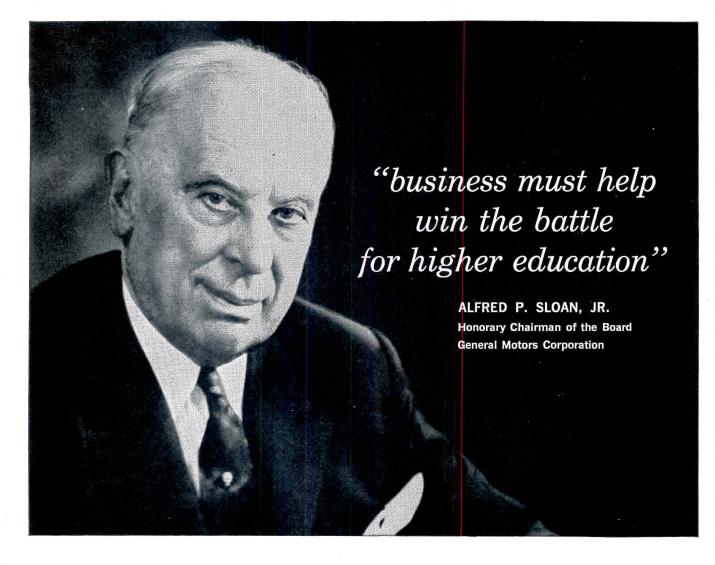

"Regardless of the strengths and attributes our nation possesses, if we fall behind in the field of education, we will fall behind as a world power.

"Our scientific, cultural and economic growth-and our political strength-will depend largely upon the educational facilities we make available to our youth. We owe it to ourselves as a nation; we owe it to our young people who will inherit this nation to provide the financial aid that will make our institutions of higher learning second to none in the world. This is of vital importance to our business community.

"Business must put its support on the line to help win the battle for higher education."

Today many of our colleges are overcrowded. In ten years, applications will have doubled and we will be faced with an even more serious crisis in our institutions of higher learning. We will need more and better college classrooms, many more well-equipped college laboratories and thousands more of the most dedicated and well-trained professors.

Only increased financial aid will provide our young people with the best college facilities. Only increased financial aid will keep our finest minds from leaving the teaching profession.

For additional information on the crisis faced by higher education write to: Higher Education, Box 36, Times Square Station, New York 36, N. Y.



Published as a public service in cooperation with The Advertising Council and the Council for Financial Aid to Education



On the Calendar

continued from page 296

ctober_

4 World Conference on Shell ructures, presented by University California, Berkeley; Building Rearch Advisory Board—National Rearch Council; and International ssociation for Shell Structures—neraton-Palace, San Francisco. Conference opens September 30

4 National fall meeting, American felding Society—Hotel Schroeder, ilwaukee, Wis.

Office Notes

ffices Opened—

Yau Chun Wong has opened a ew office for the practice of arnitecture at 116 South Michigan ve., Chicago 3.

Welton Becket and Associates, rchitects, have opened new offices 300 Park Ave., New York 22.

Offices have been opened for hancy Miles Lott at 7188 Sunset lvd., Altavista, Calif. The new ofces are located in the Burroughsckerman building, planned and esigned by Mr. Lott while associted with Richard Dorman and ssociates.

Reynolds, Smith and Hills, Archiects and Engineers, Jacksonville and Tampa, Fla., announce the pening of an office in Orlando at West Gore Ave.

R. A. Pierce Associates have bened new architectural offices a Craig-Forbes Officenter, 4535 orbes St., Pittsburgh 13, Pa.


Tew Firms, Firm Changes-

The firm name of Fridy-Gaukerruscott & Fridy, Inc., Engineers as been changed to Fridy-Gauker & ridy, Inc., Engineers. Offices are at 321 Arch St., Philadelphia, Pa.

Donald E. Harmony has been appointed general manager with Joseph E. Biro & Associates, Consulting Engineers, Easton, Pa.

Jerry F. Weiss, formerly a partner Hart and Weiss, Architects, has brimed a new firm, Jerry F. Weiss and Associate, Architects, 2485 Fairount Blvd., Cleveland Heights, hio. Robert W. Blatchford is assoate.

continued on page 313

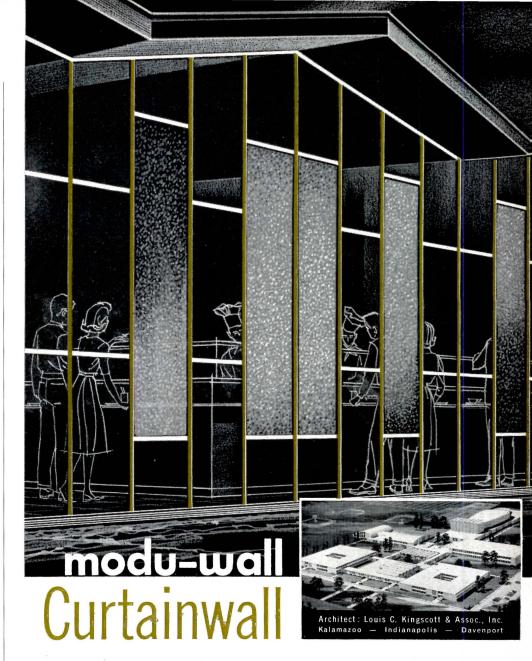

...a wealth of design freedom in lasting exteriors


The new Marion (Indiana) High School clearly shows the use of Moduwall curtainwall at its versatile best. Here, a combination of polyform quartz aggregate panels set off by bronze Kalcolor vertical mullions provide dramatic color and an arresting third dimensional effect.


The Modu-wall curtainwall system provides a performance proved design...assured weather tightness...effective condensation drainage... completely flush interior walls...and the advantage of earlier occupancy.

To create the desired architectural mood, you can choose from plain or patterned Kalcolor aluminum panels, and factory-installed porcelain, quartz-aggregate, and ceramic tile.


For complete information contact your nearest Modu-wall office, listed below, or consult catalog 3a/MO in Sweets.








modu-wall, inc. PARCHMENT 1, MICHIGA

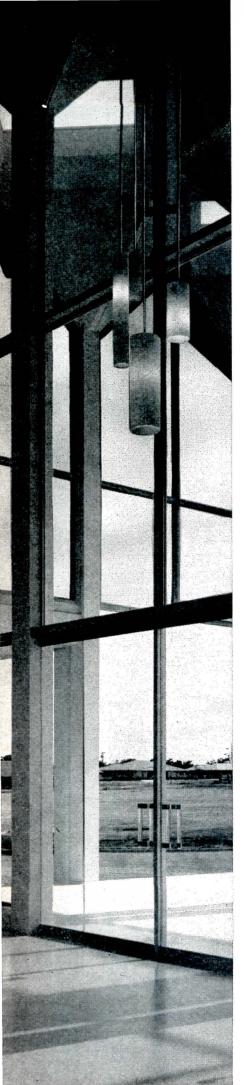



MAN TAKES **COLORING BOOKS** TO SCHOOL!

This was a very important school, beautifully planned to the last detail. It was the Hockaday School in Dallas, one of the country's finest preparatory schools for girls . . . now completing a vast new center on a 100-acre site.

The man was important, too. He was the Man from Devoe, whose main responsibility is personal assistance to architects on any problem involving paint. The books were the seven volumes of our Modern Color Classics,® covering over 1,000 interior and exterior color selections in the Devoe Library of Colors® system. In this case, the Devoe Library of Colors helped the architect and his color consultants decide on 1,768 gallons of interior and exterior paints, matched to a complex range of color requirements for nine new buildings. Selections included Devoe vinyl wall paint, alkyd flat enamel, semi-gloss enamel and Mirro-lac enamel.

Tomorrow, the Man from Devoe can be helping you ... just as willingly and easily. With information on paint formulae and maintenance costs, or technical help in color selection, for example. With capable supervision of paint deliveries to your job site. Or with tips on cutting costs. It all depends on what you need.

Wherever you are, the Man from Devoe is at your service . . . without obligation. To reach him, simply write or phone the Devoe Color Consultation Service at your nearest Devoe office.

Photos show main entrance Administration Wing, The Hockaday School, Dallas, Texas. Architect: Harwood K. Smith & Partners, Dallas; General Contractor: Robert E. McKee General Contractors, Inc., Dallas; Painting Contractor: Eddie H. Shahan, Inc., Dallas.

DEVOE & RAYNOLDS COMPANY, INC. A SUBSIDIARY OF MERRITT-CHAPMAN SCOTT CORP.

Atlanta • Boston • Charlotte, N.C. • Chicago • Cincinnati • Dallas • Denver • Detroit • Houston • Los Angeles • Louisville • Moonachie, N. J. • New Orleans • New York • Philadelphia • Stamford, Conn. • Warehouses in all principal cities, coast to coast.

Please send me the free RAINBOW SELECTION of 300 "thoughtstarter" colors chosen from the Devoe complete Library of Colors®.



Name		-
Company	AP	

Address

_Zone___State_

Now one product cures, hardens, seals and dustproofs new concrete floors with a single application

West Chemical Concrete Floor Treatment goes right on after troweling... cuts labor costs in half

Now you can treat newly-laid concrete floors immediately after troweling with no delays for drying. No delays between treatment applications.

For West Concrete Floor Treatment cures, hardens, seals and dustproofs new concrete with a single, simple, penetrating application. Gives a thorough, deep-cure treatment which also prepares the surface perfectly for the addition of composition tile or other material.

It enables concrete to retain over 95% of its moisture. Permits a gradual and even release of moisture so that the curing, hardening and sealing processes occur simultaneously.

Just one coat of West Concrete Floor Treatment seals concrete against stains from acids, oils, and greases during the early construction phases. Protects surface from plaster, paint, mud, and abrasive traffic during final construction phases.

This remarkable time-and-labor saving treatment is as effective indoors as out. No special skill is needed to apply it. No complicated machinery or equipment. And it meets ASTM specifications C-156 and C-309.

So speed up your whole operation, cut costs in half and protect your investment by proper curing with West Concrete Floor Treatment.


The man to contact for specifications and additional information is your local West representative, or mail coupon below. West Chemical Products, Inc., 42-16 West Street, Long Island City 1, N. Y. In Canada: West Chemical Products, Ltd., 5621-23 Casgrain Ave., Montreal, P. Q.



Vest Chemical Pro Concrete Division, I	
42-16 West Street,	Long Island City 1, New York
☐ Please send me fur West Concrete Floo	
☐ Have your represen	tative call
Name	
NameCompany	
_	

305




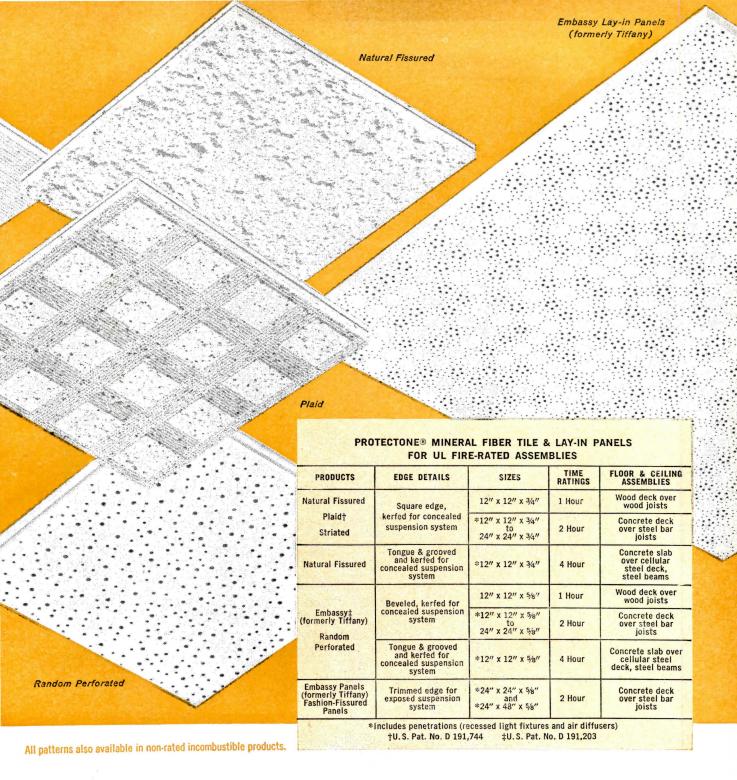

The Acousti-Celotex family of PROTECTONE® fire-retardant mineral fiber tile and lay-in panels offers you the widest choice of patterns and textures for UL time-rated ceiling assemblies. Celotex Protectone products meet every design challenge, the most demanding building codes. No spray or membrane fire protection required. Dry installation speeds construction. Building owners save money ... benefit from earlier occupancy, reduced insurance premiums. Your Acousti-Celotex Distributor, listed in the Yellow Pages, is a member of the world's most experienced acoustical organization. He offers valuable Ceiling Consultation Service, without obligation.

ACOUSTI-

THE CELOTEX CORPORATION, 120 S. LA SALLE ST., CHICAGO 3, ILLINOIS IN CANADA: DOMINION SOUND EQUIPMENTS, LIMITED, MONTREAL, QUEBEC

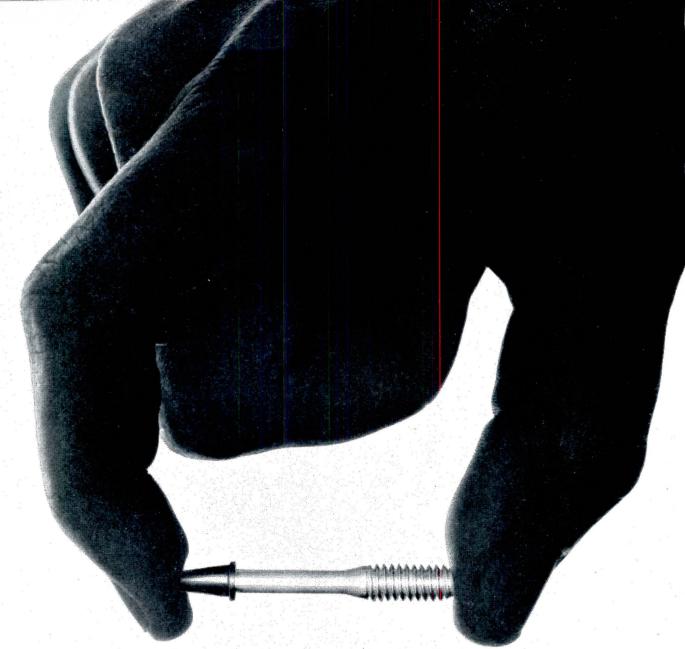

This 1/5 ounce fastener holds 2,000 pounds

Either we're frauds, or that's one helluva powerful fastener

It's easy to be skeptical.

Nevertheless, a Ramset #2428 powder-actuated fastener, set in 4,500 p.s.i. concrete, withstands a sheer load of 2,000 pounds, a tension load of 1,800 pounds.

Humbug, you say?

We'll set up any test you want. Anywhere. And we'll bring along the flimsy little fasteners.

We're pretty confident.

First of all, any powder-actuated fastener—with the propertip shape—forms a compressive bond with concrete.

Secondly, our Ramset fasteners are austempered. Austempering is a special, two-stage, heat treating process. Increases holding power a full ¼ over conventional heat treating methods.

Thirdly, some of our biggest boosters were once outrageously skeptical.

You can take the easy way out and

send for a report by an independent testing lab. Shows the recommended load for each of our fasteners by hardness of concrete and by depth of penetration.

Or you can call our bluff on the tests. You really can't lose. Once we've proved our case on holding power, we'll also show you how our little Ramset fasteners cut costs. Just write us on your letterhead.

IMSEE WINCHESTER-WESTERN DIVISION Olin 301-1 Winchester Avenue, New Haven 4, Conn.

but we make

some make
some make
types of wall coverings

WOOD ALL VINYL VINYL FABRICS

Laminating Services makes three types of wall coverings — wood, vinyl fabrics and all vinyl. The result is the wealth of experience and know-how you'll notice when your L.S. representative comes calling. He will demonstrate our fine quality products.

Pliant Wood



Cloth-backed natural wood veneer. Easy to apply on any hard, smooth, dry surface — flat or curved. Manufactured to architect's specifications. Matched grain provides continuous-pattern beautiful in appearance for large and small wall areas — material is delivered to the job, matched and numbered to assure proper installation. Your choice of woods, imported and domestic.

·L-FAB "22" .



An exceptionally tough covering for heavy usage applications. Pure virgin vinyl with color fused to underside — durable — to withstand the hardest usage. Meets flame-spread rating, abrasion, tear strength, and other Government requirements. Available in a cloth-backed "upholstery grade", to provide design continuity between walls and furnishings. Vin-L-Fab "22" is available in 6 embossed patterns and an unlimited choice of colors. Special colors in solids, two-tones and stripes are available in small quantities.

N-L-FAB ..



Durable vinyl fused to cloth backing. Adaptable to most all wall covering applications, it is available in weights and thicknesses ranging from heavy-duty to light weight. Vin-L-Fab is supplied in many embossed patterns and in a wide selection of colors. Meets G.S.A. requirements.

MANUFACTURERS OF WALL COVERINGS MADE WITH ROVANA


NATIONAL DISTRIBUTOR FOR JOANNA WALL FABRICS
SAMPLES, SPECIFICATIONS, BROCHURES AVAILABLE ON REQUEST
DISTRIBUTORS LOCATED IN MOST PRINCIPAL CITIES

LAMINATING SERVICES, INC.

4700 ROBARDS LANE

LOUISVILLE 18, KENTUCKY

For more data, circle 158 on Inquiry Card

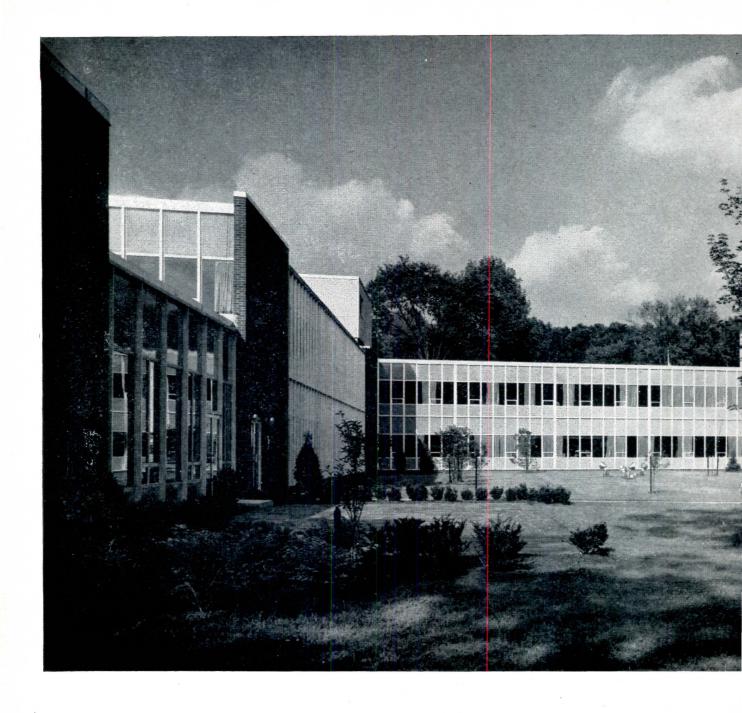


New Sylvania buildings richly reflect Lupton's

Sylvania's new headquarters provide another shining example of how LUPTON handles the complete job, from architect's design to final installation. Make your creative demands as exacting as you like...LUPTON single-source responsibility makes certain that your most imaginative uses of aluminum curtain wall systems are fully realized.

Our units allow full scope for projects of any size ... for unlimited versatility of function... for uninhibited architectural expression, planning, and

form. Now you can specify—and get—virtually any combination of colors, finishes, and textures. And when it comes to skilled assistance from project engineers, LUPTON's staff can advise on or coordinate the manufacturing processes your design requires. After that, our curtain wall craftsmen see to it that your concepts are followed to a T. For final expert touches, LUPTON field supervisors assure speedy, efficient installation, always with an eye to maximum savings.

You have the assurance, too, of LUPTON financial

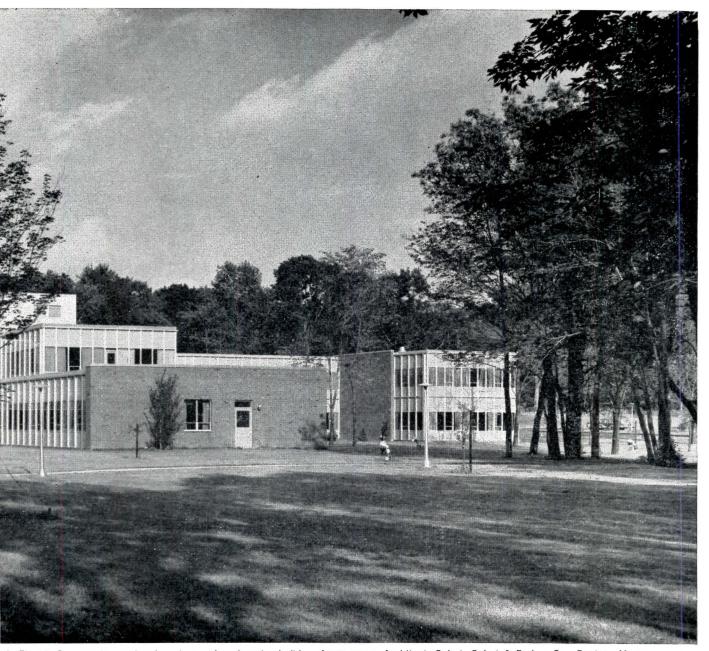

nia Electric Company's new headquarters and engineering build-Waltham, Mass., feature 2666 Lupton curtain wall units. Light matte finish porcelain enamel panels are laminated to urethane

foam cores. Architect: Cabot, Cabot & Forbes Co., Boston, Mass. Associate architect: Paul Van West, Williamsport, Pa. Contractor: Gilbane Building Co., Providence, R. I. Photo by Cortlandt V. D. Hubbard.

vided responsibility on curtain wall projects

responsibility. Ours is a solidly established company that backs up all jobs with a reputation for reliability of 25 years' standing.


In short, you can confidently rely on LUPTON total services and ability to turn your ideas into 'ully achieved realities. Why not investigate every advantage we can offer for your present or future projects? See Sweet's Architectural File (sections 3 and 17) for the Michael Flynn Aluminum Curtain Wall and Window catalogs. A call to the nearest LUPTON representative (see Yellow Pages

under "Windows—Metal") will bring fast action without obligation.

LUPTON®

MICHAEL FLYNN MANUFACTURING CO.

Main Office and Plant: 700 East Godfrey Avenue, Philadelphia 24, Pa. West Coast Office and Plant: City of Industry (Los Angeles County), California. SALES OFFICES: San Leandro, California; Chicago, Illinois; New York City; Cleveland, Ohio; Dallas, Texas. Representatives in other principal cities.

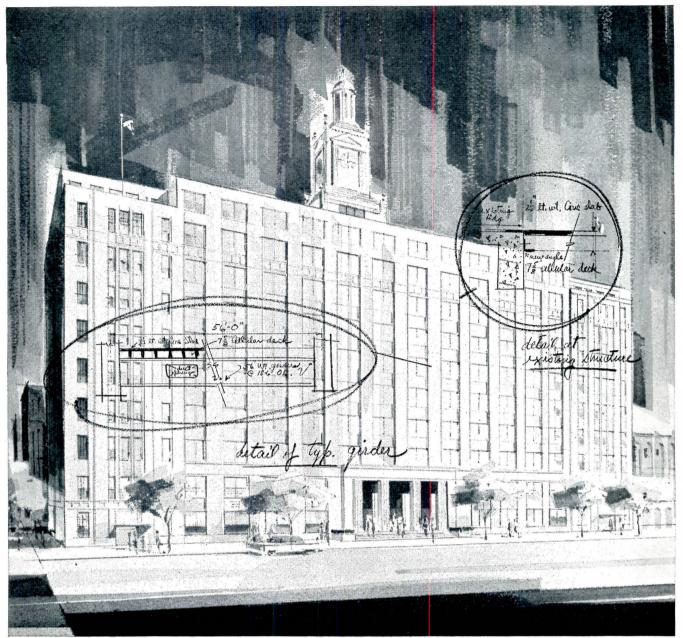


Hoyle, Doran & Berry-Architects

DOUBLED IN STEEL!



When plans called for doubling the size of the New England Mutual Life Insurance building in Boston, certain very definite considerations made steel construction the logical choice. For example a prime requisite was that tenancy and operation of the building was to be uninterrupted. That meant speedy construction and that in turn meant steel. Another was clear spans allowing for maximum flexibility in the use of office space and for this, 56' spans framed with steel girders and columns were provided. Complete electrical and telephone flexibility was still another requirement, and the answer was cellular steel floor decks. By the time this handsome building is completed, 6,000 tons of structural steel will have gone quietly into its construction. We say "quietly" for out of consideration for the neighbors, bolting will be used instead of riveting.





STEEL "CAN DO!"

No matter how complicated the job, no matter how many "musts" the client requires, steel with its versatility and adaptability, can meet the needs.

SPEED IS INHERENT

The very nature of the material comes to the aid of the builder—permitting the job to proceed in almost any weather—cutting the time element with prefabricated sections delivered to the job site ready for immediate installation.

STRENGTH IS CERTAIN

Lighter walls, far less dead weight than other construction materials, steel provides rugged, dependable strength—permits enormous spans—and because dead load stresses are minimized, steel decking may take the form of flat steel plates, corrugated steel planks or gridwork, open or filled.

AND ECONOMY IS GREATER THAN EVER

Now, with the new AISC Specification pointing the way to utilization of lighter weight, high-strength steels, additional savings are possible through reduction of steel tonnage required.



INLAND STEEL COMPANY
30 West Monroe Street • Chicago 3, Illinois

Wide Flange Beams • Steel Plates • Bearing Piles and Steel Sheet Piling • Ti-Co® Galvanized Sheets • 4-Way® Safety Plate Enameling Iron—Sub-Purlins

For more data, circle 161 on Inquiry Card

Office Notes

continued from page 303

Fred Bassetti and John M. Morse, former partners in Bassetti & Morse, Seattle, Wash., have established independent architectural practices. Fred Bassetti and Company are to be temporarily located at 1602 Tower Bldg., Seattle. John M. Morse and Associates have permanent offices at 1610 Tower Bldg., Seattle.

Louis M. S. Beal and Kenneth E. Johnson have been elected vice presidents of I.S.D., Inc., the interior space design division of Perkins & Will, architects. Mr. Beal directs the activities of the New York City office; Mr. Johnson heads the Chicago office.

Philip C. Patterson and Robert P. Meyerhof have become full partners in the firm of Smith and Williams, Architects and Engineers, 1414 Fair Oaks Ave., South Pasadena, Calif.

Joseph M. Brandstetter, chief engineer, Joseph A. Vedra and S. Ernest Pepe, senior project engineers, have been promoted to associates with the firm of A. Epstein and Sons, Inc., Engineers and Architects, Chicago. Milton Herman, after an absence of 17 years during which he was a partner in the firm of Herman & Salzman, Chicago, has rejoined A. Epstein and Sons, Inc. as an associate.

The name of Bellman, Gillett & Richards, Toledo architectural and engineering firm, has been changed to Richards, Bauer & Moorhead. Architect Robert M. Lutz has been advanced to senior associate and engineer Robert W. McMahon has been named an associate.

Norman M. Klein is now an associate partner with Whittlesey Conklin & Echeverria and Whittlesey & Conklin, 31 Union Square W., New York.

New Addresses -

J. D. Guillemette, Consulting Engineers, 728 Industrial Bank Bldg., Providence, R.I.

Ricciuti Associates—Architects— Engineers, 328 Chartres, New Orleans, La.

Richard Boone Rogers, A.I.A., 511 North Mills St., Orlando, Fla.


Howard Schroder, Architect, 1284 Wishon Ave., Fresno, Calif.

Ralph Stone and Company, Inc., Engineers, 10960 Santa Monica Blvd., Los Angeles, Calif.

from **BLONDER-TONGUE**



an invaluable guide to selection of the proper system • 12 packaged systems covering 80% of all master TV installations • basic principles of master TV installations to increase your know-how•handy slide-rule for DB to voltage conversion; calculate distribution system losses.



6)) (4) An indispensable aid to consulting engineers, architects and to all who must write master TV specifications for the growing market among schools, motels, hotels and apartment buildings.

 USE CONVENIENT COUPON 	• •
BLONDER-TONGUE LABS. 9 Alling Street, Newark 2, N. J.	R-9
Please send me: Planning Master TV Systems—FREE (norr \$1.00).	
☐ How to Write Master TV Specifications— Company	
Address	
CityZoneState	
Occupation—please check: architect consulting engineer inst	aller

For more data, circle 162 on Inquiry Card

EPCO PULLS AND KNOBS ARE DESIGNED TO LOOK BETTER, WEAR LONGER, AND INSTALL EASIER!

The GP-14, GP-15 and GP-16 extruded aluminum snap-on pull, and the GP-17 plastic snap-on pulls are for 1/4" sliding glass or panel doors. The WP-18 and WP-34 are screwed to 3/4" sliding doors.

EPCO pulls for doors and drawers are of extruded aluminum. Special anodized finishes are available.

EPCO knobs are machined from aluminum or brass bar stock. Both aluminum and brass knobs are available in standard finishes.



Free 32-page Catalog on all EPCO pulls, track and magnetic catches available on request.

See Sweet's Catalog Arch. File 19g-En and Light Construction File 7b-En.

PULLS for

Sliding Doors

PULLS


for Doors and for **Drawers**

for Cabinet and **Furniture** Doors and



Drawers



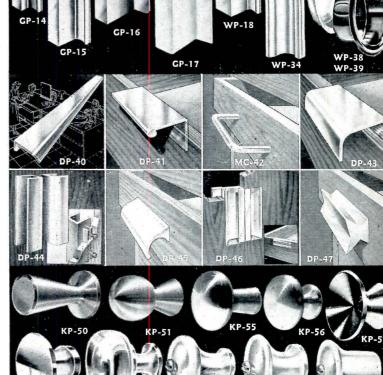

For more data, circle 163 on Inquiry Card

THE ENGINEERED PROD

P.O. BOX 108 - FLINT, MICHIGAN - PH. CE 9-8689

MEMO

Look into

featherock®



The lightweight natural stone veneer for economy beauty and speed of erection.

- Covers 5 times more per ton.
- Weighs 6 to 10 lbs. per sq. ft.
- Low "in the wall" cost.

Nationally distributed.


Write for AIA File.

featherock® Inc. Dept. R9

6331 Hollywood Blvd., Los Angeles, California

For more data, circle 164 on Inquiry Card

Write for your copy of this new 16-page catalog!

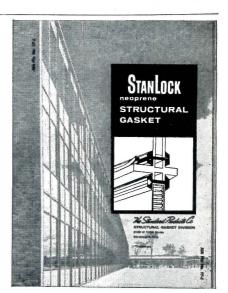

Sweet's Architectural 1962 File: 3f

StanLock neoprene structural gasket is the proved way to seal any type of curtainwall construction permanently. It is the only structural gasket with the tempered locking strip that provides a more positive seal where it is needed to prevent infiltration of water, air and dust.

In a letter or postcard just say: "Send me a copy of the StanLock catalog." It will be sent to you promptly. Write to . . .




For more data, circle 165 on Inquiry Card For more data, circle 166 on Inquiry Card

with American's New 21/2 x 5 foot louver...



ARCHITECTS: Argonaut Realty, Div. General Motors ELECTRICAL CONTRACTOR: Harlan Electric Co., Detroit, Mich. CEILINGS: Custom Ceilings, Inc. Detroit, Mich.

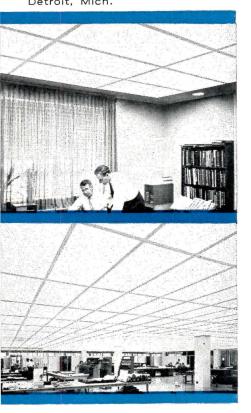

CHOSEN BY GENERAL MOTORS FOR THE NEW TERNSTEDT OFFICE AND ENGINEERING BLDG. A MODEL OF PROGRESSIVE ARCHITECTURE

LUMINOUS CEILING: Completely covers the office and working areas. The new 2½ x 5 ft. plastic open cell 45° shielding louver ceiling, suspended below two-lamp high out-put slimline strips on 30" centers, designed for 120 to 175 foot-candles.

MORE ECONOMICAL: The new $2\frac{1}{2}$ x 5 ft. louver requires considerably less grid system, structural work, less parts to handle which permits simplification of the installation.

GREATER VERSATILITY: New louver size is ideal for 5 x 5 ft. modules and the new trend in larger variations of module patterns, island types, or complete ceilings.

UNINTERRUPTED LIGHT: Through the use of fewer structural members. This large louver panel provides more glare-free area with cleaner ceiling appearance, and easy lamp replacement.

STURDY CELL CONSTRUCTION: Of $\%_6$ x $\%_6$ x $\%_6$ cubes, offers sag-free shadowless, high efficiency with low surface brightness.

SPECIFY AMERICAN'S NEW 21/2 X 5 FT. LOUVERS ON YOUR NEXT LUMINOUS CEILING REQUIREMENTS

Write for free sample kit and specification sheets today.

american louver company


5308 NORTH ELSTON AVENUE . CHICAGO 30, ILL.




AMERICAN LUTHERAN RETIREMENT HOME, Fargo, North Dakota—the state's first prestressed lift-slab building. Each of six post-tensioned slabs measures 103' x 47'. Maximum column spacing—24' x 15'11". Architect: Foss & Co., Fargo-Moorhead. General Contractor: J. E. Kreig & Sons, Inc., Fargo. Consulting Engineer: Kolbjorn Saether & Assoc., Chicago. Lifting Contractor: Northwest Lift Slab Co., Portland, Oregon.

THREE MORE
SUCCESSFUL COLLABORATIONS

Lift-slab jobs post-tensioned by Ryerson

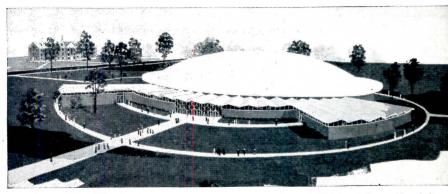

300-FT. CONCRETE DOME highlights auditorium of the General Ministerial Assembly of the Church of God, Anderson, Ind. Dome was cast over a mound of earth and lifted into place. Dome ring is post-tensioned with BBRV tendons supplied by Ryerson. Architect: Johnson, Ritchhart & Assoc., Anderson. Gen. Contractor: Lewis Construction Co., Anderson. Lifting: Great Lakes Lift-Slab, Chicago; Sky Hook Lift-Slab, Overland Park, Kansas.



This brief demonstration could make your next recessed lighting installation 20% more efficient

The test is simple and accurate and will take less than twenty minutes of your time.

The test apparatus consists of a precision light meter which is mounted to swing in an arc above an inverted recessed fixture. The purpose of the test is to show you the lighting efficiency and distribution of a recessed fixture.

Why should you know how much light gets out of the recessed housing? Because most of the recessed lighting fixtures on the market today vary widely in efficiency. We are not exaggerating when we say that in all probability you can increase the efficiency of your next recessed lighting installation by as much as 20% if you put the results of this test demonstration to work for you.

In an installation where recessed lighting must provide general as well as decorative illumination, a 20% improvement in efficiency would permit you to:

- A) increase the footcandle level of the installation appreciably without increasing the number of fixtures used, or
- B) reduce the number of fixtures required and

effect an important reduction in cost of fixtures, wiring and installation.

The architects and engineers who have seen this demonstration have found it accurate, interesting and useful. We keep the test as relatively non-commercial as possible, but we obviously would not offer to conduct such demonstrations if we didn't have a recessed fixture which is an excellent performer.


The fact is that the one fixture which consistently leads all others in efficiency is manufactured by the Moe Light Division of Thomas Industries.

It's no accident. Among all competitively priced recessed fixtures, the Moe Light housing is the only one with a full parabolic reflector. This efficient reflector directs virtually all light out of the fixture and distributes it evenly.

We could easily diagram and publish the test data, but we'd prefer to show you the demonstration in your own offices and let you draw your own conclusions. Why don't you fill in the coupon below and send it today!



207 E. Broadway, Louisville 2, Kentucky Moe Light • Benjamin • Star Light • Enchante

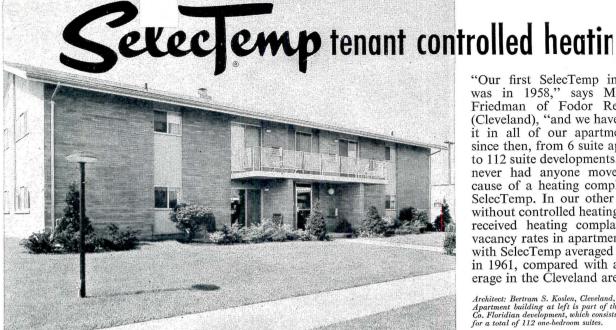

"Our first SelecTemp installation was in 1958," says Mr. David Friedman of Fodor Realty Co. (Cleveland), "and we have installed it in all of our apartments built since then, from 6 suite apartments to 112 suite developments. We have never had anyone move out because of a heating complaint with SelecTemp. In our other buildings without controlled heating, we have received heating complaints. Our vacancy rates in apartments heated with SelecTemp averaged about 1% in 1961, compared with a 10% average in the Cleveland area.

Architect: Bertram S. Koslen, Cleveland, Ohio. Apartment building at left is part of the Fodor Realty Co. Floridian development, which consists of 11 buildings for a total of 112 one-bedroom suites.

SelecTemp room or individual units are recessed in wall. Each unit has thermostat, air filter and quiet centrifugal blower circulating warm air. Flexible small pipe distribution system uses heat from a central boiler. Non-electric, no wiring. Available as heating-cooling units in single wall panel, or can be used with separate cooling systems.

IRON FIREMAN®



Division of ELECTRONIC SPECIALTY CO.

COORDINATED PROGRAMMED COMFORT CONTROL

Iron Fireman, 3074 W. 106th St., Cleveland 11, Ohio (In Canada, 80 Ward Street, Toronto)

- ☐ Send literature and specifications on Iron Fireman SelecTemp heating.
- ☐ Arrange for demonstration of SelecTemp unit in actual operation in our office.

Name	
Address	
City	State

For more data, circle 169 on Inquiry Card

MODULAR PRACTICE

Prepared by the Modular Building Standards Association Presents the application of modular principles to the design and construction of buildings in general and educational facilities in particular—and shows how these principles can help the building industry cope with the current construction boom. Increased productivity is the basic theme and primary aim.

COVERING: Elements of modular practice. Design. Development of working drawings. Plans. Elevations and sections. Details. Structural, mechanical and electrical. Modular practice and the contractor. Manufacturing. The future. 1962. 198 pages, \$8.95.

M. J. TOMLINSON:

FOUNDATION DESIGN AND CONSTRUCTION


1962. In Press.

SEND NOW FOR ON-APPROVAL COPIES

JOHN WILEY & SONS, Inc.

440 PARK AVENUE SOUTH

NEW YORK 16, N. Y.

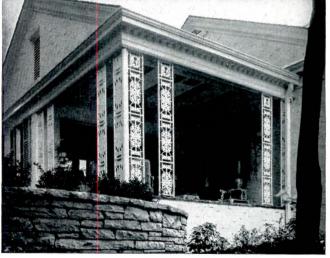

Aiji Tashiro, Architect . Hickory, No. Carolina

For Enduring Charm . . . Specify

Since 1858, Architects have relied upon Fiske for the widest choice of artistic designs, materials, craftsmanship and dependability. Now, more than ever, Architectural Metal Work by Fiske . . . in Aluminum, Bronze, Stainless Steel and Iron ... represents the finest obtainable.

Write for our complete catalog of designs or send blueprints for quotations.


Architectural METAL WORK by

Aluminum, Bronze Stainless Steel and Iron

I. W. Fiske Architectural metals, Inc.

113-115 Pennsylvania Avenue, Paterson 3, New Jersey ESTABLISHED 1858

For more data, circle 170 on Inquiry Card

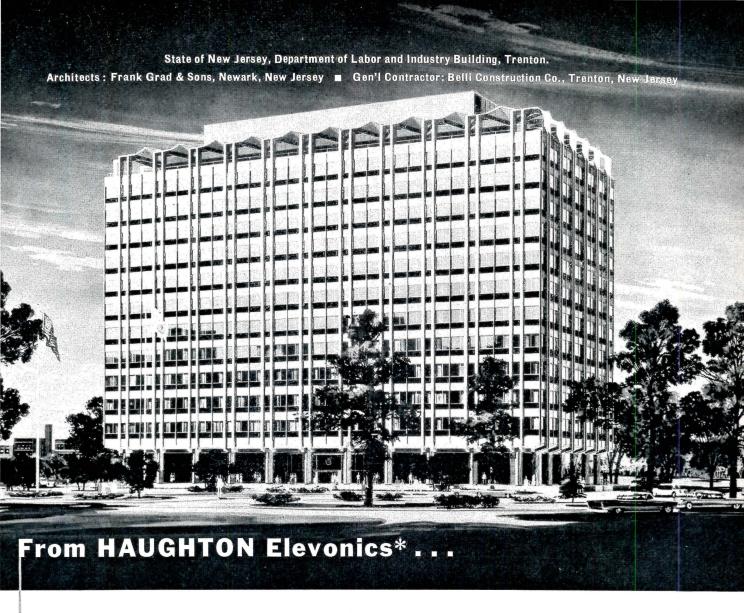

xciting new concept in elevatoring for an exciting new building

Buildings are for people. ■ And people who use the elevators in Trenton's new Department of Labor and Industry Building will enjoy speed, comfort and convenience that can be provided only by Haughton Elevators under fully-automated electronic control. ■ Not even peak demands at "coffee breaks" or rush hours can cause service to deteriorate. ■ An automatic electronic computer constantly receives and analyzes data pertaining to amount and character of traffic, and makes adjustments to match traffic needs exactly. ■ Such is the magic of Haughton Elevonics*, key to superior elevator performance in




new buildings and old. For complete information on our design, modernization and maintenance capabilities, contact your Haughton sales office (listed in the Yellow Pages), or write: Haughton Elevator Company, Division of Toledo Scale Corporation, Toledo 9, Ohio. Passenger and Freight Elevators, Escalators, Dumbwaiters.

Haughton's advanced program in systems research and engineering with specific emphasis on the creative application of electronic devices and instrumentation for betterment of systems design and performance. Registered in U. S. Patent Office.





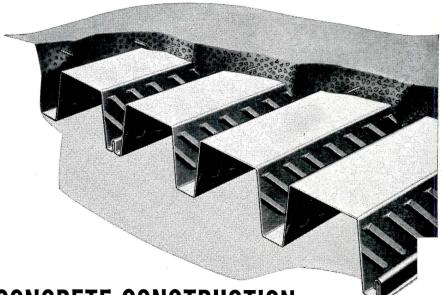

)W: REINFORCED CONCRETE CONSTRUCTION

1)UT REBARS, TEMPORARY FORMS, OR SHORING

Inland Hi-Bond Floor Deck cuts slab cost 10%-20%

Today, a new system has eclipsed the low cost of traditional reinforcing materials and methods for concrete floor slabs. On a recent typical job, a complete Inland Hi-Bond Floor, including deck and poured slab, cost \$90.00 per square; a comparable traditional concrete slab would have cost \$101.00.

Here's how you save, using Hi-Bond deck: You don't need steel reinforcing bars (except temperature mesh). You don't need temporary forms or shoring; Hi-Bond deck is a permanent form for wet concrete.

Raised lugs in the webs of Hi-Bond panels provide a positive lateral and vertical mechanical bond between steel and concrete, causing them to act as a composite unit.

Hi-Bond floor deck is available in a number of profiles. Where electrification is desirable, Hi-Bond can be furnished as a cellular floor.

For further information on Hi-Bond — or other Inland floor systems — ask an Inland sales engineer. Write for catalog 270, or see Sweet's, section 2j/In.


There's an Inland floor system to meet every span requirement economically.

Type B Hi-Bond Floor Deck Type BR Hi-Bond Floor Deck Type BF Celluflor Type N Hi-Bond Floor Deck Type BB Celluflor® wide, 11/2" deep. wide, 11/2" deep. wide, 11/2" deep. wide, 3" deep. Type 3HF Celluflor Type NF Celluflor Type 4.5H Floor Deck Type 4.5H Celluflor Permanent steel centering, 28" coverage. " wide, 3" deep. wide, 41/2" deep. wide, 41/2" deep. wide, 41/2" deep.



Inland Steel Products Company Engineered Products Division DEPT. 1, 4033 WEST BURNHAM STREET • MILWAUKEE 1, WISCONSIN

ALBANY, ATLANTA, BALTIMORE, BOSTON, BUFFALO, CHICAGO, CINCINNATI, CLEVELAND, COLUMBUS, DALLAS, DENVER, DETROIT, FREMONT, CALIF., HOUSTON. INDIANAPOLIS, KANSAS CITY, MO., LOS ANGELES, NEW ORLEANS, NEW YORK, OMAHA, PHILADELPHIA, PITTSBURGH, SALT LAKE CITY, SAN FRANCISCO, SEATTLE, ST. LOUIS, ST. PAUL, TULSA

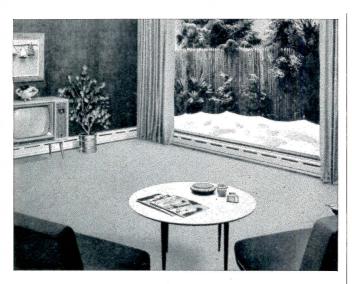

Burnham Hydronic* Heatingfinest for every home you design

Client satisfaction is guaranteed in every new home that's heated with BASE-RAY, the original and still the finest radiant baseboard. It's so quiet, so inconspicuous you have to look twice to find it. It's slim, smart looking, blends beautifully with room decor. And it's all but indestructible because it's all cast iron. Clean, draft-free BASE-RAY radiant heating is the finest for any home — ranch style, two story or split level.

Burnham's new F.H.A. approved BASE-RAY series loop system helps cut installation costs up to 50% and maintain top performance. Specify it on your next job.

Team BASE-RAY with a Burnham cast-iron boiler. Boilers are shipped "ready to go"— assembled, wired and factory tested. It's the hydronic heating team that cuts costs and satisfies home buyers best.

*Hydronics-the science of heating with warm water



Attractive, space-saving boiler for oil or gas ▶


Write now for new, 16-page, free Burnham manual telling how to cut costs on BASE-RAY series loop installations.



SINCE 1873 Heating	M Corporation, & Cooling Division agton, New York Member
 Send me Burnham Desi BASE-RAY Series Loop 	•
☐ Also send me information	on on BASE-RAY and Boilers.
Name	
Address	
City	State
	AR-92

you can figure building costs

QUICKLY and ACCURATELY




BOECKH'S MANUAL OF APPRAISALS

OVER 100,000 individual unit costs—more than 300 buildings, with hundreds of variations, all easily converted to local cost conditions through the supplementary service, BUILDING COSTS.

BUILDING COSTS Published Monthly

A supplementary service giving an analysis of current market conditions and the latest cost indexes for the major metropolitan areas of the United States and Canada to convert the estimating Manual to local cost conditions.



SEND TODAY FOR COMPLETE DETAILS

E.	H.	Boeckh	&	Associates
1 4	0.4	44 C4		14/

1406 M Street, N.W. Washington 5, D. C.

Please forward to the undersigned, brochure containing full details of your building estimating and appraisal services.





A unique numerically controlled Traffic Regulator is the heart and pulse of the Montgomery Measured-Demand Group Su-pervisory Control System. Completely automatic in operation, this sophisticated programming device constantly calculates the number of calls registered, selects the proper program, and summons the necessary cars to meet existing requirements. As traffic demands change, a new program and the necessary cars are automatically selected, meeting the new requirements.

The dependability and efficiency of Montgomery Measured-Demand Systems have been proven by years of in-service operation in numerous installations. Pictured is one of several Montgomery Measured-Demand Group Supervisory Control Systems.

Branch and representative offices in all principal cities. Consult yellow pages of phone book or write.

montgomery ELEVATOR COMPANY

Elevator Craftsmen Since 1892

MOLINE, ILLINOIS

For more data, circle 176 on Inquiry Card

MONTG

E-LIKE BEAUTY AND PROTECTION

On interior walls of masonry, concrete, wood, metal, plaster or gypsum board, Vitra-Tile produces a hard, smooth coating closely resembling ceramic tile at a fraction of the cost.


Vitra-Tile may be applied over new or old walls by brush, roller or spray. Its self-baking finish becomes extremely hard, is non-porous and resistant to abrasion and chemicals. It creates a continuous, hard surface in single color or decorated effects for great beauty at low cost.

For corridors...lavatories...operating rooms...laboratories ...classrooms...super markets, etc. Send for color brochure illustrating and describing Vitra-Tile and its application, or ask your P & L representative. Pratt & Lambert-Inc., 75 Tonawanda St., Buffalo 7, N.Y.

PRATT& LAMBERT-INC.

A Dependable Name In Paint Since 1849

NEW YORK . BUFFALO . CHICAGO . FORT ERIE, ONTARIO

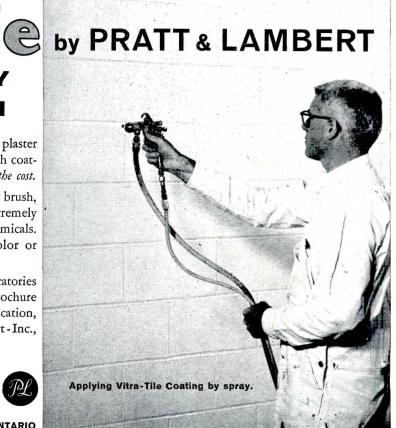

Just Published!

MODERN CHURCH ARCHITECTURE

A Guide to the Form and Spirit of 20th Century Religious Buildings

By Albert Christ-Jener

Artist, author, and Dean of the Art School, Pratt Institute

and Mary Mix Foley

Former Assistant Editor, McCalls, and Associate Editor, Architectural Forum


333 pages 10¾ x 11% \$9.75

OVER 300 ILLUSTRATIONS

Plans, cutaway drawings, interior and exterior views, photographs of construction, details of windows, chapels, etc. Here are forty magnificent churches, monasteries, and seminaries that reveal the full range of expression attainable in religious architecture today.

The finest achievements in the Roman Catholic and Protestant traditions are represented—from modest chapels to magnificent cathedrals and seminaries. Many are acknowledged masterpieces; others are bold experiments suggesting the potential of modern technology; still others are modest structures using regional building materials in a fresh, yet spiritually evocative manner.

More than a collection of beautiful pictures, this inspiring work penetrates the surface of contemporary church architecture. The complementary text clearly shows the firm roots of this new achitecture in the latest structural systems and in the changing liturgy of the churches.

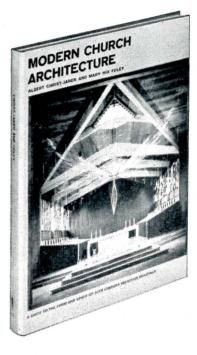

OTHER HELPFUL McGRAW-HILL BOOKS

NATIONAL ELECTRICAL CODE HANDBOOK

A guide to quick, practical understanding of National Electrical Code rules. Gives rules in same order as Code, each followed by clear, simple explanation of its meaning and pointers on applying it. Based on latest Code (1959). By A. Abbott, rev. by F. Stetka. 10th Ed., 680 pp., 387 illus., \$12.00

HANDBOOK OF NOISE CONTROL

Authoritative guide to the measurement and control of sound. Covers technical, human, and legal aspects, including physical acoustics, vibration control, psycho-acoustics, acoustical measurement and instrumentation, acoustical engineering, and architectural acoustics. By a staff of specialists. Ed. by C. M. Harris. 1053 pp., 763 illus., \$18.00

CONCRETE ENGINEERING HANDBOOK

Covers the entire field, from planning and design of concrete structures and elements, through selection and use of effective materials and quipment, to proved construction practices for buildings, bridges, pavements, and other concrete work. By a staff of specialists. Ed. by W. S. La Londe, Jr. 1172 pp., 792 illus., & tables, \$25.00

NATIONAL PLUMBING CODE HANDBOOK

Makes meaning of National Plumbing Code rules entirely clear. Covers rules in same order as Code—follows any difficult or involved rule with simple explanation of how it affects the job at hand and how to apply it. Based on ASA A40.8. By V. T. Manas. 491 pp., 528 illus. & tables, \$12.50

ENGINEERING MATERIALS HANDBOOK

Extensive reference on physical and mechanical properties of materials, their adaptations, advantages, limitations, comparison with other materials, and ability to withstand use and deterioration. Covers hundreds of materials, with attention to problems of their use in specific industries. By a staff of specialists. Ed. by C. L. Mantell. 1952 pp., 678 illus., \$25.00

BUILDING CONSTRUCTION HANDBOOK

Provides practical information on every aspect of building design, materials, and construction. Ranges from selection of an architect through all stages of construction and management. Covers steel, concrete, and timber construction. By a staff of specialists. Ed. by F. S. Merritt. 912 pp., 611 illus., & tables, \$15.00

HANDBOOK OF RIGGING


Comprehensive handbook of methods, pointers, and data on all aspects of rigging for transportation and handling of heavy equipment and jobs in crecting or demolition of structures. Includes ropes, slings, scaffolds, cranes, hoists, jacks, rollers, skids, etc. By W. E. Rossnagel, 2nd Ed., 342 pp., 328 illus., \$8.50

HANDBOOK OF HEAVY CONSTRUCTION

Expert guidance in estimating requirements of heavy construction jobs, solving field problems, and operating and maintaining equipment. Covers excavating, concrete work, bridge crection, paving, foundations, tunnels, slab and beam construction, etc. By a staff of specialists. Ed. by F. W. Stubbs, Jr. 1040 pp., 600 illus., \$22.50

SEE BOOKS 10 DAYS FREE - SEND THIS COUPON

McGraw-Hill Book Co., Inc., Dept. ARR-9, 327 W. 41st St., New York 36, N.Y. Send me book(s) checked below for 10 days' examination on approval. In 10 days, I will remit for book(s) I keep, plus few cents for delivery costs, and return unwanted book(s) postpaid. (We pay delivery costs if you remit with this coupon; same examination and return privilege.)							
☐ Christ-Jener ← Foley—Mod. Church ☐ Manas—Natl. Plumbing Code Hdbk., \$12.50 ☐ Abbott—Natl. Elec. Code Hdbk., \$12.00 ☐ Mantell—Engg. Matls. Hdbk., \$25.00 ☐ Harris—Hdbk. of Noise Cont., \$18.00 ☐ Merritt—Building Cons. Hdbk., \$15.00 ☐ LaLonde—Concrete Engg. Hdbk., \$15.00 ☐ Stubbs—Hdbk. of Heavy Cons., \$25.00							
NAME							
ADDRESS							
CITY ZONE STATE							
COMPANY							

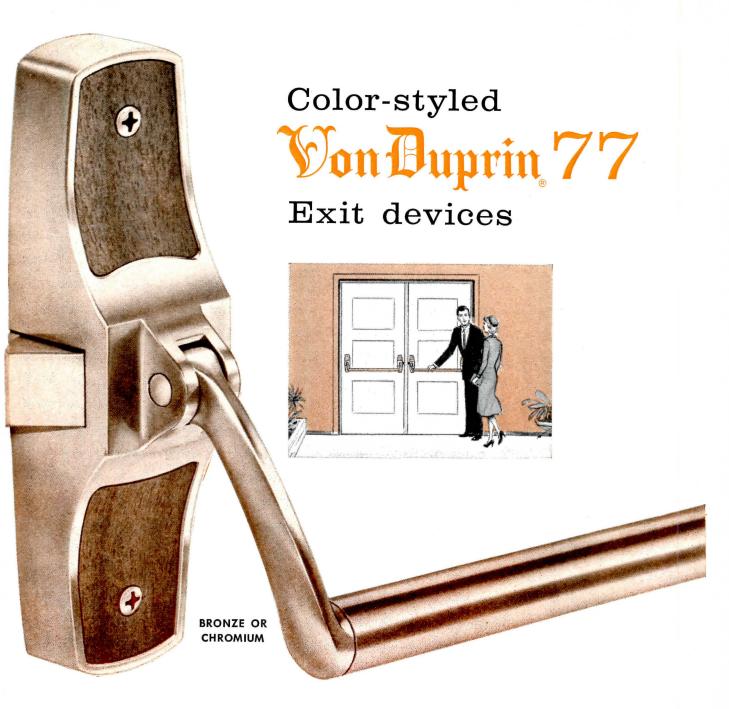

• This handsome woodgrain pattern is one of six decorator colors available in permanently applied, steel-backed vinyl.

Now you can color coordinate your 77 exit devices with the decor of the building interior. Specify color on cases only, as crossbar covering only, or a combination of both.

Von Duprin's 77 line is also available in plain cases . . . either bronze or chromium. For complete details and color selections, write today for Bulletin 611.





VON DUPRIN DIVISION • VONNEGUT HARDWARE CO. • INDIANAPOLIS 25, INDIANA

ELECTRIC HOT WATER HEAT 2,500,000 B.T.U.



PRECISION

ELECTRIC HOT WATER HEATING BOILER

COMPLETE UNIT READY FOR INSTALLATION

with circulation hot water system and water chiller for year-round air conditioning.

CONVERSION EASILY ACCOMPLISHED

where other type fuels now used. Suited for home, churches, motels, apartments, hotels, hospitals, commercial buildings, swimming pools, snow melting and domestic hot water for large users. Temperature range — 60 to 250 degrees. Equipped with Sequence and Proportional Controls when desired.

- Every unit tested and inspected 40,948 to 2,500,000 B.T.U. Output.
- All Boilers meet the requirements of the ASME Boiler and Pressure Vessel Code. Natl. Board approved.

No chimney! No odors! No flame! No ducts! No noise!



For more data, circle 179 on Inquiry Card



McKINLEY METAL PRODUCTS

o. o. McKINLEY co., inc. 4530 N. Keystone Ave., Indianapolis 5, Ind.



cantilevered sun cornice • cornice shade • marquee-canopy walkway cover • door hood • wall facing • fascia gravel stop

For more data, circle 180 on Inquiry Card



MIRAMAR HOTEL, SANTA MONICA, CALIFOR-NIA • ARCHITECT: FRANK GREEN • GENERAL CONTRACTOR: FVFRETT M. BRUNZELI notels
and
motels
many
Architects &
Builders
SELECT

Willer sliding glass doors

To an ever-increasing degree in homes, apartments, motels, hotels, and commercial building, the quality of the sliding glass doors symbolizes the quality of the entire structure. For this reason, more and more architects and builders are selecting Miller quality sliding glass doors. Visually, a beautiful focal point; structurally, there's durability and quality in every detail. For single and/or dual glazing.



A HOUSE TIM

TO LAST

SLIDING GLASS DOOR CO.
3216-AR Valhalla Dr. • P.O. Box 189
Burbank, California • Victoria 9-1357
Member of Building Contractors Association.



For more data, circle 181 on Inquiry Card



Nobody has to worry about remembering to turn lights OFF in this building. Clock-controlled G-E Remote-Control Wiring system does the job.

At 5:30 P.M. in this office – 12,000 lamps go off automatically

Clock-controlled G-E Remote-Control Wiring makes building more efficient - saves \$30,000 a year!

Inconvenient lighting control used to cost a pretty penny in this large office area.

The confusion caused by hardto-find switch panels wasted employee time. The overtime operation of "forgotten" lamps wasted money in unnecessary power consumption, lamp replacement labor, and air-conditioning costs.


The problem was solved neatly with General Electric Remote-Control Wiring and a program clock. Estimated savings: \$30,000 a year!

With the new G-E system,


12,000 lamps are turned Off automatically at 5:30 P.M. 1,000 "night lamps" are left ON.

Late workers who need light simply step to convenient wall switches, to turn lamps over their own areas back ON. The system repeats its turn-OFF job at 7:30, 9:30 and 12:00.

If you want to provide modern programed lighting control in any building—new or old—write for details about G-E Remote-Control Wiring. General Electric Company, Wiring Device Department, Providence 7, Rhode Island.




One program clock actuates series of G-E motorized controls which switch thousands of lamps On or Off, through low-voltage circuits and relays.



Any number of G-E wall switches can be added, for convenient local use. Remote control through lightweight, inexpensive 24-volt wiring lowers costs.

Progress Is Our Most Important Product

GENERAL ELECTRIC

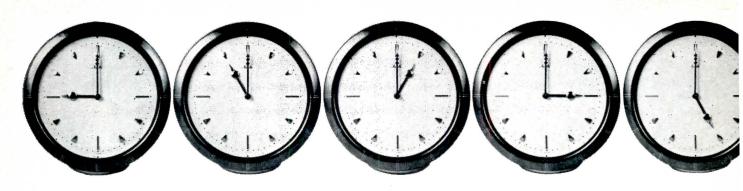

ROBERT M. LITTLE's 'ROUND-THE-CLOCK AID

Robert M. Little, nationally-known Miami architect, says: "We have an as ciate who gives us answers to a host of questions about building materiand equipment on a moment's notice—at any hour of the day or night. I reform of course, to our Sweet's File, which constantly saves valuable time in pruct selection and specification."

The real credit for the completeness and usefulness of the Sweet's F in your office belongs to the manufacturers who make their callogs instantly accessible in the File. They have earned your considerate




STEELCRAFT

The finest name in...

METAL DORS and FRAMES

Another suggestion from the Steelcraft Architectural Detail File.



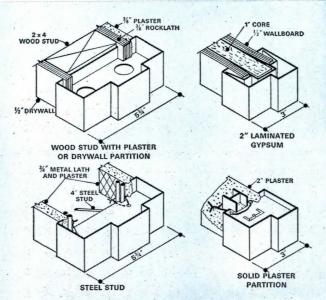

Honeycomb core — A Steelcraft development that provides new strength! A honeycomb core is permanently bonded to two layers of steel . . . deadens sound, adds ruggedness.

David Eskin, AHC, Steelcraft Boston Distributor, with Ralph Leblanc and Irving Salsberg, of the architectural firm of Salsberg & Leblanc, discussing details of the modern office building the firm designed for Wellesly, Mass. Steelcraft doors and frames throughout. Steelcraft has developed frame sections for every type of partition, wood or steel stud construction, solid or drywall finish, as well as for solid plaster and laminated partitions. Steelcraft frames and doors are stocked in a large variety by local Steelcraft distributors. All Steelcraft doors can be used interchangeably on any Steelcraft frame. Call a Steelcraft distributor for professional assistance in coordinating hardware and approval drawings . . . save delivery time . . . cut construction costs.

THE STEELCRAFT MANUFACTURING COMPANY

9017 Blue Ash Road, Cincinnati 42, Ohio



BEST WAY TO MAKE A MAGAZINE IS TO MAKE IT WORTH



More architects—and more engineers—pay to read Architectural Record than any other architectural magazine.*

More Record subscribers renew their subscriptions.

More architects and engineers prefer Architectural Record—a preference steadily recorded in 167 out of 184 studies sponsored by building product manufacturers and their advertising agencies.


Leadership in paid architect and engineer circulation, highest renewal rate, strong reader preference—all reflect the great worth of the Record to its readers.

Small wonder more advertisers value the Record most.—For fifteen consecutive years they have placed more pages of advertising in Architectural Record than in any other magazine in the field. They're doing it again in 1962 by a margin of better than 50 per cent over the second place magazine.

*The Record has the right ones, too, the **active** ones — responsible for over 88% of all architect-planned building—a fact documented by **Dodge Reports!**

WORTH ITS ADVERTISING RATE

TS SUBSCRIPTION PRICE

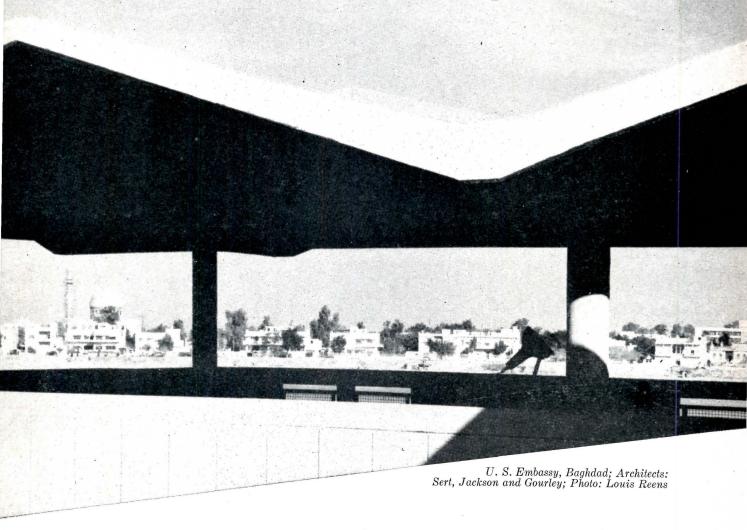

Here's Why Architects and Engineers Value Architectural Record Most . . .

- It's the one magazine edited specifically for—and sold to—architects and engineers.
- Its 15 full-time editors and ten editorial consultants are impressively qualified in the fields of architecture, engineering, education and journalism.
- Its editors are attuned to the interests of architects and engineers by (a) the most intensive editorial research in the field, including Eastman Readership Research, and (b) the unique building industry informational facilities and services of F. W. Dodge Corporation, including Dodge Reports and Dodge Construction Statistics.
- Its unequaled number of editorial pages cover the full range of architect and engineer practice both nonresidential and residential, large and small—thoroughly serving today's needs—and tomorrow's.

Finally, Architectural Record's advertising pages constitute the most comprehensive monthly report to architects and engineers on building product features, applications and developments.




	h		
Index to Advertising			Oakite Products, Inc
PRE-FILED CATALOGS of the man- ufacturers listed below are available in the 1962 Sweet's Catalog File as fol-	A Fiat Metal Mfg. Fischbach & Mc A Fiske Architect	. Co., Inc 16-17 ore, Inc 25 ural Metals, Inc.,	Ramset
lows: (A) Architectural File (green), IC Industrial Construction File (blue), (LC) Light-Construction File (yel-	A-IC Flexicore Co., I A-IC-LC Floor Tile Divis Ruberoid Com	inc	A Otis Elevator Co
low). A Adams Rite Manufacturing	A Flynn Mfg. Co. A Follansbee Steel A Formica Corpor	ration	A Panel Structures, Inc
Company	A-IC-LC General Electric	Company 333	A Pittsburgh Plate Glass Co., Paint Div
Aerofin Corporation		Whizzer Corp	C Portland Cement Association 75, 25 A Pratt & Lambert, Inc. 32 C Precision Parts Corp. 33 A Products Research Co. 5
A-LC American Biltrite Rubber Co 117 A American Cyanamid Company	A-IC Granco Steel Pi		C Raynor Manufacturing Co 11
(Bldg. Prods. Div.)		itor Company325	C Red Cedar Shingle Bureau 29 Remco 29 Remington Rand Office Systems 252-25
A American Olean Tile Company 78-79 A-IC-LC American Saint Gobain Corp. 89 to 92 A-LC American Telephone and	A Hexcel Products A Holcomb and Ho A-IC Hubbell, Inc., H	oke Mfg. Co., Inc. 296 Harvey 339	A Republic Steel Corp. 293-29 Richard-Ginori 6 A Rixson, Inc. 4
Telegraph Company 37 A AMETEK, Inc. Troy Laundry Machinery Division 244	A Hunter Douglas Brass Co A Huntington Lab	Div., Bridgeport A-Io	C Robertson Co., H. H. 8 A Rohm & Haas Company 27 C Rolscreen Co. 33 to 3
Amsterdam Corporation 45-46 A-LC Anaconda American Brass Co 104 A-LC Andersen Corporation 124-125		mpany 312-313	C Rowe Manufacturing Co
Architectural Record	A-IC-LC Inland Steel Pro Iron Fireman M	oducts Co. 77, 326-327 A-IG	C Ryerson & Son, Inc., Joseph T. 316-31
A Bally Case and Cooler, Inc 98 A-IC Barber-Colman Company 284-285 Barnebey-Cheney Co 266	A Jamison Cold S A Janitrol Heating		Sargent & Co
A-IC-LC Barrett Div., Allied Chemical Corp	A-IC-LC Johns-Manville	86-87, 127	Shure Bros., Inc
A-LC Bell & Gossett Co. 29 A-LC Bell Telephone System 37	A-LC Kentile, Inc A-IC-LC Keystone Steel	& Wire Co 238-239	Square D Company
A-IC-LC Bestwall Gypsum Company	A-IC-LC Kimberly-Clark A-IC Kinnear Mfg. C A Kirsch Co	o., The 66	C Stark Ceramics, Inc. 22 A St. Charles Mfg. Co. 10 A Steelcraft Mfg. Co., The 33 Structural Clay Products Inst. 13
A-IC Borden Metal Products Co 211 A Brookline Industries, Inc 93 Buensod Stacey Corp 267	A LCN Closers, In	ic 222-223	Suburban Appliance Company
Burnham Corp	Lennox Industri A-IC-LC Libbey Owens F Lightolier, Inc.	ord Glass Co. 272-273 280-282	Sweet's Catalog Service 334, 33 Sylvania Lighting Products 34
A-LC California Redwood Association 119 A-IC-LC Carrier Air Conditioning Co. 72-73, 76, 220 A Carthage Marble Corp 97	A Linen Supply A America	ssociation of 230	Talk-A-Phone Co. 28 Titus Mfg. Corp. 242-24 Trinity White Div., Portland Cement
A-IC Ceco Steel Products Corporation 320-321 A-IC Celotex Corporation, The 306-307	A-IC Macomber, Inc. A Marmet Corp A-LC Marsh Wall Proc	249	Troy Laundry Machinery A Division of AMETEK, Inc 24
A-IC Cleaver-Brooks Co	Marvin Electric	Mfg. Co 289 ok Co., Inc 330 A-LO	United States Gypsum
A Corbin Division, P. & F 103 A-IC Corning Glass Works 106-107	McQuay, Inc A-IC Meadows, Inc. V	V. R	United States Steel Corp. (Subs) 64-65, 29 U.S. Stoneware
A-LC De Vac, Inc	A-LC Miller Sliding G	crong, Dessau, 115 A-Id lass Door Co.,	C Upco Co., The 27
Industries, Inc	A Mills Co IC-LC Minneapolis-Hor		"Von Duprin" Division 33
A-IC Dover Corp., Elevator Div 2-3 A-IC DuKane Corporation 224 Dn Pont de Nemours & Co., E. I		s Co 231-232 eturing Co 62-63 A-IC-LC 	Waterloo Register Co., Inc
A Duriron Company, Inc., The 1 A-IC-LC Dur-O-Wal, Inc 11	Inc A-IC Montgomery Ele	322-323 A-IC-LO	Westinghouse Electric Corp. 245-247, 270-27 Wheeler Reflector Co., Inc 29
A Eastern Products Corp 3rd Cover A Eggers Plywood Company 278 A-LC Elkay Mfg. Co 84	A-IC-LC Natco Corporati	on 116	Wiley & Sons, Inc., John 32
Emerson Electric Mfg. Co 30-31 A-LC Engineered Products Co., The	A-IC-LC National Gypsus Nesbitt, Inc., Jo	m Co	C York Corp
22 22 22 22 22 22 22 22 22 22 22 22 22	11 Hew Cashe Fro	A-D(, zononie company 200-20

NEW YORK—James E. Boddorf, Sales Mgr.; Tom Tredwell, Advertising Mgr.; Blake Hughes, Marketing Mgr.; Richard Crabtree, Business Mgr.; Benton B. Orwig, Director of New Business Development; Joseph R. Wunk, Advertising Production Mgr.; Harry M. Horn, Jr., Michael J. Davin, 119 W. 40 St.; BOSTON—Harry M. Horn, Jr., 855 Park Square Bldg.; BUFFALO—Benton B. Orwig, James B. Ryan, 310 Delaware Ave.; CHICAGO—Robert T. Franden, James A. Anderson, Robert Kliesch, Douglas S. Brodie, 1050 Merchandise Mart; CLEVELAND—John C. Jackson, Louis F. Kutscher, James B. Ryan, 321 Hanna Bldg.; DETROIT—Louis F. Kutscher, 527 Free Press Bldg.; LOS ANGELES—Robert L. Clark, 1709 West Eighth St.; MIAMI—Michael J. Davin, 802 N. W. First St.; PHILADELPHIA—Tom Tredwell, Michael J. Davin, Broad & Locust Streets; PITTSBURGH—John C. Jackson, 411 Seventh Ave.; ST. LOUIS—Richard Grater, Robert T. Franden, 3842 W. Pine Blvd.; SAN FRANCISCO—John I. Howell, 255 California St.

A-IC-LC

TELLS YOU WHERE TO REACH FOR BUYING INFORMATION!

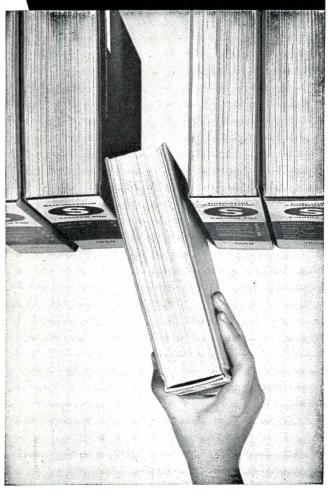

*These symbols are used in the facing index to tell you which advertisers make their catalogs instantly accessible in Sweet's Catalog Files. The letters stand for the Architectural, Industrial Construction and Light Construction Catalog Files.




SWEET'S CATALOG SERVICE

Division of F. W. Dodge Corporation 119 West 40th Street, New York 18, N. Y.

ARCHITECTURAL BRIEFS

on special-purpose electrical wiring devices

SAFETY OUTLETS



"TWINSAFE" PROTECTIVE OUTLET

SG-62

Protects children or irresponsible adults from shock if they push metal objects into slots because it shunts current away from inserted object. Power flows only when plug is in place. Also grounds 3-wire cords from appliances and tools. UL listed. 15 A., 125 V., brown or ivorine. See Page 126-T in our Catalog 29.

EXPLOSION-PROOF OUTLET AND PLUG

No. 24303 et al

For all Class I, Group C or D, atmospheres in operating, delivery, anesthesia, or incubator rooms or industrial areas. UL listed and described in NFPA Bulletin 56.

Safety-chambered Hubbellock® outlet cannot arc while plug is being inserted or removed, Mechanically actuated micro-switches remain electrically dead until a specially keyed Hubbellock® plug is seated and rotated clockwise. Can't be energized by other plugs.

Special epoxy-filled, grounding plug No. 24312 for 3-wire cords is washable and contains no air spaces where explosive gases can accumulate. For new work or remodeling. 20 A., 125 V., 60-cycle AC only. See Page 32-A in our Catalog 29.



DUPLEX OUTLET GROUNDING ADAPTER

No. 5291

Plugs and screws into parallel or T-slot duplex outlets and converts them to 3-wire grounding outlets for plugs with U-shaped grounding blades. Useful in remodeling when occupancy can't be delayed for rewiring. Nothing in existing system is removed except outlet's cover plate screw. No rewiring needed with grounded systems. Also usable with ungrounded systems. UL listed. Brown or ivorine. 15 A., 125 V. See Page 127-I in our Catalog 29.

FILE-SIZED CATALOG PAGES WILL BE SENT ON REQUEST




HARVEY


INCORPORATED

Bridgeport 2

Connecticut

For more data, circle 184 on Inquiry Card

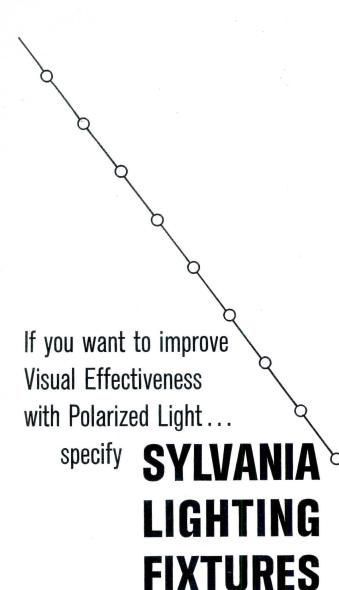

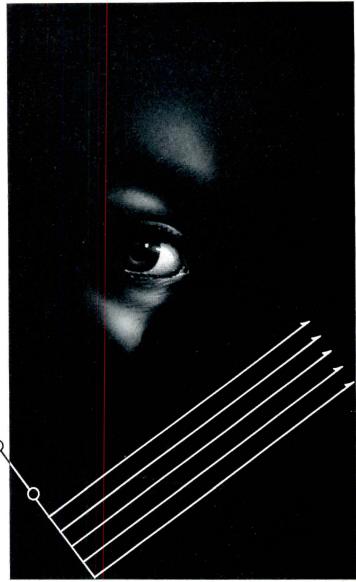

with **POLRIZED* PANELS**

Over two years of scientific research** have indicated tha Multi-Layer POLRIZED Panels improve Visual Effectiveness by reducing reflected glare and sharpening contrasts. These are the same shielding panels that are available with Sylvania Lighting Fixtures.

Test results are now available showing the performance of POLRIZED lighting panels in Sylvania recessed equipment Ask to see the complete photometric data for your next in stallation where Polarized Light will benefit the overall lighting design.

SYLVANIA LIGHTING PRODUCTS
A Division of SYLVANIA ELECTRIC PRODUCTS INC.
One 48th Street, Wheeling, West Virginia

SYLLVAI A

SUBSIDIARY OF
GENERAL TELEPHONE & ELECTRONICS

GENERAL

*Trade Mark of POLRIZED PANEL CORPORATION

**Conducted by H. Richard Blackwell, Ph. D., Professor and Director, Institute for Research in Vision, The Ohio State University, Columbus, Ohio.