

NA
1
I 56
V. 41
no. 2



IRVING K. POND, DES.

LORADO TAST, SCULPT.

UNIVERSITY OF MICHIGAN
GENERAL LIBRARY



Entered at the Postoffice at Chicago as second-class matter.

CONTENTS.

EDITORIAL:

Death of Richard M. Upjohn—A New Lien Law for Illinois—An Architect's Objections to High Buildings	13
HEATING.....	14
By C. E. Thomas, Architect.	
A QUARTET OF MURAL PAINTINGS.....	15
THE PENNSYLVANIA RAILROAD'S NEW YORK TERMINAL	16
A NEW SYSTEM IN JAIL DESIGN.....	17
THE CHICAGO ARCHITECTS' BUSINESS ASSOCIATION.....	17
COMBUSTION.....	17
By Morris R. Ebersole.	
SOUTH FIELD DESIGNS FOR THE COLUMBIAN UNIVERSITY.....	18
THE 'RELATION OF NATURAL TO ARTIFICIAL BEAUTY IN LANDSCAPE	18
PAINTS IN ARCHITECTURE.....	19
MOSAICS.....	19
ASSOCIATION NOTES.....	19
Brooklyn Chapter, A. I. A.	
OUR ILLUSTRATIONS.....	19
INDEX TO ADVERTISEMENTS.....	IX

NORTH-WESTERN TERRA COTTA CO.

WORKS AND OFFICE:

Clybourn and Wrightwood Avenues.

BRANCH OFFICE: 1118 Rookery Building,
CHICAGO.

A NEW ROOFING TILE

WITH DOUBLE INTERLOCK AT TOP AND SIDES

ABSOLUTELY RAIN AND SNOW PROOF

NOW ON THE MARKET

Being made of stiff clay with metal dies under a pressure of fifty tons, it is both exceedingly light and dense, and will not break up nor flake off under the action of the elements. Better than other tile. As cheap as good slate.

THE NATIONAL TILE ROOFING CO.

LIMA, OHIO, U. S. A.

FITCH SASH LOCKS



"THE PERFECT
WINDOW FASTENER"...

SEND FOR CATALOGUE
AND WORKING MODEL

THE W. & E. T. FITCH CO., NEW HAVEN, CONN.



THE WINSLOW BROS. COMPANY

CHICAGO

ORNAMENTAL IRON AND BRONZE AND
MONUMENTAL BRONZE STATUARY

THE WINSLOW ELEVATOR & MACHINE CO.

HIGH-GRADE ELECTRIC AND HYDRAULIC ELEVATORS

FOR SALE.

Two passenger and one freight, Hale, 100-foot travel elevators; vertical cylinders; been in use some years, but in first-class condition. Also one 18½ by 14 by 14 Duplex Delamater pump. Apply at office of

William Donaldson & Co.,
Minneapolis, Minn.

WANTED: A first-class architectural draftsman, one well up in designing and detail; permanent position and good salary to right party. Address, stating full particulars regarding experience and salary wanted, RICHARDS, McCARTY & BULFORD, Architects, Columbus, Ohio.

PITKIN'S

PREMIUM

FOR PRESERVING AND
BEAUTIFYING.

PAINT

We will be pleased to send a handsome color-card, appropriately framed in Flemish oak, to architects on application.

Geo. W. Pitkin Co.

Station "C," CHICAGO.

Advance News

INDICATING

Chances to Sell

PLANS, MATERIALS, FIXTURES,
FURNITURE, MACHINERY,

May be secured with promptness, accuracy and thoroughness, and at reasonable rates, from

THE PRESS CLIPPING BUREAU,


ROBERT AND LINN LUCE,

78 Park Place, NEW YORK.
Pike Bldg., CINCINNATI.

68 Devonshire St., BOSTON
Cooper Bldg., DENVER.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers

THE STURTEVANT SYSTEM

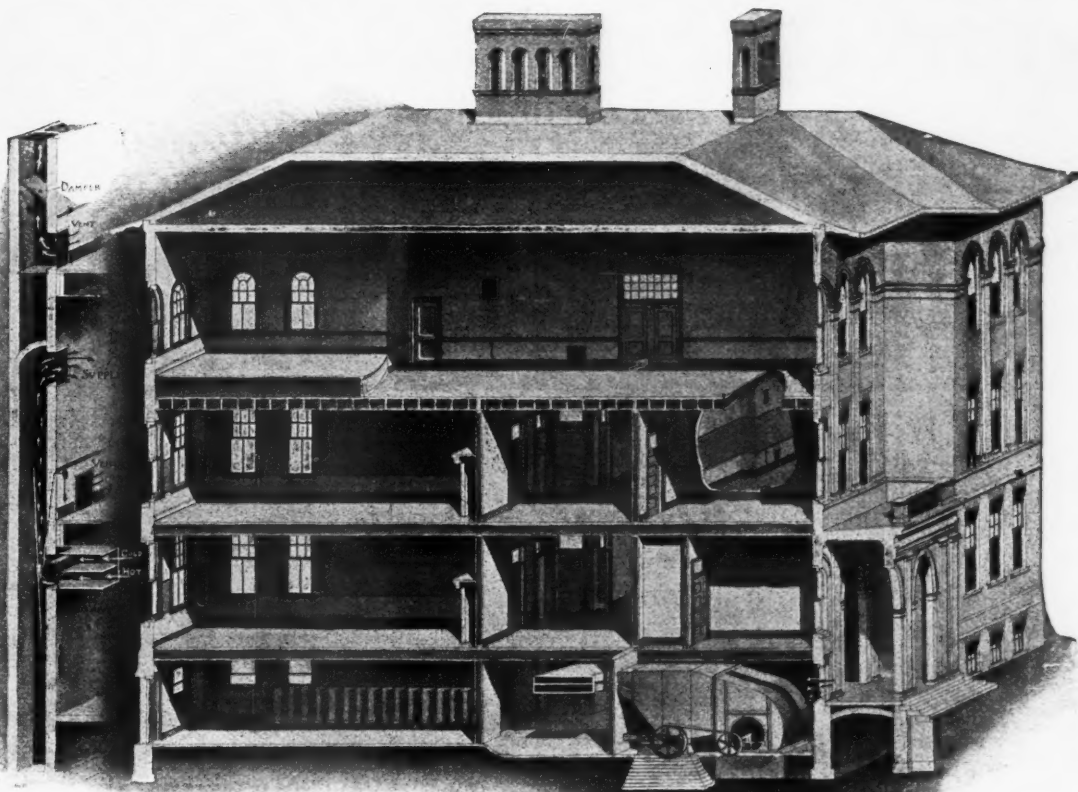

OF
SCHOOL-
HOUSE
VENTI-
LATION
and ::
HEATING

Insures positive venti-
lation at all times with
air properly tempered
and thermostatically con-
trolled.

**B. F.
Sturtevant
Company**
BOSTON, MASS.

NEW YORK
PHILADELPHIA
CHICAGO
LONDON

315

TAYLOR OLD STYLE ROOFING TIN

was used to replace
copper on old Inde-
pendence Hall in Phil-
adelphia years ago.
This Roofing Tin is
still as good as when
first laid.

Made only by


N. & G. TAYLOR CO.
PHILADELPHIA

Established 1810



Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

Westinghouse Gas Engines

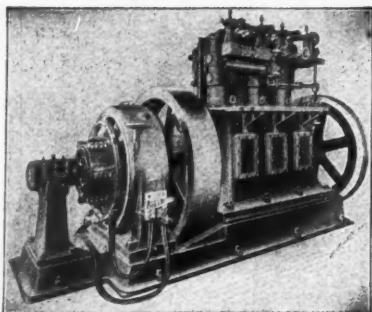

Westinghouse Gas Engine Generating Set.

For providing Light and Power in Private Residences, Office or Public Buildings. They are Smooth, Noiseless and Efficient in Operation.

For particulars address nearest office of

Westinghouse, Church, Kerr & Co.

NEW YORK, BOSTON,
PHILADELPHIA,

Engineers,

PITTSBURG, CHICAGO,
DETROIT,

Sell the product of

The Westinghouse Machine Co.

PITTSBURG,


Designers and Builders of

CHICAGO,

STEAM ENGINES, GAS ENGINES, STEAM TURBINES.

RONEY MECHANICAL STOKERS.

Westinghouse Induction Motors



Require no skilled attendance.

Are controlled by a switch placed where most convenient.

WRITE FOR CIRCULAR 1050

Westinghouse Electric & Mfg. Co.

SALES OFFICES IN ALL LARGE CITIES

PITTSBURG, PA.

P-15

THE WINKLE TERRA GOTTA CO.

MANUFACTURERS OF

Architectural Terra Cotta

IN ALL COLORS.

OFFICE:

**Rooms 502 and 503, Century Building,
ST. LOUIS, MO.**

Works: CHILTENHAM, ST. LOUIS.

"A land of music and flowers and birds."

OLD MEXICO

Is a more "foreign" land and has more interesting places and strange customs to attract the traveler from the United States than any country of Europe, and it is right at home. A winter trip to Mexico is delightful, and can be best made by the

NEW YORK CENTRAL LINES

Lots of facts regarding Mexico can be had at either of our 77 Information and Recreation Bureaus.

A copy of the 52-page Illustrated Catalogue of our Four Track Series sent free on receipt of a 2-cent stamp by George H. Daniels, General Passenger Agent, New York Central Railroad, Grand Central Station, New York.

The FOUR-TRACK NEWS for November, 1902, has an interesting article on Mexico. Sold by newsdealers everywhere for 5 cents.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.




The Name "Standard"

IS CAST IN RELIEF ON EVERY PIECE OF THE

Porcelain Enameled Ware

That has received the highest awards at all World's Fairs and Expositions

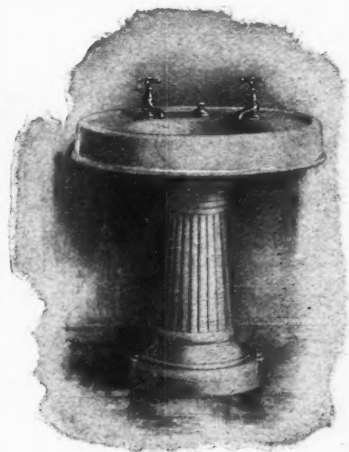

The guarantee which this name carries with it is absolute and a perfect assurance against the annoyances inseparable from the use of inferior and non-guaranteed brands.

It is essential to perfect sanitation that all sanitary equipment such as Bathtubs, Lavatories, Water Closets, etc., have a surface that is hard and absolutely non-porous.

"Standard" PORCELAIN ENAMEL provides these features in the highest possible degree, combining the daintiness and purity of china with the strength and durability of iron.

Book of Modern Bathrooms showing a series of designs, together with descriptions and prices, mailed free on application.



STANDARD SANITARY MFG. CO.,
PITTSBURGH, PA.


Van Noorden's Ventilators

The most essential thing to health is fresh air. The surest way to secure live, fresh air is to use Van Noorden's Ventilators. They are different. In that difference lies their originality. In that originality lies their science. They let out dead, contaminated air, suck in fresh air, and keep it in motion. They are ornamental, mechanically perfect, and made to live up to the artistic treatment of any building.

Suppose you send for illustrations, descriptions and prices. A postal will do.

E. VAN NOORDEN CO.

944 Mass. Ave.,
Boston.



IF THE PAINTER OBJECTS

To the use of ready-made combination paints containing zinc white

LET HIM

Add the zinc white himself. It can be obtained ground in oil, like lead. Zinc white is essential if the work is to be durable.

FREE—Our Practical Pamphlets:

- "The Paint Question,"
- "Paints in Architecture,"
- "Specifications for Architects,"
- "House Paints: A Common Sense Talk About Them,"
- "French Government Decrees."

The New Jersey Zinc Co.
11 Broadway, NEW YORK.

LOUIS J. MILLET

(Successor to HEALY & MILLET)

Interior Decorator

151 MICHIGAN AVE., CHICAGO

Leaded Glass. Glass Mosaic. Frescoing

Sidewalk Lights



CONCRETE REFRACTING LENS.

SEND FOR CATALOGUE

Brown Bros. Mfg. Co.

Established in 1860

Main Office and Factory:

Twenty-second Street and Campbell Avenue

Telephone, Canal 115

Branch Office—N. W. Cor. Jackson Boul. and Clinton St.

Telephone, Main 4085

Chicago

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

The Millar Gas Machine

SAFE, DURABLE, AUTOMATIC

Simple In Construction

Economical In Operation

APPROVED BY ALL INSURANCE COMPANIES

THE MILLAR-GANTZ CO.
DIXON, ILL.

TEL. HARRISON 3652


THOMAS HAWKES
LANDSCAPE ARCHITECT

DESIGNS PREPARED FOR PARKS,
CEMETERIES, PRIVATE ESTATES, SUB-
DIVISIONS, ETC.

CORRESPONDENCE SOLICITED

1532 MONADNOCK BLOCK

CHICAGO

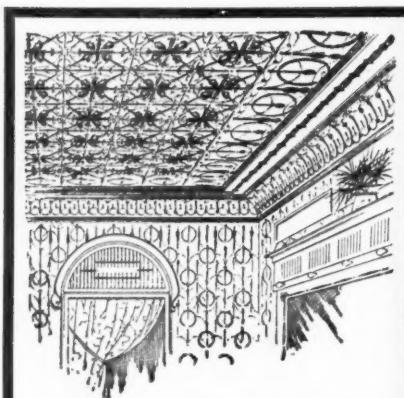

Berger's Metal Ceilings

Are symmetrical and pleasing to the eye and command the admiration of all. They can be used in all classes of buildings, are easy to apply, and highly ornamental. They don't shrink, crack, get water-soaked, or fall off. They are safe and sanitary. Their durability makes them the most economical ceilings in existence. Our "Classified Designs" embrace a variety of styles, and there is no building that we can not match in its style of architecture. Send for our booklet "A New Idea in Metal Ceilings"—it's free.

The Berger Mfg. Co., Canton, Ohio
Eastern Branch, 210 E. 23d St., N. Y.
Western Branch, 19-21 S. Main St., St. Louis, Mo.

THE CHEAPEST GOODS

Do not always cost the least.

Established 1844.

Peerless Mortar Colors

Are the Brightest, Strongest and Most Durable.

THEIR ULTIMATE COST IS THEREFORE THE LOWEST.

SAMUEL H. FRENCH & CO.
PHILADELPHIA.

Send for Samples.



AMERICAN SIDEWALK LIGHT CO.


MANUFACTURERS OF ALL KINDS OF

Concrete and Hyatt Sidewalk, Floor and Skylight Work,
AND ALL KINDS OF IRONWORK.

Coal-Hole Covers of every description always on hand.

Tel. Monroe 643.

156-158 West Ohio St., CHICAGO.



Hardwood Floors

Wood Carpets, Parquet
Floors, Rug Borders.

Send for book of designs.

E. B. MOORE & CO.
37 Randolph Street,
CHICAGO, ILL.

Put into the White House by the U. S. Government.



CUDELL
ANTI-SYPHON



F. E. CUDELL'S

Patent Sewer-Gas and Backwater Trap

For Wash-Bowls, Sinks, Bath and Wash Tubs,
CLEVELAND, OHIO.

W. W. ABBOTT,

MANUFACTURER OF

PICTURE FRAMES

MATS AND PASSEPARTOUTS

FRAMES MADE TO ORDER. ARCHITECTURAL
DRAWINGS REMOUNTED.

Telephone
Harrison 3455

255 Wabash Ave., CHICAGO

W. H. S. Lloyd Co.

REPRESENTING

A. SANDERSON & SONS, OF LONDON.

ENGLISH WALL PAPERS

JAPANESE LEATHERS
GRASS CLOTH

Finest Stock of Foreign Wall Papers in U. S.

26 E. 22d St., New York

Hydraulic Press Brick Co.

Missouri Trust Building, ST. LOUIS, MO.

TOTAL
ANNUAL
CAPACITY,
300,000,000
BRICKS.

American Hydraulic Press Brick Co.,	St. Louis, Mo.
Chicago Hydraulic Press Brick Co.,	Chicago, Ill.
Cleveland Hydraulic Press Brick Co.,	Cleveland, Ohio.
Eastern Hydraulic Press Brick Co.,	Philadelphia, Pa.
Findlay Hydraulic Press Brick Co.,	Findlay and Toledo, Ohio.
Illinois Hydraulic Press Brick Co.,	St. Louis, Mo.
Kansas City Hydraulic Press Brick Co.,	Kansas City, Mo.
Kelley Brick & Tile Co.,	West Superior, Wis.
Menomonic Hydraulic Press Brick Co.,	Minneapolis, Minn.
New York Hydraulic Press Brick Co.,	Rochester, N. Y.
Ohio Press Brick Co.,	Zanesville, Ohio.
Omaha Hydraulic Press Brick Co.,	Omaha, Neb.
Union Press Brick Works,	St. Louis, Mo.
Washington Hydraulic Press Brick Co.,	Washington, D. C.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

THE J. W. REEDY ELEVATOR CO.

Passenger and Freight

ELEVATORS.

83 to 91 Illinois Street,
CHICAGO.

31-33 Tenth Avenue,
NEW YORK CITY.

FOR INFORMATION ABOUT

U. S. MAIL CHUTES

WHICH ARE

A necessity in office buildings and hotels,
write to the sole makers,

THE CUTLER M'F'G CO., Rochester, N. Y.
PATENTED. AUTHORIZED.

Electric Signals

FOR PASSENGER ELEVATORS

Elevator Supply and Repair Co.

136 Liberty Street,
NEW YORK

34 W. Monroe Street,
Tel. Main 1741 CHICAGO

WANTED

A line of medium and low priced wood
mantels for 1903, by the largest distributors
in the world. Address Advertiser,
811 Boyce Building, Chicago.

SUPERINTENDENT

A first-class superintendent with years of
practical experience upon all classes of city
work, especially large constructions, wishes
to be placed in communication with architect
or builder requiring such services. He is
fully recommended by this office. Address
Superintendent, care Inland Architect.

Florida and
New Orleans

via

Queen & Crescent Route

Southern Railway

and connecting lines

Through Pullman service from Chicago,
Cleveland, Pittsburg, Louisville, daily except
Sunday; Detroit and Toledo, Tuesday,
Thursday and Saturday; to St. Augustine
without change.

FROM CINCINNATI

3 Trains to Florida, 8:30 a.m., 8:05 p.m., 9:15 p.m.
2 Trains to New Orleans, 8:05 p.m., 8:30 a.m.

Route to Florida either via Chattanooga,
Atlanta or Jacksonville; or via Asheville
and Savannah.

Write for rates and printed matter.

W. C. RINEARSON, G. P. A.,
CINCINNATI

CRANE VALVES

ESTABLISHED 1855

"WHATEVER
IS WORTH
DOING AT ALL
IS WORTH
DOING WELL."
Telephone 555

THE HENRY O. SHEPARD COMPANY

212-214
Monroe St.
CHICAGO.

Printers, Embossers
Blank Book Makers

We do
all kinds of
Printing and
Binding.
Rush Work a
Specialty.

.. Observe typography of THIS JOURNAL as a fair specimen of our grade of work ..



Interlocking
Rubber Tiling

As laid by us in the
main office of Western Electric
Building, Chicago.

Noiseless, non-slippery, sanitary,
extraordinarily durable. Laid di-
rectly over any floor, in old or new
buildings. For all parts of business
and public buildings, churches, hos-
pitals and libraries; for kitchens,
laundries, billiard-rooms, bath-
rooms, piazzas, halls, etc., of
private residences.

NEW YORK BELTING
& PACKING CO., Ltd.

CHICAGO 150 Lake Street
NEW YORK 25 Park Place
PHILADELPHIA 724 Chestnut Street
BALTIMORE Baltimore Rubber Co.
ST. LOUIS 411 North 3d Street
SAN FRANCISCO 509-511 Market St.
LONDON, } The B. & S. Folding Gate Co.
ENG. } 19 to 21 Tower Street, Upper
St. Martin's Lane, W. C.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.



Soft, rich color effects are produced on shingles by the use of Shingletint.

There are many brands of shingle stains in the market, but only one **Shingletint**, which means much to the consumer, who may safely buy it and know he is getting the best shingle stain made.

Shingletint is a scientific combination of linseed oil, coloring matter, creosote and the necessary drying agents; its use not only beautifies but prolongs the life of the shingles.

Finished woods and descriptive literature sent free upon application.

BERRY BROTHERS, Limited
Varnish Manufacturers,

New York Philadelphia Chicago St. Louis
Boston Baltimore Cincinnati
San Francisco

Factory and Main Office, DETROIT

JENKINS IMPROVED AUTOMATIC AIR VALVES



Suitable for high or low pressure. Take no more room than an ordinary air cock. Endorsed by the leading steam experts as the best made and the quickest working. All genuine stamped with our Trade-Mark.

JENKINS BROTHERS,

NEW YORK.
BOSTON.
CHICAGO.
PHILADELPHIA.



Avoid Extremes of Heat and Cold

— BY USING —

THE POWERS SYSTEM

— OF —

Temperature Regulation.

Applicable to all kinds of heating apparatus in Schools, Churches, Residences, Office Buildings, etc.

Successfully applied to the control of heat in RAILWAY CARS.


SEND FOR CATALOGUES.

The Powers Regulator Co., 40 Dearborn Street, Chicago.

111 Fifth Avenue, New York.

224 Franklin Street, Boston.

"GIANT" METAL SASH CHAIN

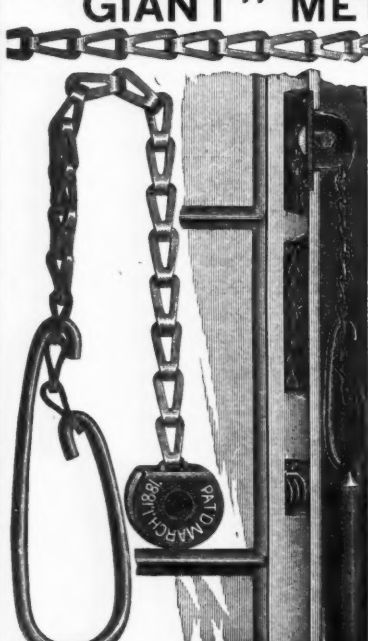

Has not been equaled in quality in 20 years. Durability guaranteed. The bronze costs 40 per cent more than any other Sash Chain metal.

Full line of Sash and Cable Chains, Sash Pulleys and Fixtures.

—
MANUFACTURED BY
**THE SMITH & EGGE
MFG. CO.
BRIDGEPORT, CONN.**

—
WRITE FOR OUR LATEST
CATALOGUE.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

A Profitable Way to see The West

is to join one of the personally conducted California excursions of the Santa Fe Route.

Congenial companions are assured.

Special conductors relieve you of all care and contribute materially to your enjoyment.

No extra charge.

Inquire of

T. A. GRADY,
Manager California Tourist Service,
The Atchison, Topeka & Santa Fe Railway,
109 Adams Street, Chicago.

KINNEAR

STEEL ROLLING

DOORS-SHUTTERS-

THE KINNEAR MFG. CO.

COLUMBUS OHIO U.S.A.

BOSTON - CHICAGO - PHILA.
NEWATER ST. - 112 CLARK ST. - 101 CHRISTY ST.

Sheet-Steel Indian Canoes

Non-sinkable and indestructible. 14 feet long, 39 inch beam.



Twenty-Two Dollars, Net. EXTRA FOR FISH BOX AND SECTIONAL BOAT.

W. H. MULLINS, 810 Depot St., SALEM, OHIO.



THE ALTON'S ENGINEER.

IF YOU WILL SEND THE ADDRESS OF A PERSON WHO, WITHIN A YEAR, WILL HAVE USE FOR THE CHICAGO & ALTON RAILWAY



(TERRITORY COVERED OUTLINED IN ABOVE MAP, WE WILL MAIL TO YOU A PICTURE, 4 1/4 X 3 INCHES, OF THE ALTON'S ENGINEER. IF, IN ADDITION, YOU WILL TELL US IN WHAT PUBLICATION YOU READ THIS ADVERTISEMENT, WE WILL SEND TO YOU A PAMPHLET ABOUT THE BIGGEST CAMERA IN THE WORLD.

GEO. J. CHARLTON,
GENERAL PASSENGER AGENT, CHICAGO &
ALTON RAILWAY,
CHICAGO, ILLINOIS.

INDEX TO ADVERTISEMENTS.

	Page		Page		Page		Page
Architectural Drawing.		Electric Plants.		Metallic Fixtures and Furniture.		Sidewalk and Vault Lights.	
Deane, E. Eldon	XV	Westinghouse, Church, Kerr & Co	IV	Art Metal Construction Co. .	III	Brown Bros. Mfg. Co	V
Architectural Iron Works.		The Westinghouse Machine Co	IV	Monuments.		Richards & Kelly	VII
The Winslow Bros. Co.	II	Elevators.		Blake, Chas. G., & Co.	XII	American Sidewalk Light Co. .	IX
American Sidewalk Light Co. .	IX	The J. W. Reedy Elevator Co	VII	Mortar Colors.		Skylights (Metal).	
Architectural Photographers.		Elevator Supplies.		French, S. H., & Co.	VI	Van Noorden Co.	V
Taylor, J. W.	XI	Elevator Supply & Repair Co. .	VII	Moldings, Mirrors, Frames.		Snow Guards.	
Architectural Views.		Engineers.		W. W. Abbott	IX	Folsom Snow Guard Co.	X
Taylor, J. W.	XI	Westinghouse, Church, Kerr & Co	IV	Paints, Oils and Varnishes.		Spring Hinges.	
Boats.		The Westinghouse Machine Co	IV	Berry Bros.	VIII	Smith & Egge Mfg. Co.	X
W. H. Mullins	X	Fireproof Doors.		Joseph Dixon Crucible Co. .	XV	Stained and Decorative Glass.	
Boiler Covering.		Kinnear Mfg. Co.	X	New Jersey Zinc Co.	V	Louis J. Millet	V
The Keasbey & Mattison Co. .	XII	Fireproof Shutters.		Pitkin, Geo. W., Co.	II	Steam Engines.	
Bricks (Pressed).		Kinnear Mfg. Co.	VI	Smith, Edward, & Co. . . .	XVI	Westinghouse, Church, Kerr & Co	IV
Chicago Hydraulic Press Brick Co	IX	Fire Extinguisher.		Pencils.		The Westinghouse Machine Co	IV
Findlay Hydraulic Press Brick Co	IX	Yantacaw Mfg. Co.	XII	Joseph Dixon Crucible Co. .	VI	Steam Fittings.	
Illinois Hydraulic Press Brick Co	IX	Fireproofing.		Crane Co.	V	Crane Co.	XV
Kansas City Hydraulic Press Brick Co	IX	National Fireproofing Co. .	XIV	Standard Sanitary Mfg. Co. .	XIV	Steam Loops.	
Menominee Hydraulic Press Brick Co	IX	Pioneer Fireproofing Co. .	XIV	Printers.		Westinghouse, Church, Kerr & Co	IV
Omaha Hydraulic Press Brick Co	IX	The Roebbling Construction Co.	XII	The H. O. Shepard Co.	VII	The Westinghouse Machine Co	IV
St. Louis Hydraulic Press Brick Co	IX	Floor Polish.		Railroads.		Steel Rolling Doors.	
Brick (Enameled).		Butcher Polish Co.	XV	Big Four Route	XV	Kinnear Mfg. Co.	VIII
Hydraulic Press Brick Co. . .	IX	Gas Engines.		Chicago & Alton	VII, X	Steel Rolling Shutters.	
Brick (Ornamental).		Westinghouse, Church, Kerr & Co	IV	Chicago & North-Western R'y	X	Kinnear Mfg. Co.	VIII
Chicago Hydraulic Press Brick Co	IX	The Westinghouse Machine Co	IV	Chicago, Milwaukee & St. Paul	IX	Steel Shutters.	
Findlay Hydraulic Press Brick Co	IX	Grilles.		Delaware, Lackawanna & Western	XIV	American Sidewalk Light Co. .	IX
Hydraulic Press Brick Co. . .	IX	Waddell Mfg. Co.	X	Denver & Rio Grande R. R. Grand Trunk Lines	IX	Kinnear Mfg. Co.	X
Illinois Hydraulic Press Brick Co	IX	Hardware.		Illinois Central	XIV	Stokers.	
Kansas City Hydraulic Press Brick Co	IX	The Yale & Towne Mfg. Co. .	XVI	The Lake Shore Route	XVI	Westinghouse, Church, Kerr & Co	IV
Menominee Hydraulic Press Brick Co	IX	Heating.		Monon and C. H. & D. Route Missouri Pacific R'y	XI	The Westinghouse Machine Co	IV
Omaha Hydraulic Press Brick Co	IX	Buffalo Forge Co.	XIII	New York Central R. R.	IV	Temperature Regulator.	
Builders' Hardware.		B. F. Sturtevant Co.	III	Queen & Crescent Route	VII	The Powers Regulator Co. . .	VIII
Orr & Lockett	XVI	Heating and Ventilating Apparatus.		Rio Grande & Western	X	Terra Cotta.	
The Yale & Towne Mfg. Co. .	XVI	Buffalo Forge Co.	XIII	Southern R'y	X	Northwestern Terra-Cotta Works	II
Builders' Sundries.		Pierce, Butler & Pierce	XVI	Santa Fe Route	X	Winkle Terra Cotta Co.	IV
The Yale & Towne Mfg. Co. .	XVI	Kellogg-Mackay-Cameron Co. .	XI	Wisconsin Central	XV	Tile (Rubber).	
Building Papers.		Ice and Refrigerating Machinery.		Reflectors.		New York Belting & Packing Co., Ltd.	VII
Cabot, Samuel	XII	Westinghouse, Church, Kerr & Co	IV	Frink, I. P.	XV	Trees.	
Cements.		The Westinghouse Machine Co	IV	Roofing Tile.		Peterson, P. S., & Son	X
French, S. H., & Co.	VI	Instruction.		National Tile Roofing Co. . .	II	Valves (Steam).	
Clothes Dryers.		American Correspondence School	XI	Roofing Tin.		Jenkins Bros.	X
Cordage.		Interior Finish.		N. & G. Taylor Co.	III	Crane Co.	VII, XIV
Samson Cordage Works	XVI	Battle Creek Interior Finish Co.	II	Rolling Doors and Shutters (steel).		Varnish.	
Creosote Stains.		The Yale & Towne Mfg. Co. .	XVI	Kinnear Mfg Co.	X	Chicago Varnish Co.	X
Cabot, Samuel	XII	Mail Chutes.		Sanitary Appliances.		Ventilation.	
Decorators' Supplies.		Cutler Manufacturing Co. . .	VII	Cudell, F. E.	IX	Buffalo Forge Co.	XIII
Drawing Material and Implements.		Mechanical Stokers.		Standard Sanitary Mfg. Co. .	V	Wall Papers.	
Abbott, A. H., & Co.	XII	Westinghouse, Church, Kerr & Co	IV	Sash Cords and Chains.		W. H. S. Lloyd Co.	IX
		The Westinghouse Machine Co	IV	Smith & Egge Mfg. Co.	VIII	Window Lines.	
		Metal Ceilings.		Samson Cordage Works	XVI	Samson Cordage Works	XVI
		Berger Mfg. Co.	VI	Sash Locks.		Wood Carpet.	
				The W. & E. T. Fitch Co. . .	II	Moore, E. B., & Co.	VI
				Sheathing and Deadening Quilt.			
				Cabot, Samuel	XII		
				Shingle Stain.			
				Berry Bros.	VIII		
				Cabot, Samuel	XII		
				Dexter Bros.	XV		

GRAND TRUNK RAILWAY SYSTEM

SOLID THROUGH TRAINS OF VESTIBULE COACHES

Pullman Sleeping Cars

BETWEEN CHICAGO, BUFFALO, NEW YORK AND PHILADELPHIA

ALSO TO THE IMPORTANT BUSINESS CENTERS OF CANADA AND NEW ENGLAND

FOR INFORMATION, TIME TABLES, ETC., APPLY TO ANY AGENT

CHICAGO CITY OFFICE, 249 CLARK ST. COR. JACKSON BOULEVARD

EXPANSION IN THE WEST

Increased trade with the Orient and wonderful commercial activity are 1903 features along the Pacific Coast.

ONLY **\$33.00**

Chicago to San Francisco, Los Angeles, Portland, Tacoma, Seattle

And many other Pacific Coast points,

Until April 30, 1903,

Via Chicago, Milwaukee & St. Paul and Union Pacific Line.

Three through trains daily to the Northwest via this route, or via St. Paul.

Information on request.

F. A. MILLER, General Passenger Agent
CHICAGO.

Please mention **THE INLAND ARCHITECT** when corresponding with Advertisers.

DRAFTSMEN WANTED

Permanent positions for high-class draftsmen of education and experience.

GREEN & WICKS

ARCHITECTS

110 Franklin St. - Buffalo, N. Y.

**TREES and SHRUBS**

NOW IS THE TIME TO ORDER

PETERSON NURSERY

164 La Salle St. CHICAGO

SEND FOR ILLUSTRATED PRICE LIST

FLORIDA AND THE SOUTH

Again the Great
**Southern
Railway**

offers to the Public unexcelled service to Florida and all Southern Tourist points.

LIMITED TRAINS, ELEGANT SLEEPING, PARLOR, DINING and CAFE CARS

"THE FLORIDA LIMITED"

leaves Chicago daily in the evening, arriving Jacksonville the second morning, less than 35 hours en route, passing through Cincinnati, Chattanooga, Atlanta, Macon and Jesup, and making connection at Jacksonville with trains for East and West Coast points in Florida. Pullman sleepers Chicago to Cincinnati and through Pullman sleepers Cincinnati to Jacksonville.

ANOTHER LIMITED TRAIN

leaves Chicago daily for Jacksonville in the morning; passing through Cincinnati, Asheville and Savannah—a daylight ride through the famous "Land of the Sky." Parlor cars to Cincinnati and through sleepers from Cincinnati to Jacksonville. Arrive Jacksonville 9:15 a.m., making connections for East and West Coast points in Florida.

You can also go via St. Louis or Louisville.

Winter Tourist Tickets

at greatly reduced rates now on sale

For full particulars see your nearest ticket agent, or write or call on

J. S. McCullough, N. W. P. A.,
225 Dearborn St.,
Chicago, Ill.

G. B. Allen, A. G. P. A.,
St. Louis, Mo.

SOUTHERN PACIFIC SUGGESTS CALIFORNIA

PROMISES

Blue Skies, Shining Seas, Snowy Mountains
Vineyards, Orchards, Grain Fields
Wealth, Health, Prosperity, and Happiness

FROM

CHICAGO \$333

commencing February 15, continuing until April 30.

Choice of routes east of Ogden, El Paso and New Orleans.
Highest class tourist car service.

Address any Southern Pacific Agent.

W. G. NEIMYER, GENERAL AGENT, 193 CLARK ST., CHICAGO, ILL.

Folsom New Model Snow Guard

Specified by leading architects to hold the snow on all pitch roofs, entirely obviating all chance of injury to life or to the property it protects. The only perfect device for this purpose.

It is made in various forms for old and new roofs of slate, shingle, tile or metal. Full information on application.

THREE HISTORIC BUILDINGS.

Faneuil Hall,
Old South Church,
King's Chapel,
Boston,

Are Fitted with this Snow Guard.

FOLSOM SNOW GUARD CO.
ROSLINDALE (BOSTON), MASS.

**GRILLES**

Original designs, beautifully carved to fit any space.

Also Carved and Embossed Mouldings, Capitals, Newel Post Tops, Rope and Twist Balusters.

Waddell Mfg. Co.
7 Plainfield Ave.,
Grand Rapids,
Mich., U. S. A.
Illustrated General Catalogue No. 18.
Over 1,000 designs.
Mailed for ten cents in stamps.

**To the West**

The North-Western Line is the only double track railway from Chicago to the Missouri River.

The double track is now completed between Chicago and Council Bluffs. Four fast trains each way daily between Chicago and Omaha, three trains daily to the Pacific Coast and two to Denver.

A double track railway across the western prairies means a great deal of history-making, empire-building, American energy.

The story of the western country and of the Pioneer Line that has played so great a part in its progress is interestingly told in a booklet which will be sent on receipt of a two-cent stamp to pay postage.

W. B. KNISKERN, PASSENGER TRAFFIC MANAGER,
CHICAGO

SITUATION WANTED.

A quiet young lady who has finished a technical course in mechanical drawing and is experienced in designing, would like to work in an architect's office in Chicago.

Address "A. B.,"

Office of Inland Architect.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

J. W. TAYLOR,

REMOVAL NOTICE:

After May 1, 1902, Monon Bldg., 324 Dearborn St. Telephone No. 1500 Harrison.

ARCHITECTURAL PHOTOGRAPHS, BUILDINGS, INTERIORS, DETAILS, ETC.

Promise to purchase two dozen from the lot at \$4.00 per dozen, unmounted, and I will send 200 from which to make the selection.

French Lick and West Baden Springs

Adjoining Resorts in Indiana

On the MONON ROUTE


Wonderful curative waters for diseased conditions of the digestive organs; magnificent fireproof modern hotels; rest, recuperation and recreation. Two trains daily via Monon Route.

Round-Trip Excursion Rate From Chicago \$12.45

Folders and facts free. Address

CHAS. H. ROCKWELL, Traffic Manager FRANK J. REED, G. P. A.
200 Custom House Place, Chicago.

Successful Boilers AND RADIATORS



ONE OF 36 STYLES

Our Catalogue, "The Boiler Magazine," sent on request, is the best ever

Kellogg-Mackay-Cameron Co.

CHICAGO

MINNEAPOLIS

KANSAS CITY

SEATTLE, WASH.

JUST THE OTHER DAY
"The Greatest Testimonial Ever Given"
CAME TO THE

APOLLO Master Piano Player

HERE IT IS:

Clark Apollo Co., London, Eng.

Craig-y-nos, Breconshire, May 31, 1902.

Dear Sirs,—The "Apollo" Piano Player I have purchased from you is marvelous. I can not find words to express my admiration for this most wonderful invention.

I have seen others, but yours is the one I consider perfect, both for piano and voice. The transposing device is most ingenious, and I congratulate you on this greatest of all musical inventions.

ADELINA PATTI, Baroness Cederstrom.

FROM

Adelina Patti

Jenny Lind's only rival as the greatest soprano that ever lived.

WHY DOES SHE LIKE THE APOLLO BEST?

ONLY THE APOLLO

- (1st) The entire 88 notes of a piano are used, 17 more than others (or even 88).
- (2d) Can instantly change the key to suit voice or instrument.
- (3d) Stores the power and delivers free from pumping pulsations.
- (4th) Allows fast pumping for fortissimo passages without deranging the tempo. It has 12 other points of superiority as vital. We'll tell you of them in a pamphlet . . . Sent with pleasure.


MELVILLE CLARK PIANO CO.

Manufacturers, Wholesale and Retail

399, 401, 403 & 405 W. Madison St., Dept. A, CHICAGO
Downtown Warerooms, 267 Wabash Av. Tel. Monroe 984

YOU ABSOLUTELY CONTROL
the *expression* (time and tone-volume)
when you play the piano with
THE APOLLO

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

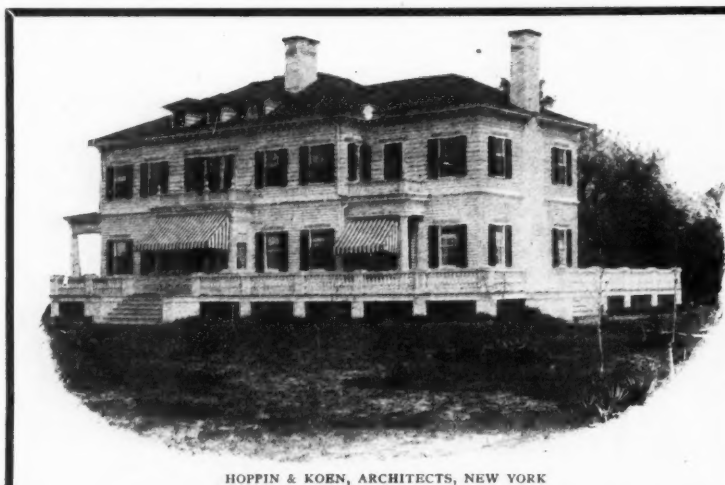

HOPPIN & KOEN, ARCHITECTS, NEW YORK

Cabot's Shingle Stains ..

MADE OF THE BEST
PIGMENTS, PURE
LINSEED OIL AND
CREOSOTE, THE
BEST WOOD PRE-
SERVATIVE KNOWN

The Standard Stains for over twenty years
Samples sent on request

Samuel Cabot

Sole Manufacturer

28 Dearborn Avenue
CHICAGO

70 Kilby Street
BOSTON

The Yantacaw Chemical Fire Extinguisher

NO

Acid used, nor poisonous gas generated
Danger from explosion
Danger from Chemical or stream to person or fabric
Periodical recharging, testing or polishing

Always in the accustomed place and ready for instant use.

No mechanism to become defective.


Can be recharged in from twelve to twenty seconds.

Much more powerful and efficient than carbonic acid gas machines.

Made in various sizes capable of charging 25, 50 and 100 gallons of water without recharging; with the twin Yantacaw, a continuous charged stream can be obtained.

SEND FOR DESCRIPTIVE BOOKLET

Yantacaw Manufacturing Co., 809 LAND TITLE BUILDING, PHILADELPHIA.



SIZES

25 gallons, 14 in. in height
100 gallons, 36 in. in height

The Roebling System of Fire-Proof Construction.

HIGHEST EFFICIENCY IN THE FIRE AND WATER TESTS OF THE NEW YORK BUILDING DEPARTMENT, AND NOW THE RECOGNIZED STANDARD OF FIRE-PROOF CONSTRUCTION.

THE ROEBLING CONSTRUCTION CO.,

121 Liberty Street,
NEW YORK CITY.

171 Lake Street,
CHICAGO, ILL.

SEND FOR CATALOGUE.



BRANCH OFFICE
67TH AND ELLIS AVENUE

SEND FOR OUR FIGURES

when you have

Anything in GRANITE

from a door-sill or polished column to a Mausoleum.

CHAS. G. BLAKE & CO.

Telephone 115 748 Woman's Temple, CHICAGO, ILL.

N. B.—We have some of the best granite carvers in the world. Try us with some capitals.



A. H. ABBOTT & CO.

Drawing Supplies,

Instruments, Tracing Cloth, Papers, Colors
Scales, Levels, Transits, Etc.

BLUE PRINTS.

50 Madison Street, CHICAGO.

MAGNESIA

Steam
Pipe
Coverings

HEAVY DAMAGES

TO BE COLLECTED AGAINST ALL INFRINGERS

IN THE SUITS against the

Philip Carey Manufacturing Company
American Magnesia Company
American Magnesia Covering Company
Schoellkopf, Hartford & Hanna Co.

The Court has required the defendants to make answer to our bill.

THEIR DEMURRER OVERRULED

Suit has been entered against the C. W. Trainer Manufacturing Co., of Boston.



All persons are warned not to engage in any piracy of our patents, as suits will promptly follow against all infringers.

Keasbey & Mattison Company
AMBLER, PENN.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

THE INLAND ARCHITECT AND NEWS RECORD

Vol. XLI.

MARCH, 1903.

No. 2



A Monthly Journal Devoted to

**ARCHITECTURE,
CONSTRUCTION, DECORATION AND FURNISHING
IN THE WEST.**

PUBLISHED BY THE INLAND PUBLISHING CO.,
609-610 MANHATTAN BUILDING, CHICAGO, ILL.

L. MULLER, Jr., Manager. ROBERT CRAIK McLEAN, Editor.

SPECIAL CONTRIBUTORS:

C. HOWARD WALKER.	D. H. BURNHAM,	W. L. B. JENNEY,
HENRY VAN BRUNT,	P. B. WIGHT,	IRVING K. POND,
LOUIS H. SULLIVAN,	ALLEN B. POND,	J. R. WILLETT,
WILLIAM S. MACHARG.	C. E. ILLSLEY.	F. W. FITZPATRICK.

TERMS: Regular number, \$5 a year; Photogravure edition, \$10 a year. Single copies, Regular number, 50c.; Photogravure edition (including 7 photogravures), \$1. Advance payment required.

The columns and illustration pages of THE INLAND ARCHITECT are open to all alike, merit and availability only determining what shall be published. Contributions appropriate to its pages are always desired.

AMERICAN INSTITUTE OF ARCHITECTS.

OFFICERS FOR 1900:

PRESIDENT	*CHARLES F. MCKIM, New York, N. Y.
SECRETARY AND TREASURER	*GLENN BROWN, Washington, D. C.
FIRST VICE-PRESIDENT	FRANK MILES DAY, Philadelphia, Pa.
SECOND VICE-PRESIDENT	ALFRED STONE, Providence, R. I.
AUDITOR FOR TWO YEARS	W. G. PRESTON, Boston, Mass.
AUDITOR FOR ONE YEAR	S. A. TREAT, Chicago, Ill.

BOARD OF DIRECTORS:

For three years.—Walter Cook, New York, N. Y.; William S. Eames, St. Louis, Mo.; Cass Gilbert, St. Paul, Minn.

For two years.—J. M. Carrère, New York city; James W. McLaughlin, Cincinnati, Ohio; R. Clippson Sturgis, Boston, Mass.

For one year.—Henry Van Brunt, Kansas City, Mo.; James B. Hill, Washington, D. C.; Normand S. Patton, Chicago, Ill.

*Executive Committee.

STANDING COMMITTEES FOR 1900:

Judiciary Committee.—Wm. S. Eames, St. Louis, Mo.; James G. Hill, Washington, D. C.; Arthur G. Everett, Boston, Mass.

House and Library Committee.—Robert Stead, Washington, D. C.; Glenn Brown, Washington, D. C.; Frank Miles Day, Philadelphia, Pa.

Committee on Contracts and Lien Laws.—Alfred Stone, Providence, R. I.; W. B. Mundie, Chicago, Ill.; Arthur G. Everett, Boston, Mass.

Committee on Applied Arts and Sciences.—W. G. Preston, Boston, Mass.; F. E. Kidder, Denver, Colo.; Frederick Baumann, Chicago, Ill.

Committee on Foreign Correspondence.—Glenn Brown, Washington, D. C.; J. G. Howard, New York city; R. W. Gibson, New York city.

Legislative Committee on Government Architecture.—George B. Post, chairman. Committee.—Bruce Price, New York city; John M. Carrère, New York city; James G. Hill, Washington; Alfred Stone, Providence. Alternates.—Edward H. Kendall, New York city; E. B. Green, Buffalo, N. Y.; D. H. Burnham, Chicago, Ill.; Robert Stead, Washington.

NEXT CONVENTION AT CLEVELAND, OHIO.

THE ARCHITECTURAL LEAGUE OF AMERICA.

OFFICERS FOR 1901-1902.

PRESIDENT	FREDERICK S. LAMB, New York.
VICE-PRESIDENT	C. H. BLACKALL, Boston, Mass.
TREASURER	JULIUS F. HARDER, New York.
CORRESPONDING SECRETARY	H. K. BUSH-BROWN, New York.
RECORDING SECRETARY	W. E. STONE, New York.
ADDITIONAL MEMBERS EXECUTIVE BOARD	{ F. CROWNINSHIELD, New York. D. K. BOYD, Philadelphia.

NEXT CONVENTION AT ST. LOUIS, MO., OCTOBER 12-13, 1903.

Death of Richard M. Upjohn, Architect.

Richard Michael Upjohn died at his home in Brooklyn on March 4, at the age of about seventy-eight years. While Mr. Upjohn's reputation as an architect will probably rest upon the designing of the State capitol of Connecticut, at Hartford, as his father, Richard Upjohn, is remembered as the architect of Trinity Church, New York, he was the architect of several noted structures, among them being St. Paul's Church at Brooklyn, the Central Congregational Church at Boston, St. Peter's Church at Albany and the Episcopal Church and High School at Hartford. Somewhat peculiar in his attitude toward men in general, he was cordial and appreciated by his friends, and gave to his profession every aid that would make for advancement and standing. His father was one of the charter members of the American Institute of Architects. Mr. Upjohn was a member throughout his professional life. His life and works give him a place among those names that head the roll of America's great architects. His office was the schoolroom from which many architects graduated into a professional life to which they have, in several cases, given more than usual evidence of their early training in securing, through their works, exceptional professional honor; among these being Mr. Clinton, of Clinton & Russell, and Cyrus L. W. Eidlitz, of New York, and Solon S. Beman, of Chicago.

A New Lien Law for Illinois.

While lien laws and measles have always seemed necessary to the people and accepted as unavoidable evils, while in the latter the treatment seems to remain the same, in the matter of lien laws the practice has been to tinker with them every time a snag is struck in their operation of sufficient force to jar some member of a building society into action, and, like the measles, the jar is contagious, and the result is an epidemic of ideas that does not subside until a new bill is formulated and presented to a State Legislature for passage. Here and there is found an individual who is immune and these ask why a building contractor or a material concern should be protected by a lien any more than a banker or grocer. But these skeptical individuals are in a hopeless minority and so the lien-law tinkering goes on. At present there is a bill before the Illinois State Legislature for the modification of the present law. The bill is a good one. An improvement upon that in operation, which, when formulated and passed ten years ago, was supposed to be the best of its kind. If we must have lien laws this present measure is probably as equitable and comprehensive as can be drawn.

An Architect's Objections to High Buildings.

Now that the "skyscraper" has seemingly come to stay, their disadvantages are becoming apparent. George B. Post in an address recently said that high buildings are structurally safe until something happens to the steel beams, that they are a menace to health, and their construction on narrow streets will necessitate "two-decker" streets to accommodate the occupants. One danger is the liability of suffocation by smoke in hallways and elevator shafts, in case of fire in the basement, to tenants who do not remain in their offices with doors closed.

HEATING.

BY C. E. THOMAS, ARCHITECT.


(Continued from page 3, Vol. XLI, No. 1.)

DIRECT INDIRECT.

Direct-indirect radiation is used where a limited amount of air is to be supplied for ventilation. Its chief value lies in its being so arranged that the indirect portion may be operated as direct, for as a ventilating apparatus it is not only unreliable but expensive.

As the outside air is brought in contact with the radiator, it becomes necessary to increase the amount of radiation, but on

DIAGRAM NO. 3.

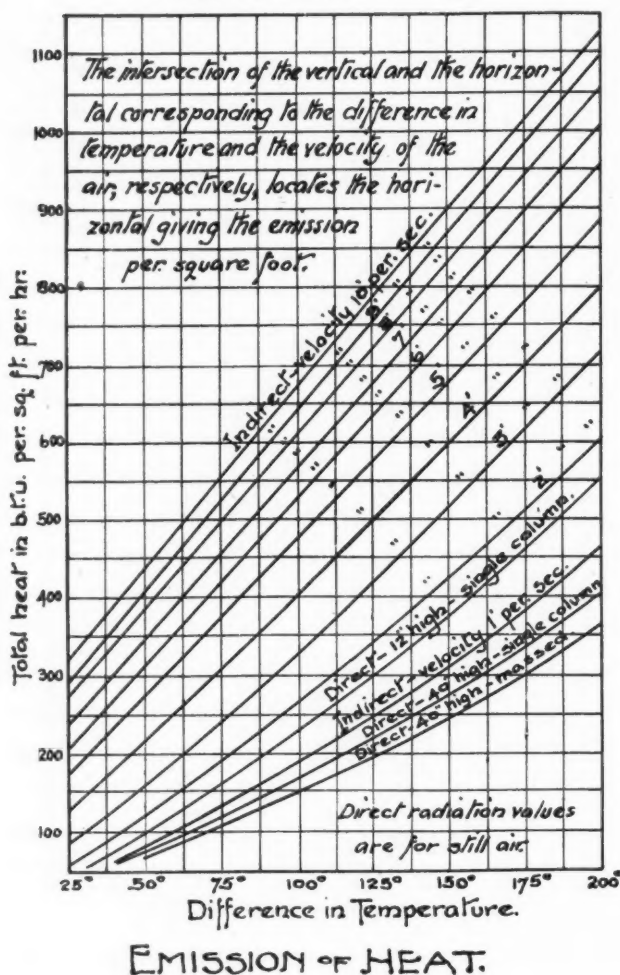

account of its dual nature, it may be considered amply safe to add twenty-five per cent to that required for direct radiation.

Having obtained the equivalent glass area, the amount of radiation may be readily taken from Diagram No. 1; thus in Example No. 1 the equivalent glass area = 160, hence 50 square feet of direct-indirect radiation would be required for steam and 80 square feet for hot water.

INDIRECT.

It has long been accepted that the best method of heating and ventilating a schoolroom is by bringing the warm, fresh air in near the ceiling and taking out the foul air near the floor. The reasons for this arrangement are simple:

1. As the warm air will go to the ceiling in any event, it is best to keep it well above the occupants of the room.
2. The warm air cools and settles very gradually, providing the best possible diffusion of gases.
3. The warm air near the ceiling is practically pure, for it has just been brought in; conversely, the foul air must be diffused in the lower part of the room and by placing the vent opening near the floor the removal of not only the vitiated air but the cold air is accomplished, and thus the temperature of the room is maintained economically, and a continuous, though impercep-

tible, current throughout the room is created. Another advantage in this location of openings and one that is often overlooked, is that the stacks are made as long as possible, and this is a most important factor in the movement of air by gravity.

It is difficult to understand why men who are thoroughly familiar with these facts will insist on trying to heat residences with the system inverted, or with just half a system.

To make a success of heating a room with hot air, some means must be provided for the ready escape of the air, no matter what kind of system is used, direct-indirect, indirect, fan or furnace.

The following data are based on complete systems.

Under ordinary conditions, if the amount of air to be provided for ventilation exceeds five changes per hour for small rooms, such as living-rooms in residences, and four changes per hour for large rooms, such as schoolrooms, the cooling surfaces may be disregarded and the calculations made on the air required, as this will take care of the losses through walls, etc.

If the ventilation is not important, the first step in the calculations is to find the amount of air necessary to maintain the temperature.

Assuming the temperature of the outside air is 0°, that of the influx 120° and that of the room as 70°, it is obvious that the air cools from 120° to 70° in overcoming the cooling surfaces, and that, as the efflux is 70°, there must be 70° wasted through the vents; hence the loss due to cooling surfaces = 50/120 of the heat required.

As 1 cubic foot of air will give off 50/58 B. T. U. in cooling from 120° to 70°, the number of cubic feet required can be found by dividing the heat lost through the cooling surfaces by 50/58. This may be better understood from the following formula:

$$\text{Cubic feet of air required} = \left(g + \frac{w}{4} \right) t - t^o \text{ by substituting the } \frac{50}{58}$$

$$\text{usual values for } t \text{ and } t^o \text{ the air required} = \left(g + \frac{w}{4} \right) 70 - 0 \text{ or the } \frac{50}{58}$$

$$\text{air required} = \left(g \frac{w}{4} \right) 81.$$

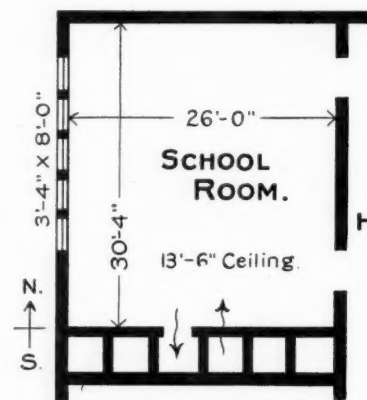


Fig. 2.

EXAMPLE NO. 2:
Find the amount of air necessary to maintain the temperature of the schoolroom shown in Fig. 2:

$$\text{West exposure} = 30' 4'' \times 13' 6'' = 410$$

$$\text{West glass area} = 5 \times 3' 4'' \times 8' = 133$$

$$4) 277 \text{ net wall.}$$

$$69 \text{ equivalent glass.}$$

$$133 \text{ glass area.}$$

$$202$$

$$\text{Add 5\% for west exposure} \dots \dots \dots 10$$

$$212 \text{ total glass to west.}$$

$$\text{North exposure} = 26' - 0'' \times 13' - 6'' = 351$$

$$4) 351$$


$$88 \text{ equivalent glass.}$$

$$\text{Add 10\% for north exposure} \dots \dots \dots 9$$




$$97 \text{ total glass north.}$$

$$(97 + 212) \times 81 = 25029 \text{ cubic feet of air required per hour to maintain the temperature. This is equal to about 2.5 changes}$$


41-2

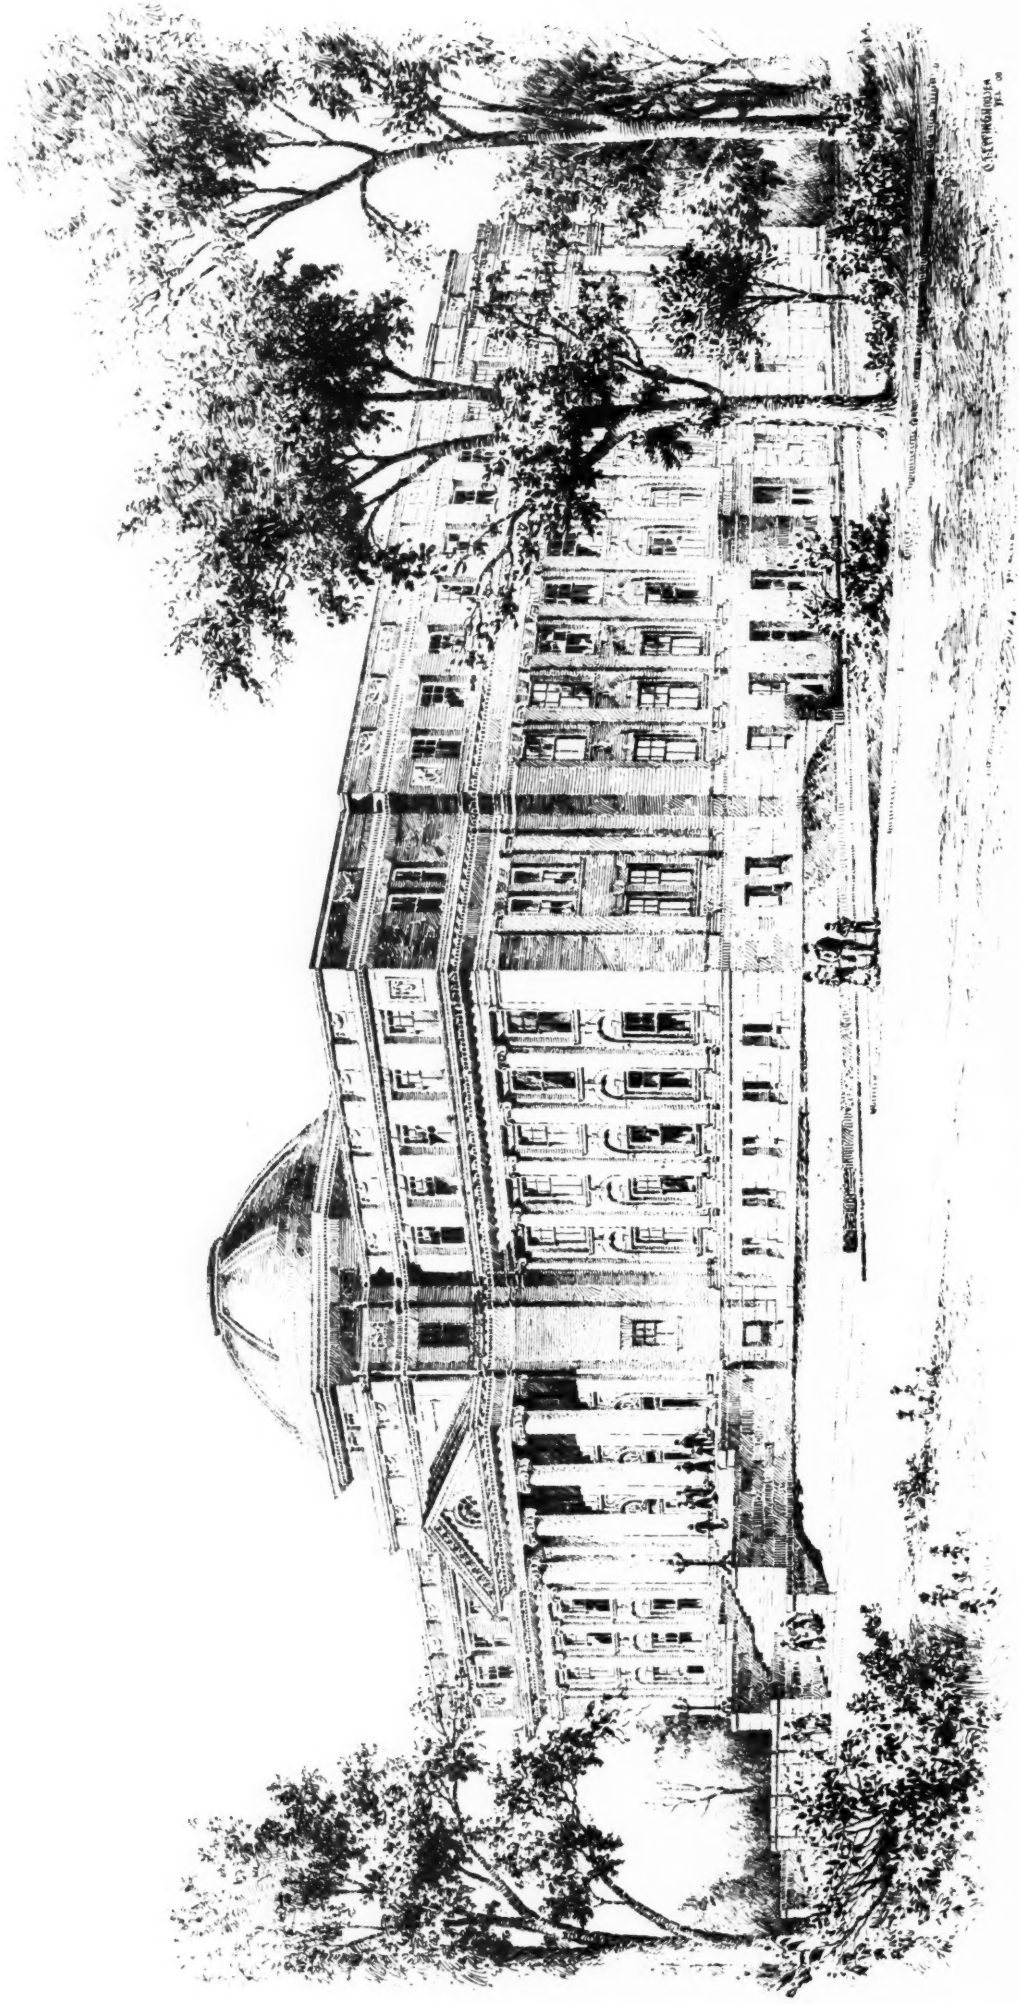

CHICAGO NORMAL SCHOOL.
W. B. MUNDIE, ARCHITECT, BOARD OF EDUCATION.

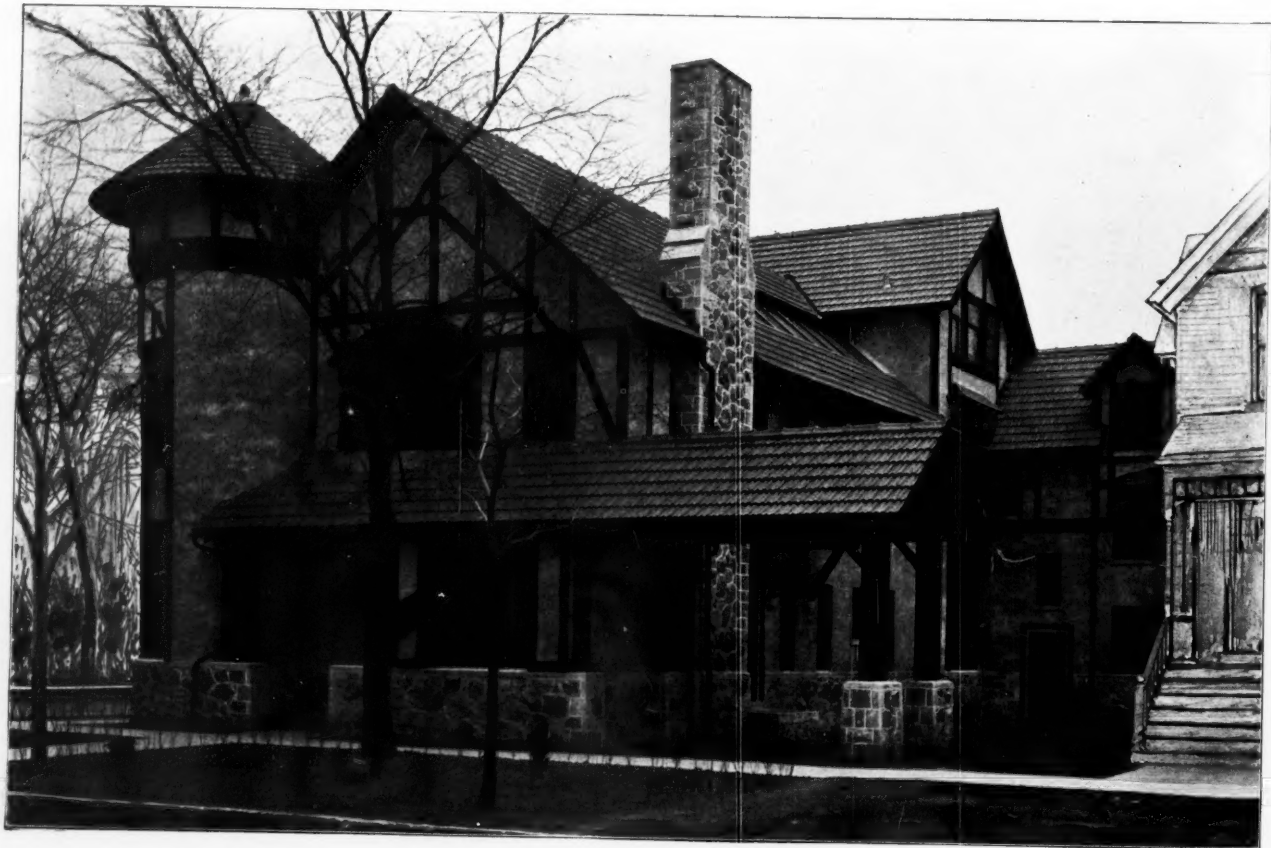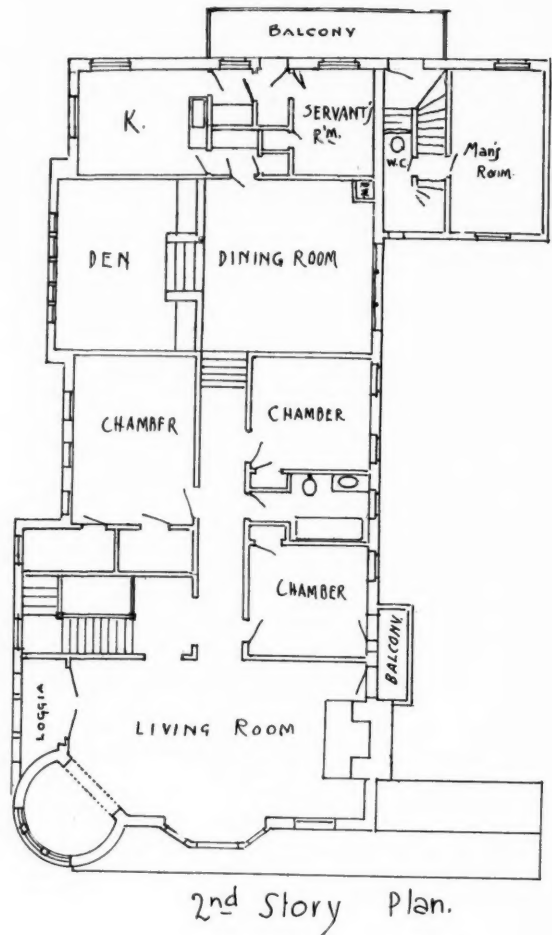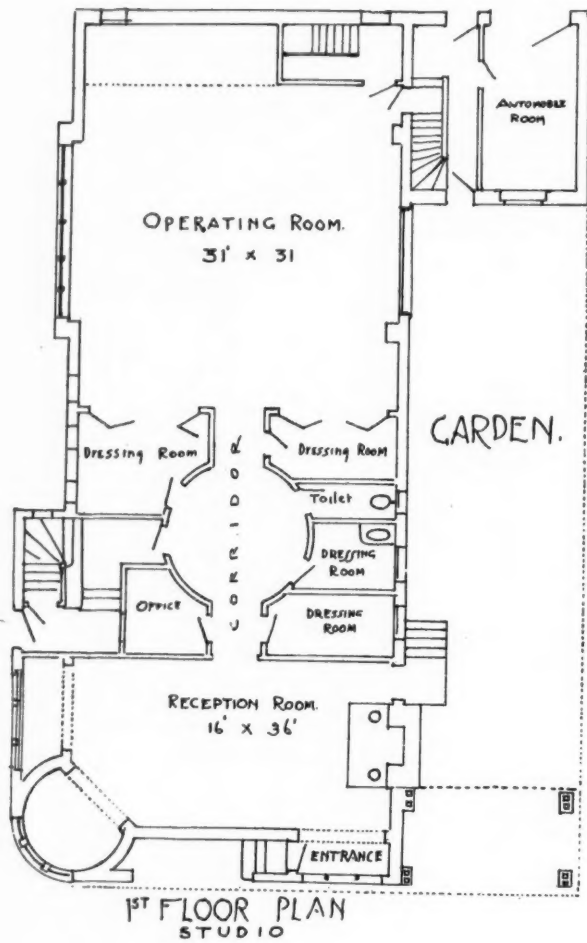

PHOTOGRAPHIC STUDIO FOR E.
P. C. STEWART

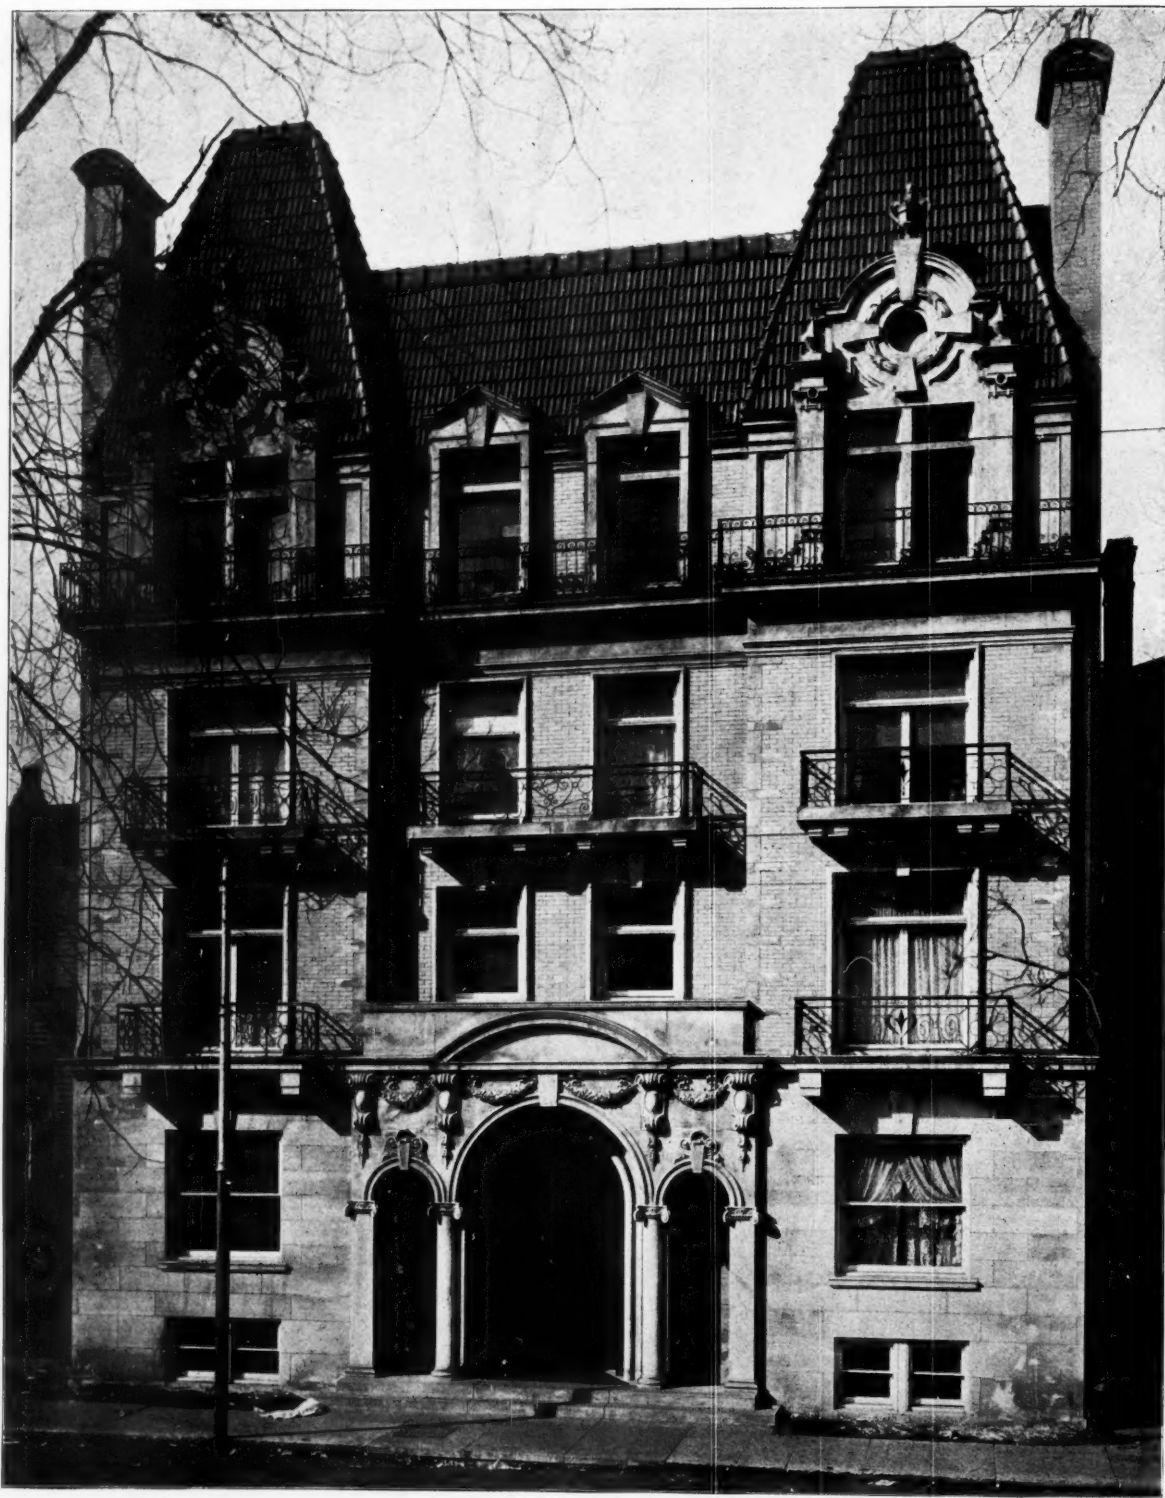


APARTMENT BUILDING, CHICAGO.



STABLE FOR J. O. GILMORE, OVERBROOK, PENNSYLVANIA.
W. L. PRICE, ARCHITECT, PHILADELPHIA.




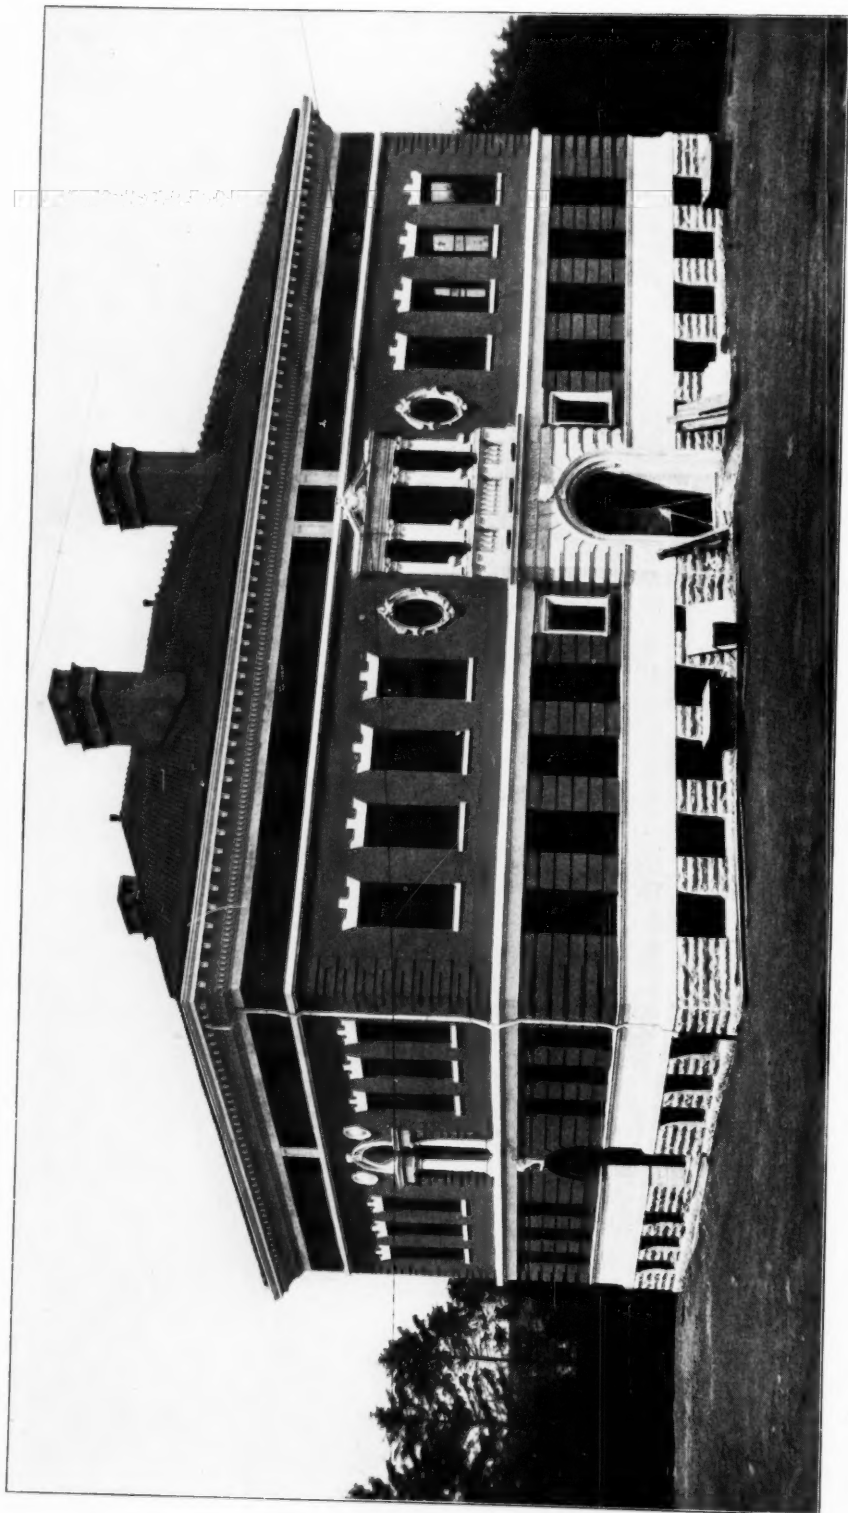


ST. BERNARD SCHOOL, CINCINNATI, OHIO.
WERNER & ADKINS, ARCHITECTS.



REAR VIEW.



FRONT VIEW.




RESIDENCE FOR W. L. BROWN
P. C. STEWART,

Negative by H. Fuernann, Chicago.



INLAND ARCHITECT PRESS.

RESIDENCE, CHICAGO.
POND & POND, ARCHITECTS.





OWN, EV
ARCHITE




DINING-ROOM.




VIEW IN RECEPTION HALL.




OWN, EVANSTON, ILLINOIS.
ARCHITECT.

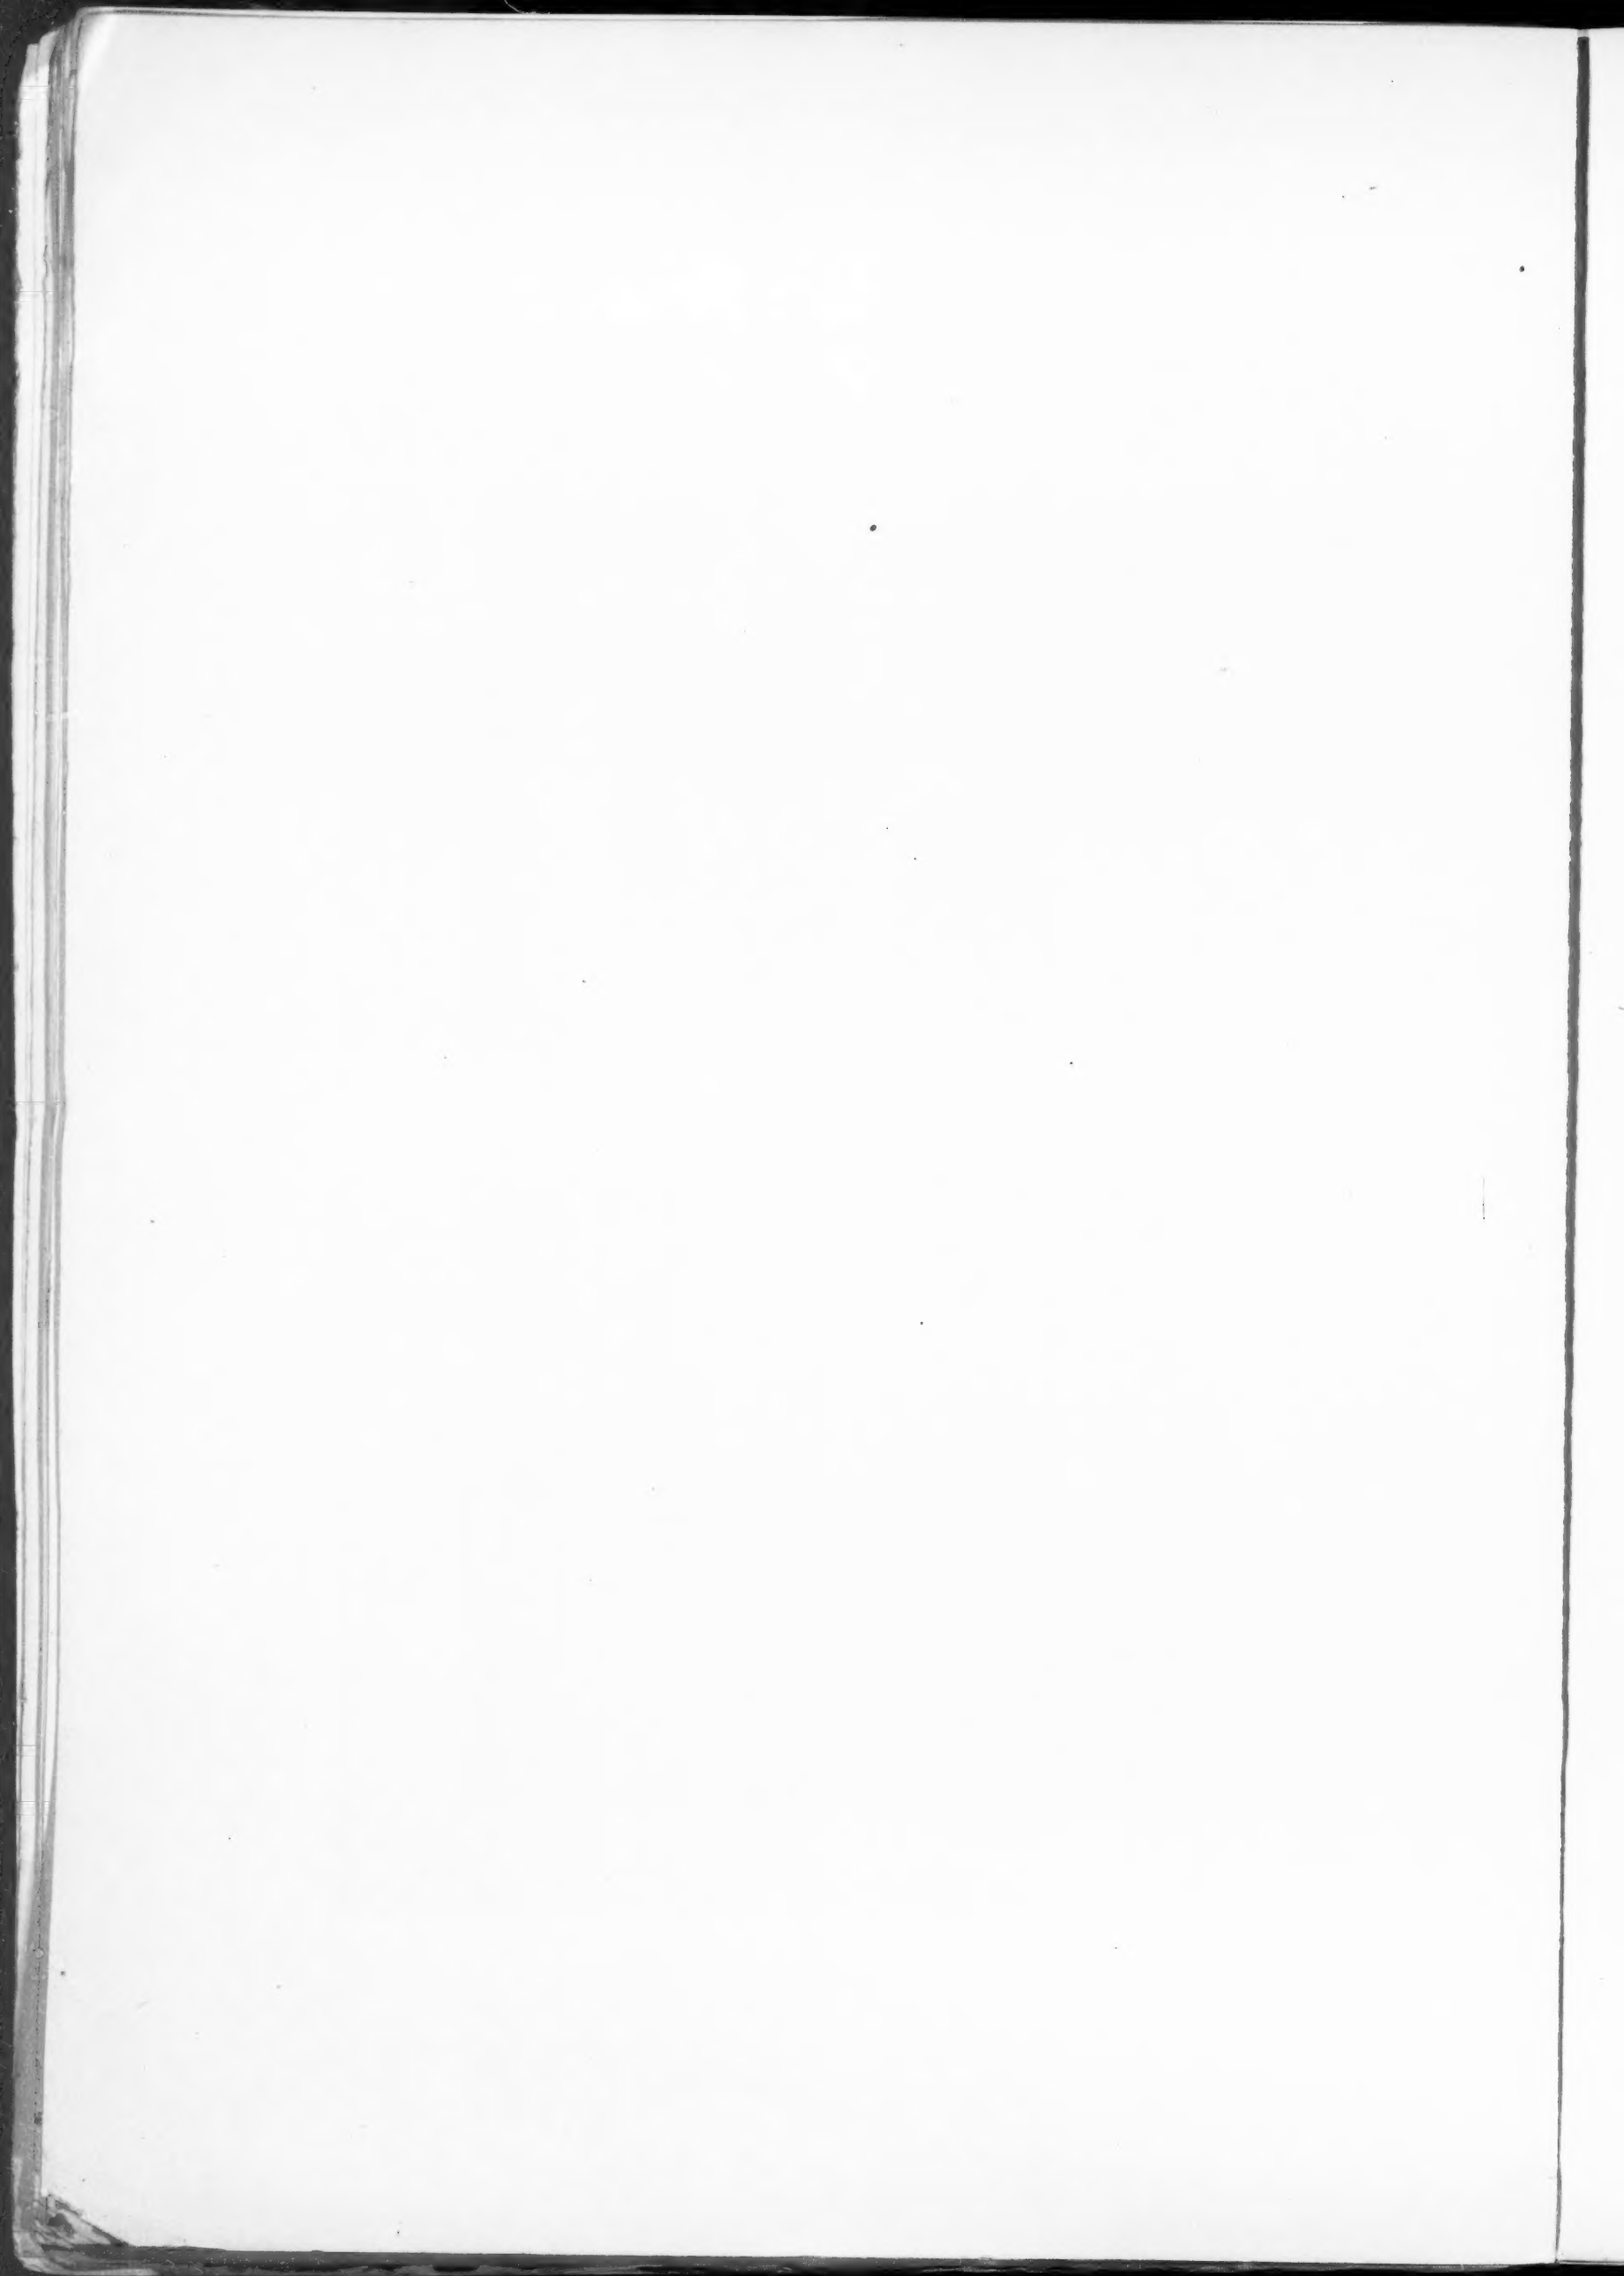

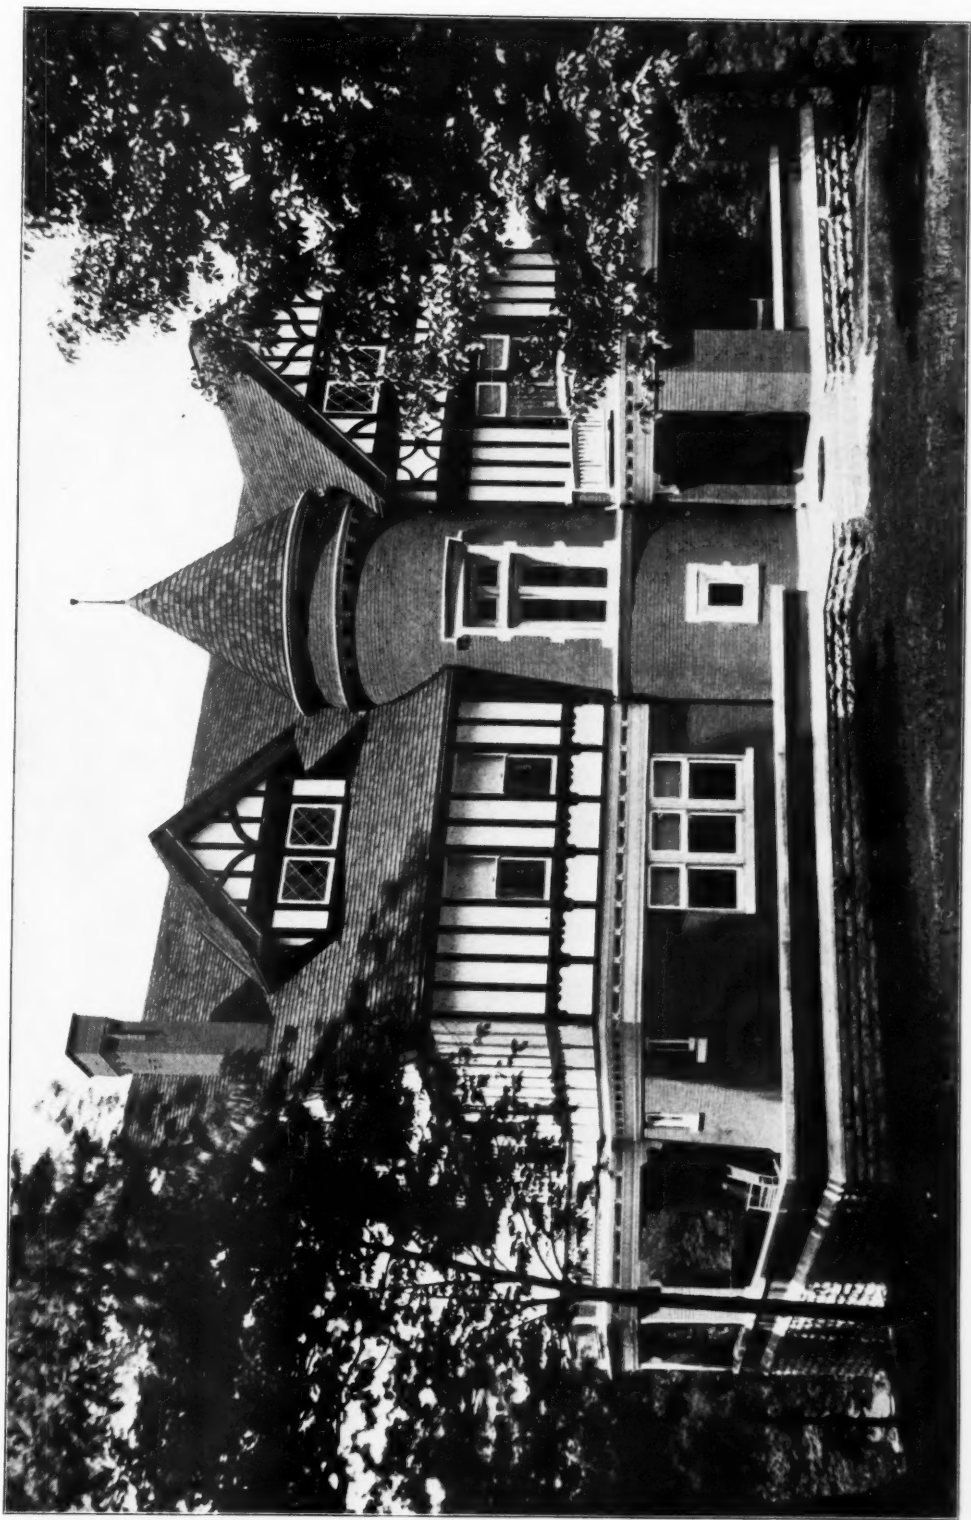

HOUSE FOR A. E. HUME, CINCINNATI, OHIO.
WERNER & ADKINS, ARCHITECTS.

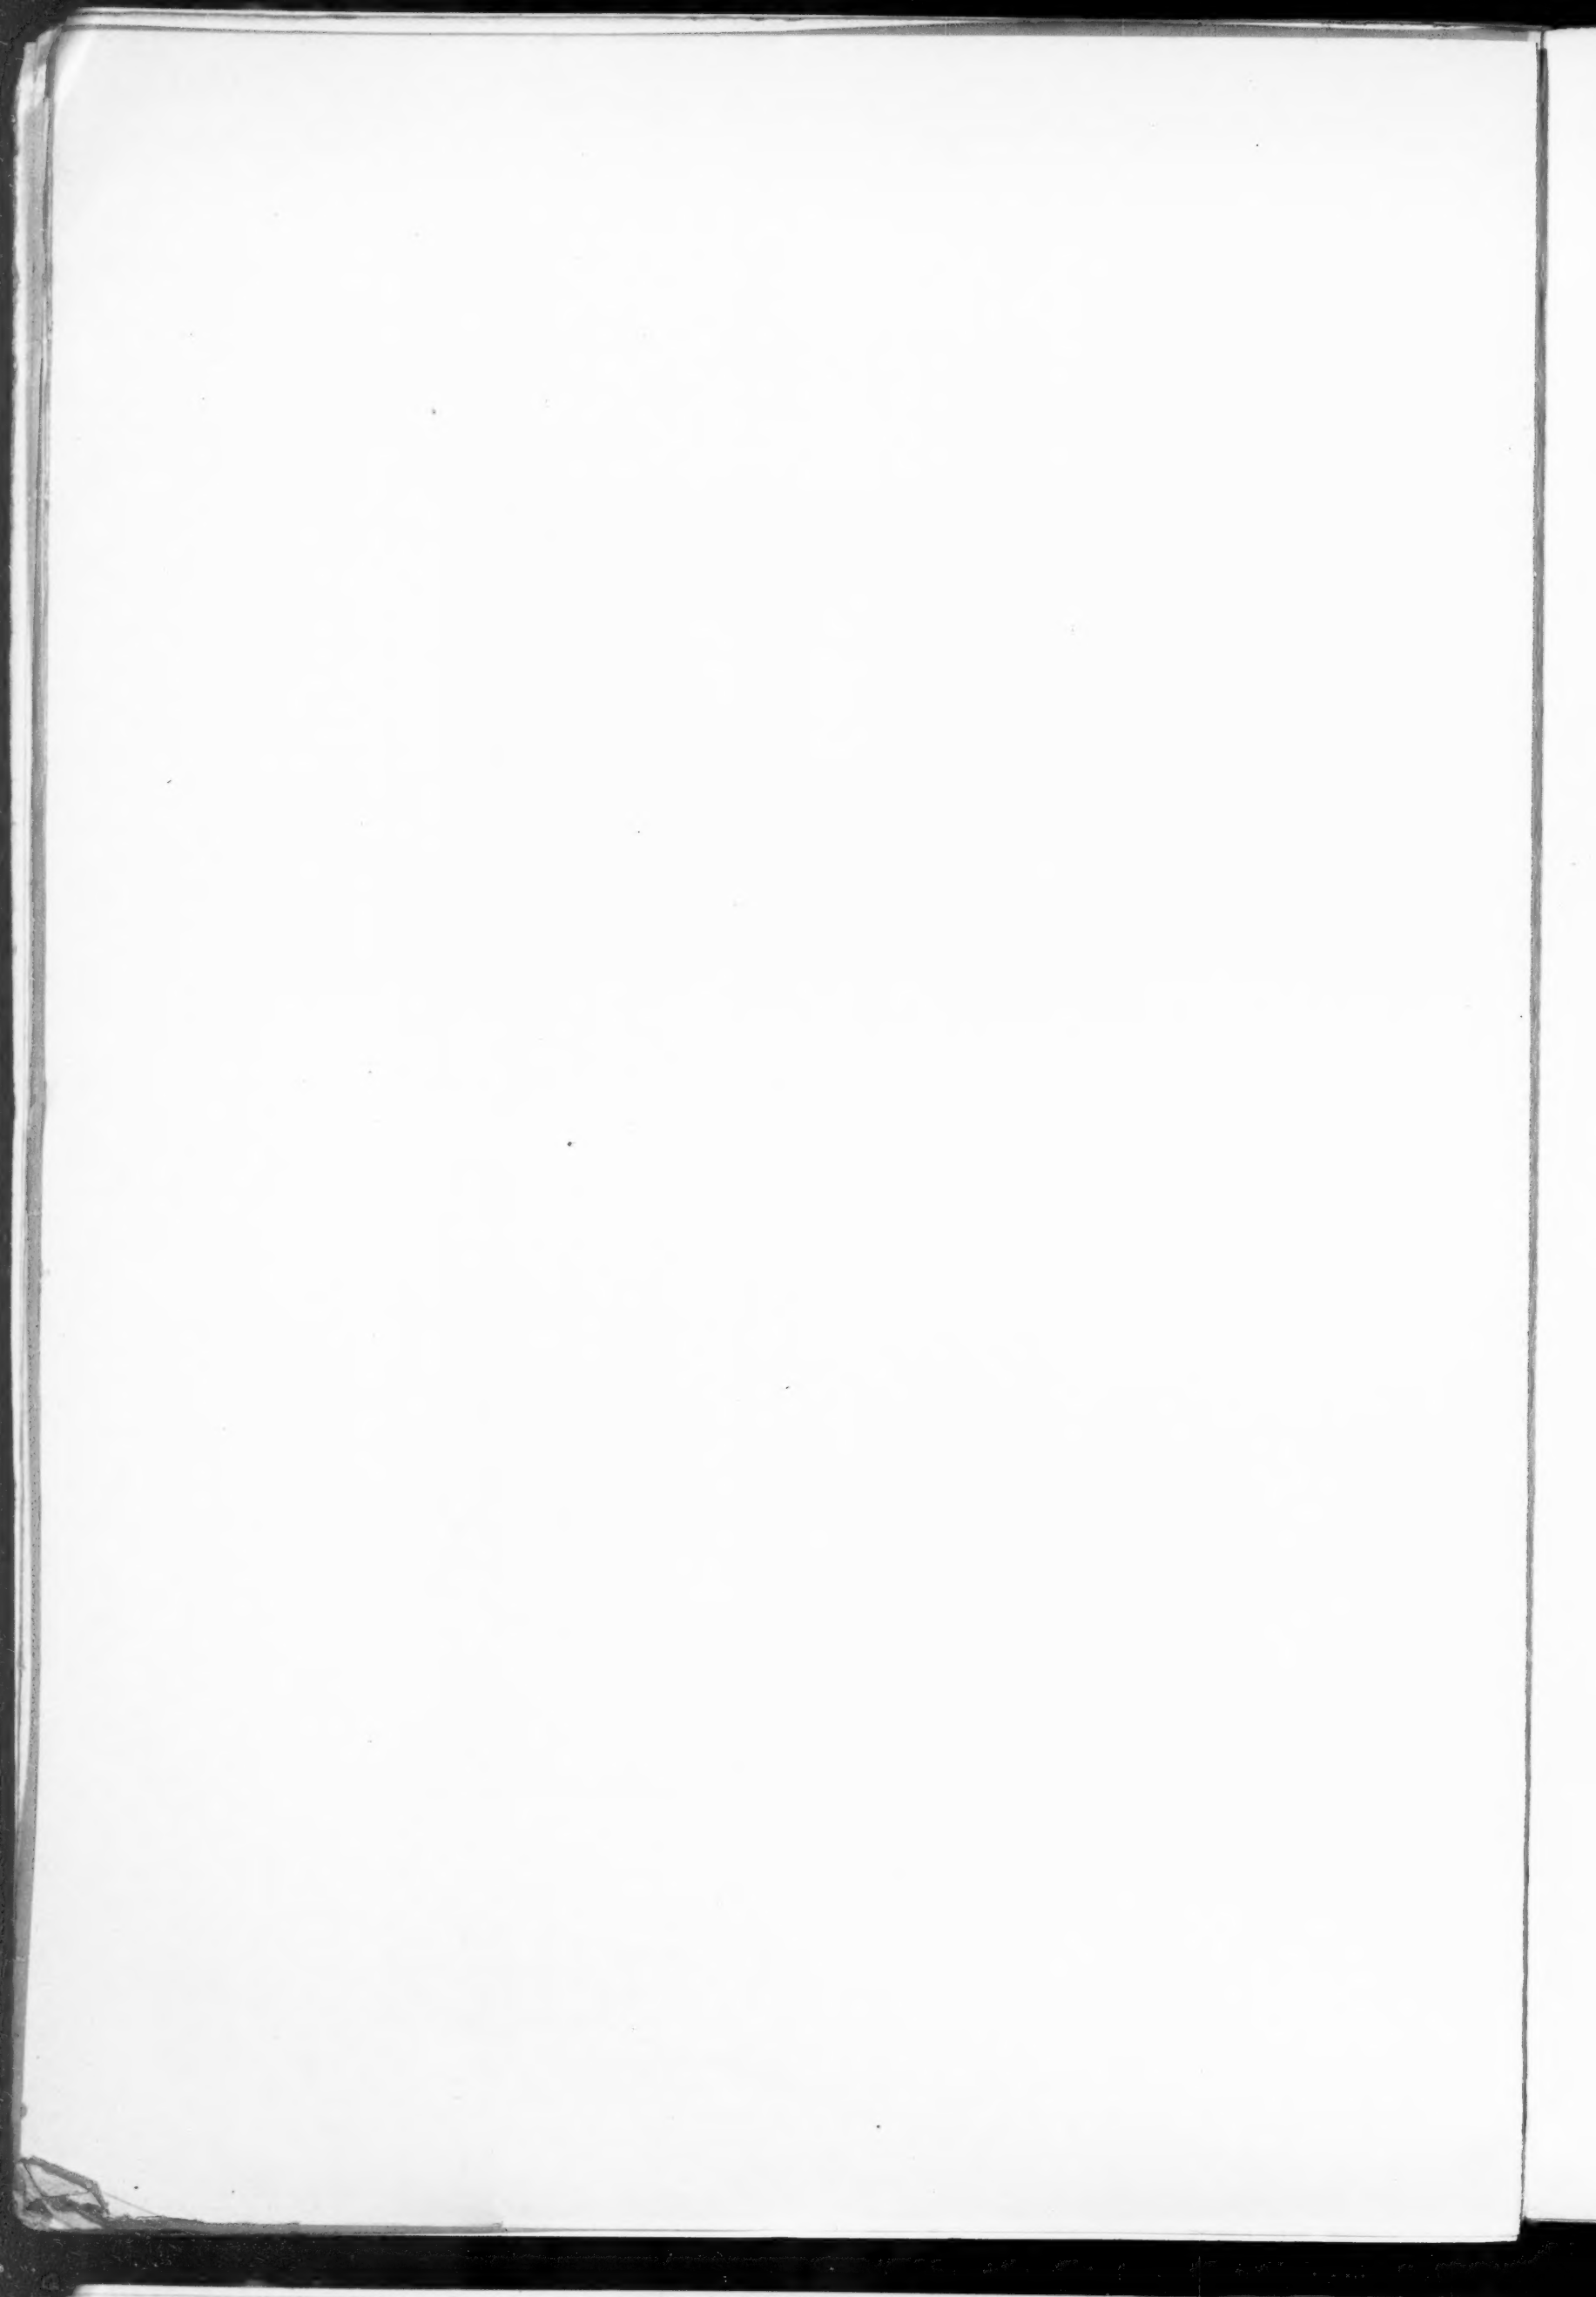



VIEWS OF HOUSE, CHICAGO.
POND & POND, ARCHITECTS.






RESIDENCE, LOS ANGELES, CALIFORNIA.
LOCKE & MUNSSELL, ARCHITECTS.



L. FO
ART, AR



L. FOWLER, EVANSTON, ILLINOIS.

ART, ARCHITECT.

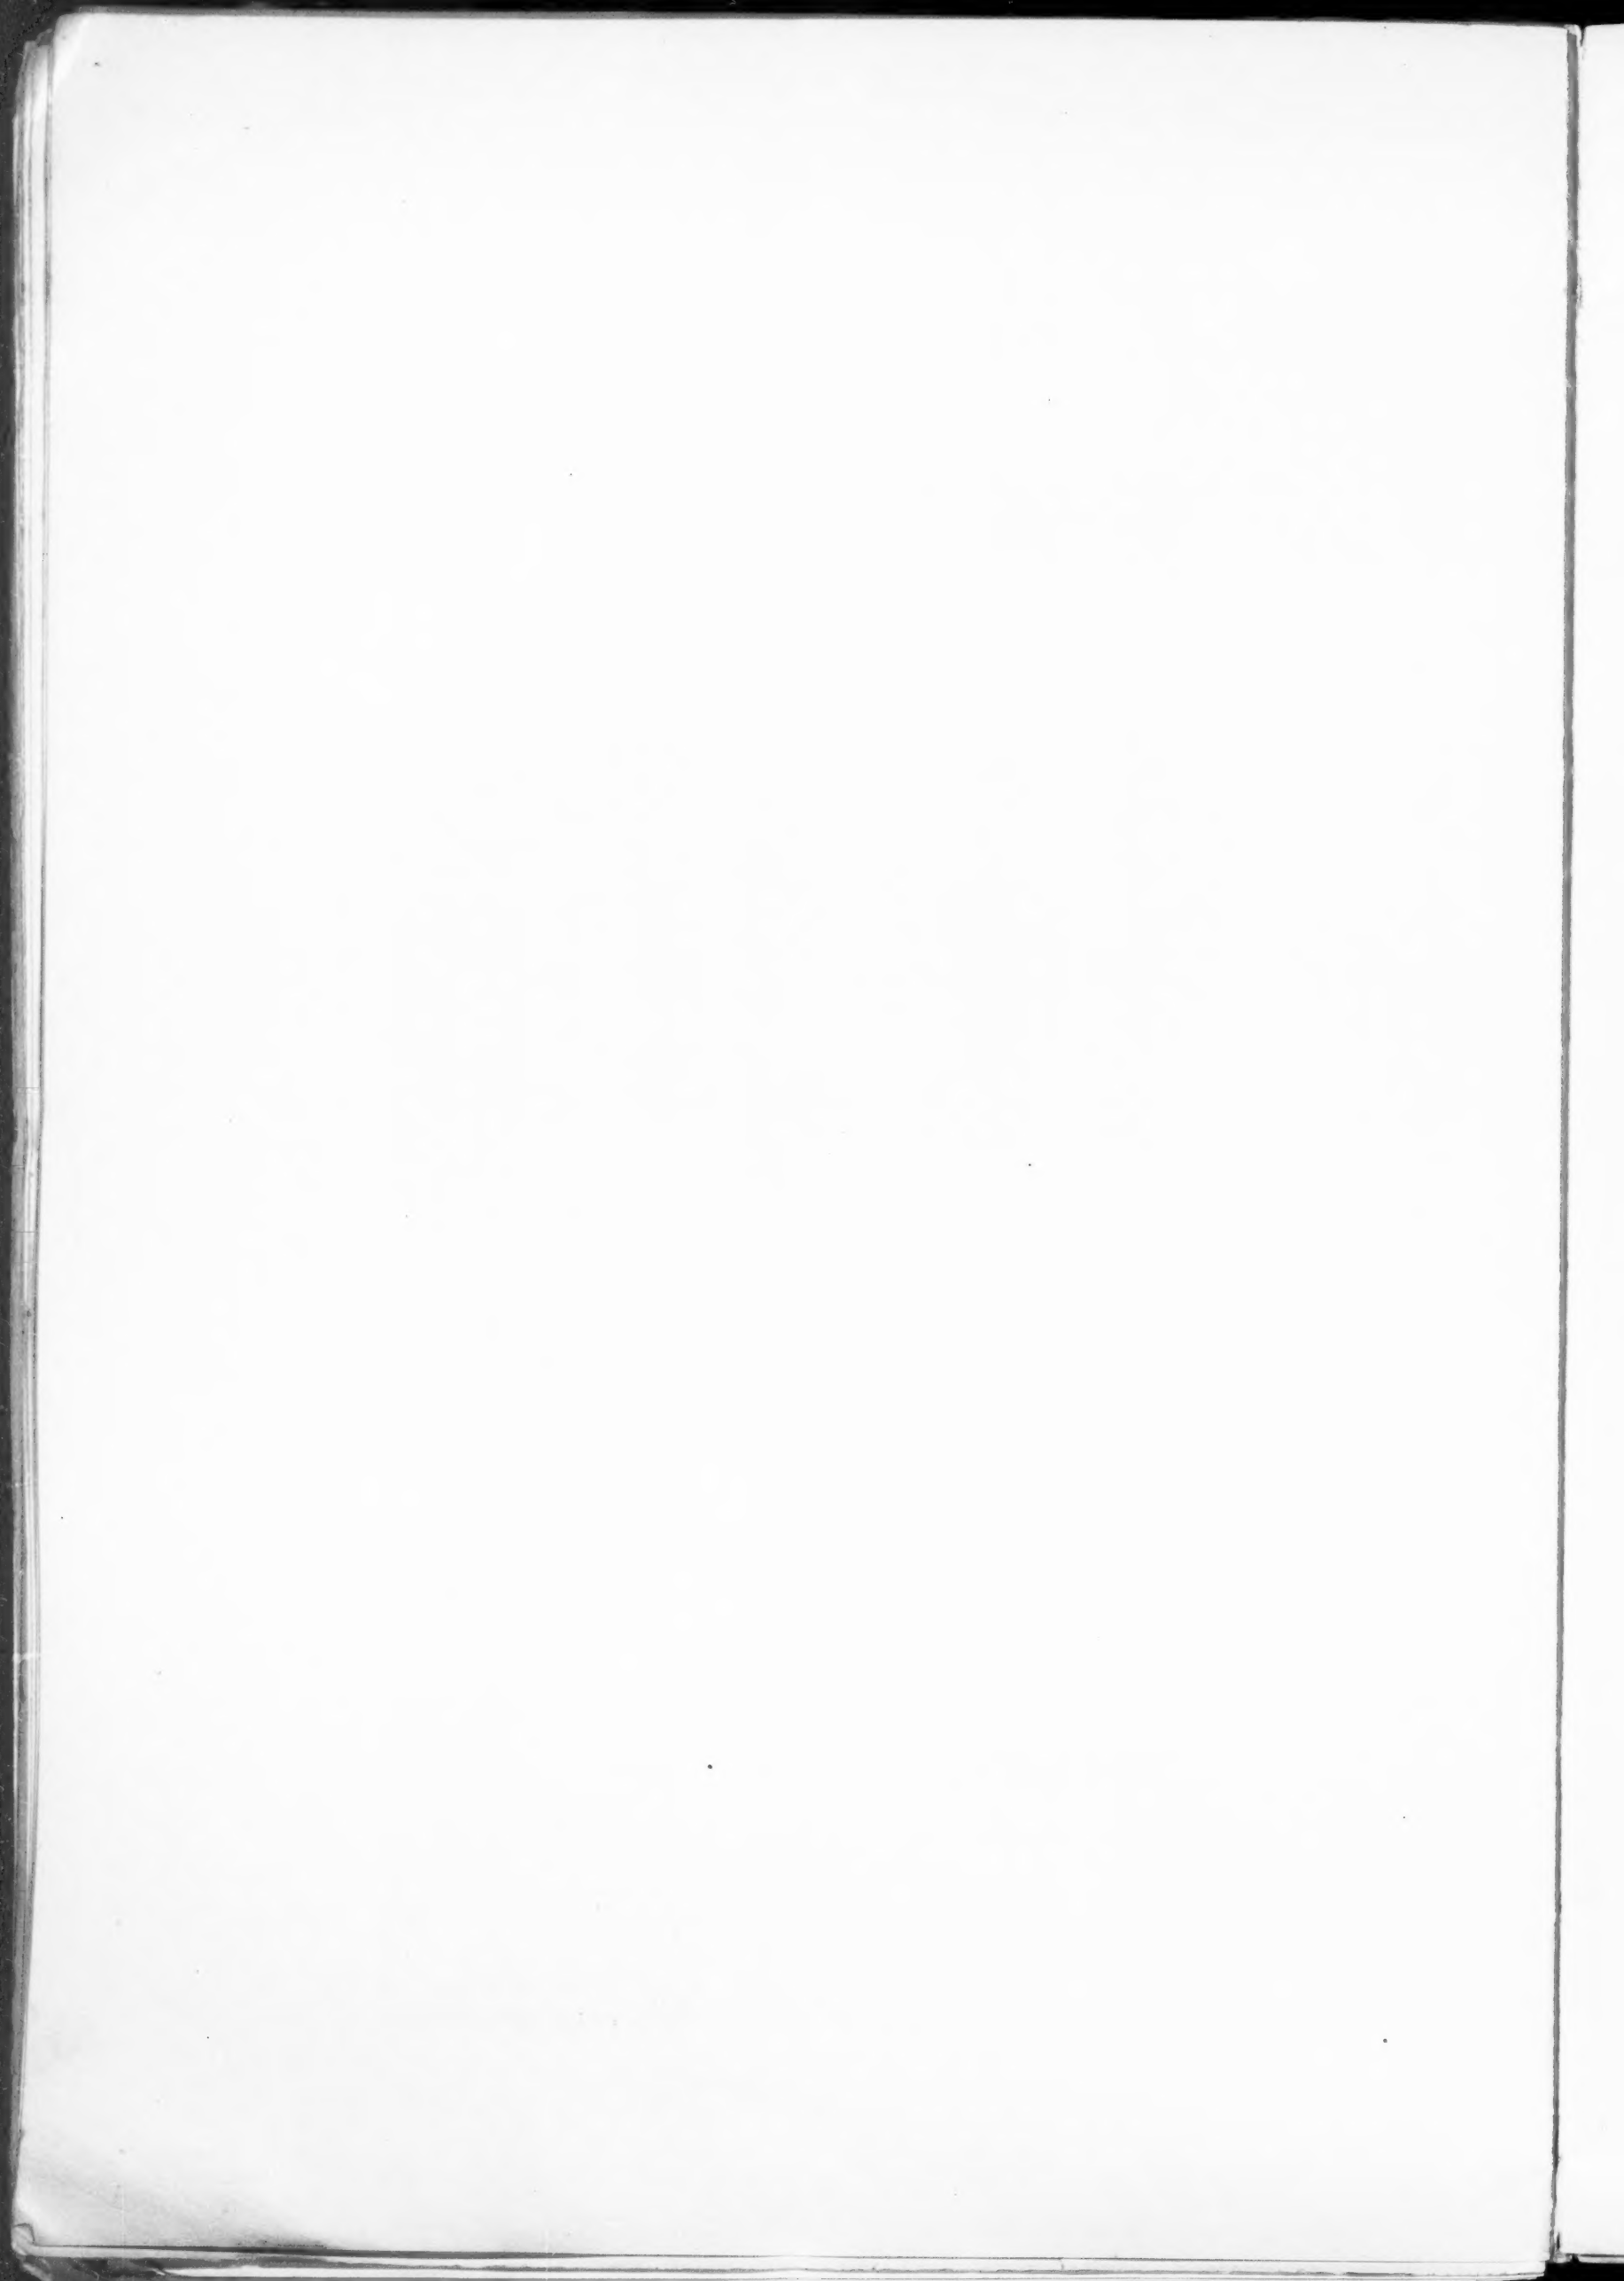

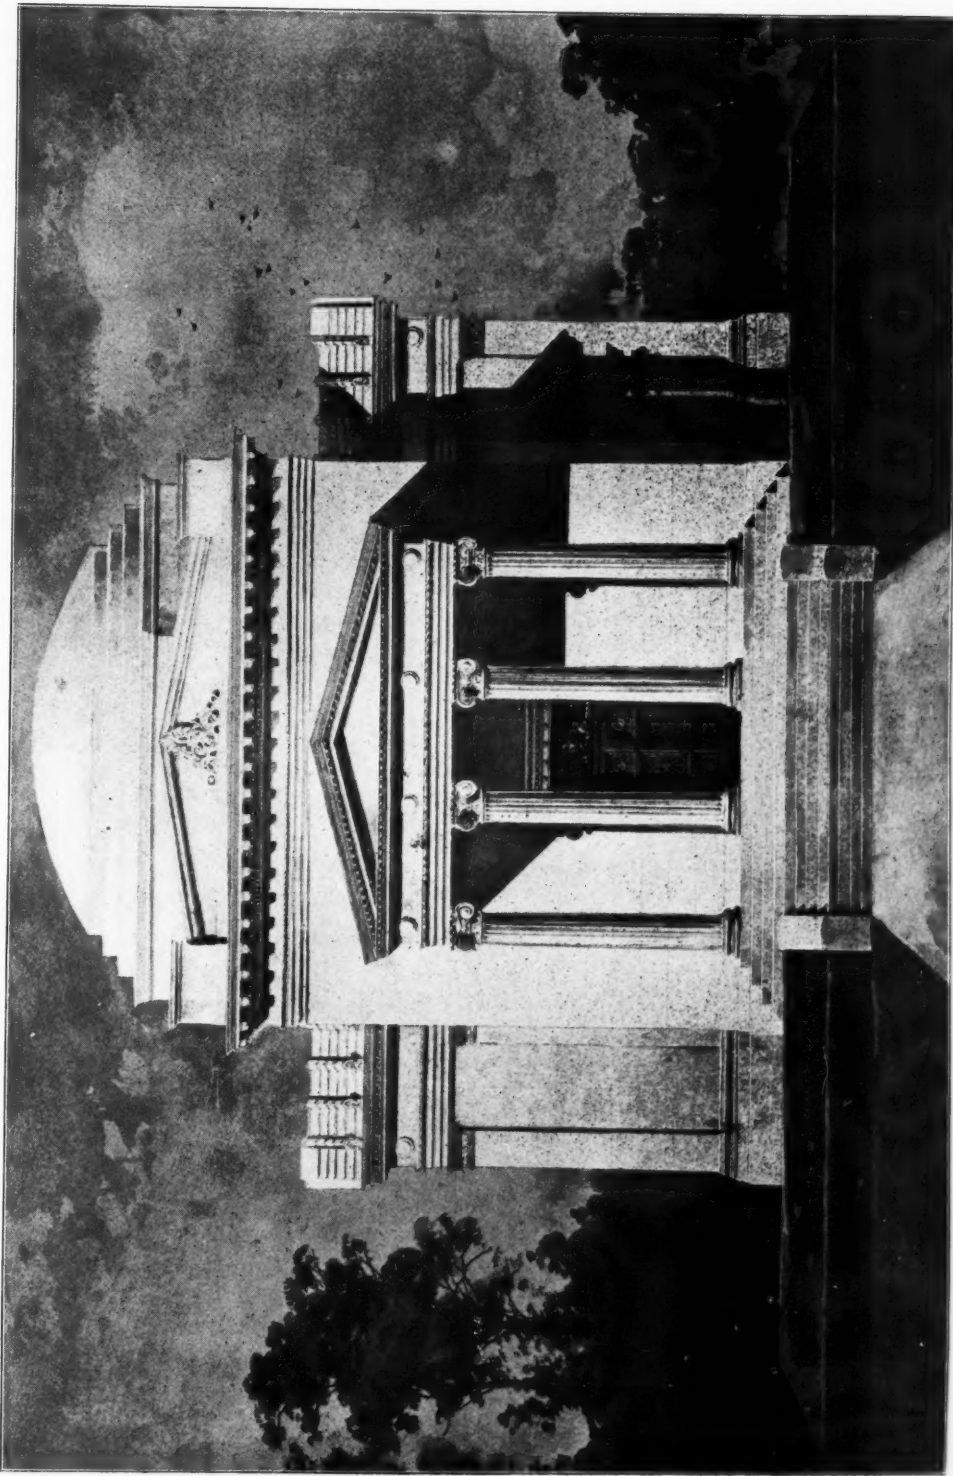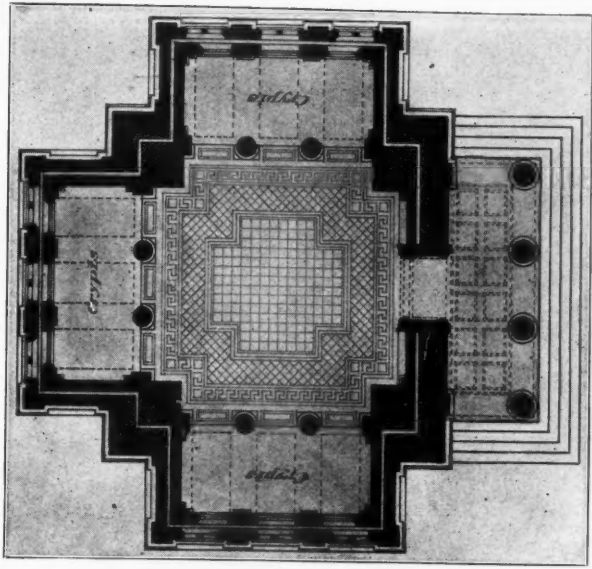

THE EVANS MONUMENT, PHILADELPHIA, PENNSYLVANIA.
WILSON BROS. & CO., ARCHITECTS.



ators would probably be 175° , and the emission would be 1.6 B. T. U. per hour per degree of difference, which would make the total emission $1.6 (175 - 70) = 168$ B. T. U. per square foot per hour. Then $\frac{11200}{168} = 66.6$ square feet of radiation, if hot water is used.

In these calculations we have found that

$$\text{No. 1 } L = \left(g + \frac{w}{4} + \frac{cv}{55} \right) t - t^o$$


$$\text{No. 2 } H = 1.9 (T - t)n \text{ for steam and}$$

$$\text{No. 3 } H = 1.6 (T - t)n \text{ for hot water, but it is}$$

obvious that H must = L , hence No. 1 = No. 2, or No. 1 = No. 3.

For all ordinary conditions $t = 70^\circ$, $t^o = 0^\circ$, $T = 212$ for

DIAGRAM No. 2.

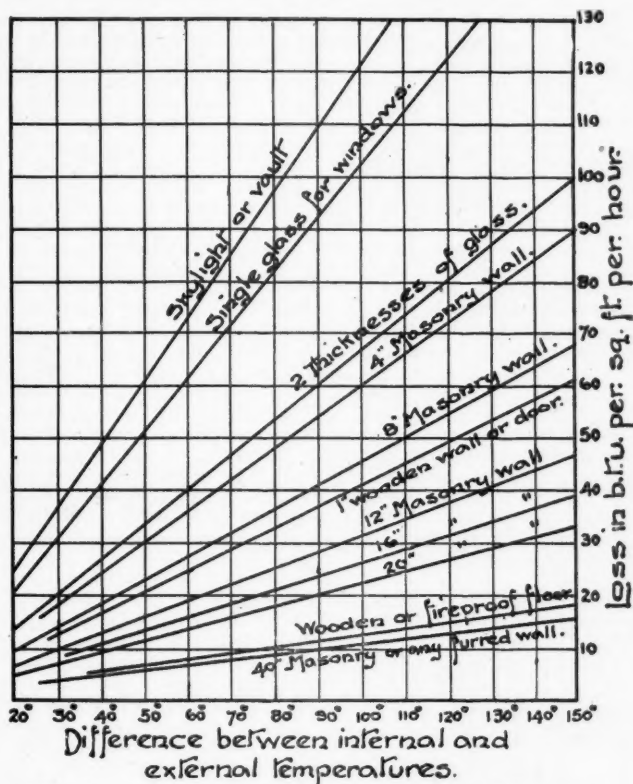

The intersection of the vertical and the diagonal corresponding to the difference in temperature and the kind of surface, respectively, locates the horizontal giving the loss of heat per sq. foot.

LOSS OF HEAT.

steam and 175° for hot water, hence $t - t^o = 70$; No. 2 = $270n$ and No. 3 = $168n$, from which we get the following equation:

$$\left(g + \frac{w}{4} + \frac{cv}{55} \right) 70 = 270n \text{ or}$$

$$n = .259 \left(g + \frac{w}{4} + \frac{cv}{55} \right) \text{ for steam and}$$

$$\left(g + \frac{w}{4} + \frac{cv}{55} \right) 70 = 168n \text{ or}$$

$$n = .41 \left(g + \frac{w}{4} + \frac{cv}{55} \right) \text{ for hot water, all of which}$$

may be expressed in the simple rule:

To find the number of square feet of radiation required, multiply the equivalent glass area (which is the same as the loss per hour per degree) by .25 for steam and by .4 for hot water.

Diagram No. 1 offers a ready means of finding the radiation required for ordinary conditions.

Diagram No. 2 is for determining the loss from various surfaces under different conditions.

(To be continued.)

THE EFFECTS OF WIND PRESSURE ON STRUCTURES.

BY ROBERT M. NEILSON.

(Continued from Page 50, Vol. XL, No. 6.)

Another important matter of study in connection with wind pressure is the relative resistance to the wind offered by bodies of different shape. A round chimney is generally supposed to offer less resistance to the wind than a square one of equal height and equal capacity. This can be deduced from De Borda's experiments and from general observations. What is the ratio of the resistances is, however, a question which can hardly be said to be settled.

Rankine gives the formulæ

$$P = ps \text{ for a square chimney,}$$

$$P = p \frac{s}{2} \text{ for a round chimney,}$$

where P denotes the total pressure against the chimney (presumably in the line of motion of the wind), s denotes the area of a diametrical vertical section of the chimney (presumably at right angles to the line of motion of the wind) and p the greatest intensity of pressure of the wind against a flat surface (presumably normal to the wind). According to Rankine, therefore, the resistance of a square chimney with one side facing the wind is to be taken as double that of a round chimney whose diameter equals the side of the square chimney. A round chimney of equal horizontal section to the square one would then have a resistance of 56 per cent of that of the square one.

Trying to arrive at a result by calculation is not of much use unless we know how the air acts on the square and on the round chimney respectively. This we know very little about. If we make certain assumptions, we can by theory find the relative resistances of bodies of different forms. For example, if we assume that wind consists of a series of small particles uniformly distributed and traveling all with the same velocity in parallel paths, and if we assume that when the particles strike a fixed body the angle of incidence is equal to the angle of rebounding, and if we further assume that the particles on rebounding never collide with each other, then the pressure P on a flat surface normal to the wind will be given by the equation

$$P = 2Adv^2$$

where A denotes the area of the surface, v the velocity of the wind, and d the density or mass per unit volume.

With the same assumptions the pressure on a cylindrical surface (such as a round chimney) would be $\frac{1}{2} Adv^2$ and that on a sphere would be Adv^2 . In the last two cases A is the diametrical section of the body, that is, the product of diameter and height in the case of the cylinder, and π and the square of the radius in the case of the sphere.

According to this reasoning the resistance of a round chimney would be $\frac{1}{3} \times 56$ per cent, or 75 per cent of that of a square chimney of equal height and horizontal section. Making the same assumptions, the resistance of a square chimney with its sides at 45° degrees to the direction of the wind would equal Adv^2 where A is the section across corners. The resistance of the chimney in this position would therefore be $\frac{1}{\sqrt{2}}$ of the resistance when set square with the wind, that is, rather less than the round chimney of equal capacity.

But however little we know of wind pressure we are certain that the assumptions we have made are not only unwarranted but impossible. The calculations are therefore of little value except for mathematical study. We have however learned experimentally a little about the relative resistance of bodies of different shapes. De Borda's experiments showed with small bodies the pressure on a sphere was 0.41 and that on a cylinder was 0.57 of that on a flat plate. A few years ago M. Le Dantec made careful experiments with falling bodies of different shapes. The bodies were guided to fall vertically, the guide, which was a tightly stretched wire, being practically frictionless. The times of starting, stopping, etc., were automatically recorded on bands of moving paper and other precautions were taken with a view to obtaining great accuracy of measurement. Some interesting and valuable results were obtained. The bodies when let go of course started to fall with an acceleration; but a critical velocity was reached in each case at which the resistance, which varied with the square of the velocity, was balanced by the force of gravity. The velocity thereafter was uniform.*

A square plate of one meter side moving at a velocity of one meter per second was found to encounter a resistance of 81 grams. Plates of equal area but of different shapes—circles, triangles,

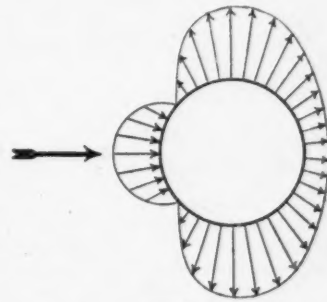


FIG. 6.
Diagram illustrating wind pressure on a cylindrical body

* See the *Engineering Magazine*, October, 1899, page 122. Also *Sull. Soc. d'Encouragement*, July, 1899.

etc.—were found to encounter resistances which were nearly proportional to their perimeters, the circle having of course the smallest perimeter and therefore the smallest resistance. The fact already mentioned as having been proved, namely, that large areas offer proportionately less resistance than smaller ones, agrees with M. Le Dantec's experiments, as the perimeters of large areas are relatively less than those of small and similar ones.

M. Canovetti has made experiments somewhat similar to those of M. Le Dantec. M. Canovetti however caused his bodies to move along an inclined wire. The horizontal distance between the ends of the wire was 280 meters and one end was 71.2 meters above the other. The inclination of the wire varied slightly owing to sagging. Times were taken by a stop watch and some of the results obtained are given in the following table:

M. CANOVETTI'S EXPERIMENTS WITH FALLING BODIES.	
Form of body.	Pressure in grams.
Circular plate; area one square meter.....	80
Rectangular plate; area one square meter.....	90
Hemisphere with convex side foremost; area of diametric section of sphere one square meter.....	22.5

In all cases the velocity was one meter per second.

It may be assumed that the average pressure on a body will be much the same whether the body is moving and the air at rest or the body at rest and the air moving. Fidler, however, says that "it has not yet been ascertained that the pressure of the wind is the same thing as the resistance offered by the air to a moving body." The pressure in the one case will of course vary much more than in the other.

The following table compares the results obtained by several experiments and formulæ for a certain area and a certain velocity:

Results obtained by different experimenters, and formulæ of the pressure on a circular plate of one square meter at right angles to wind traveling at 1 meter per second.	
Formula or experiment.	Pressure in grams.
Rouse's	122
Didion's	88
Dines'	73
Hawskley's	131
Le Dantec's	72
Canovetti's	80
Perfect impact †.....	249

It is well known that a body of umbrella shape offers a great resistance to air moving against its concave side. This fact is made use of in the parachute, and windmills are constructed on this principle. According to General Didion the resistance of a parachute whose depth is one-third of its diameter is about double that of a flat circular plate of the same diameter. This fact is also borne out by the experiments of Hutton.

The total force exerted by the wind on a plate is, of course, the sum of the positive pressure on the windward side and the negative pressure on the leeward side. For example, if the pressure on the windward side of a plate of 1 square foot area is 50 pounds above atmosphere and that on the leeward side 26 pounds below atmosphere, the effective force on the plate is $50 + 26 = 76$ pounds. The experiments of Du Buat and Thibault seemed to show that the positive pressure on the windward surface of a plate was double the negative pressure or suction on the leeward side. Other experiments, however, lead us to believe that the relative values of positive pressure and suction depend on the shape and inclination of the plate.

The effective force on a plate is found not to be the same as on a prism whose ends are formed by two such plates, the wind pressure being perpendicular to the plate and to the ends of the prism. In spite of the skin friction on the sides of the prism, the effective force on the latter is less than on the plate. This does not seem unnatural when we consider that the air striking the plate or the end of the prism will be projected laterally and will be able to close in again behind the prism much better than behind the thin plate. There will therefore be greater suction behind the plate than behind the prism.

In many cases it is desirable not only to know the total effective force on a body, but the pressure and suction on its front and rear sides separately. Thus, in a house it is necessary to have each wall strong enough to stand the wind pressure or suction (whichever is greatest) as well as to have the house constructed to resist being swept away as a whole. The same thing holds good in box girders or tubular bridges. It should be noted that a wind gauge, which consists of a plate which is exposed both front and rear, will register a pressure which is the sum of the pressure on the windward side and the suction on the lee side.

The question of the pressures on two parallel plates having a space between them not laterally enclosed is also important. Two such plates occur as the girders of a plate-girder bridge. Baker's experiments with equal parallel discs are interesting in this connection. The total effective force on the two discs was found to be as given in the following table:

Distance apart in terms of diameter....	1.0	1.5	2.0	3.0	4.0
Total effective force in terms of effective force on single disc by itself....	1.0	1.25	1.4	1.6	1.8

As there must be a certain amount of force exerted on the leeward disc, it follows that the effective force on the windward disc is reduced by putting behind it at a distance of a diameter another similar disc. That is, not only does the windward disc shield the leeward one, but the leeward disc shields the wind-

ward one. And this is what one would naturally expect on a little consideration; for the air between the discs must be comparatively still and suction on the back of the windward disc be very little. In the case of plate-girder bridges, therefore, we may assume that the effective force on the windward girder will be less than if it were alone, and the effective pressure on the two girders will depend on the relation between their heights and their distances apart.

We know that in a gale the velocity of the wind is constantly changing. The maximum pressure recorded by a small gauge therefore will not as a rule measure the force to which a structure is subjected. The small inertia of the gauge will enable it to register the maximum force reached during a puff, but a few feet or even a few inches away the pressure at the same moment may be less. Besides this the maximum pressure may last for only an instant. That is to say, the pressure due to a puff of wind may increase to a maximum and then decrease. For example, at Greenwich on January 16, 1872, the average pressure for each separate hour of six consecutive hours varied from 2.8 to 3.6 pounds per square foot; but the maximum pressure each separate hour was from 30 to 42 pounds per square foot. Now a light gauge will register the very maximum, while the heavy body will be affected only by the average pressure during a small period of time. Consider for example the stability of Cleopatra's needle on the Thames Embankment. We could easily find the uniform wind pressure which would be required to overturn it, but a sudden small gust which merely reached that intensity for an instant would not effect the result; there is more than the weight of the stone to be overcome—there is the inertia. This fact is well illustrated by the way that windows are blown in by gusts of wind which seem to make no impression on the buildings containing the windows, when, by calculation, the windows in many cases ought to stand a greater steady pressure than the building.

A series of comparative tests with gauges which require different amounts of work to make them record would be very interesting and instructive. We might employ spring-actuated plate gauges with large and small masses, or we might cause the pressure on equally massive plates to act on water gauges having large and small sections of tube.

It should be noted that gauges are often affected by buildings or erections in the vicinity and do not register the pressure that would exist in the open. We all know how seriously the draft of chimneys is affected by adjacent objects. It has been suggested that comparatively feeble gusts of wind might rupture a structure if the period of the gusts was equal to the natural period of vibration of the bridge. But the probability of this

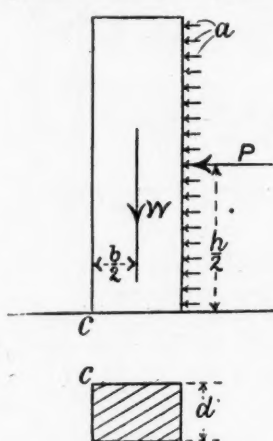


FIG. 7.
Diagram illustrating the stability of a column.

occurring for more than two or at most three consecutive gusts seems so remote that its effect beyond this possible maximum periodicity may be neglected. A large structure is more stable than a small one of a similar shape and nature. That is, it takes a greater wind pressure per square foot to overturn a large structure than to overturn a smaller one of the same shape and the same density, if the structures rely on their weights only to resist overturning and if the material is not ruptured. Consider the column shown in Fig. 7, which we will suppose to be of rectangular cross section and to have a height h , a breadth b and a thickness d . Let w be the weight of a unit volume of the material of which the column consists. The small arrows a represent a uniform wind pressure of p pounds per unit area. The large arrow P represents the resultant wind pressure on the column acting at a distance of $\frac{1}{2}h$ from the ground. The large arrow W represents the weight of the column which acts through its center of gravity, the line of W being at a distance of $\frac{1}{2}b$ from the back of the column. Let us take moments about the edge c, c . The overturning wind pressure will be such that the moment of P equals the moment of W .

$$\begin{aligned} \text{therefore } P \times \frac{h}{2} &= W \times \frac{b}{2} \\ \text{but } P &= hdp \\ \text{and } W &= hbdw \\ \text{therefore } hdp \times \frac{h}{2} &= hbdw \times \frac{b}{2} \\ \text{therefore } hp &= b^2w \\ \text{therefore } P &= \frac{b^2w}{h} \end{aligned}$$

For columns of similar shapes b varies as h , and therefore p varies as one of the linear dimensions. Therefore, if a wind

† That is according to equation near the bottom of page 553.

pressure of 20 pounds per square foot is required to overturn a column 20 feet high, a wind pressure of 40 pounds per square foot will be required to overturn a 40-foot column of the same material and similarly proportioned. If the 40-foot column had a base equal to that of the 20-foot column, instead of being proportionately greater, then the same wind pressure would overturn both. This applies to bodies of any shape.

Fig. 8 shows three columns similar except for their bases, which are equal. These columns are equally stable.

This fact may be expressed by the following rule:

For equal stability against wind pressure, similar bodies require equal bases and not similar bases.

This rule must be taken as approximate only, for there are several considerations which we have left out of account, such as skin friction of the wind on the sides of the structure, the effect of the friction of the ground on the wind pressure on the front lower part of the structure, and the greater intensity of wind pressure on small than on larger areas. The rule, however, is roughly speaking, correct and explains why in nature an insect has such a large leg base and a large quadruped proportionately such a small one.

We assumed in considering the stability of the column shown in Fig. 7 that it would tilt about the edge c. We did this because we were considering stability given by weight only, and not considering the strength of the material. In some cases the material would not fracture and the structure would tilt as has been shown. In other cases the material about the tilting edge would crush. This crushing would not affect the overturning moment, but it would reduce the moment of stability and therefore lessen the wind pressure that the column would stand.

This article will not be complete without a few words on tornadoes. We are not troubled with tornadoes in Great Britain, but in America they occur every now and again and contrive to do a maximum amount of damage in a minimum of space and time. The destructive power of some of these tornadoes has been terrific, but happily their track is usually very narrow and it seems the wisest course as a rule not to attempt to construct buildings to withstand them, but to take the chance, which is really extremely small, of a tornado ever striking them. At a meeting of the American Society of Civil Engineers, the widths of the tracks of several tornadoes were given. The Marshfield tornado was 1,800 feet wide, the St. Charles tornado not more than 60 feet and the Medford tornado had a track only about 13 feet wide.

It is not in the province of this article to discuss the cause of tornadoes. The cause, however, involves a low barometric pressure at some place, and this affects the nature of the destruction caused by the tornado, and the nature of the provisions to withstand it, if such provisions are to be made. In some cases damage seems to be done by suction. In the tornado or cyclone or "vacuum storm," as it has been very appropriately called, which swept through the cities of St. Louis and East St. Louis on the evening of May 27, 1896, there were unmistakable signs of damage having been done by a sudden fall of pressure. Walls of houses in many cases fell outward, evidently due to the excess of pressure inside the houses when the pressure outside was suddenly reduced. The capacity for harm of a sudden fall of pressure will be evident when we consider that every inch of mercury equals a pressure of 70.7 pounds per square foot. If, therefore, the barometric pressure were suddenly reduced outside a building by an inch and a half, the walls of the house would be subjected to the enormous pressure of 106 pounds per square foot. Several houses were found after the St. Louis tornado with walls intact, but with the lath and plaster torn off the ceilings of the rooms immediately below the attics. In these houses there was no flooring on the attics, and the only explanation of the phenomenon seems to be that, when the vacuum wave passed the house, the excess of pressure in the rooms got out by windows or flues or otherwise, but that in the case of the attics with no adequate air exits, the excess of pressure of the imprisoned air burst down the ceilings of the rooms below. In many cases, in which the outside walls of houses were in part thrown down (outward), light partitions and light furniture were left unmolested, showing that there had been no violent air currents inside the house.*

FIFTY THOUSAND DOLLARS for a year's superintendence is the sum mentioned to be given to J. H. Stewart, of James Stewart & Sons, contractors, of St. Louis, for "applying American rush methods" in constructing the Savoy Annex in London.

* See paper of Mr. Julius Baier, Pro. Am. Soc. Civil Engineers, January, 1899.

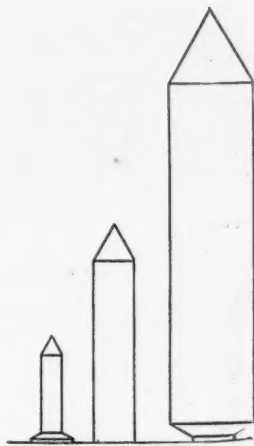


FIG. 8.
Illustrating effect of size on stability.

REVISION OF THE UNIFORM CONTRACT.

THE report of the Committee on Contracts and Lien Laws of the American Institute of Architects, submitted at the last convention, the full text of which was omitted from the convention report last month, is an interesting document, giving as it does explanation of the different changes in uniform contract form, and the reasons therefor as well as the principal advantages accruing from the use of this form of contract. The report is as follows:

REPORT OF COMMITTEE ON CONTRACTS AND LIEN LAWS.

The Committee on Contracts and Lien Laws has, in accordance with the vote of the Institute at the last convention, in conjunction with a committee appointed by the National Association of Builders, revised and published the Uniform Contract, a copy of which is hereto attached.

The members of the committee on the part of the National Association of Builders were John S. Stevens, of Philadelphia, its president; Charles A. Cowen, of New York city, its vice-president, and William H. Sayward, of Boston, its secretary; all of whom entered upon the work with interest and gave to it much time and thought, especially Mr. Sayward, who acted as secretary of the committee and to whom much credit is due for the care and labor bestowed upon its preparation and printing.

It has been the endeavor of the committee to preserve as much as possible of the form which has been in use for the past thirteen years, omitting such portions as have been deemed objectionable, simplifying it where possible and adding some clauses deemed important. The most notable omission is the clause which designates the architect as the agent of the owner.

Article II has been so modified as to clearly indicate the ownership by the architect of the plans and specifications, and that the charges for their use and for the services of the architect are to be paid by the owner, thus condemning the unprofessional practice which has obtained in some quarters of making contractors pay for detail drawings.

The arbitration clause has been retained, with considerable and important modifications, to make it more effective, hoping thereby to facilitate settlements out of court should disputes arise that from any cause could not be adjusted by the architect.

The committee had before them the form approved by the Royal Institute of British Architects, a form in vogue in Washington and numerous forms from individual architects, some of which it conceives are signed by contractors only because they fear to offend the architects issuing them, or, which is more probable, because they have implicit faith in them for their fair dealing, and believes it has, under legal advice, provided a form which provides for emergencies, deals justly with both owner and contractor, protects the rights of each, will admit of almost universal application and will be used even more extensively than the previous form, which reached a sale of more than five hundred thousand copies, or an average of nearly forty thousand a year.

The committee is aware that a few prominent and older architects are wedded to their own forms and some are able to impose the duty of drawing contracts upon the counsel employed by their clients, but to the great body of practitioners a uniform contract is of great service and it seems to the committee that an advantage of its continual and nearly universal adoption will be to establish its provisions as usual and proper, and thus give it a standing in the courts which no individual contract would possess.

It should be borne in mind that the omission of what to some may seem important, can easily be remedied by writing in and offensive clauses stricken out, both of which would attract at once the attention of both contractors and owners. The former are so familiar with its contents that they do not hesitate to sign it when it has not been changed, and are able to see at a glance where it has been changed, which will readily challenge their consideration.

PHILADELPHIA T-SQUARE CLUB EXHIBITION.

THE T-Square Club opened its annual exhibition of architectural designs and drawings, January 7, filling the gallery of the Art Club, at Broad and Chancellor streets. The T-Square Club has made itself notable in the architectural life of Philadelphia by its determination to present at its annual exhibition, and through various competitions which it holds during the year, both the best student work and the best work of architects who have already attained distinction.

According to the *Philadelphia Press* the exhibition this year has for its two notable showings the monumental work in progress by Mr. Cass Gilbert and Mr. Ernest Flagg. No more important work is to-day under construction than the great group of buildings for the National Naval Academy at Annapolis, whose cost will reach nearly \$6,000,000.

The drawings which Mr. Flagg here exhibits were the only ones from this country which received a medal at the Paris exposition. The scheme, which was a difficult one, centers around the chapel, about which are disposed a group of varied buildings handled in a grandiose Renaissance, somewhat heavy but effective.


Mr. Cass Gilbert sounds an altogether different note in the façade of the Art building for the Louisiana Purchase Exposition. Attracted doubtless by the success of the Pinakothek in Munich in using a Greek front as a mask for the broad areas of galleries, Mr. Gilbert, working with great simplicity and directness, reducing his decoration to a minimum, securing serenity and ease by an expanse of wall, and at the same time concentrating decoration upon his three façades of columns, manages to combine something of the simplicity of Greek architecture with the broad effect of Roman models.

Next to the work of men who have attained distinction comes the work of those who have distinction before them—the young students whose work is exhibited here. It illustrates the admirable character of the instruction and inspiration imparted by the school of architecture at the university.

Mr. Wilson Eyre is represented by picturesque groups of buildings handled with that singular perception of the value of relation which all his work displays. Architectural drawing can not go much farther than in the suggestive handling of Jules Guerin's residence of Mrs. Robert Lesley. Some charming windows by Nicolo d'Ascenzo are exhibited, together with a nude decorative design less attractive. Original cartoons of the decoration for Keneeth Israel by Gustav Ketterer are interesting examples of pictorial decoration.

SUB-CONSTRUCTION AS APPLIED TO STEEL BUILDINGS AND SUBWAYS.


THE problems entering into the world of construction and engineering are something incalculable. Like the astronomers who gaze into the starry vaults of heaven and find new bodies and their relative value one to the other, so the engineers and architects are constantly looking into methods, new and old, of construction to discover a way to save labor,

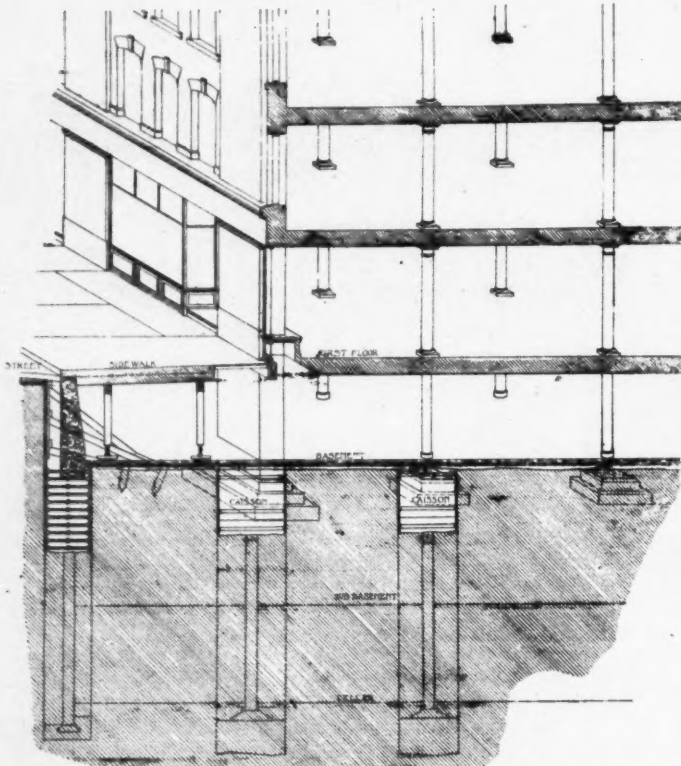

NO. 1. GENERAL SECTION, SHOWING METHOD OF BUILDING RETAINING WALLS. PATENTED JANUARY 13, 1903.

material and time, and the one who hits upon the idea of applying theories to practical use is the successful and progressive mind. One of the most vital points of construction is the building of foundations on a proper foundation. Formerly great openings in the earth were dug, in the trenches of which tons and tons of stone coursing were laid on which to erect the super-

structure of almost equally heavy material. Time and new ideas have changed all this. The introduction of the skeleton construction of steel columns and beams has opened up new ways of accomplishing and overcoming the slow, cumbersome methods of a few years ago. And now a new method of accomplishing the quick erecting of a great office building before digging out the earth is presented to the professional world, and without doubt the system just introduced by Mr. John Meiggs Ewen, Marquette building, Chicago, and herewith explained in a terse manner, will interest engineers and architects. As a time-saver it seems supreme. In the first place, it is the inversion of practical foundationwork. Build your foundation first and then dig, while

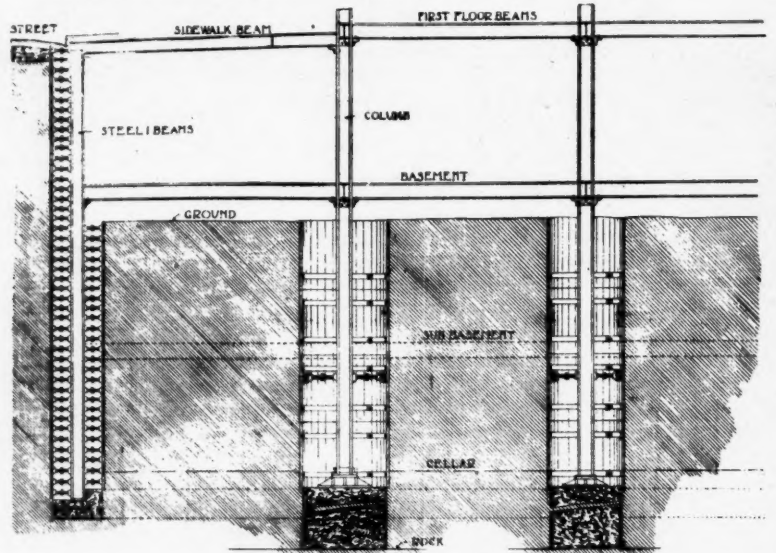


GENERAL SECTION SHOWING EXCAVATION PARTIALLY MADE.


NO. 3.

the superstructure is being erected. Start from your street level and build both ways at the same time, up and down. This is the practical working of the Ewen system.


It has, heretofore, been the practice when erecting buildings to remove all the earth, completing the excavation before building the foundations and retaining walls. The new system is explained in cut No. 2. It is at once evident that in removing the earth it becomes necessary to sustain the neighboring streets and adjoining buildings while this work is in operation. The expense, danger and loss of time in doing the work in this manner are very great. The earth under the street and under the foundations of the adjoining buildings must be supported by sheathing propped up by heavy timbers, which of a necessity must be shifted constantly to make room for excavating as it progresses. If a slip or a mistake should be made in removing these props, it would be almost impossible to state the amount of damage that would accrue. It will be at once seen that when this new method is adopted, as shown in Figs. 2 and 3, there can be no danger from the settlement of the streets or adjoining buildings. The excavations need not be finished until after the superstructure is well along. The thick stone retaining wall will be done away with. There will be no shifting of large shores, runways, etc., because these will not exist. There need be no overtime or added expense in connection with the excavation, as the same may be done leisurely, if necessary, after the superstructure is completed. The economies attending the work will be many, for the fundamental principle of not excavating the soil until the substructure is completed, is the logical one. Some of the valuable and economic points in this system are, that when the earth is excavated it can be done by mechanical contrivances attached to the steel beams of the superstructure. The wagons employed for carrying away the earth may drive in from the street on the first floor, thus doing away with runways. The work of excavating can be prosecuted with greater economy, and overtime will be unnecessary. As a time-saver, it might be mentioned that, if the Ewen system had been used on a very prominent building recently erected here, where the excavating went to a depth of thirty-three feet below the street level, at least two months would have been saved in the time of erecting, and so it would be and will be with the great office buildings

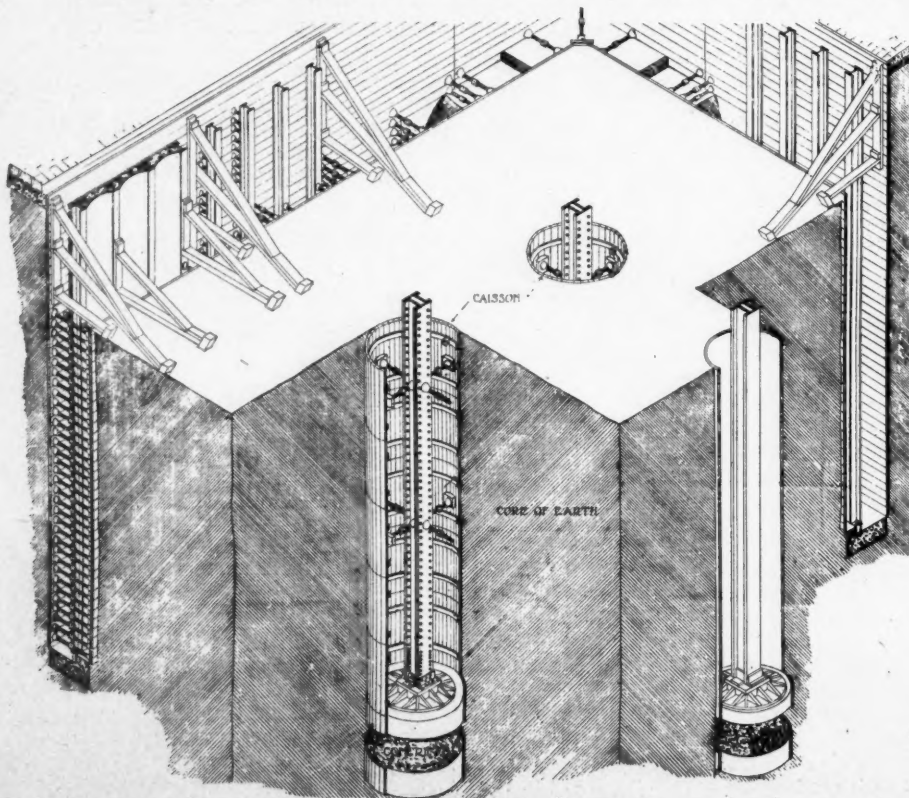

NO. 2. CAISSONS SUNK, COLUMNS IN PLACE, READY FOR SUPERSTRUCTURE.

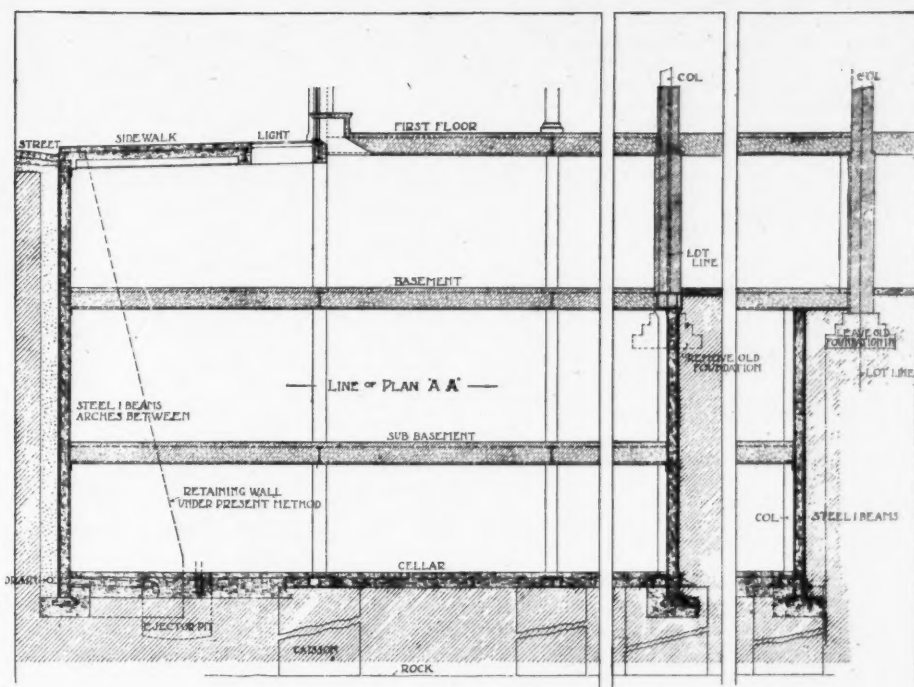


NO. 4. SECTION OF RETAINING WALL.

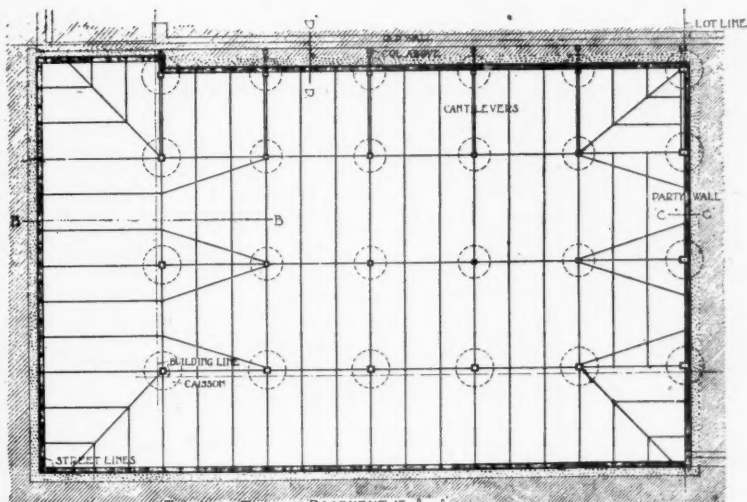


FRAMING PLAN OF BASEMENT AT A A.

NO. 5.

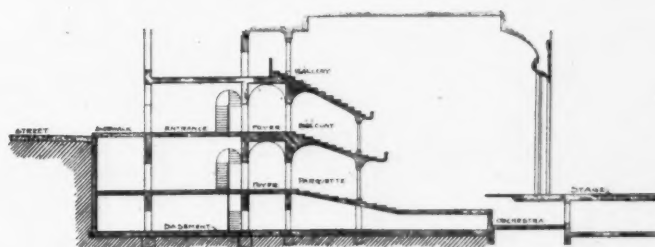


THEATER BALCONY ON LEVEL WITH THE SIDEWALK.

NO. 6.

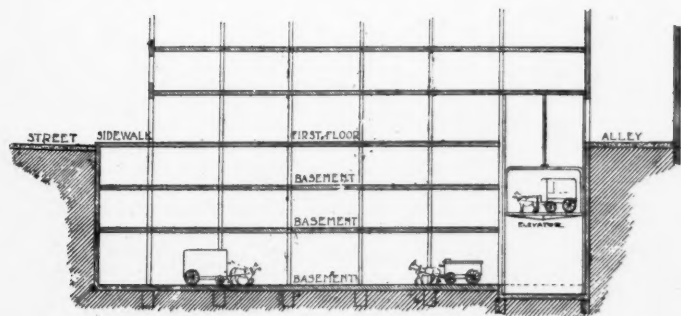

DELIVERY WAGONS LOADING IN BASEMENT INSTEAD OF ON STREET.

NO. 7.

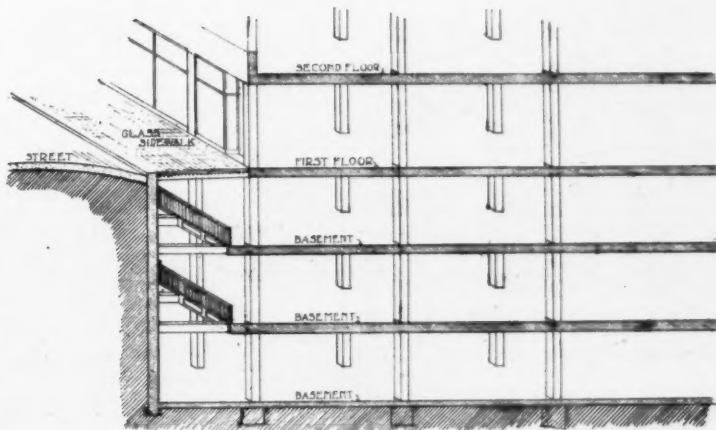


OPEN GALLERIES IN SUB-BASEMENTS FOR STORES WITH GLASS SIDEWALK.

NO. 8.

that are about to be erected, anywhere from two to three months can be saved in the time of erecting these great structures which of necessity will be greatly to the advantage of the owners, architects and contractors.

As property increases in value in the down-town districts, the desirability of adding underground stories to buildings will become more apparent. It is evident that a sub-basement under the large department stores could be very profitably used in connection with the shipping department and loading of wagons, thereby relieving the sidewalks and streets of the annoyance of being blocked so many hours of the day. This system is shown in plan 7. The adoption of this plan would prove an actual saving to the stores and a boon to the public. Large stores could well afford to build several basements underground, leaving the portion directly under the sidewalk which would be built of prismatic light glass, open, as shown in plan No. 8, which would add very largely to the available space of the building. Property is so valuable in London that some of the theaters are built entirely underground. The Criterion Theater is an excellent example, being built directly under the Criterion restaurant, the floor of the restaurant being only a few steps above the street level and forming the roof of the auditorium for the theater. This of course may be an extreme case, but there are many cases where the floor of the first balcony is upon the level of the street, therefore it might be advisable for theaters that are being built in

retaining wall, placing heavy planks on each side and holding them by means of a series of jack-screws. When the first plank has been placed in position, the trench is sunk, say one foot deeper and another set of boards and jack-screws is placed in position. Thus the work is continued to the desired depth, as shown in plan No. 1. The excavation for the columns is made by the usual caisson method. This work is carried down to solid rock or suitable foundation. This hole is supplied with concrete and a column footing. A column is then inserted, supported in the proper manner. In case of considerable depth, the columns must be stayed as by throwing out from the columns supports against the inner walls of the caissons. It will now be possible to begin the upper structure by putting in position I beams and the like and suitably attaching them to the upper end of the exterior vertical beams and to the columns. After a little further excavating the second layer of floor supports can be put in to form the floor of the basement. The earth for the sub-basement may now be removed, also the planks with the inner short jack-screws. This process will continue until the floor line of the sub-basement is reached. The floor beams are in like manner bolted to the walls and columns. In the same manner the cellar excavation is made and the floor of the cellar can be placed in position; thus there will be constructed within the retaining wall, but securely supporting the same by reason of the lateral beam, a steel structure which will constitute the

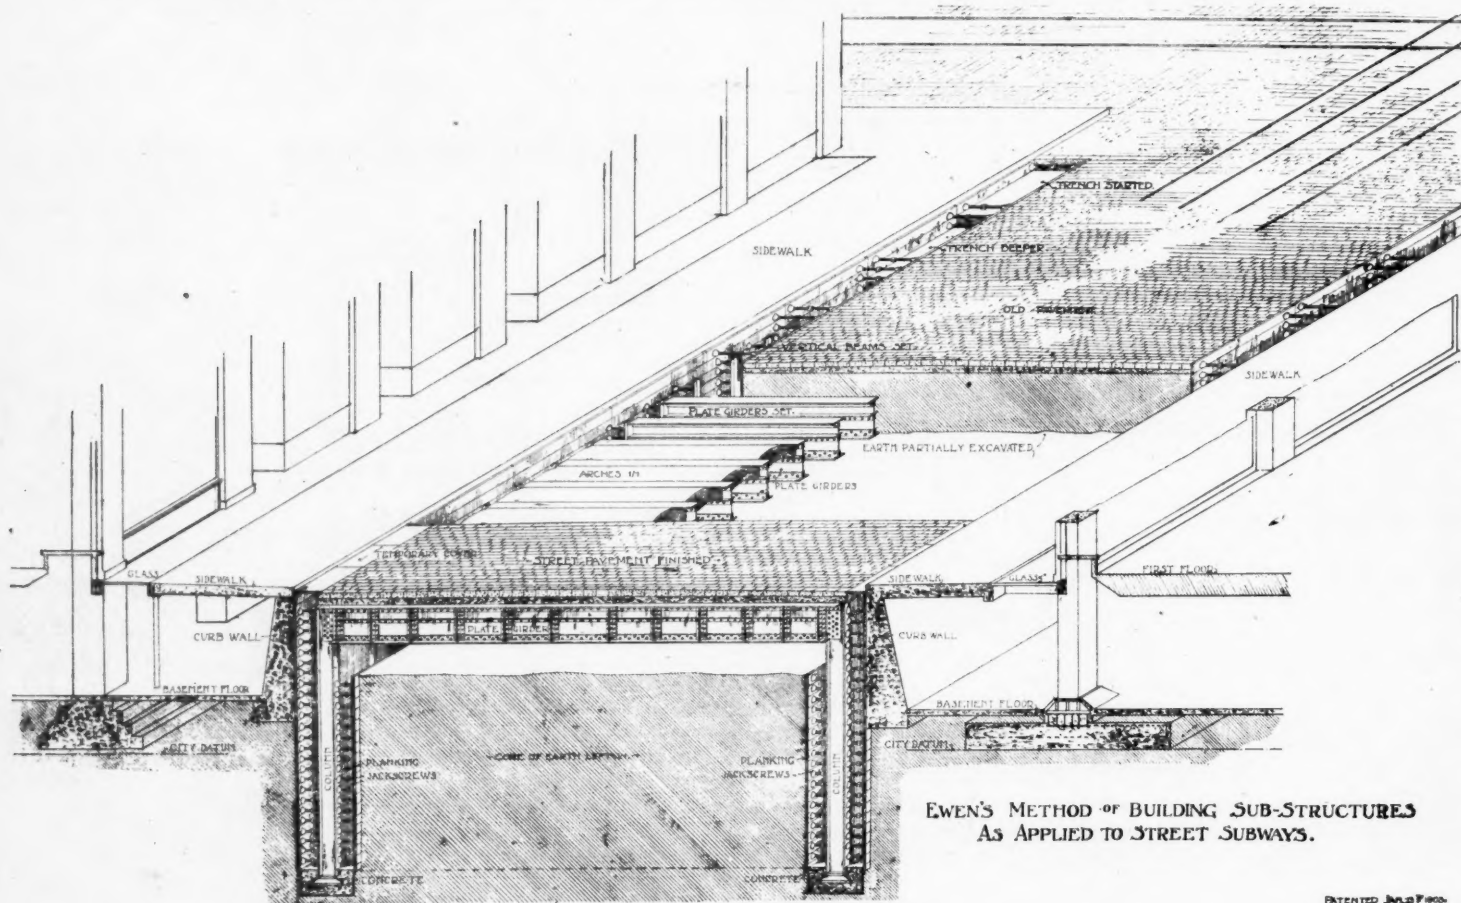

EWEN'S METHOD OF BUILDING SUB-STRUCTURES
AS APPLIED TO STREET SUBWAYS.

PATENTED JULY 1900.

the crowded districts of cities to be erected partially underground, thereby giving equal facilities to the audience to escape in case of fire, as represented in plan No. 6, the Ewen system of sub-construction making this feasible and practical. It is also evident that if the inner courts of large office buildings be continued below the street level, which is possible and practicable with the Ewen system, several desirable floors of court offices may be obtained, with good light and ventilation almost equal to the present second and third court stories. The value of a method that will allow this to be accomplished with impunity becomes apparent to the architect.

Not only is the Ewen system applied to buildings, but to the construction of subways in large cities. The advantages are at once manifest when the matter is understood, and from letters which have been received from the highest authority in the engineering and architectural profession it would show that this method of construction is fully appreciated. The plan of constructing of subways is shown in plan 9, and a study of this plan and plan No. 1, with the short explanation herewith, will probably give one a fair understanding of the system.

The first step is to remove the curb wall and sidewalk, though the latter may be retained, and in lieu of such wall, the usual support is erected. Start a trench along the line of the exterior

substructure of the building and which will be entirely surrounded, if this be desired, by a retaining wall of steel and concrete. The short jack-screws are then removed one by one and the space between the planks and the retaining walls is filled up with crushed stone or suitable filling material. When the whole process has been completed and the entire structure has been finished, it will be found that there is an exterior wall of vertical I beams and concrete around the building site, and that it is securely attached to and forms part of the structure of the building, as shown in plan No. 4. This retaining wall is held in position by the cross beams and may present a vertical interior face if desired. This substructure may be carried to any desired depth. It is a safe method because the inner core of earth sustains the same pressure at all times during the process of the work. The superstructure may be erected on the columns before the substructure is completed. By the use of this process it is feasible to erect under a standing building a new retaining wall and substructure at any time and without disturbing the occupants of the building. There are undoubtedly many ways in which this system will be applied to sub-construction under many varied and difficult problems which constantly arise in finding a safe bottom for the erection of a massive office building; and time and use will bring out all its values and adaptability to the existing mode of construction.

COMBUSTION.*

BY MORRIS R. EBERSOLE.

THE term "combustion" is applied to any chemical change which is accompanied by an evolution of heat and light, but in its popular sense it is applied to the union of substances with oxygen when this union is accompanied by the same phenomena. A combustible substance is one which has the power to unite with oxygen, and an incombustible substance is one which has not this power. Another class of "combustions," or more properly called "oxidations," are those chemical unions of substances with oxygen which are not accompanied by flame or light. Examples of these are: the rusting of iron, the purification of the blood in the lungs, the decay of animal refuse, etc. These things in "combusting," or uniting with oxygen, will evolve heat, but as the action is slow and spread over a long time, the heat evolved does not evidence itself in the form of flame, except in very extraordinary instances. Combustion is exclusively a chemical action. The study of its phenomena by Lavoisier, the French chemist, in the latter part of the eighteenth century, is what put the present elaborate system of chemistry on its feet. A given amount of combustible substance requires an exact chemical equivalent amount of oxygen—no more, no less—to perfectly consume it, and by virtue of this, as all chemical changes give off or use up heat, there will be a definite amount of heat to be obtained, assuming we have burned the substances according to the conditions of "perfect combustion." As the combustion is more or less perfect, the heat effect will be correspondingly large or small, and what remains from the total amount it is possible to obtain will escape in the form of unburned products. Many substances, coal or wood, for example, will not actively combine with oxygen or combust until they have been heated to a high temperature, called the "kindling temperature." In kindling a fire we first start it burning with paper, oil or excelsior, substances which ignite easily because they are easily heated to their kindling temperature; these in turn produce a large flame, which brings the kindling wood to the proper temperature for uniting with the oxygen in the air; and this in its turn affects the coal in like manner, until finally we have obtained a combustion which maintains itself as long as the coal lasts and the supply of air is sufficient.

Perfect combustion is dependent upon the supply of oxygen or air and upon the completion of the chemical union of the products of combustion with it. The more oxygen supplied the more active the combustion. Should the supply of oxygen or air be shut off, the fire would naturally go out; or should this supply be very limited, it might become insufficient to maintain the combustion at the proper temperature and the heat we expect to get would be lost in the form of unburned products.

NEW PUBLICATIONS.

WALL PAPERS AND WALL COVERINGS. A practical handbook for Decorators, Paperhangers, Architects, Builders and House-owners, with many half-tone and other illustrations, showing the latest designs. By Arthur Seymour Jennings. One large 8vo vol.; cloth. Price, \$2. New York: William T. Comstock.

Some years ago the author prepared a book under the title of "Practical Paper Hanging," and this book attempts to cover more completely the subject than in the previous work. It is very elaborately illustrated with half-tones of the latest designs of a large number of manufacturers, both in America, England and France, and special chapters are devoted to English, American and French papers.

A chapter is devoted to the selection of wall-papers. Another treats of the different varieties of wall-papers and their characteristics, of wall coverings and decorative fabrics and materials.

Practical questions, such as the tools used, are given very full treatment, with illustrations of the latest devices and full descriptions.

Rules to be observed and suggestions as to meeting difficult or unusual obstacles are given, and the whole subject seems to have been carefully and systematically studied, and is presented in a well-arranged manner, making it a valuable handbook both for the mechanic and designer.

ASSOCIATION NOTES.**NATIONAL BRICK MANUFACTURERS' ASSOCIATION.**

The National Brick Manufacturers' Association held the most successful and well-attended convention of its seventeen years of existence at Boston on the 5th, 6th and 7th of February. The visitors were welcomed to Boston by Robert S. Peabody, president of the Boston Society of Architects, and among the many addresses on technical subjects Architect R. Clepston Sturgis spoke on "The Sizes of Brick," in which he made a plea for a standard proportion for brick that would give more artistic proportions to the heads and stretcher. While Mr. Sturgis held out the hope that cheaper brick would supplant the wooden house, Mr. W. G. Titcomb denounced the practice of the manufacturer who sells his product to the contractor for cash where the price is set below the real value of the product.

DETROIT ARCHITECTURAL CLUB.

The Detroit Architectural Club held a special meeting at the clubrooms, February 2. The principal event on the program was

*From *The Boiler Magazine*, Kellogg-Mackay-Cameron Company, Chicago. See ad. in this journal.

the reading of a bill proposed by Architect Thomas E. White, of Lansing, "To license architects and regulate architecture as a profession." The reading of the bill was followed by informal discussion of the subject, after which some important business concerning the coming exhibition was transacted. A number of architects and particularly members of the American Institute of Architects, were invited to be present.

THE ARCHITECTURAL LEAGUE OF NEW YORK.

The eighteenth annual exhibition of the Architectural League of New York opened on February 13 and will close March 7. The exhibits will be discharged March 9.

MOSAICS.

ARCHITECTS GREEN & WICKS, of Buffalo, propose to offer six apprenticeships in their office to boys wishing to enter the architectural profession. A competitive examination will be held and the six adjudged most talented will be given practical instruction in their office and provided with a scholarship in the Art Students' League, the local art school, where they will be taught free-hand drawing and clay modeling. The idea seems worth repeating *ad libitum*.

JUST now London is pointing with pride to what is regarded as the most gorgeous business palace in the world. "Lloyd's Register," as the new building is known, has just been completed at a cost of \$500,000. The new building is not large, hence its comparatively small cost. It is constructed of the finest Portland stone, and the exterior is of great architectural beauty. The carvings on the porch and the bronzes between the pillars are by Mr. George J. Frampton, the Royal Academician, and are executed in his best style. The weathercocks are two little ships of copper gilt, one a modern liner and the other an ancient fifteenth-century sailing boat. Valuable marbles, inlaid woods, mother of pearl and even jewels have been utilized in the decoration of the interior. T. E. Collcutt, the architect, recently gave the press some details of his work, which, in beauty of design and wealth of decoration, is indeed a masterpiece. "Quite the costliest part of the building," said Mr. Collcutt, "is the frieze of Lynn Jenkins, representing a procession of medieval ships. The vessels are of bronze, the sky of mother of pearl and the figures of bronze, with ornaments of real sapphires. The faces are carved in ivory." The magnificent fireplace in the library is of marble, carved by H. Pegram, and the ceiling paintings are to be executed by Professor Moira. The ceiling itself is vaulted and profusely decorated with carvings and gilt. Round the paneled walls are inlaid woods. The supporting pillars are of polished marble. The mantelpiece is exceptionally beautiful carved marble. The fire dogs, of old Italian work, stand six feet high and are worth \$2,500. Even the clerk's office is more suggestive of a palace than a business house, for it is lined with marble, and the electric-light fittings are of beaten copper. Valuable old Persian carpets cover the floors.

OUR ILLUSTRATIONS.

Apartment building, Chicago.

Residence, Chicago, Pond & Pond, architects.

Apartment building, Chicago, Andrew Sandegren, architect.

St. Bernard School, Cincinnati, Werner & Adkins, architects.

Residence at Los Angeles, California, Locke & Munsell, architects.

Residence for A. E. Hume, Cincinnati, Werner & Adkins, architects.

Photographic studio for E. L. Fowler, Evanston, Illinois, P. C. Stewart, architect.

Stable for J. O. Gilmore, Overbrook, Pennsylvania, W. L. Price, architect, Philadelphia.

Residence for W. L. Brown, Evanston, Illinois, P. C. Stewart, architect. Two exterior views, and view in stairway hall and in dining-room are shown.

Evans mausoleum, to be built in the Woodlands Cemetery, Philadelphia, Wilson Brothers & Co., architects. This mausoleum will be built in accordance with the terms of the will of the late Dr. Thomas W. Evans, the famous American dentist, of Paris, and will cost, with the site, about \$200,000. The exterior will be built of granite entirely, including the roof. The interior will be built of polished white marble and mosaics. The building will be built double, that is, with an outer shell and an inner shell, and will be arranged so that it can accommodate twenty-seven crypts or receptacles.

Photogravure Plate: Residence, Chicago, Pond & Pond, architects.

PHOTOGRAVURE PLATES.

Issued only with the Photogravure Edition.

Semi-detached houses, New York city, Hoppin & Koen, architects.

Stables for M. J. Sullivan, New York, Trowbridge & Livingston, architects.

Public Library, Trenton, New Jersey, Spencer Roberts, architect, Philadelphia.

Public school, Wayne, Pennsylvania, David K. Boyd, architect, Philadelphia.

Church, Harvard, Massachusetts; Warren, Smith & Briscoe, architects, Boston.

Residence for J. O. Gilmore, Overbrook, Pennsylvania, W. L. Price, architect, Philadelphia. Two views are shown.

GAS FITTERS' RULES

The following rules have been adopted by the People's Gas Light & Coke Company, of Chicago, governing the piping of buildings for the distribution of gas for light and fuel.

OFFICE BUILDINGS, DWELLINGS AND FLATS.

MANUFACTURED GAS FOR LIGHT.

The following tables show the proportionate size and length of tubing allowed:

Size of Tubing.	Greatest Length Allowed.	Greatest Number of $\frac{3}{8}$ " Openings Allowed.
$\frac{3}{8}$ inch	20 feet	2 openings
$\frac{1}{2}$ inch	30 feet	3 openings
$\frac{5}{8}$ inch	60 feet	10 openings
$\frac{3}{4}$ inch	70 feet	15 openings
$1\frac{1}{4}$ inch	100 feet	30 openings
$1\frac{1}{2}$ inch	150 feet	60 openings
2 inch	200 feet	100 openings
$2\frac{1}{2}$ inch	200 feet	200 openings
3 inch	300 feet	300 openings

Drops in double parlors, large rooms and halls of office buildings must not be less than $\frac{1}{2}$ inch.

STORES, HOSPITALS, SCHOOLS, FACTORIES, ETC.

MANUFACTURED GAS FOR LIGHT.

Size of Tubing.	Greatest Length Allowed.	Greatest Number of $\frac{1}{2}$ " Openings Allowed.
$\frac{3}{8}$ inch	20 feet	1 opening
$\frac{1}{2}$ inch	60 feet	8 openings
$\frac{5}{8}$ inch	70 feet	12 openings
$\frac{3}{4}$ inch	100 feet	20 openings
$1\frac{1}{4}$ inch	150 feet	35 openings
2 inch	200 feet	50 openings

For stores the running line to be full size to end of last opening.

All drops to be $\frac{1}{2}$ inch with set not less than 4 inches.

Twenty feet of $\frac{3}{8}$ -inch pipe allowed only for bracket lights.

BUILDING SERVICES.

In running service pipe from front wall to meters the following rules will apply:

Size of Opening.	Greatest Length Allowed.	Greatest Number of $\frac{3}{4}$ " Openings Allowed.
1 inch	70 feet	1 opening
$1\frac{1}{4}$ inch	100 feet	3 openings
$1\frac{1}{2}$ inch	150 feet	5 openings
2 inch	200 feet	8 openings

All openings in service must be equal to the size of riser, which in no case must be less than $\frac{3}{4}$ inch.

MANUFACTURED GAS FOR FUEL.

Size of Tubing.	Greatest Length Allowed.	Greatest Number of $\frac{3}{4}$ " Openings Allowed.
$\frac{3}{8}$ inch	50 feet	1 $\frac{3}{4}$ -in. or 2 $\frac{1}{2}$ -in.
$\frac{1}{2}$ inch	70 feet	2 or 1 $\frac{3}{4}$ -in. and 2 $\frac{1}{2}$ -in.
$\frac{5}{8}$ inch	100 feet	4 or 2 $\frac{3}{4}$ -in. and 4 $\frac{1}{2}$ -in.
$\frac{3}{4}$ inch	150 feet	7 or 4 $\frac{3}{4}$ -in. and 6 $\frac{1}{2}$ -in.
2 inch	200 feet	15 or 8 $\frac{3}{4}$ -in. and 14 $\frac{1}{2}$ -in.

For mantels, grates and small heating appliances, for heating space not to exceed 1,728 cubic feet, thirty feet of $\frac{1}{2}$ -inch pipe is allowed for one opening only, and two such openings are considered as one $\frac{3}{4}$ -inch opening.

FOR GAS ENGINES.

Size of Engine.	Size of Opening.	Greatest Length Allowed.
1 H. P.	1 inch	60 feet
2 H. P.	$1\frac{1}{4}$ inch	70 feet
5 H. P.	$1\frac{1}{2}$ inch	100 feet
7 H. P.	$1\frac{3}{4}$ inch	100 feet
12 H. P.	2 inch	140 feet

Supply for gas engine must be separate, and an independent service will be required.

NATURAL GAS FOR FUEL.

Classification of Appliances.	Size of Openings	Greatest Length Allowed.
Small portable gas cooking stove	$\frac{1}{2}$ inch	20 feet
Small portable gas heating stove	$\frac{1}{2}$ inch	20 feet
Kitchen boiler heater when separated from range	$\frac{1}{2}$ inch	20 feet
Miscellaneous appliances consuming less than 15 cubic feet per hour each	$\frac{1}{2}$ inch	20 feet
Gas cooking ranges	$\frac{3}{4}$ inch	30 feet
Ordinary coal ranges, equipped for the use of gas	$\frac{3}{4}$ inch	30 feet
Large heating stoves	$\frac{3}{4}$ inch	30 feet
Gas logs and other grate fires	$\frac{3}{4}$ inch	30 feet
Miscellaneous appliances consuming 15 to 40 cubic feet of gas per hour each	$\frac{3}{4}$ inch	30 feet
Miscellaneous appliances consuming 40 to 75 cubic feet of gas per hour	1 inch	60 feet
Hot air furnaces for heating 10-room buildings or less	$1\frac{1}{4}$ inch	70 feet
Hot air furnaces for heating 10 to 15-room buildings	$1\frac{1}{2}$ inch	100 feet
Low pressure steam or circulating water boiler for heating 10 rooms or less	$1\frac{1}{2}$ inch	100 feet
Low pressure steam or circulating water boiler for heating 10 to 15 room house	2 inch	140 feet
Low pressure steam or circulating water boiler for heating 16 to 26 room houses	$2\frac{1}{2}$ inch	100 feet
Low pressure steam or circulating water boiler for heating 27 to 50 rooms	3 inch	300 feet
Low pressure steam or circulating water boiler for heating 50 to 80 rooms	4 inch	400 feet

For special purposes not provided for above, apply to the company's inspector for information.

SUMMARY.

1. All branches or cross lines of pipe from the main line must have a set not less than 4 inches dropped square, and must be well secured to joist by gas hooks or straps.

2. All openings must be closed with iron caps, no split pipe or broken fittings repaired with cement or lead will be allowed.

3. All drops on branch lines and openings for side brackets must be square bends; no nipples allowed.

4. The risers in all buildings must be carried up an inside partition out of reach of frost and must be placed where the meter and stop cock can be readily got at. Vestibules not to be considered as inside partitions.

5. To avoid trapping, gasfitters must grade all pipes to risers or drops.

6. In no case will a meter be set where it is not easily accessible, or where it is exposed to frost and dampness, or liable to injury from any cause.

7. All pipe for fuel must be run independent, and connected to light riser at

meter end, with right and left, union or running thread.

8. Supply for gas engines must be separate, and an independent service will be required.

9. Drops in churches, schools, public halls, stores, double parlors, large rooms, etc., must not be less than $\frac{1}{2}$ inch.

10. No riser in any building must be less than $\frac{3}{4}$ inch and in stores must not be under deck of show windows, as meter will not be set there.

11. The riser in any building must not be less than 20 inches from the floor for two to ten openings:

2 feet 6 inches for ten to thirty openings;

4 feet for thirty to sixty openings;

5 feet for sixty to one hundred openings;

6 feet for over one hundred openings.

Where meters are to be set on wall, no riser must be higher than 9 feet from floor.

12. In all cases where extensions are made, care must be taken to break pipe where the rule for size can be maintained, and in no case shall extension be made from small pipes.

13. In flat buildings meters should be set in basement or in room provided for meters; otherwise in premises where gas is consumed.

14. All risers and building services must be brought to front of building and within 18 inches of wall or partition, and must not be less than 15 inches apart where risers are grouped.

15. In all cases where building service is used, provide header with an opening for each riser; where risers are in groups, openings must not be less than 15 inches apart.

16. Underground work by gasfitters between main and meter will not be allowed or accepted.

17. To avoid complications, gasfitters should consult this company before locating risers in corner buildings.

18. In flat buildings where appliances are installed for the joint use of tenants, such as laundry stoves, driers, etc., run pipe from each meter to laundry and provide a header with a lock cock for each tenant. Fasten securely to each cock a metal tag with the flat number plainly marked thereon.

In cases where one common riser is desired, locate header in laundry and provide lock cocks and tags as provided above.

19. All work must be proved with mercury gauge, not less than a 6-inch column of mercury being allowed.

20. All pipe must be examined by the inspector of this company before being concealed, and twenty-four hours notice must be given by gasfitters when any pipe is ready for inspection.

21. If the rules concerning the size of pipes are not clearly understood in each case, or if unusual conditions are met with, which the rules do not cover, communicate with the company's inspector.

22. It is the purpose of the company to strictly enforce the above rules, and no certificate of inspection will be given when they are not complied with.

23. Architects, builders and owners of buildings are requested not to allow a bill for gasfitting unless accompanied by a certificate of inspection.

SPECIFICATIONS

Adopted by the People's Gas Light and Coke Company, of Chicago, for the equipment of boilers and furnaces for the use of natural gas as fuel.

LOW-PRESSURE STEAM AND HOT WATER CIRCULATING BOILERS.

1. Use two-inch cast-iron burner with flattened mouthpiece. For water-leg boilers use this style with a mouthpiece at an angle of 45 degrees, and set so that the mouth of the burner is about 3 inches above the grate line, and about 3 inches from side of fire-box and from 8 to 10 inches center to center. For return tubular boilers use the straight burners with flattened mouthpiece set at right angles to the length of the boiler, and from 9 to 12 inches below the shell. For each of the above styles of burners use mixer having flaring opening for the air and a wire screen covering for the air and gas openings.

NOTE.—Special combinations of these two styles of burners can be used to advantage for certain types of boilers. We would recommend consultation with the company's representatives in all special cases.

2. The burners and valves should be arranged so that the first valve will control one burner only, the second valve two burners and remaining valves not over four burners each. On the reaches from the header supplying the burners, use $\frac{1}{2}$ -inch globe valve for one burner, $\frac{3}{4}$ -inch for two burners and 1-inch for all over two burners.

3. Drill mixer-pins for the single and double burners, 3-16 inch each. Drill mixer-pins for balance of the burners, 7-32 inch each.

4. Place sheet iron across the fire-box between the mixers and the top of the burners in such a manner as to exclude air from the fire-box, except what passes through the mixers. Do not place sheet iron across opening to ashpit.

5. The header must be the full size of the pipe leading to the boiler, as specified in the company's rules for piping for natural gas. Do not take the supply pipe for any other appliances off the header supplying the boiler.

6. There must be a globe valve on the main line leading to the header within easy reach, which can be used to entirely shut off the supply of gas from the header. This valve should be left wide open when burners are used, and the gas supply controlled by the small valves in front of boiler.

7. There must be a union between the first valve on the header and the nearest fitting on the pipe, and a union on each reach between the valve and the burners.

8. Do not put in pilot lights. They are unnecessary unless a regulator is used. If a regulator is used, the pilot lights will be put in by the regulator company at the time the regulator is installed. If a regulator is ordered, specify that there must be a mixer on each pilot light.

HOT-WATER HEATERS.

For water heaters with circular fire-pots, such as the Wilks, Tobasco, etc., or for small hot-water circulating boilers, use the same equipment as for ordinary hot-air furnaces, except that if Vulcan burner is used it should be covered with about 6 inches of broken firebrick.

HOT-AIR FURNACES, WITH CIRCULAR FIRE-POTS.

Use the Claybourne Improved Cross Burner, with auxiliary, or the Vulcan Round Sectional Burner, with mixers which have flaring opening for air and wire screen covering both air and gas openings.

DIRECTIONS FOR INSTALLING CROSS BURNERS.

1. Set the burner with bottom of burner on grate line. Put mixer for the main burner on horizontal pipe, using a 10-inch nipple between the mixer and the ell turning up toward the burner. Drill opening in mixer-pin $\frac{1}{4}$ inch. Place the mixer for the auxiliary burner on the vertical pipe and drill the mixer-pin No. 19 Morse drill. Place the iron deflector, furnished with burner, on top of auxiliary burner, leaving not less than 2-inch space all around between deflector and fire-pot. If space is greater than 5 inches, extend deflector with firebrick.

2. Sheet iron must be placed between the mixers and the burners in such a way as to entirely exclude air from the fire-pot, except what passes through the mixers.

3. Make header for furnace same size as run to the furnace, with 1-inch opening for main burner, and $\frac{1}{2}$ -inch opening for auxiliary burner.

4. Use 1-inch globe valve for main burner and $\frac{1}{2}$ -inch globe valve for auxiliary burner.

5. There must be a globe valve on the main line leading to the header within easy reach, which can be used to entirely shut off the supply of gas from the header.

6. There must be a union between the first valve on the header and the nearest fitting on the pipe.

7. Do not use pilot lights. They are unnecessary unless a regulator is used. If a regulator is used, the pilot lights will be put in by the regulator company at the time the regulator is installed. If a regulator is ordered, specify that there must be a mixer on each pilot light.

DIRECTIONS FOR INSTALLING THE VULCAN ROUND SECTIONAL BURNER.

1. Burners from 14 to 18 inches in diameter must be of at least three sections, with a separate $\frac{1}{2}$ -inch globe valve controlling the supply of gas to each section.

2. Burners 20 inches in diameter or more must be of at least four sections, with a separate $\frac{1}{2}$ -inch globe valve controlling the supply of gas to each section.

3. Burners should be placed so that the outside rim of the burner will be not less than 1 inch, or more than 2 inches, from the side of the fire-pot.

4. Burners should be placed from 2 to 6 inches above bottom line of fire-pot.

5. There must be a globe valve on the main line leading to the header within easy reach, which can be used to entirely shut off the supply of gas from the header.

6. There must be a union between the first valve on the header and the nearest fitting on the pipe.

7. Sheet iron must be placed between the mixers and the burners in such a way as to entirely exclude air from the fire-pot, except what passes through the mixers, and should be not less than 2 inches below the burner.

8. Make openings in the mixer-pins for each section of the burner the size of No. 19 Morse drill.

9. Mixers must be put on the vertical pipes under the burner, and not on the horizontal pipes from header to ashpit.

10. Do not use pilot lights. They are unnecessary unless a regulator is used. If a regulator is used, the pilot light will be put in by the regulator company at the time the regulator is installed. If a regulator is ordered, specify that there must be a mixer on each pilot light.

HOT-AIR FURNACES WITH SQUARE FIRE-BOXES.

For furnaces having a square fire-box use the Claybourne box burners, or the Holland box burner. Cover with 4 to 6 inches of broken firebrick. Pieces of firebrick should be about the size of fist. These burners should be set about 6 inches from center to center, with a separate valve controlling the supply to each burner. Drill the mixer-pins for either of these styles of burners, No. 19 Morse drill.

NOTES.

1. The above specifications are the result of careful experiments made by the company with a view to determining the kind of burners and arrangement which give satisfactory and economical results. The company does not assume any responsibility for the work of gasfitters, but will send competent inspectors, if requested, to examine burners and equipment and will give the benefit of the judgment of these inspectors to consumers, without charge.

2. It is of the utmost importance in all cases that there should be dampers which will effectually control the draft and remain set in any position desired. The pipe leading to the chimney and the chimney flue should be examined and cleaned. Too much draft is expensive, because of the waste of heat up the chimney. Too little draft causes imperfect combustion and a bad odor from the products of combustion in the basement and throughout the house. Good dampers and proper adjustment of them are as important as good burners.

3. As natural gas is becoming more and more generally used in all kinds of appliances, it frequently happens that special forms or arrangements of burners are necessary. The company's representatives will be pleased to consult with gasfitters or customers in regard to what form of equipment would be most likely to give satisfactory results in any special cases.

THE INLAND ARCHITECT AND NEWS RECORD

Vol. XLI.

ADVERTISERS' TRADE SUPPLEMENT.

No. 1

AN UP-TO-DATE TRAIN.

The New York Special to New York State points, New York and Boston, via Michigan Central, leaves Chicago daily 5:20 P.M., arrives Buffalo 7:50 A.M. next day, New York 6:30 P.M., Boston 9:03 P.M., running via Niagara Falls. O. W. Ruggles, general passenger and ticket agent, Chicago.

A TOOT FOR GRAPHITE.

Dixon's Graphite is so well and favorably known, and has been so long upon the market, that to call attention to its value is almost superfluous. The Joseph Dixon Crucible Company, of Jersey City, New Jersey, have, however, just issued a unique booklet treating in an entertaining manner of the various purposes to which their production is applied, especially as regards the reduction of friction in machinery. This will be found of considerable value to those who may be interested in automobiles, to which it is largely devoted, while the cuts that embellish the text are well calculated to provoke smiles in response to their humor.

A FIFTY-FOOT CALENDAR.

N. W. Ayer & Son, the Philadelphia advertising agents, who have a national reputation for "keeping everlastingly at it," believe in sticking to a good thing when they have one. For instance, their calendar for 1903 follows the design used for several years past, but with new coloring. And in truth it would be hard to improve upon their design; the dates are plainly readable at fifty feet, yet the calendar is not unpleasantly conspicuous; it is artistic, simple and useful, and it is not surprising that it has become so popular an adjunct to business offices that the supply never equals the demand.

While they last, one will be mailed to any address for 25 cents, which barely covers cost and postage.

FASTEST TRAIN IS THE EMPIRE STATE.

By an official change in the running time of the Southern Express, the flyer of the Orleans Railway, of France, the Empire State Express, of the New York Central & Hudson River Railroad, has regained its lost title of "the fastest train in the world."

When the Empire State Express started on its first race toward Buffalo, more than ten years ago, it established a long-distance record which was not excelled until the Orleans Railway inaugurated its Southern Express, which runs from Paris to Bayonne.

There were many complaints that the Southern Express failed to make its daily record run according to schedule. Tourists insisted that the time-card outsped the train. Then the Southern Express was wrecked and many lives were lost. Traffic officials of the road concluded that the pace was too fast and the scheduled running time was extended an hour. This extension meant the abdication of the throne and the return of the crown to America.

During the period of its humiliation, the Empire State Express made no effort to increase its running time, traffic officials of the New York Central believing that this could not be done with safety. For more than 216 miles of the 440 between New York and Buffalo, the Empire State makes the run at an average speed of more than sixty miles an hour. The highest speed is reached between Fairport and Rochester, where for nine miles the train maintains a speed of 66.33 miles an hour. The train consists of a 144-ton locomotive, of the Central-Atlantic type, one composite, smoking and baggage car, three coaches and one parlor car. The weight of these five cars

is 261 tons, and the weight of the entire train, including the engine, is 405 tons.—*From the New York Herald, January 25, 1903.*

ANOTHER SIGNAL SUCCESS FOR THE YANTACAW.

A very successful exhibition of the effectiveness of the "Yantacaw Chemical Fire Extinguisher" has just been given.

A structure, 16 feet high and about 7 feet square, was erected and filled with slats, boards and shavings. It was then thoroughly saturated with kerosene oil and lighted.

The chief of the local fire department took charge of the affair and gave the signal when to play on the fire. He gave the word after allowing the fire to gain a good headway, and the stream was turned on and the fire extinguished in about five seconds.

It was lighted up again and the performance repeated with even greater rapidity than before. The chief then requested permission to try the extinguisher belonging to the Rescue Truck Company on the fire. It was lighted up again and the chief ordered a six-gallon carbonic-acid gas extinguisher turned on, but his efforts to control it were useless and the fire still burned fiercely. The chief then ordered that the Yantacaw play on one side of the box and the carbonic-gas machine on the other. The difference was at once apparent, as the Yantacaw side was instantly black, while the other side still burned. Finally, the Yantacaw went over to the other side and put the fire out. The tests were highly interesting and instructive, as heretofore it has always been conceded that the carbonic gas was the best known extinguisher, but it was proved very plainly at this test that the Yantacaw is away ahead.

NOTICE TO ARCHITECTS AND BUILDERS.

W. H. Mullins, Salem, Ohio, desires to call the attention of architects and builders to the fact that he has just completed the purchase of the Watson Fireproof Window Company, including all their machinery and dies and the exclusive right to manufacture under the Watson patents in all States and Territories of the United States, also for export, excepting Illinois, Maine, New Hampshire, Vermont, Rhode Island, Massachusetts and the city of Greater New York. Mr. Mullins desires to secure manufacturer's agents in every city throughout their territory, and would be pleased to correspond with parties relative to terms. Catalogues and full information will be cheerfully furnished to all interested parties.

Perspective Drawing

TAUGHT BY MAIL

Also Courses in

**Mechanical Drawing
Architecture**



MAIN BUILDING
ARMOUR INSTITUTE.

INSTRUCTION
UNDER
SUPERVISION
OF
MEMBERS
OF
FACULTY
OF
ARMOUR
INSTITUTE
OF
TECHNOLOGY

Specification Reminders

CEMENTS

PORTLAND.

Garden City Sand Co., 188 Madison St., Chicago.

CONTRACTORS

GENERAL.

Clarence I. Wolfinger, 164 La Salle St., Chicago.

FIRE BRICK

Garden City Sand Co., 188 Madison St., Chicago.

HEATING

FURNACE.

Robinson Furnace Co., 107 Lake St.

STEAM AND HOT-WATER BOILERS.

Kellogg-Mackay-Cameron Co., General Offices, Chicago, Minneapolis, Minn., Kansas City, Mo.

INTERIOR FINISH

Clarence I. Wolfinger, 164 La Salle St., Chicago.

SAND

WHITE.

Garden City Sand Co., 188 Madison St., Chicago.

EVERY Architect and Contractor engaged in the installation of Electrical, Steam or Power Plants can gain a thorough working knowledge of these subjects through our courses in

Electrical and Steam Engineering
Heating, Ventilation and Plumbing

The curriculum also includes Civil, Mechanical, Locomotive and Marine Engineering, Navigation, Sheet Metal Work, Textile Manufacturing under foremost authorities. Also 40 short Special Engineering Courses.

In addition to their regular instruction papers, students in full Engineering courses are furnished a Technical Reference Library (in ten volumes) as a help in their studies.

AMERICAN SCHOOL OF CORRESPONDENCE
at
Armour Institute of Technology
CHICAGO, ILL.

Mention Inland Architect.



BUFFALO Improved Ventilators

Perfect
Ventilation

FOR

SCHOOLS, CHURCHES,
FACTORIES, FOUNDRIES, ETC.

Also constructed with glass top, affording both light and ventilation.
Most efficient, simple, storm-proof and symmetrical.

BUFFALO FORGE COMPANY
BUFFALO, N. Y.

CHICAGO OFFICE:
22-24 Randolph Street

NEW YORK OFFICE:
39 Cortlandt Street

SPECIFICATION REMINDER

FOR THE USE OF

Architects, Builders
AND OTHERS.

A complete summary of items of every branch of building work. A very useful book for those who have to do with the erection and construction of buildings. Price, 50 cents per copy. Apply to

WILLIAM H. SAYWARD,
Secretary of the National Association of Builders,
166 Devonshire St. BOSTON, MASS.

"Big Four" Route.

CHICAGO

TO

INDIANAPOLIS,
CINCINNATI,
LOUISVILLE.

SOUTH and SOUTHEAST

THE SCENIC LINE TO

Hot Springs, Va., and
Washington, D. C.

Via the

Chesapeake & Ohio R'y.

J. C. TUCKER, G. N. A.

234 Clark Street,

CHICAGO.

THE NEW YORK SPECIAL

A Splendid Train to New York,

Boston, and the East, via the Michigan Central, leaves Chicago 5:20 p. m. daily, arrives Buffalo 7:50 a. m. next day, New York 6:30 p. m., Boston 9:03 p. m., with through sleeping and dining cars, and runs via Niagara Falls. O. W. Ruggles, General Passenger and Ticket Agent, Chicago.

**THE
Flexible Roofing**

MF Roofing Tin not only has a very heavy coating of pure tin and new lead, but it is the most flexible and easiest worked of all roofing tin. This property of MF Roofing Tin permits perfect fitting around angles of roof, corner or chimney—no waste of time or material.

**MF
Roofing Tin**

is so carefully made, by hand labor, and so many precautions taken to send out only perfect plates, it invariably makes a roof that will last half a century or more. This **MF** trademark stamped on every sheet. Ask your roofer for MF Roofing Tin, or

write to W. C. CRONMEYER, Agent,
to Carnegie Building, Pittsburg,
for illustrated book on roofing.
American Tin Plate Company, New York.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

NATIONAL FIRE PROOFING COMPANY

STANDARD METHODS OF
HOLLOW AND POROUS TILE
FIREPROOFING

OFFICES

FRICK BUILDING	- - - - -	PITTSBURGH
170 BROADWAY	- - - - -	NEW YORK
NORTH AMERICAN BUILDING	- - - - -	PHILADELPHIA
TREMONT BUILDING	- - - - -	BOSTON
HARTFORD BUILDING	- - - - -	CHICAGO

PIONEER FIRE-PROOFING COMPANY

1515 Marquette Building
CHICAGO

CONTRACTORS FOR FIRE-PROOFING
OF BUILDINGS

MANUFACTURERS OF CLAY PRODUCTS

The Architectural Index

*Being a Monthly Index to a Selected List of Periodicals
on Architecture and Allied Subjects*

It embraces the principal publications of the United States, Canada, England, Germany and France.
It indexes alphabetically every article in them.

It redeems the articles from their miscellaneous character, making them easily accessible and therefore of inestimable value.

It will help you by locating articles on certain subjects concerning which you wish to be informed, giving the number and page of the periodicals containing such matter.

It is compiled by experts.

It costs only One Dollar a year.

Its value can not be demonstrated here.

Send Ten Cents for a sample copy and you will realize how valuable it is to you.

The Architectural Index

729 Sixth Avenue

NEW YORK

THE NEW YORK SPECIAL

The Magnificent Train

of the Michigan Central, leaves Chicago daily 5:20 p. m., runs via Niagara Falls, and arrives Buffalo at breakfast time next morning, New York State points during the day, New York City 6:30 p. m., and Boston 9:03 p. m., with through dining and sleeping cars. O. W. Ruggles, Central Passenger and Ticket Agent, Chicago.

MINNEAPOLIS AND ST. PAUL

FINE
SERVICE

ILLINOIS CENTRAL

CENTRAL

VALLEY

MISSISSIPPI ROUTE

FROM
CHICAGO

RAILROAD

New First-Class Through Line

from Chicago via Dubuque, Waterloo and Albert Lea. Fast Vestibule Night train with through Sleeping Car, Buffet-Library Car and Free Reclining Chair Car. Dining Car Service en route. Tickets of agents of I. C. R. R. and connecting lines.

A. H. HANSON, G. P. A., CHICAGO.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

Mr. Architect: REASONS WHY YOU SHOULD USE

Dexter Brothers' English Shingle Stains

BECAUSE they will outwear paint or any other stain.
BECAUSE they preserve the shingle.
BECAUSE they do not give a painted effect to the shingle.
BECAUSE they do not change as other stains do.
BECAUSE they have no disagreeable odor.
BECAUSE they are used on the best work from Maine to California.
BECAUSE they are used by people who want the best of everything.

Exclusively used on the shingled country houses of Mr. George Vanderbilt at Biltmore, Mr. J. Pierpont Morgan, Adirondacks, Hon. Wm. C. Whitney, Westbury, L. I., Mr. Thomas W. Lawson, Egypt, Mass.

Manufactured by

DEXTER BROTHERS COMPANY

103-105-107 Broad Street

H. M. HOOKER CO., Agents
57 W. Randolph Street
CHICAGO

BOSTON

W. S. HUESTON, Agent
81 Fulton Street
NEW YORK



BUTCHER'S BOSTON POLISH

Is the best finish made for

FLOORS,...

Interior Woodwork and Furniture.

Circulars Sent on Application.
For Sale by Dealers in Painters' Supplies.

MANUFACTURED BY THE
BUTCHER POLISH CO.,

356 Atlantic Ave., Boston, Mass.

OUR No. 3 REVIVER IS A SUPERIOR FINISH FOR KITCHEN AND PIAZZA FLOORS.

IRON and TIN ROOF PAINT

THE PROPERTY OWNER SAVES MONEY WHEN THE
ROOF IS PROPERLY PAINTED WITH

DIXON'S SILICA-GRAPHITE PAINT

ADDRESS
JOSEPH DIXON CRUCIBLE CO., Jersey City, N. J.

UP-TO-DATE STORES ARE KNOWN BY

their show windows. If they are artistically dressed, they are effective; if properly lighted, doubly so. Every merchant appreciates this fact.

FRINK'S SPECIAL PATENT WINDOW REFLECTOR

embodies every principle of correct window lighting. Investigation invited. Highest awards everywhere.

I. P. FRINK, 551 PEARL STREET, NEW YORK.

CRANE FITTINGS

ESTABLISHED 1855

**CONVENIENT
TRAINS**

Leave St. Paul and Minneapolis daily

... VIA ...

Wisconsin Central R'y

... FOR ...

**MANITOWOC,
MILWAUKEE,
CHICAGO,**

where direct connections are made
for the East and South.

Nearest ticket agent can give you
complete information.

JAS. C. POND, Gen. Pass. Agent,
MILWAUKEE, WIS.

E. ELTON DEANE,

**ARCHITECTURAL COLORIST,
AND ILLUSTRATOR,**


68 SEYMOUR BUILDING

Fifth Ave., corner 42d Street,
NEW YORK.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

ESTABLISHED 1872

INCORPORATED 1890



71 & 73 Randolph Street.

MANUFACTURERS, WHOLESALE AND RETAIL DEALERS

Builders' Hardware

ART METAL-WORK OF ALL KINDS.

Cooling Rooms.

Mechanics' Tools.

Table and Pocket Cutlery.

Our selection comprises THE BEST from all the leading factories, as well as our own, and our heavy purchases enable us to offer you these goods at prices which can not fail to please.

We have many specialties which we manufacture and control which can not be found anywhere else.

Orr & Lockett Hardware Co.

71 & 73 RANDOLPH STREET.

Telephone, Central 551.



The Yale Lock

with Paracentric Key affords the highest standard of security, and is made in hundreds of styles and sizes, adapted to almost every possible use, from a jewel-case to a prison door.

Little Brochures, "What is a Genuine Yale Lock," "Yale Night Latches," "Artist and Artisan," etc., will be sent on request.

The
YALE & TOWNE
Mfg. Company.

CHICAGO OFFICE:
131 Wabash Avenue.



IF YOU



SPECIFY

SAMSON SPOT CORD



You can tell at a glance that no other Sash Cord is substituted. It is warranted to be of the best cotton stock, smooth finish and perfect braid.

SAMSON CORDAGE WORKS
BOSTON, MASS.

The Lust Will Last

Only when the right kind of varnish is used. The best materials and nearly fourscore years experience in manufacturing give permanent satisfaction when you specify

I. X. L. Preservative Coatings

For Varnish Catalogue write

EDWARD SMITH & CO.

Varnish Makers and
Color Grinders

45 Broadway, New York.

59 Market Street, Chicago.



TRADE MARK.

The 20th Century Limited

The LAKE SHORE

and

NEW YORK CENTRAL

TWENTY HOUR CHICAGO—NEW YORK TRAIN

Lv. Chicago, daily, 12:30 p. m., Cent. Time
Ar. New York, daily, 9:30 a. m., East. Time

A. J. SMITH
Gen'l Pass'r and Ticket Agt.
CLEVELAND

C. F. DALY
Chief Ass't Gen'l Pass'r Agt.
CHICAGO

City Ticket Office, 180 Clark St.

Chicago to New York Between Business Hours