

ar







**British  
Industries Pavilion**

**BRUSSELS EXHIBITION**

Structural Steelwork fabricated  
and erected jointly by

**CONCRETE & STRUCTURAL  
PRODUCTS LTD**


Hamworth Trading Estate,  
Hampton Road West,  
Fulham (Tel 3458)  
Middlesex

and  
**CARTER—  
HORSELEY  
(ENGINEERS)  
LTD**

Merchbank Lane, Waddon  
Croydon (Tel 7226)  
Surrey

# HOLLOW CLAY BLOCKS FOR BETTER CONSTRUCTION CORNERS AND CLOSERS

The use of 'Phorpres' Corner and Closer blocks in conjunction with 'Phorpres' Standard blocks gives better, quicker construction of the internal leaf of cavity walls and of internal partitions.

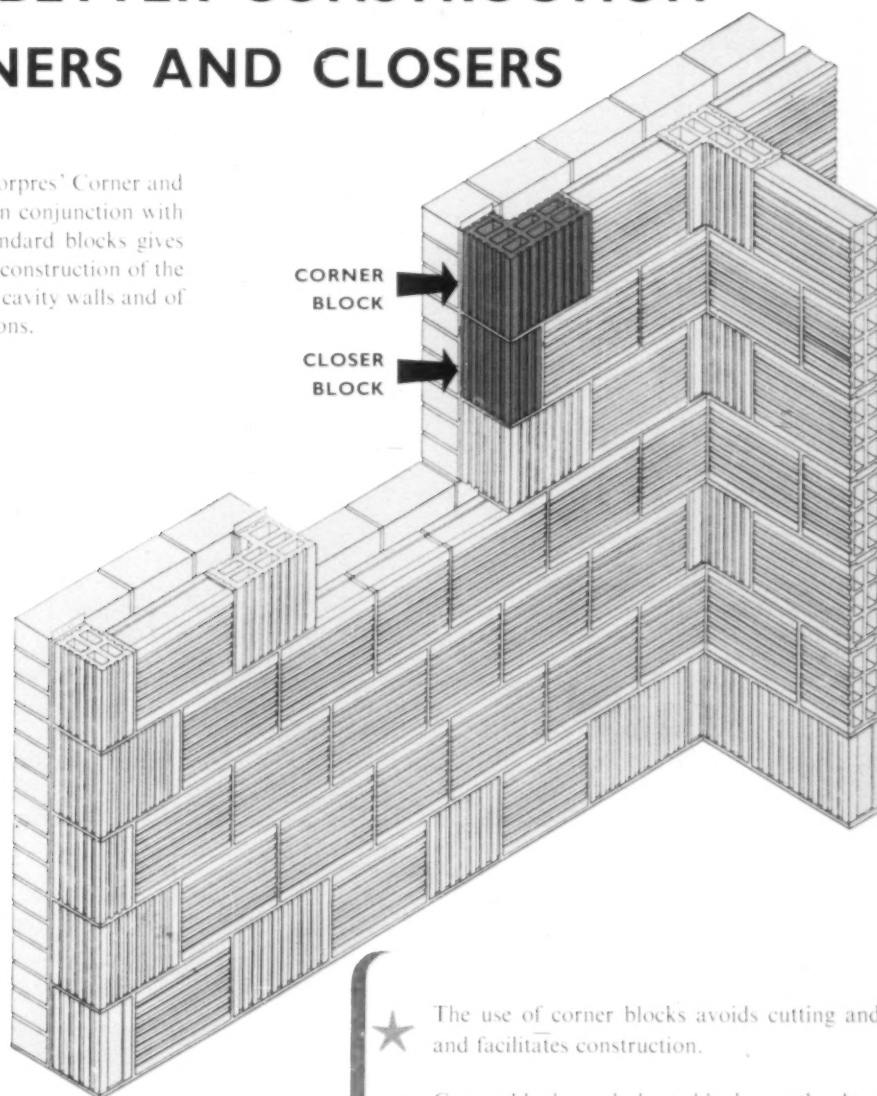

## THE ADVANTAGES

- ★ The use of corner blocks avoids cutting and so speeds and facilitates construction.
- ★ Corner blocks and closer blocks neatly close the cavity at window and door openings; subsequent filling of the cavity end is eliminated.
- ★ These special blocks provide a good tight backing for insertion of vertical D.P.C. in cavity walls.
- ★ The use of corner and closer blocks provides a clean, workmanlike finish — a mechanical key for plaster can be supplied if required.

## AVAILABILITY

'Phorpres' Corner and Closer blocks are available with every delivery of 'Phorpres' Standard Building blocks.



**LONDON BRICK COMPANY LIMITED** in the service of the building industry

*Head Office:* Africa House, Kingsway, London, W.C.2. Telephone: HO1 1000 B2B2  
*Midland District Office:* Prudential Buildings, St. Philip's Place, Birmingham 3. Telephone: Central 4141  
*South-Western District Office:* 11 Orchard Street, Bristol 1. Telephone: Bristol 23034/5  
*Northern District Office:* St. Paul's House, 20-22 St. Paul's Street, Leeds. Telephone: Leeds 20771



BY APPOINTMENT  
TO HER MAJESTY QUEEN ELIZABETH II  
BRICK MAKERS



# hand made tiles




*Hand-made, in the traditional manner, C.S. Roofing Tiles not only give pleasure to the eye, but being made from Bridgwater Clay — famous for its non-flaking, non-cracking qualities — they can be relied upon for yeoman service.*


Double Roman No 7  
Sizes :  $16\frac{1}{2}$ " x  $13\frac{1}{2}$ " (approx.) 1,000  
tiles cover 131 square yards (approx.)



COLTHURST, SYMONS & CO LTD • BRIDGWATER • SOMERSET

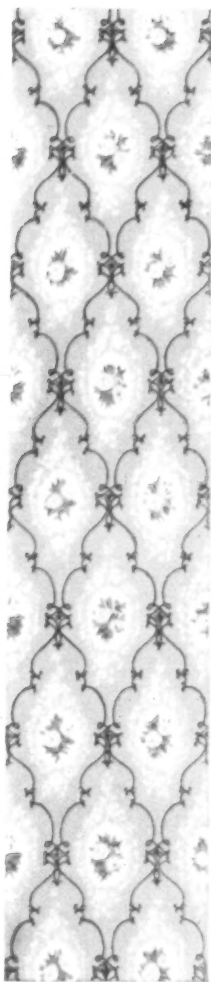

THE BOWOOD

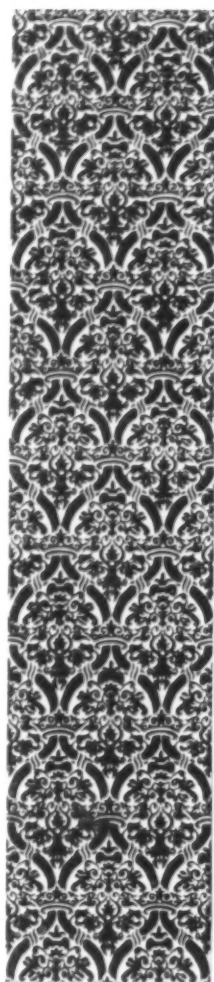

THE DUDLEY





THE BROMPTON



THE CAXTON




THE ARLINGTON

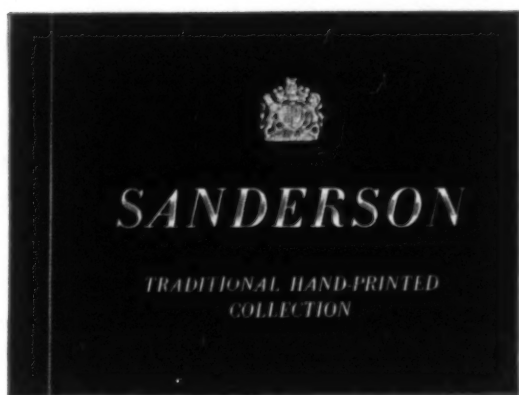

Quote the past! Faithfully hand-printed, the new Sanderson Traditional Collection sets before you the authentic grandeur and grace of styles that refuse to depart. The choice is such that you can give a room the exact character you wish — be it never so resplendent. You are welcome to visualise schemes, complete with fabrics and paints, at any of the Sanderson showrooms; or the pattern book is available on loan.

ARTHUR SANDERSON & SONS LTD.  
BERNERS STREET, LONDON, W.1.

GLASGOW: 5-7 NEWTON TERRACE • EDINBURGH: 7 QUEEN STREET • LEEDS: 30 LOWER BASHINGALL STREET • MANCHESTER: 11 KING STREET  
BIRMINGHAM: 220 CORPORATION STREET • SOUTHAMPTON: 65 THE AVENUE • EXETER: ST. STEPHEN'S HOUSE, HIGH STREET

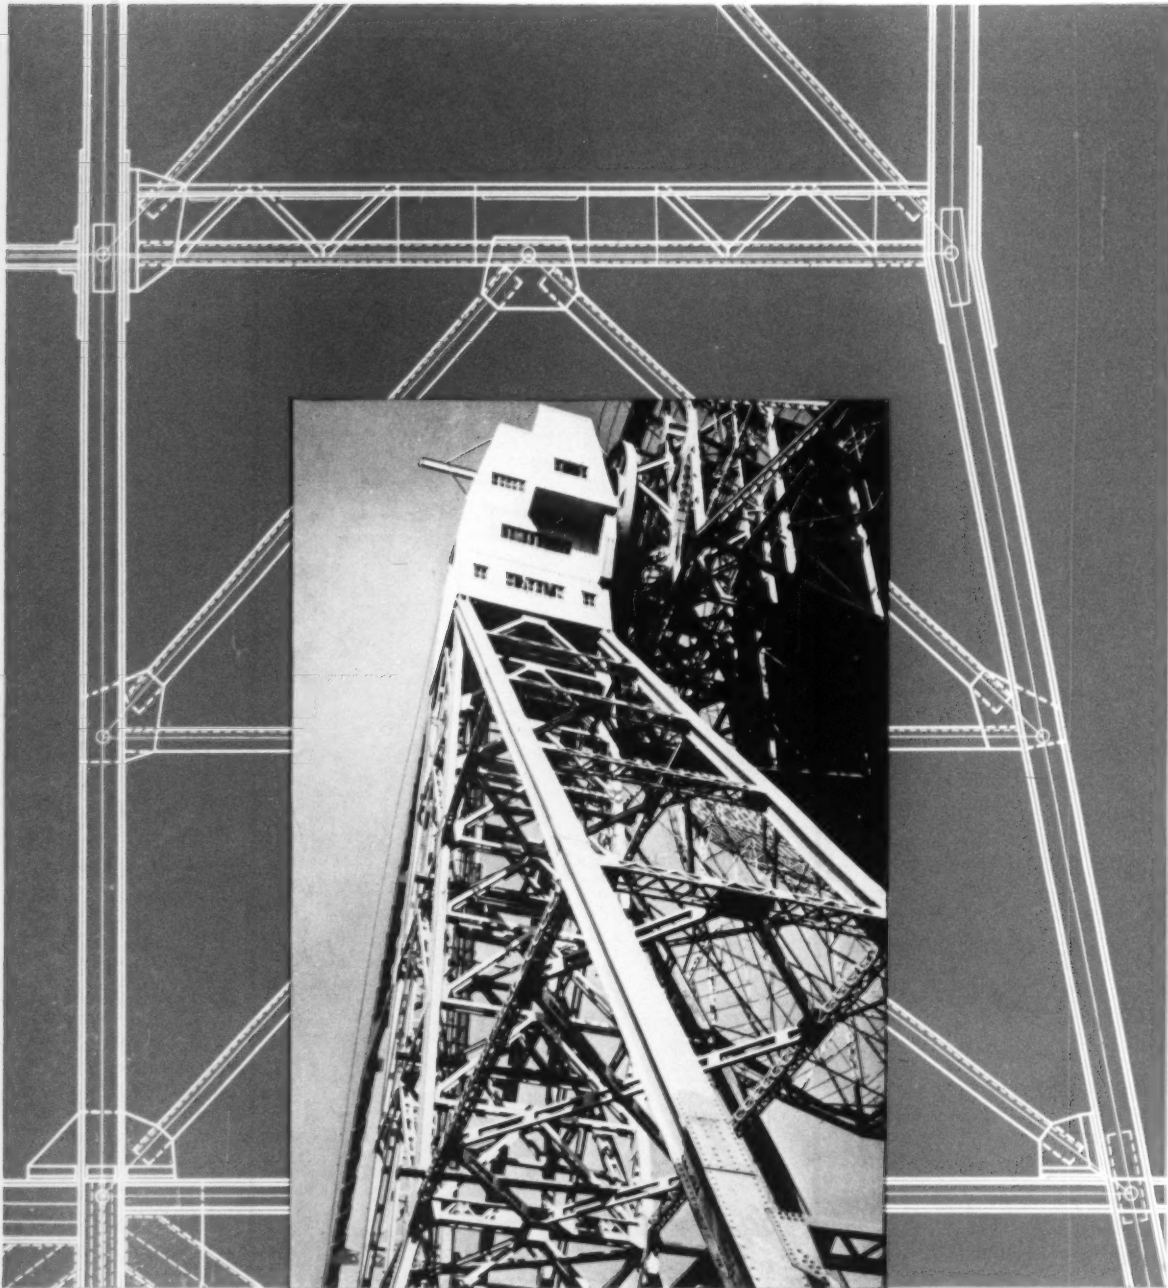

Radio telescope at Jodrell Bank built  
by United Steel Structural Company

*Bowl diameter—250 ft.*

*Height of towers—180 ft*

*Weight of structural steelwork—1,800 tons*

*Consulting engineers: Husband & Company*

UNITED STEEL STRUCTURAL COMPANY LIMITED  
SCUNTHORPE · LINCOLNSHIRE



USS35






## This well designed nursery is evenly warmed—How?

With Crane Skirting Heating. This has been installed, so that there is even, comfortable radiant heat effective all over the room. And, of course, the heating is inconspicuous, for Crane panels take the place of the normal skirting. So obviously it does not hamper your design but leaves the wall and floor space completely free.

Here are three noteworthy advantages of this latest heating medium. One, you don't have to worry about space for heating units or unsightly lateral pipework—panels complete that

part of the circuit. Two, these cast iron panels have real strength—they will not buckle or yield under the most arduous duty. Three, installation is easy—ordering and fixing follows routine procedures.

*There are two types of Crane Skirting Heating: Type R (Radiant) in 2' or 1' lengths, 6" or 9" high. Type RC (Radiant-Convactor) in 2' or 1' lengths, 9" high.*




**NOW 9-INCH TYPE R**  
New 9-inch Type R provides additional heating surface and blends perfectly with 9-inch Type RC.

26

## CRANE Skirting heating system

CRANE LTD., 15-16 RED LION COURT, FLEET STREET, LONDON, E.C.4. WORKS: IPSWICH - LONDON. SHOWROOMS: 118 WIGMORE STREET, W.1.  
AND GREAT WEST ROAD, BRENTFORD, MIDDLESEX. BRANCHES: BIRMINGHAM, BRENTFORD, BRISTOL, GLASGOW, LONDON, MANCHESTER.

## CHOSEN FOR THE PLANETARIUM

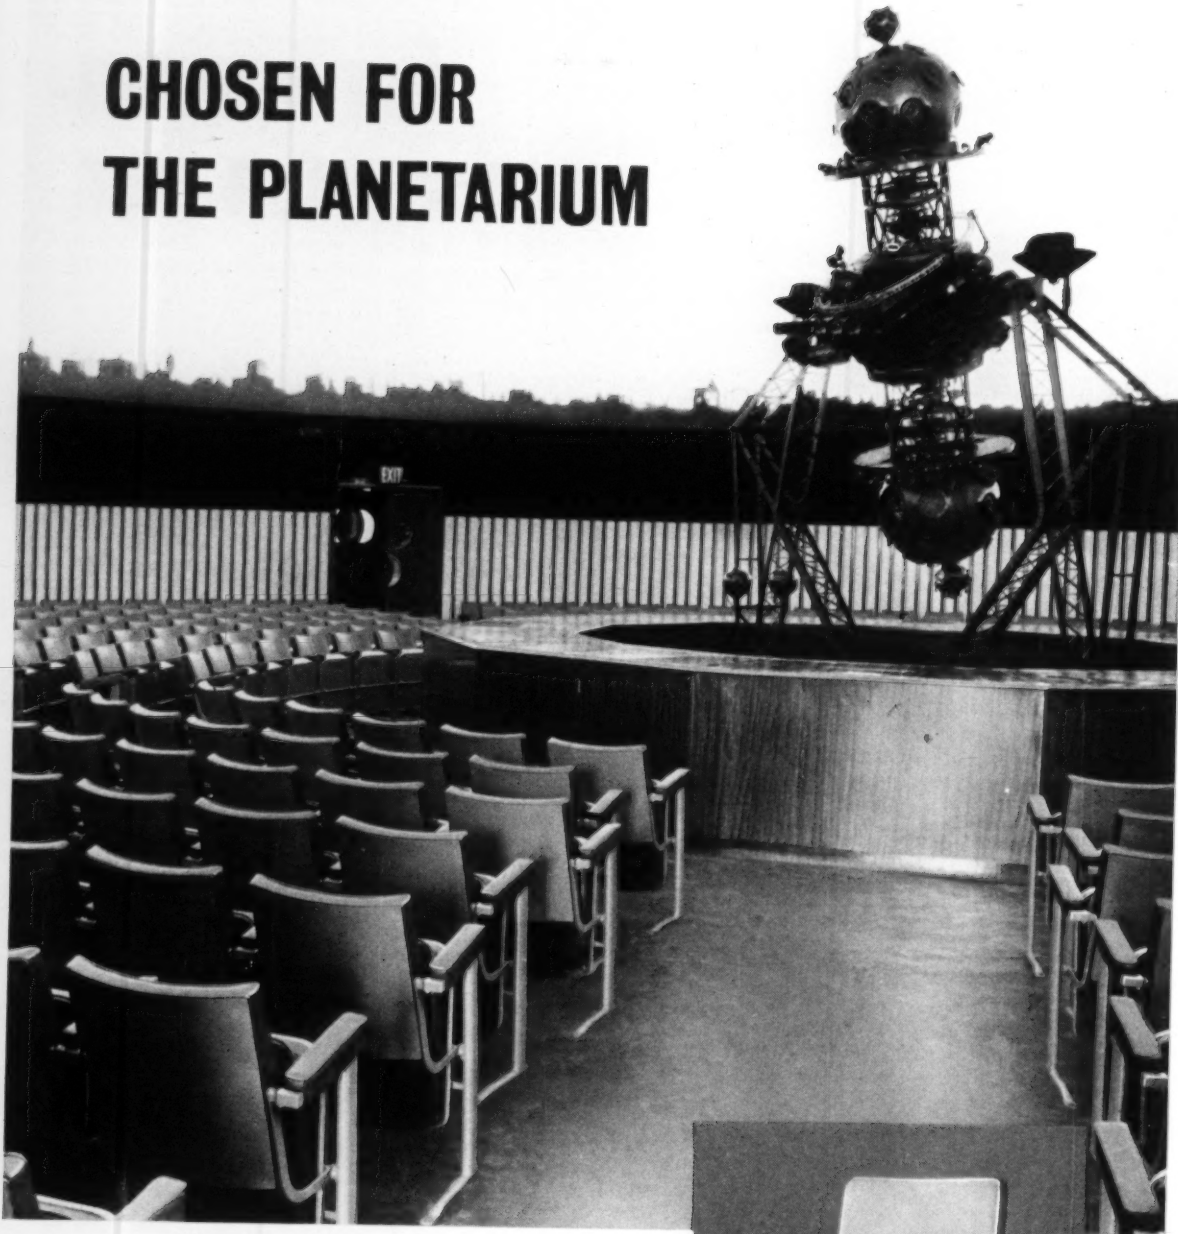


*Architect: George Watt Esq., A.R.I.B.A.*

Another tribute to Cox for auditorium seating! The Planetarium recently opened in London has a seating capacity of five hundred and fifty five, and Cox were responsible for the manufacture and installation of the tip-up chairs.

*Cox were responsible also for the seating at the Royal Festival Hall and the Manchester Free Trade Hall.*



G1312  
Typical Cox Seating

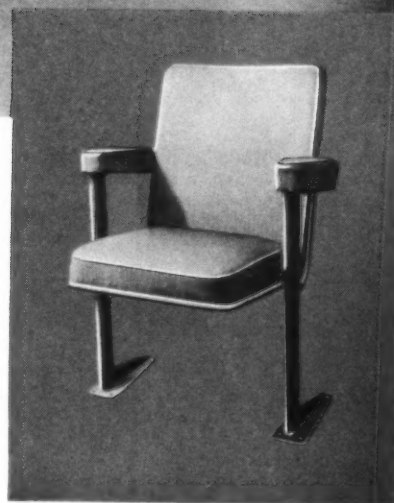

*A descriptive illustrated booklet will be sent on request.*

COX & CO (WATFORD) LTD · WATFORD BY-PASS · WATFORD · HERTS · Telephone: WATFORD 5631.

HCN217

of  
course  
mason's  
add  
something  
extra  
to  
their  
paint



Practising architects  
are invited to  
write for this helpful  
book—"Joseph Mason  
Painting Specifications"

That "extra something" in  
Masopar means a wider  
choice and more helpful  
service. Joseph Mason's  
standard shades are  
supplemented by the full  
B.S.S.2660 colour range.  
Then, of course, you can have  
expert guidance from our  
Technical Team in planning  
the application.

**joseph mason paints**

JOSEPH MASON AND COMPANY LIMITED, DERBY. TELEPHONE: 40691-2-3

MANUFACTURERS OF VERY GOOD PAINTS SINCE 1800



Craftsmen in wood and metal.



The Tourist-class Lounge in the new Cunard Passenger Liner "SYLVANIA," designed by the Decorative Architect and Chief Furnishing Superintendent of the Cunard Steam-Ship Company Ltd. Builders: John Brown & Co. (Clydebank) Ltd.

We were responsible for all the decorative features of this space, including fibrous plasterwork to ceilings and interior decorations.

**Samuel Elliott & Sons (Reading) Ltd.**

CAVERSHAM · READING · BERKSHIRE

Telephone: Reading 71536 (3 Lines)

**At the  
exhibition...  
and in  
millions  
of homes ....**

**YALE**  
REGISTERED TRADE MARK


## Door Fittings

Wherever the highest quality in materials and craftsmanship are required, YALE is the automatic choice. Leaders of their particular field for years, YALE combines hereditary craftsmanship with up-to-the-minute techniques in modern engineering.

On show in the British Pavilion on the stand of the Council of Industrial Design.


### YALE No. 1

#### CYLINDER RIM AUTOMATIC DEADLATCH



*(Lever handle can be locked by key on the inside and automatically deadlocks when the door is shut.)*

### YALE TRIGGER CUPBOARD CATCH No. 1506




*(Latest type bolt release works by easy thumb pressure. No turning. Available in wide range of finishes.)*

**THE YALE & TOWNE**  
**MANUFACTURING COMPANY**  
BRITISH LOCK AND HARDWARE DIVISION  
WILLENHALL · STAFFORDSHIRE · ENGLAND


### YALE DOVER DESIGN—INSIDE DOOR MORTICE LOCKSET No. L310 WITH 2 LEVER LOCK



*(Produced in a variety of attractive finishes to match contemporary décor.)*

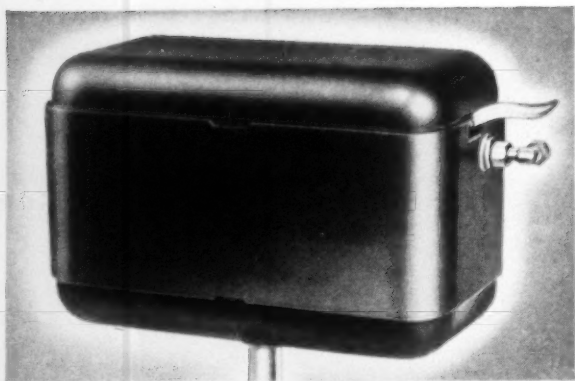



The new Fordham "Raven" in Black Plastic.

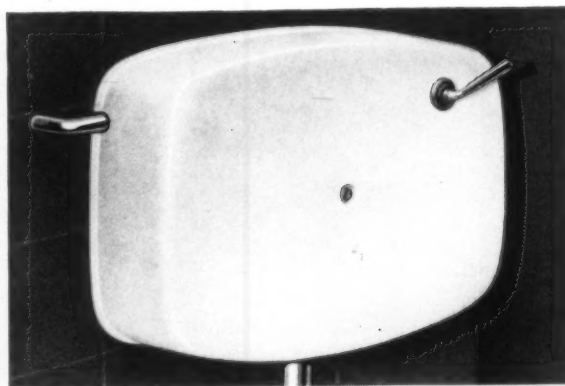

Fordham Panel Model "O". Projects only 6 ins. from the wall.




Fordham Polythene Ball Float.

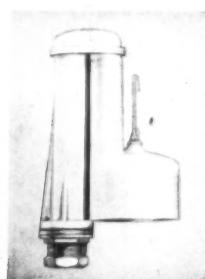

The Fordham All-Polythene Syphon.

Fordham "Acquasave" long-life, non-stick, trouble-free Ball Valves in hard Polythene.

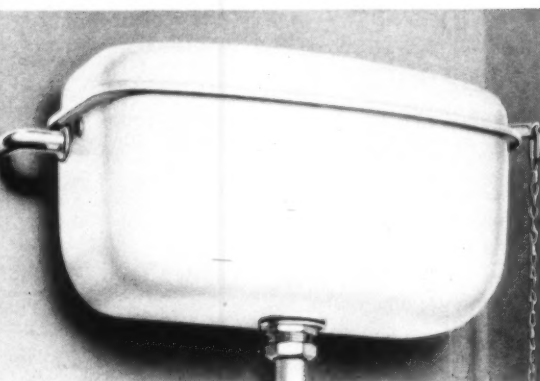

Fordham "Cleanline" high level cistern.

Look to Fordham for leadership in the design and development of Sanitary Equipment. The new range of Fordham "Cleanline" Cisterns—accepted by the Council of Industrial Design for "Design Review"—are the most handsome and least expensive cisterns obtainable today. In White or coloured vitreous finishes to match any scheme of decoration, they are available in Ivory, Primrose or Green at the cost of White. The recent addition

to the Fordham range is the "Raven" in Black Plastic—superbly efficient, beautifully finished, and at an unrivalled low price. All models are fitted as standard with the incorrodible Fordham All Polythene Syphon and Ball Float and are available with the revolutionary new "Acquasave" non-stick toughened plastic ball valve. Illustrated literature will be sent on request.


FORDHAM PRESSINGS LIMITED

HEAD OFFICE & WORKS: DUDLEY ROAD, WOLVERHAMPTON  
Other Factories at Earlsfield (London), Hinckley (Leics), Sedgley (Staffs).

TELEPHONE: 23861.2



# High resistance to thermal transmission...

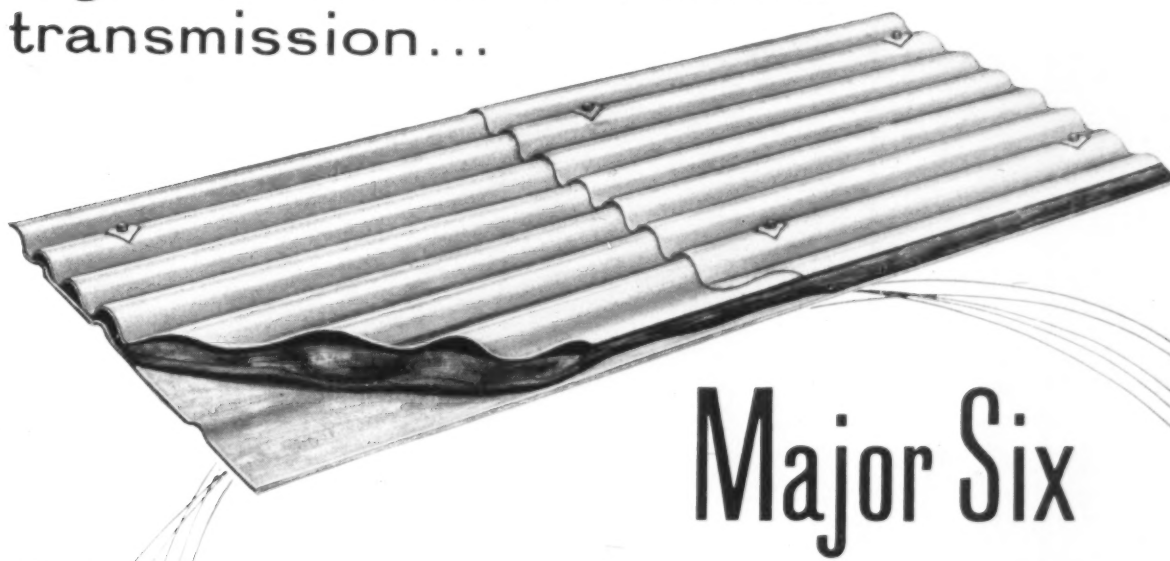


## Major Six


### DOUBLE CLADDING INSULATION

provides a high resistance to thermal transmission, contributing to higher equable interior temperature and consequent economical heating. Here is dependable roofing made for quick erection and permanent service.

It's the DOUBLE cladding that does it!—a rigid asbestos-cement underlining sheet laid directly to purlins as a soffit upon which the sheet of insulation is laid before putting the "Major six" sheet in position.

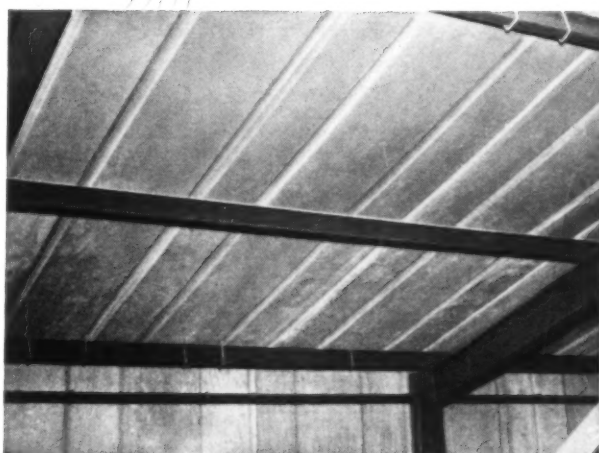

Photograph above illustrates interior view of roof

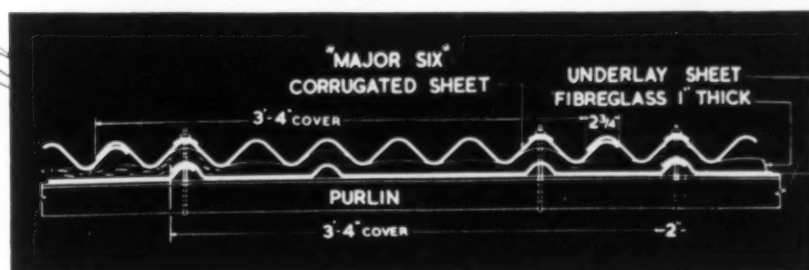

Easily fixed with hook bolts and washers. "Major six" Double Cladding Insulation complies with the requirements of "Thermal Insulation Industrial Buildings" Bill.




**ARTILLERY HOUSE • ARTILLERY ROW • LONDON SW1**

Telephone: ABBey 3081 Telegrams: "Atlstonco, Sowest"


Works at: MELDRETH, Nr. Royston Herts.

Also at: GREENHITHE • STROOD • CAMBRIDGE • SHORNE • RYE (Sussex) • GT. YARMOUTH

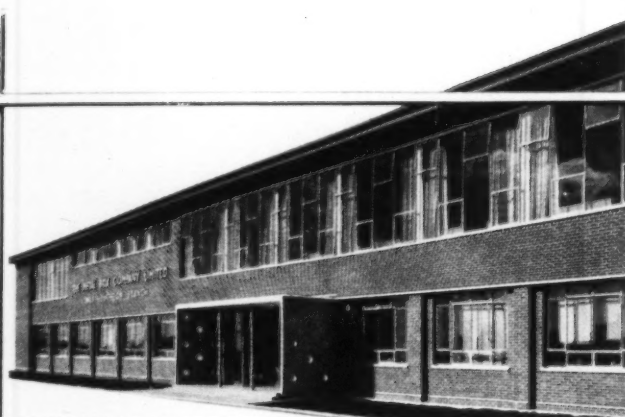

*Architects*  
S. N. Cooke & Partners F. R. I. B. A.  
*Main Contractors*  
William Towson & Sons Ltd., Bolton

## Maxweld reinforces it

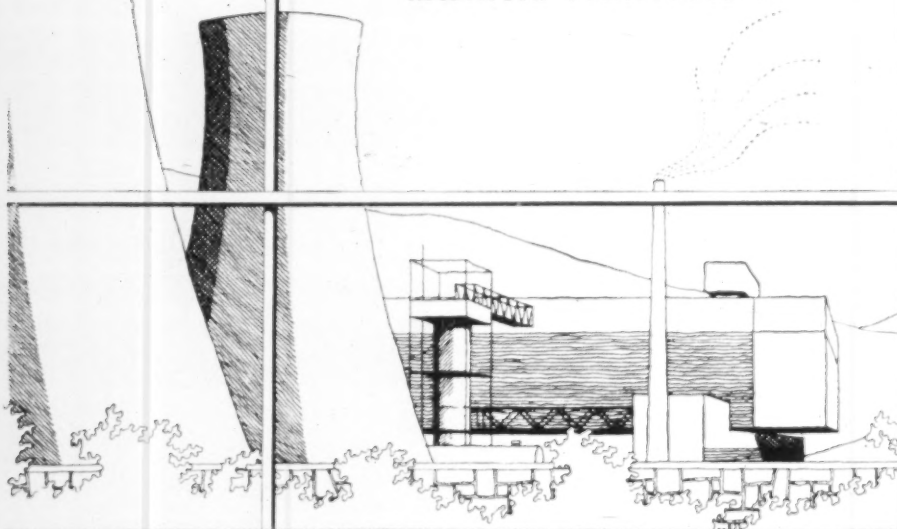

The reinforcement fabric used in the Metal Box Company factory at Bolton was supplied by Richard Hill. Do you need reinforcements? Then call up the Maxweld man! He can give you all the facts on the type and quantity of fabric you'll need plus a rough idea of the cost. And he's backed by the

### Richard Hill Design Service

who can then draw up more detailed plans and estimates. You can get him at Middlesbrough (2206), London (Mayfair 3538), Birmingham (Mid. 5625), Manchester (Central 1652), Leeds (2-7540), Bristol (24977), Glasgow (Central 2179), Nottingham (Bulwell 27-8383), Bournemouth (Westbourne 63491), Cardiff (46552), Belfast (29126).

## Maxweld fabric


is manufactured by **RICHARD HILL LIMITED** (Established 1868)  
Newport Wire and Rolling Mills, Middlesbrough, Yorkshire. Tel: Middlesbrough 2206

A MEMBER OF THE FIRTH CLEVELAND GROUP



CRC 1000E

now, after years of intensive  
research, Robertson Thain  
announce a time-tested  
protected metal in a  
range of attractive  
colours

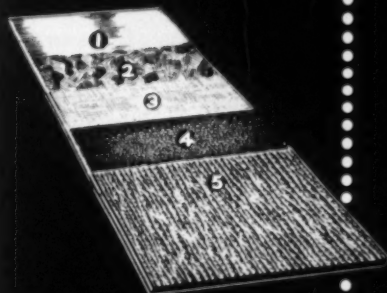

- ① Steel Core
- ② Zinc Coating
- ③ Asbestos Felt which is pressed on to zinc coating whilst still molten
- ④ Bitumen impregnant
- ⑤ Final weatherproof coating (applied on both sides of the sheet or on one side only) in one of the four colours

RED

GREY

GREEN

BUFF

colour  
galbestos

RESISTANCE TO CORROSION · LONG LIFE · MINIMUM MAINTENANCE · REAL COLOUR

Resistance to corrosion, minimum maintenance and long-life are qualities which have been proved in Galbestos Protected Metal by decades of service in industries of every kind.

Now after years of research and the most stringent tests Robertson Thain announce Colour Galbestos, a product which allies the beauty of colour to the well known advantages of Galbestos Protected Metal.



WRITE FOR LITERATURE ON COLOUR GALBESTOS

**ROBERTSON THAIN LIMITED**

ELLESMERE PORT · WIRRAL · CHESHIRE

Telephone: Ellesmere Port 3622-9

Telegrams: 'Robertroof'

Sales Offices: BELFAST · BIRMINGHAM · CARDIFF · EXMOUTH · GLASGOW · IPSWICH · LIVERPOOL

LONDON · MANCHESTER · NEWCASTLE · SHEFFIELD

Associated Companies or Agents in most countries throughout the world





*The Swimming bath in the new University of London Student's Union Building—Malet St., W.C.1  
Architect: Messrs. Adams, Holden & Pearson.*

The whole of the glazed tiling,  
also the unglazed tiling to the circular  
columns for this elegant swimming  
bath in the new University of  
London Student's Union Building  
was carried out by the firm  
of W. B. Simpson.

Simpson's—founded a hundred and twenty-  
five years ago—provide and lay high quality  
tiles and terazzo mosaic for public  
buildings of every kind. Their first-class  
service and superb workmanship  
are known and valued throughout  
the architectural profession  
and the building industry.




**W. B. SIMPSON AND SONS LIMITED**

ST. MARTIN'S HOUSE · 374 WANDSWORTH ROAD, S.W.8

TLING · TERRAZZO · GLASS AND CERAMIC MOSAIC

# SAFELY IN - SAFELY OUT


## with this 'Electro-matic' Traffic Controller

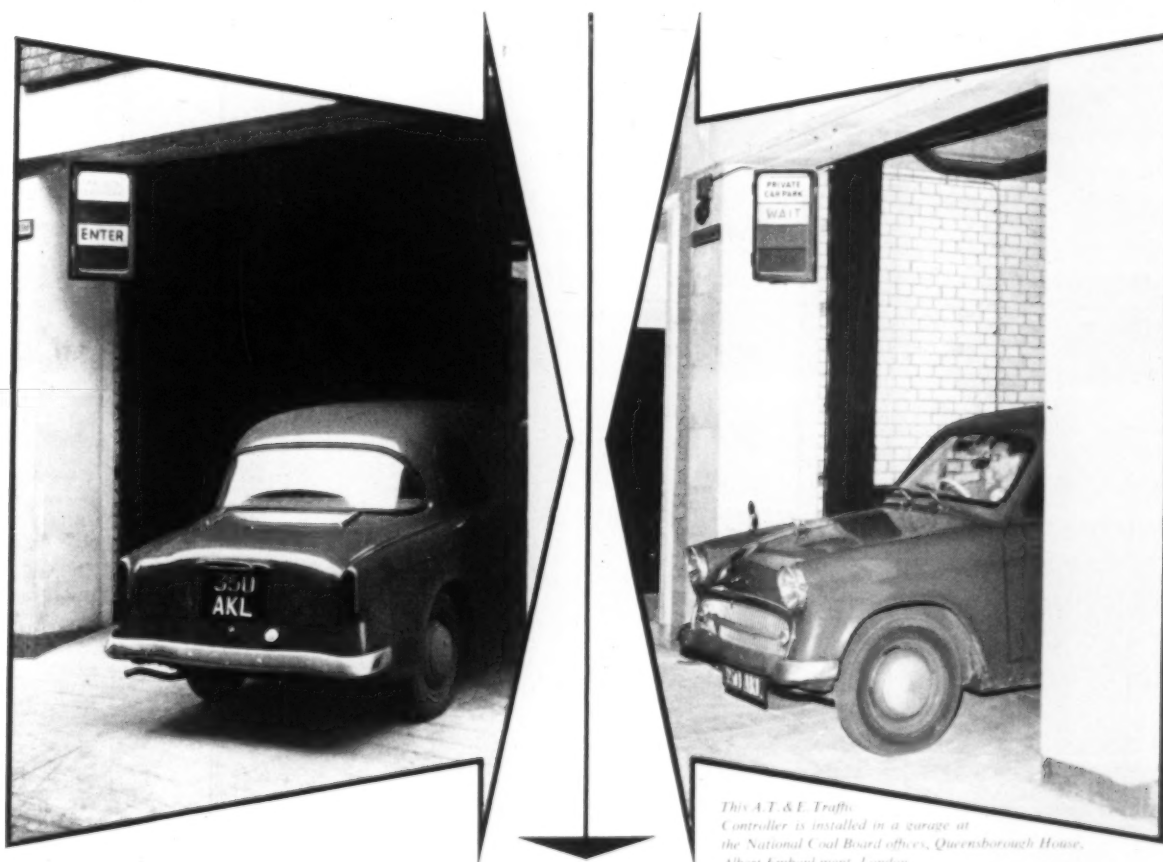

*This A.T. & E. Traffic Controller is installed in a garage at the National Coal Board offices, Queensborough House, Albert Embankment, London.*

A car can enter and leave this National Coal Board garage in perfect safety. The "Electro-matic" traffic controller is a "driver's eye", enabling him to know exactly when to drive in and out.

The signal indications of this fully automatic traffic controller are clearly illuminated and easily understood. The unit is compact, foolproof and economical to install and operate. It is a popular choice for car parks and garages.



Similar types of controllers are available for effective circulation of transport on factory estates.




At refineries, particularly, they provide that additional degree of safety which is so necessary.



**AUTOMATIC TELEPHONE & ELECTRIC CO. LTD.**


Strawger House, Arundel Street, London, W.C.2. Telephone: TEMple Bar 4506  
Telegrams: Strawger, Estrand, London. Strawger Works, Liverpool 7.

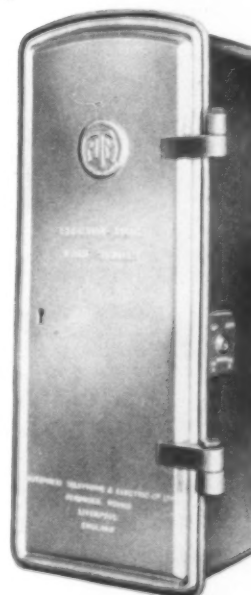

AT10971



...a **BILSTON**  
bath  
will be  
perfect...

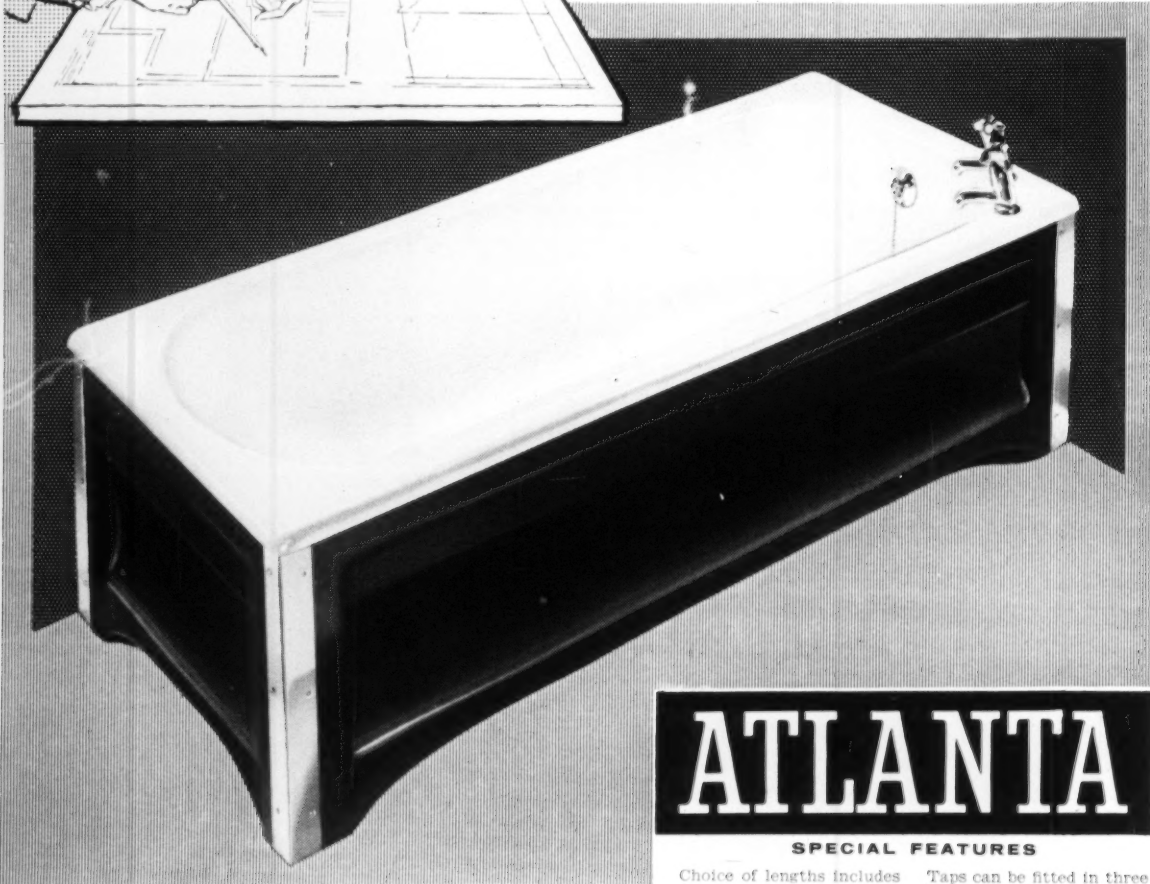

## ATLANTA

### SPECIAL FEATURES

Choice of lengths includes 72", 66", 61", 60" and 54".

Atlanta flat bottom helps to prevent slipping — a point of special importance if a shower is fitted.

Shallow step is safe for young and old. The Atlanta can be fitted to give an overall height of only 16".

Taps can be fitted in three different positions, to meet all possible requirements.

Corner tap mounting facilitates installation and maintenance.

Supplied with or without overflow — with or without handgrip.

The Atlanta costs no more than an ordinary bath

With perfection in mind, a Bilston bath is the natural choice. Bilston design and finish have instant appeal. Bilston quality is appreciated year after year, as its beauty remains unimpaired by the passing of time. The Bilston range includes the exact colour required for any decorative scheme.

*Bilston Baths  
for lasting beauty*

Atlanta •  
Magna •  
Cresta •  
Marina •  
Mermaid •  
Bermuda •




BILSTON FOUNDRIES LTD. · BILSTON · STAFFORDSHIRE · Illustrated literature is available on request.



# Rawlbolts

## hold a mountain face!

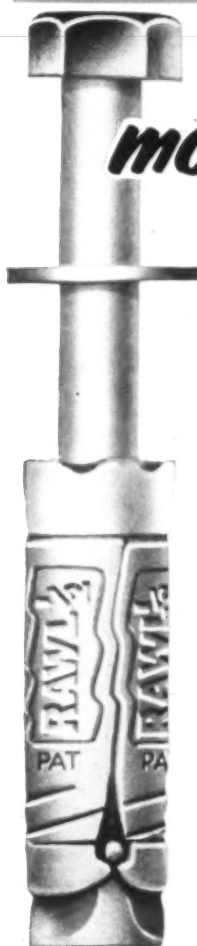

Ask on your trade card or letter paper for free copy of Rawlplug TECHNICAL DATA SHEET folder R1519 which has been specially designed for gentlemen of the Drawing Board. An invaluable source of reference for dimensions, loads, weights, etc., of Rawlplug Fixing Devices.



This photograph is a challenge to your imagination. It was taken in the Dolomites in Italy. The fractured mountain face on the left threatened to collapse. It is now held in safety — with — Rawlbolts. How was it done?

### 12 tons per Rawlbolt

The whole area shown in the square was supported by K20 Rawlbolts, with high grade tensile steel rods, embedded into the rock to a depth of 66 feet. The Rawlbolts were so spaced as to take a constant load of 12 tons each. It is this standard of performance that accounts for the vast numbers of Rawlbolts used throughout industry every year.

### It's the world's speediest bolt-fixing

A Rawlbolt is fixed in minutes — no chiselling, no subsequent grouting in, no waiting for cement to harden. You drill the material, insert the Rawlbolt, tighten up. It is ready to take its full load, at once.

# RAWLBOLTS

*For speed and strength*


THE RAWLPLUG COMPANY LIMITED  
CROMWELL ROAD · LONDON · S.W.7





## goes to sea

The last car rolls aboard . . . . down come the huge shutters, and another trip begins for the "Princess of Vancouver." Brady Steel Rolling Doors are suitable for any size or kind of opening. They are designed for strength and trouble-free operation which guarantee a hundred per cent performance even in the most rigorous conditions and justify absolute confidence in their security. Hand or power operated, they are available singly or in series. Send for illustrated leaflet S 21

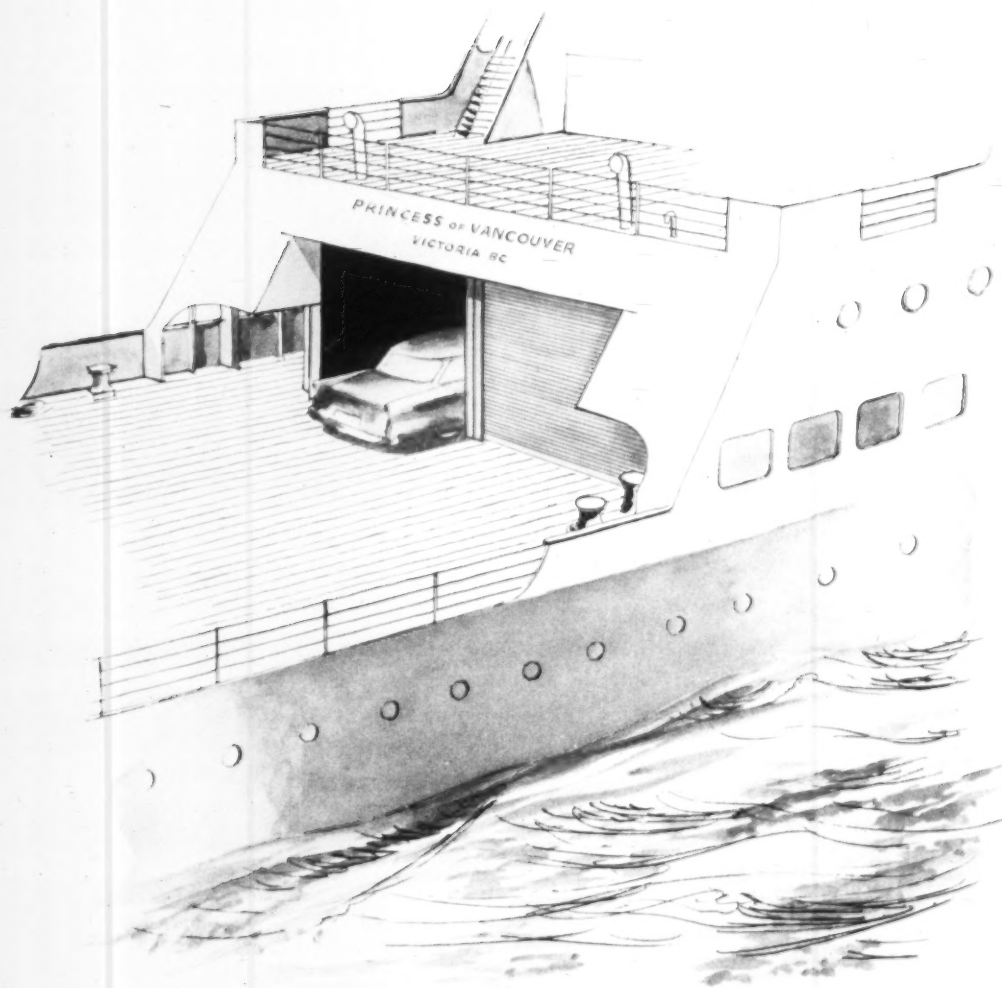

G. Brady & Company Limited, Manchester, 4. Telephone COLlyhurst 2797/8.

BRADY FOR EVERY OPENING: BRADY ROLLING DOORS IN STEEL, WOOD AND ALUMINIUM. SLIDING SHUTTER DOORS. GRILLES IN STEEL, ALUMINIUM OR NYLON. UP AND OVER DOORS. FIREPROOF DOORS. COLLAPSIBLE GATES. SLIDING DOOR GEAR



THE DOORS COMMANDING THE WORLD'S LARGEST SALE—  
London, Birmingham, Glasgow, Montreal, Port Credit, Hong Kong

Stamps © London



# English Oak for St. Paul's

Our English Oak has regularly been approved for joinery and constructional work in the maintenance and restoration of St. Paul's Cathedral. We can meet the exacting requirements of those responsible for Britain's ancient and historic buildings because we offer—

- FORESIGHT** to accumulate the right stocks up to ten years and more before they are used.
- EXPERIENCE** to understand the problems.
- SKILL** to produce what is needed.
- INTEREST** to co-operate in these fascinating works to their successful conclusion.

Architects and Contractors who are now working on the great buildings of the future appreciate and value highly the same foresight, experience, skill and interest which they find at—

**William Mallinson  
and Sons Ltd.**

TIMBER and VENEER MERCHANTS


130 HACKNEY ROAD · LONDON · E.2

Telephone Shoreditch 7654

Telegrams "Almanes" London

MANUFACTURERS OF PLYWOOD, AMOURPLY, PANELS, COMPOSITE PARTITIONING AND INFILL PANELS



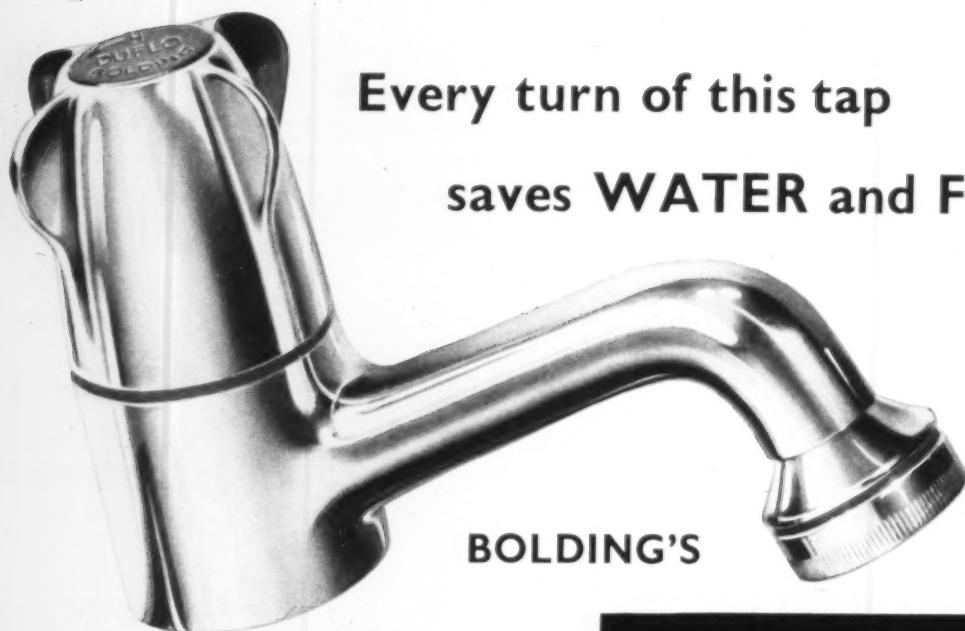

Every turn of this tap  
saves **WATER** and **FUEL!**

**BOLDING'S**

**DUFLO**

Economy in water and fuel consumption is a major consideration when specifying washroom installations for industry. That's why the Architect of today turns to today's most modern spray tap system—Bolding's Duflo, accepted by the B.W.A and the M.W.B.

#### **More Attractive**

Specially constructed for heavy duty, chromium plated to B.S.S., and with body and outlet constructed in one piece, the 'Duflo' is ultra-modern in design.

#### **More Economical**

The 'Duflo' incorporates a unique restrictor that adjusts water volume and reduces consumption to barely one quarter that of a  $\frac{1}{2}$ " standard pillar tap!

#### **More Convenient**

DUFLO automatically supplies water at cold, tepid or hot temperatures at a twist of the tap head—out-dating conventional systems.

*Both practical and handsome, this special lavatory basin features an outlet with fixed grating. Incorporating the 'Duflo', it represents a major advance in washroom fittings and provides maximum savings for industry in water and fuel consumption.*



*Write for illustrated leaflet*

Manufactured by **JOHN BOLDING & SONS LIMITED**

Grosvenor Works, Davies Street, London, W.1. Telephone: MAYfair 6617

AP62



## CASE HISTORIES



### New look for old Gibraltar

In vivid contrast to its traditionally Spanish surroundings  
the splendid new King George VI Memorial Hospital,  
with a Ruberdal Roof, now towers majestically  
above Gibraltar's ancient streets.

*Gibraltar's new King George VI Memorial Hospital was  
designed by Architects Cowell & Matthews of London who specified  
Ruberoïd Built-up Roofing surfaced with Ruberdal Tiles.*

# RUBEROID




Barrie Street,  
Paddington  
Flats for L.C.C.  
Architect's Dept.  
General Contractors  
Messrs. Wates Ltd.

## ***Founded on facts...***

... Four facts!

- \* No vibration with Pressure (cast in situ) piles
- \* Easily installed where headroom is as low as 6ft.
- \* The sinking of piles in waterlogged strata or in water is a simple routine operation.
- \* Many millions feet of pressure piles already installed under all sorts of conditions.

### ***THE PRESSURE PILING COMPANIES***



**THE PRESSURE PILING CO. (PARENT) LTD**  
**637 OLD KENT ROAD LONDON S.E.15**

**THE PRESSURE PILING CO. (NORTHERN) LTD**  
**6 Winckley Square, Preston, Lancs**

**The original and largest Bored Piling Specialists in the World**



# CANADIAN TIMBER

...from Canada's vast forests  
a wood for almost every need!



## CANADIAN SPRUCE

### Special Properties

Excellent strength-weight ratio  
Medium soft textured  
Odourless and tasteless  
Very good nailing and  
gluing properties  
Highly resilient

### Typical Uses

Scaffold planks  
General construction  
Case making and food packaging  
Ladders, oars, paddles and  
boat manufacturing  
Musical instruments and  
sounding boards

For further information on Canadian Woods, contact:  
Commercial Counsellor (Timber), Canada House, London, S.W.1.

## CROSSLEY CARPETS


SPECIAL SERVICE FOR CONTRACT INSTALLATIONS

CROSSLEY offer an outstanding Colour and Design service for contract work through their expert Design Staffs in both Halifax and London.

This Design Service is at all times available to contract clients who wish to obtain 'a special carpet for a special job' through their usual trade suppliers.

Such clients are welcomed at both the Halifax and London Studios, where they can personally discuss their particular requirements with the Crossley Designers.

John Crossley & Sons have wide experience of contract installations. Their plain and patterned, all-wool pile carpets will withstand many years of practical hard wear. Hotels, Shipping Lines and other contract users of Crossley Carpets have been delighted at the length of service given.

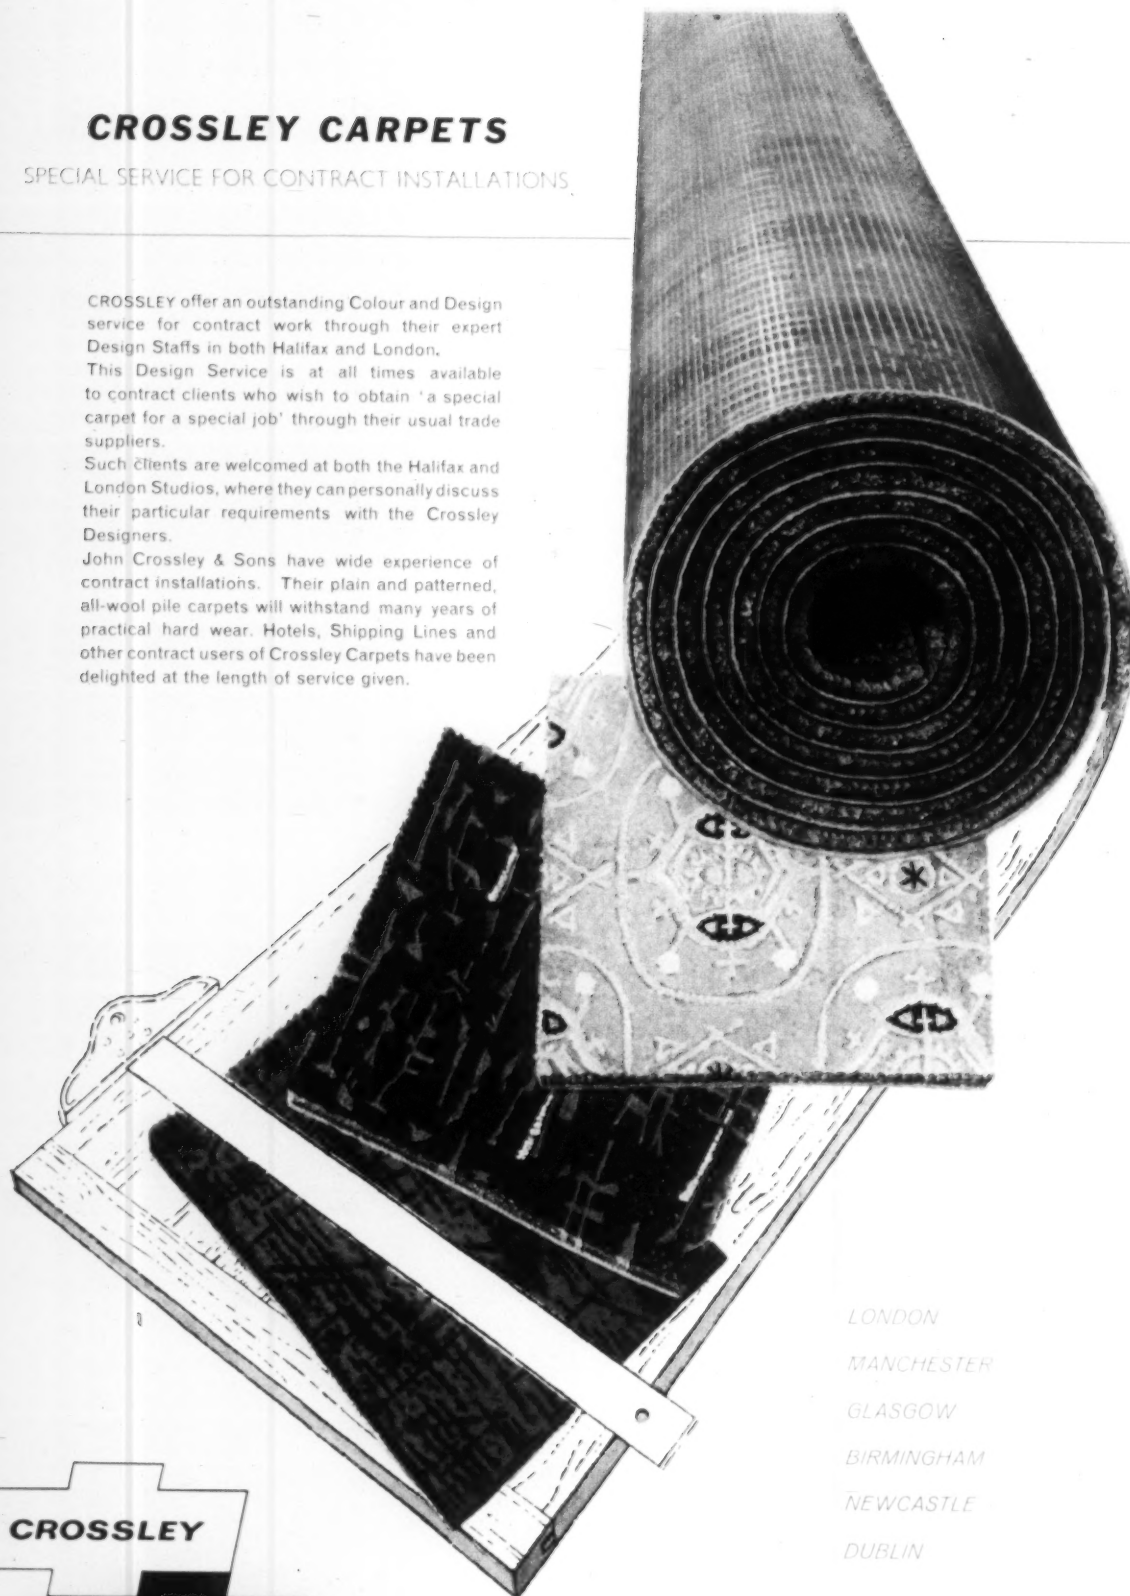

LONDON

MANCHESTER

GLASGOW


BIRMINGHAM

NEWCASTLE

DUBLIN

JOHN CROSSLEY & SONS LTD., DEAN CLOUGH MILLS, HALIFAX

Makers of fine carpets for more than 150 years

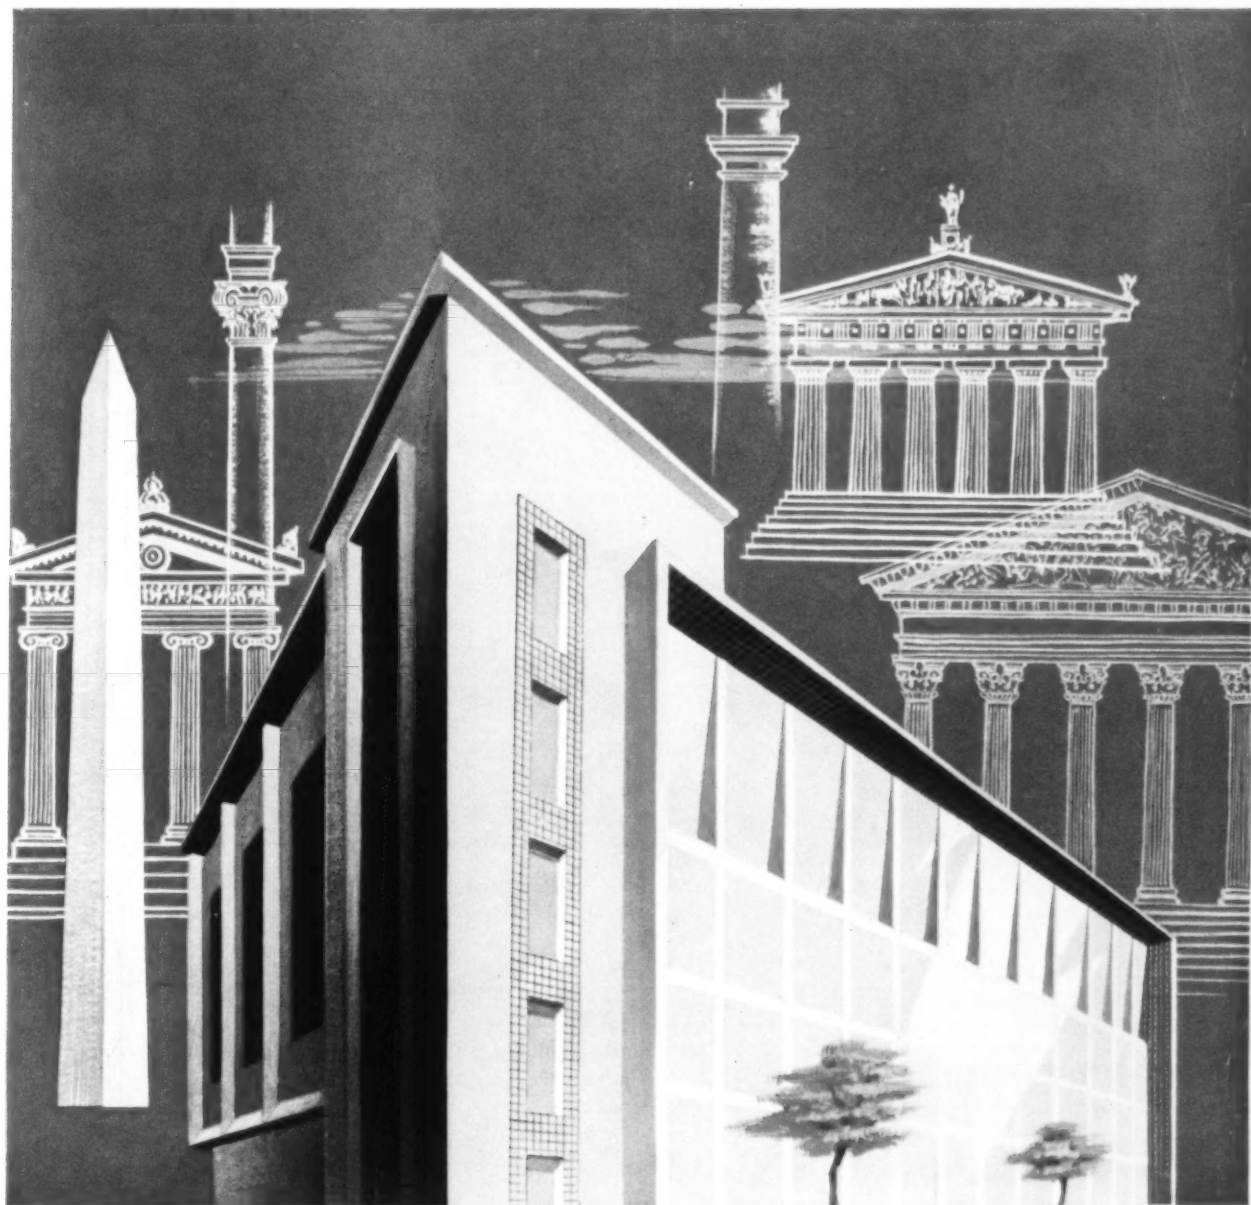

*A proud past - A GREATER FUTURE*

*From the very beginning of civilised architecture  
the use of Faience and Terra Cotta has played an important  
and abiding part. Leeds Fireclay with its modern adaptations  
of an ancient craft provides the modern architect with  
inspiration for an even greater future. Leeds Fireclay Faience  
and Terra Cotta are available in a wide range of colours.*


**LEEDS  
FIRECLAY**

WORTLEY, LEEDS 12. TEL. LEEDS 638021  
LONDON OFFICE: LEEDS HOUSE, CAVENDISH PLACE, LONDON W.1. Tel. LANGham 3511



**FAIENCE & TERRA COTTA**




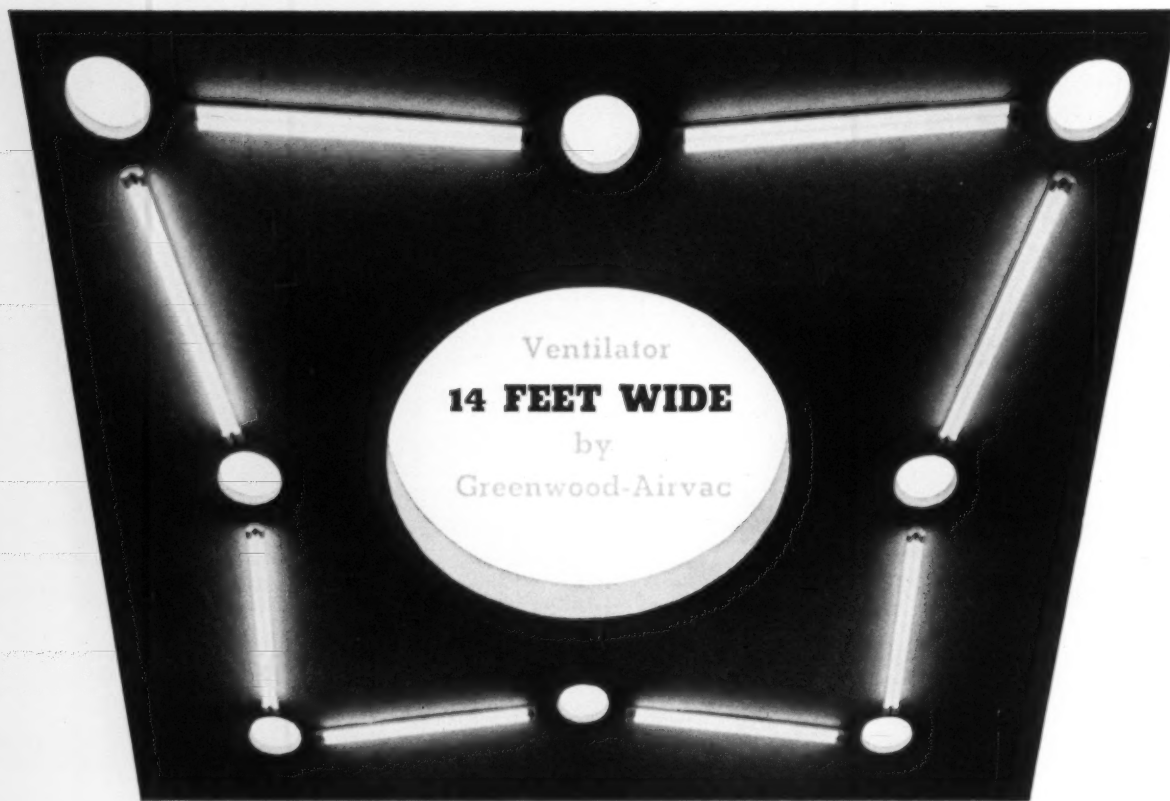

At the new Wimbledon covered courts a central ventilator was needed 14 ft. in diameter. Greenwood-Airvac engineers designed and built a special fitting, shown above, photographed from inside, and, below, from the outside.


Spectacular tasks of this kind broaden the experience which helps Greenwood-Airvac build a *Standard Range* of roof ventilators to meet, efficiently and economically, the vast majority of demands for ventilation

and daylight. The cut-out illustrations below are two examples, both of which carry standard glass or 'Perspex' domes. Circular ventilators from 18 in. to 6 ft. diameter, rectangular from 2½ ft. square to 4 ft. x 6 ft.



Please write for the new illustrated data sheets on Greenwood-Airvac ventilators

New covered  
courts at  
Wimbledon, London  
All England  
 Lawn Tennis Club  
Ground & etc.

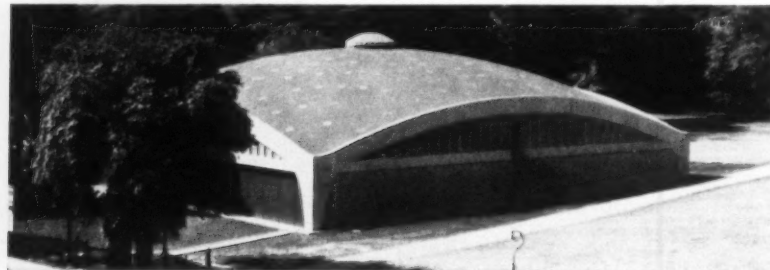


# Greenwood-Airvac ventilation

GREENWOOD'S AND AIRVAC VENTILATING COMPANY LTD

PATENTEES, DESIGNERS AND MANUFACTURERS OF  
VENTILATING EQUIPMENT AND ELECTRICAL  
CONDUIT SYSTEMS.



BEACON HOUSE, KINGSWAY, LONDON, W.C.2.  
CHANCERY B135 (4 lines) 'Grams: AIRVAC', LONDON.

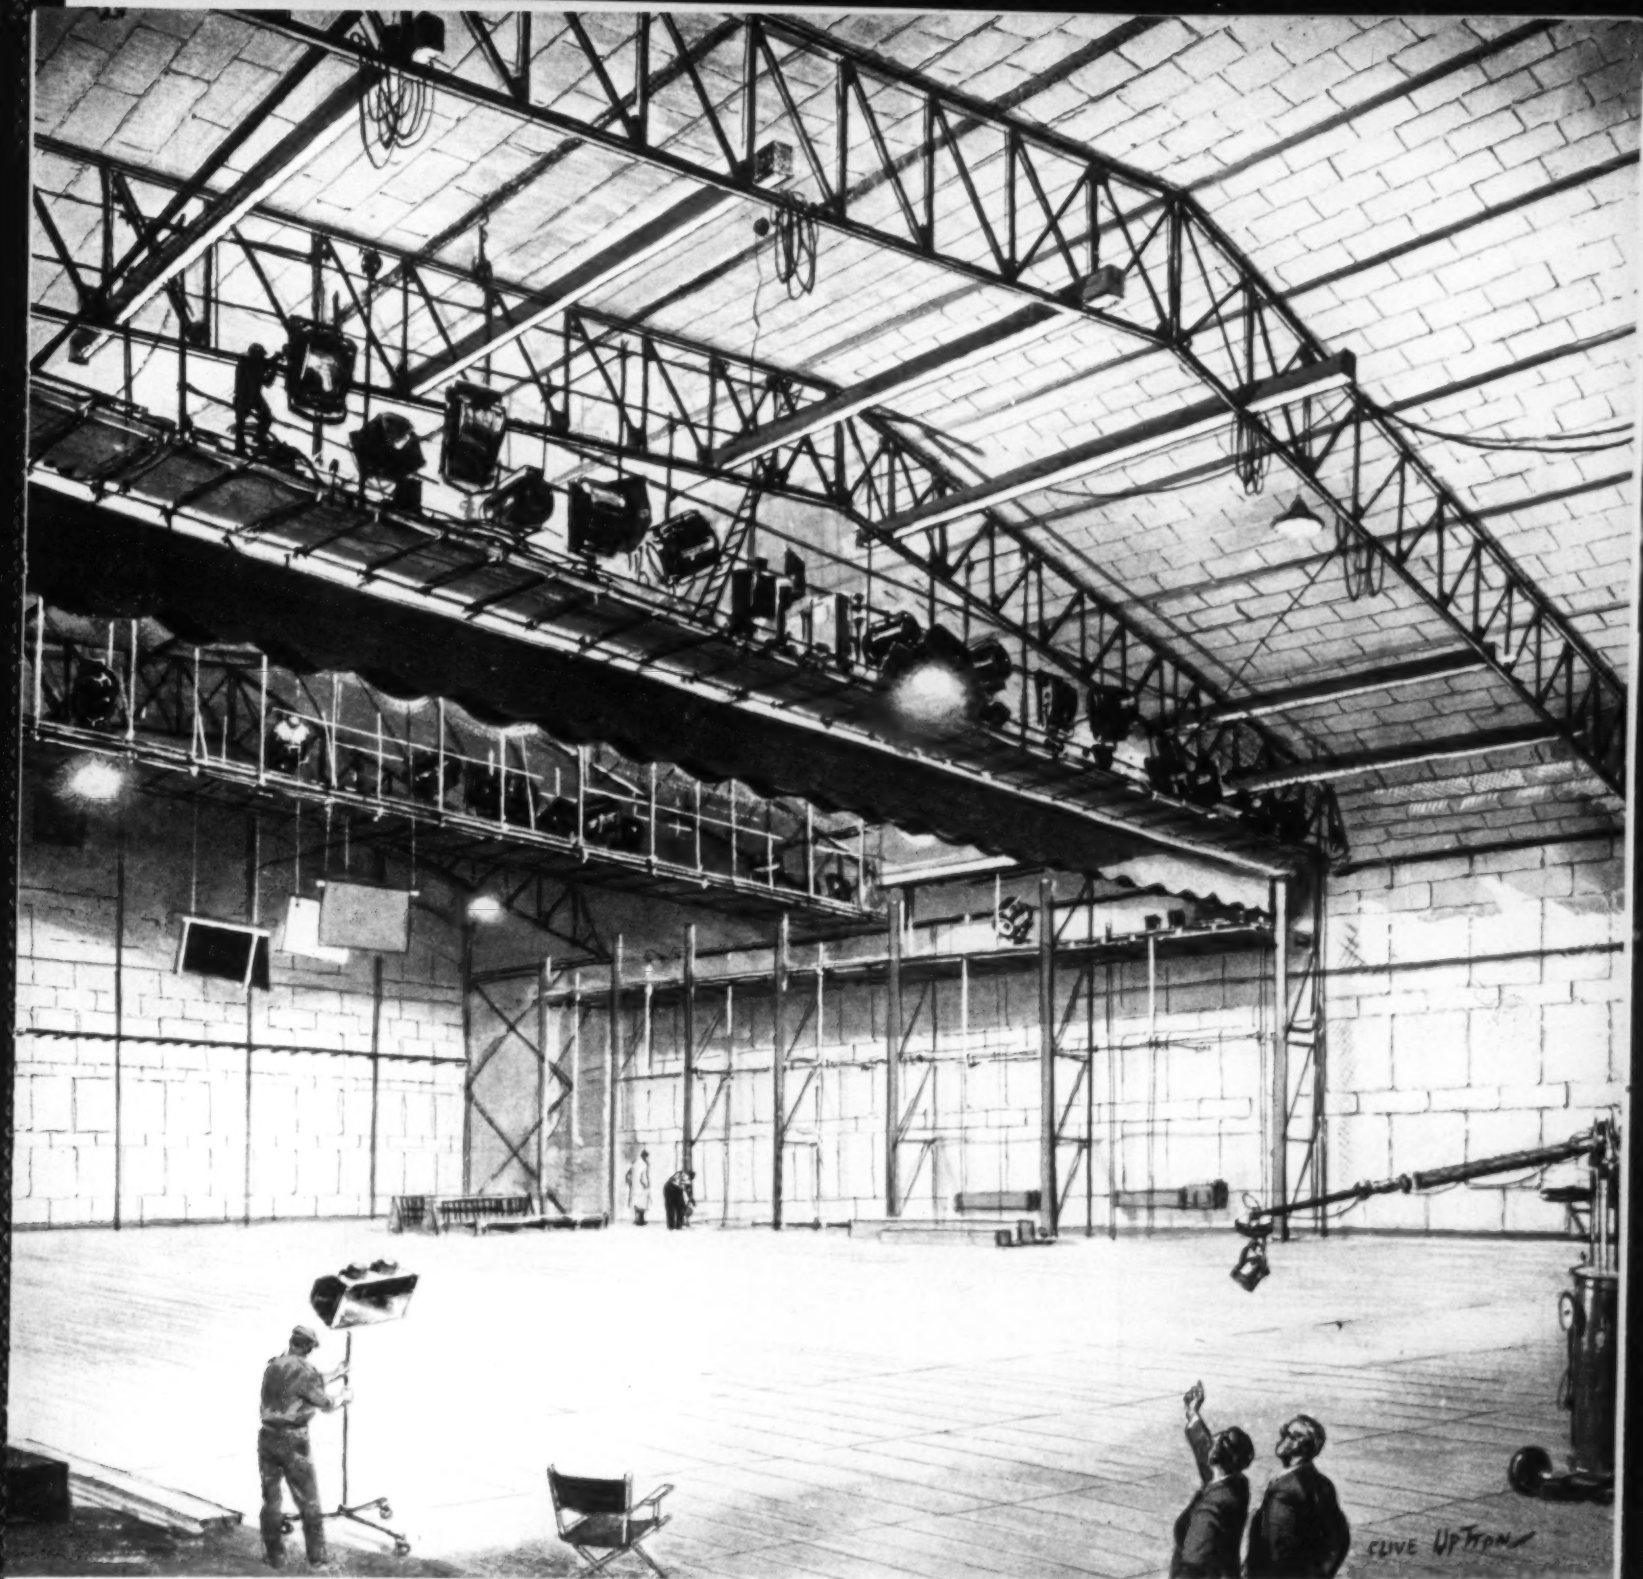

### **STAGE 5, ELSTREE STUDIOS**

Lined with some 30,000 square feet of 'J & B' MINERAL WOOL  
for Associated British Picture Corporation Ltd.

**Insulated with 'J & B' MINERAL WOOL**

**JONES & BROADBENT LIMITED**

*Perren Street, LONDON, N.W.5. Telephone: GULLiver 2120*



### ***A.E.I. Lighting at Brussels Exhibition***


Inside the British Industry Pavilion, a rectilinear structure of steel and glass curtain walling, the general lighting is wholly indirect. Mazda fluorescent lamps in suspended troughing light up the white painted underside of the aluminium roof, picking out the pattern of the blue-grey structural supports.

Under the canopy before the entrance are clusters of 'Satina' fittings. A group of these fittings, designed by A.E.I., have recently been chosen as one of the Designs of the Year (1958) by the Council of Industrial Design.

The A.E.I. main interior lighting system was chosen from schemes put forward by a number of lighting manufacturers working within a budget limit of £5,000.

*Architects:* Edward D. Mills & Partners.

*Electrical Contractors:* James Kilpatrick & Son Ltd.




**Publicity Department**  
18 Bedford Square London W.C.1

M4770



The incomparable Adamsez delivery service ensured the prompt arrival of two incomparable Adamsez fittings at the incomparable Brussels International Exhibition.

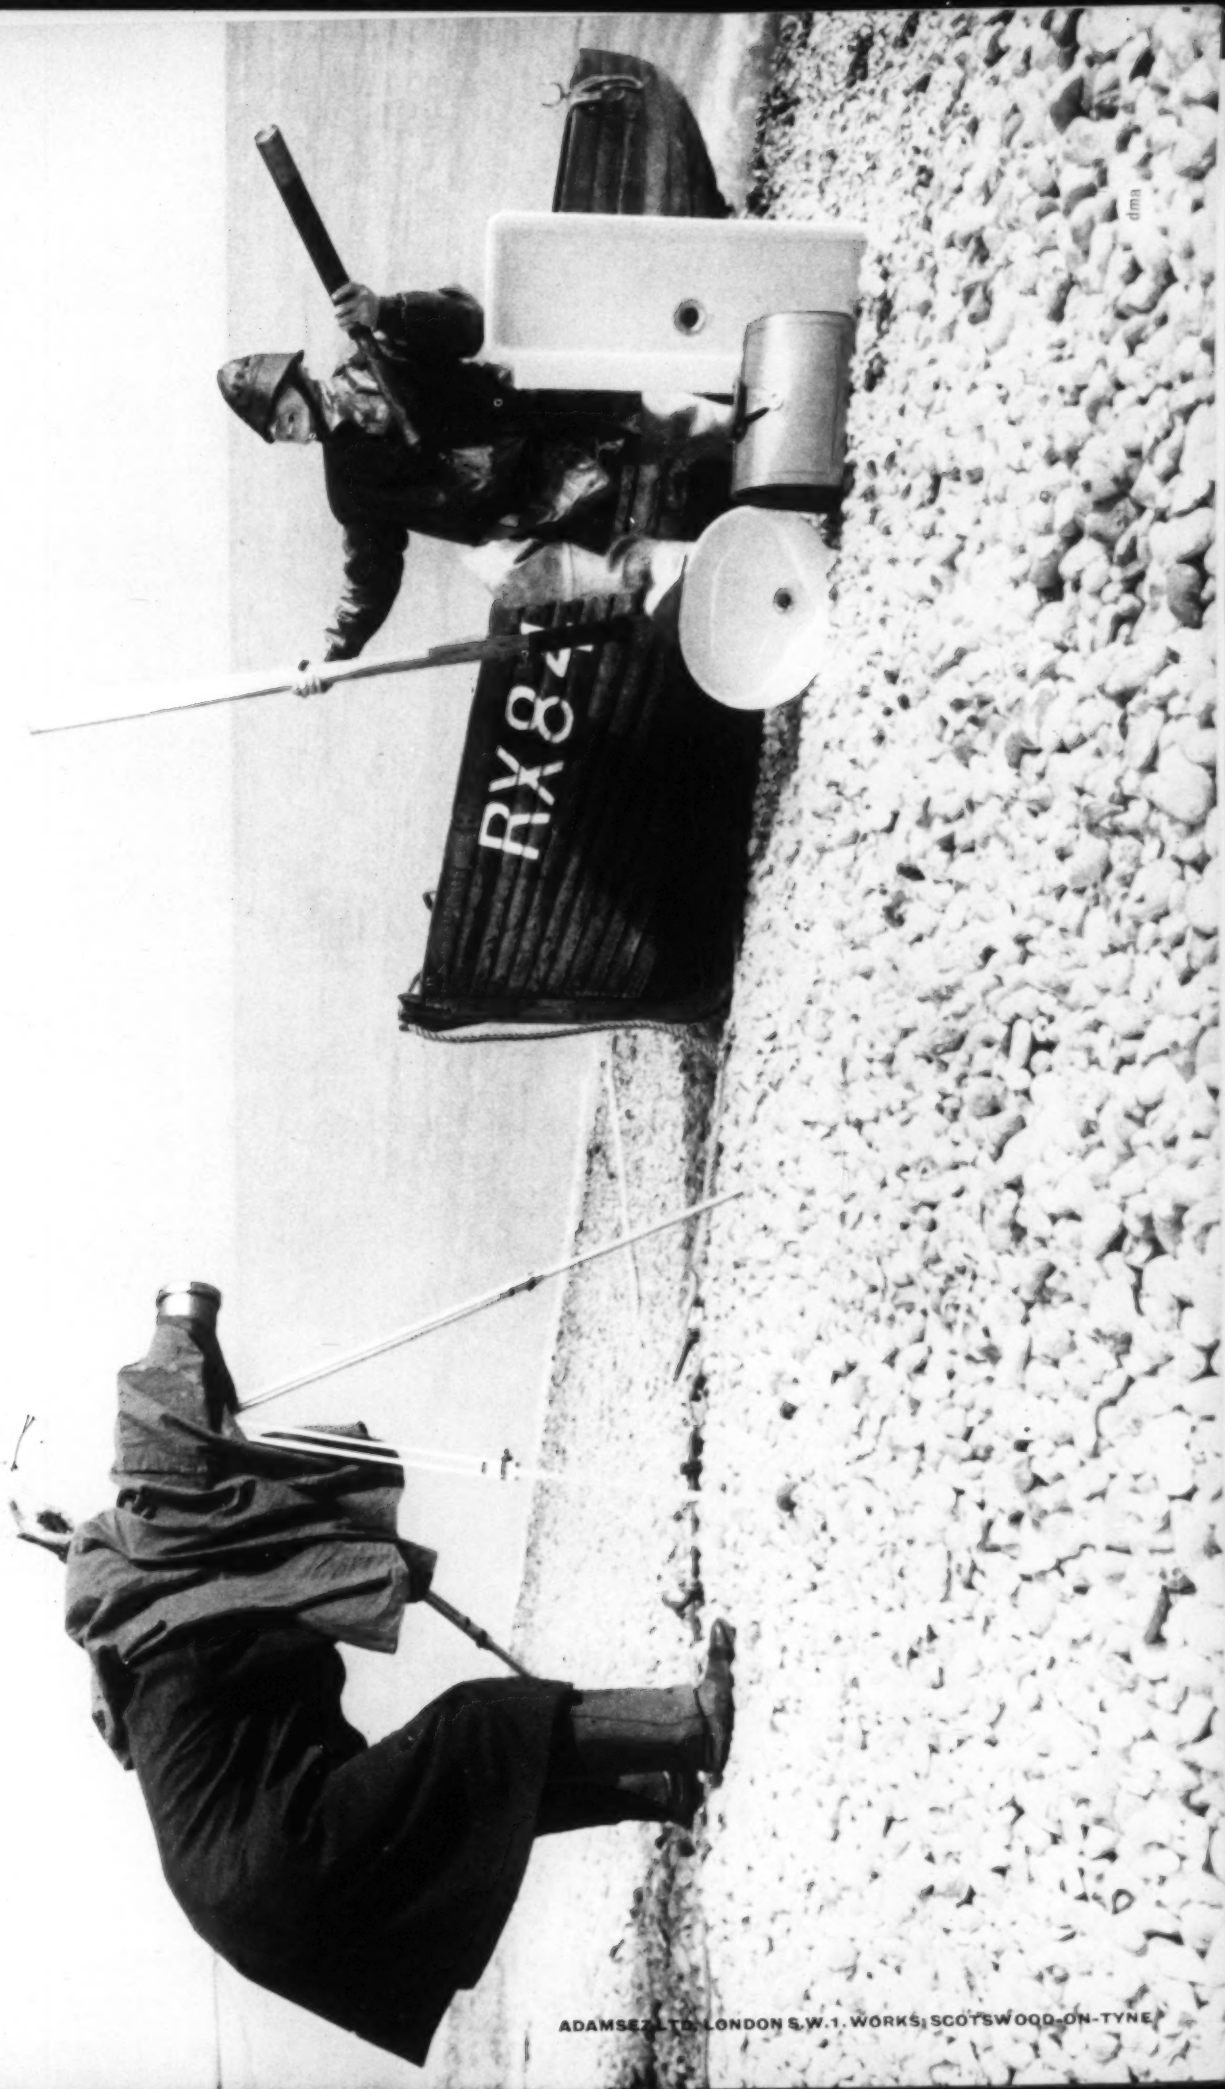

ADAMSEZ LTD LONDON S.W.1. WORKS, SCOTSWOOD-ON-TYNE

BRUSSELS 1958

James Kilpatrick & Son Ltd

*Electrical Engineering Contractors*

21 TOTHILL STREET · LONDON · SW1

*Were responsible for electrical design and installation  
in the BRITISH INDUSTRY PAVILION  
BRITANNIA INN · the CINEMA  
CITY OF LONDON EXHIBIT  
the FOX AND HOUNDS · all  
EXHIBITION STANDS and  
other sections of the British  
Industry contribution*



BRITISH INDUSTRY



Architects

Edward D. Mills & Partners



ARCHITECTS:  
Edward D. Mills & Partners

## Gridswitches at Brussels

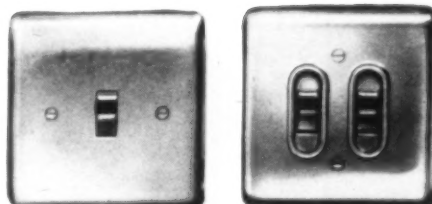

MK Gridswitches and 13 ampere switchsocket-outlets and socket-outlets were selected by the Electrical Engineering Contractors, Messrs James Kilpatrick & Son Limited, for exclusive use within the various buildings in the British Industry section at the Brussels Exhibition. MK accessories are also installed in the Offices, Sub-stations Nos. 1 and 2, the Britannia Inn, the Fox and Hounds, the Cinema, the Self-Service Shop, and on Exhibition Stands.



... the mark of leadership



M. K. Electric Limited, Wakefield Street, London N.18 Edmonton 5151




# Design for \* today **WITH QUICKTHO 'WINDOWALL' CURTAIN WALLING**

The Quicktho 'Windowall' System greatly simplifies walling design in framed buildings and gives flexibility in positioning of windows and ventilators. Constant research and development have brought the system to the highest standards of efficiency. Inaccuracies in erection are allowed for—generous tolerances are provided at every junction. Condensation can be collected and drained at any desired transome or cill level. All Quicktho sections are high corrosion resisting aluminium alloy extrusions.

Cole Green Lane S.M. School  
County Architect,  
Herts. County Council



## **HORIZONTAL SLIDING WINDOWS**

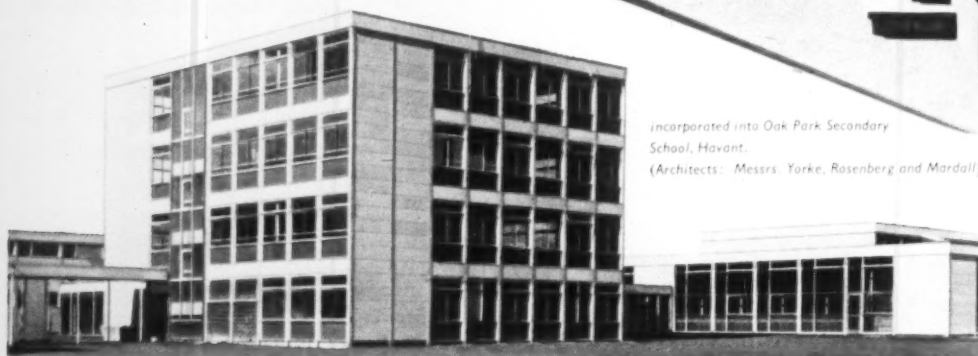

Incorporated into Oak Park Secondary  
School, Havant.  
(Architects: Messrs. Yorke, Rosenberg and Mardall)

Quicktho Horizontal Sliding Windows have attractive, functional design and faultless action. They are factory glazed and ready for direct mounting into timber sub-frames. Available in any dimensions up to four feet high by eleven feet wide or equivalent area.

The Quicktho Technical Department is always at your service

Send for free brochure on Quicktho Building Division Products

# **QUICKTHO**

**QUICKTHO ENGINEERING LTD.**

### **QUICKTHO ROOF LIGHTS**

Aluminium alloy fixed and hinged roof lights in single or multiple units. Opening type simply operated with balancing mechanism of unique design.

### **QUICKTHO TOP-HUNG VENTILATORS**

Supplied in any size to fit apertures up to seven feet wide. Factory glazed and ready for direct mounting into timber sub-frames.

**POINT PLEASANT, WANDSWORTH, LONDON, S.W.18**

Telephone: VANDyke 4115 6

Telegrams: Quicktho, PUT., London



## SUGAR CANE FIBRES *from the British Commonwealth*

Look at cane fibres under a microscope. See how amazingly long they are. During manufacture these fibres interlock and interweave to give Celotex Insulation Board unique strength and durability.

Most ordinary insulation boards are made from short vegetable fibres. No doubt about it, the long cane fibre is tough, naturally resistant to rot and you find it ONLY in Celotex CANE FIBRE INSULATION BOARD.

Here is an Insulating Board . . . a superb Board . . . at a competitive price PLUS good delivery, constant high quality and a unique after sales technical service. That's CELOTEX CANE FIBRE INSULATION.

Ask for it by name and if you need technical advice, without obligation, it's yours for the asking—from the Celotex Technical Advisory Service.

**CELOTEX** REGD TRADE MARK cane fibre insulation



Sugar Cane Fibre under a microscope. See how long the tough fibres are.

CELOTEX LIMITED, North Circular Road, Stonebridge Park, London, N.W.10. Telephone: Elgar 5717 (10 lines)



## IMPORTANT ANNOUNCEMENT

**The General Electric Co. Ltd.**

*and*

**Lumenated Ceilings Limited**



The success of the Lumenated Ceiling technique with its evenly-diffused and shadowless lighting is well-known. A combined nation-wide service to market and apply this modern system has now been established by The General Electric Co. Ltd. and Lumenated Ceilings Ltd. The joint research and production facilities thus provided will extend still further the scope of this brilliant new idea in architectural lighting.


**THE GENERAL ELECTRIC CO. LTD.**

Magnet House, Kingsway, W.C.2. Telephone: TEMple Bar 8000

**LUMENATED CEILINGS LIMITED**

Alliance House, Caxton Street, S.W.1. Telephone: ABBey 7113



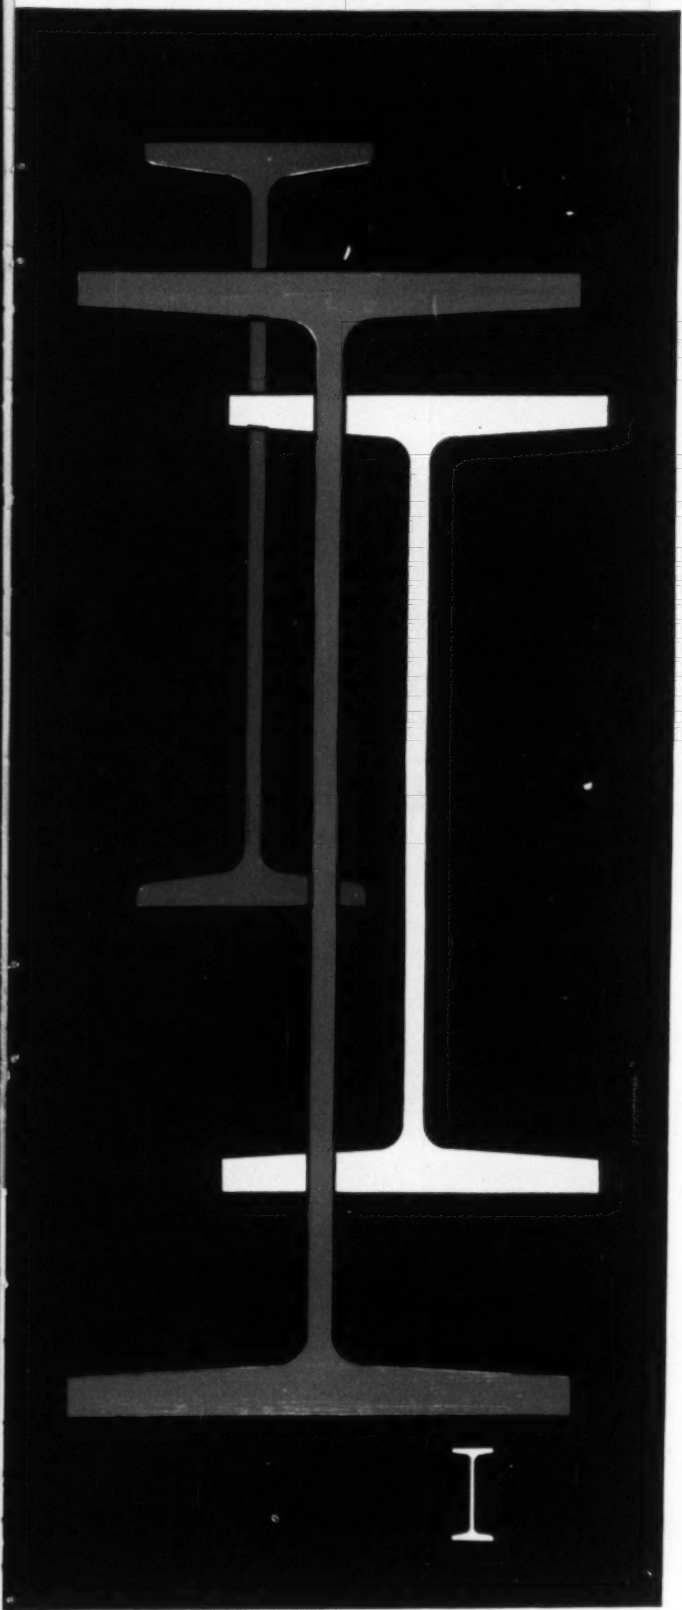

# The widest range of structural steel sections in Europe 'UNIVERSAL'

PLUS

## BRITISH STANDARD SECTIONS

Sections from our new Universal Beam mill range from the much needed 'H' sections 6 in. by 6 in. up to the largest beams in Europe.

These sections, available in different 'weights' giving different load-carrying capacities, eliminate much plating and compounding of girders.

In addition to Universal Beams, the mill can roll British Standard sections.

The illustrations show interesting comparisons on the same scale.

The red beam is 24 in. by 7½ in., the largest of the British Standard range; the yellow beam is 24 in. by 12 in., hitherto the largest rolled in this country, but now available in three weights: 160, 120 and 100 lb. per foot; the blue beam is 36 in. by 16½ in., the largest in Europe, and is available in two weights, 260 and 230 lb. per foot. Equally valuable are the new 'families of columns', which, like the beams, avoid the need for flange plating.

*The little white section is the B.S. 3 by 1½ in. (4 lb.), to the same scale as the others and is the smallest I section rolled by us.*

# DORMAN LONG

# FORMICA\*



## SURFACES

*Hundreds of thousands of Brussels fair-goers are calling at the Britannia Inn. Some talk Dutch, some talk deutsch and some talk Eskimo. But you don't need a dictionary to appreciate the striking, charming and practical aptness of the FORMICA decorative laminates on that long bar. The top is in Ivory Softglow. The side panels feature the Whitbread motif in blue on an ivory ground, carried out in FORMICA laminates by our special artwork process. Next time you want an individual design, colour and surface richness, smooth, hard, virtually everlasting and clean, get in touch with us. We can do just as good a job for you, on furniture, on fittings, wall or ceiling panelling . . .*

\* FORMICA is a registered trademark. Formica Ltd, Dept F, De La Rue House, 84 86 Regent Street, London W1



Design Registrations  
Lavatory Basin - No. 871142  
"Sheerline" Taps - No. 870930

## *DESIGNS OF THE YEAR - 1958*

### THE "CARLTON" LAVATORY

as illustrated above has merited the distinction of being chosen for  
an award by The Council of Industrial Design as one of twenty  
OUTSTANDING DESIGNS IN BRITISH INDUSTRY  
exhibited at The Design Centre, London, during the year 1957

# Shanks

SHANKS & CO., LTD., TUBAL WORKS, BARRHEAD, SCOTLAND  
Also at London, Manchester, Newcastle-on-Tyne, Glasgow, Bristol, Belfast





## Plyglass at Brussels

THE TRANSLUCENT PLYGLASS mural measuring approx. 13 ft. by 170 ft., which is the main feature of the south elevation of the BRITISH INDUSTRIES PAVILION (*Architect: Edward D. Mills, F.R.I.B.A.*), was designed by Cecil Stephenson to represent by means of colour and form the vitality and precision of British industry.



Other examples of Decorated Plyglass at Brussels are the glass screen designed by James Gardner in the Hall of Science and Technology of the British Government Pavilion and the route maps of B.O.A.C. and B.E.A. at the joint stand of the air corporations.

PLYGLASS LIMITED

EDINBURGH WAY, HARLOW, ESSEX. HARLOW 24271/3


### Multipoint Communal Aerial Systems

... A multiplicity of individual arrays is replaced and the highest standard of reception provided for Band I and Band III TV programmes, as well as Band II radio broadcasts for any reasonable number of receivers.

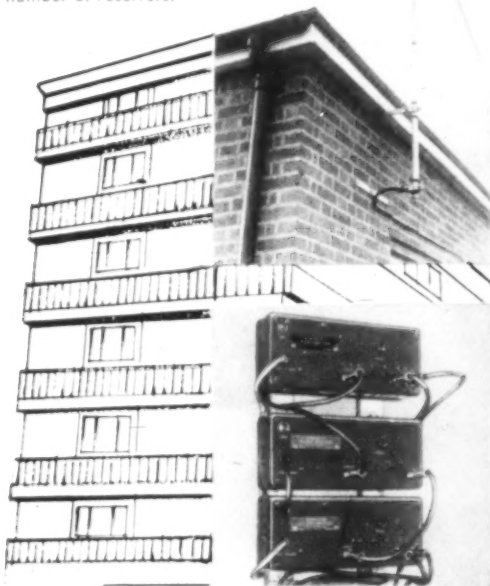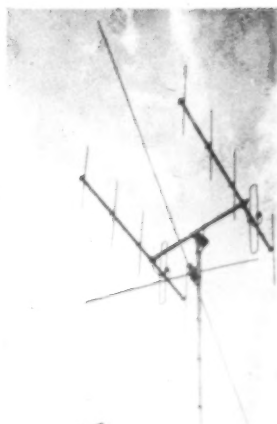

### Aerial Amplifying Units

... The master aerial is connected through pre-amplifying units to the receiver feeding system to give a balanced level of signal at each outlet.




*Multipoint aerial systems can be laid with power cables.*

## A complete Electrical Service for Flats

- ... Multipoint aerial systems for TV and Radio (VHF reception).
  - ... Many cables and flexibles for all power and lighting requirements.
  - ... Floor warming cable for space heating.
- In fact, for all electrical cables, specify Aerialite in flats, hotels, stores, schools and all industrial and domestic premises.

*Within the Aerialite Group are specialised divisions for the design and manufacture of cables, aerials, electronics equipment and wiring accessories. A complete electrical service is therefore available to meet any specification.*

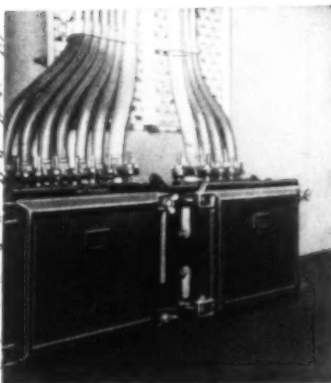

### Power and Lighting Cables

... Aerialite cables and flexibles conform fully to the relevant British Standard Specification.

ASHTON rubber-insulated cables (BS 7.1953)

ASHTON PVC-insulated and sheathed cables (BS 2004.1955) or ASHATHENE plastic-insulated and sheathed cables (BS 1557.1954)



### Floor Warming Cables

... For electrical space heating, ASHATHERM provides thermal efficiency and maximum personal comfort, with the lowest installation and running costs.


For full information write to The Engineering Service Dept.:

# Aerialite

HEAD OFFICE AND CABLE DIVISION

AERIALITE LIMITED · CASTLE WORKS · STALYBRIDGE · CHESHIRE Tel: STALybridge 2223.8

CW 4844

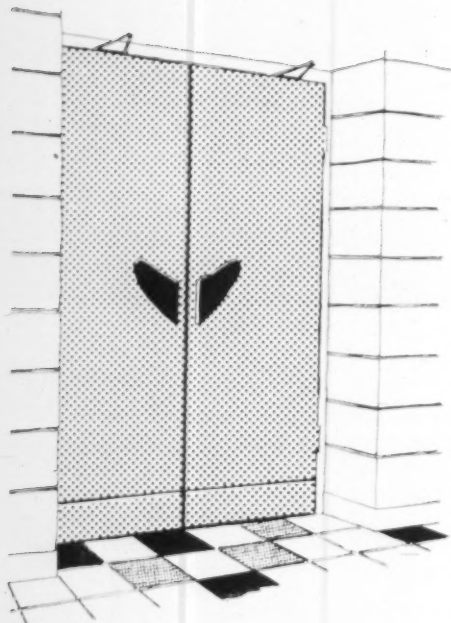

## Only the SLIM arms can be seen

The "No. 500" is a new door closer designed for use when the appearance of the door and surroundings are of first consideration. With nothing visible except the slim arms, which are styled to be as streamlined and unobtrusive as possible, it achieves complete concealment without loss of power or door control. The "No. 500" is suitable for internal single-action doors not exceeding 7' by 3' in size, and 70 lbs. in weight.

- \* Smooth and silky check-action.
- \* Bounce completely eliminated.
- \* Closing and latch speed fully adjustable.
- \* Stand open device put in and out of action as desired.
- \* Body only 1 1/2" wide, overall length 13".
- \* Opens to 90° or 180° according to fixing position.
- \* No oil leakage.



# N<sup>o</sup> 500

PATENTS PENDING

*Concealed Overhead Door Closer*

**William Newman & Sons Ltd.**

HOSPITAL STREET BIRMINGHAM 19



# DAWNAYS

## STEELWORK

Specialists in the design  
fabrication and erection of riveted  
and welded steel-framed structures  
of every description



**DAWNAYS LIMITED**  
**BRIDGE & STRUCTURAL ENGINEERS**

STEELWORKS RD., BATTERSEA, LONDON, S.W.11

Telephone: BATTERSEA 2525 (10 lines)

ALSO AT: SWANSEA • CARDIFF • WELWYN GARDEN CITY • NORWICH • HULL  
SOUTHAMPTON • PETERBOROUGH • ROMFORD • VICTORIA STREET, S.W.1

**Far-Air**

**filters save their cost**

Hotels, cinemas, restaurants, foundries, and other large establishments where clean air is essential have found that Far-Air installations can save approximately 75% of their previous annual expenditure.


Comparison of Far-Air with similar filters in identical applications shows that Far-Air filters are unequalled for efficiency, have indefinite life, hold 50% more dirt, and need less frequent attention and maintenance.

Ask for details of our laundry service for Viscous Panel Filters.


**... within 2 years**



4" and 2" Far-Air Viscous Panel Filters



Far-Air self-washing filter.



Far-Air Grease Eliminator.

for high efficiency at low cost . . .

**interpose an INTERMIT Far-Air filter**

INTERMIT LIMITED • BRADFORD STREET • BIRMINGHAM 5 • PHONE: MIDLAND 7951

MEMBER OF THE



BIRFIELD GROUP


# GLASS DECORATION

at the

## BRUSSELS EXHIBITION

in Sandblasting  
Engraving, Silvering  
and  
Ceramic Enamelling

V  
•  
I  
•  
P  
  
P  
A  
V  
I  
L  
I  
O  
N

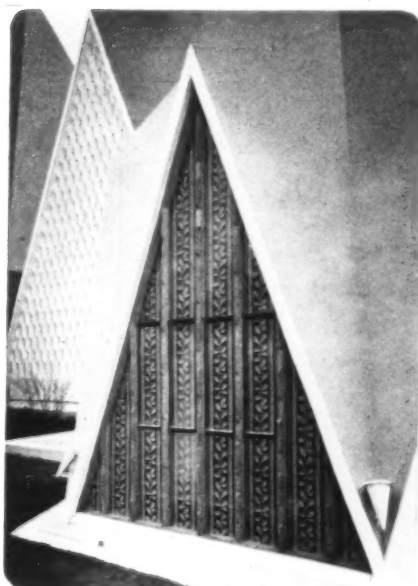

designed by  
Prof. R. Y. Goodden

WE ARE SPECIALISTS IN  
DECORATIVE GLASS FOR  
EXHIBITIONS, HOTELS,  
RESTAURANTS, SHIPS,  
CIVIC CENTRES, CHURCHES  
SCHOOLS, OFFICES AND SHOPS

THE  
LONDON SAND BLAST  
DECORATIVE GLASS WORKS LIMITED


SEAGER PLACE, BURDETT ROAD, E.3.

TELEPHONE: ADV 1074-5



designed by  
Lynton Lamb for I.C.I.

SEE OUR EXHIBIT  
AT THE BUILDING CENTRE  
STORE STREET, W.C.1

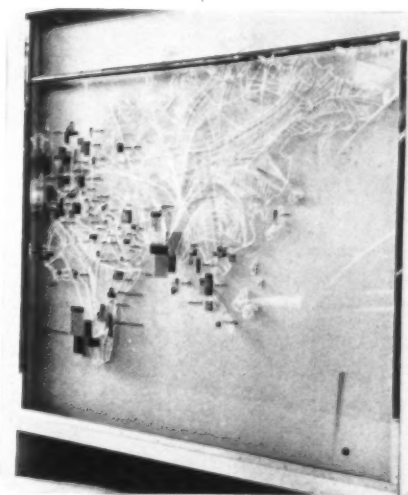

Part of World Map Feature  
designed by  
Design Research Unit

C  
H  
E  
M  
I  
C  
A  
L  
  
M  
A  
N

B  
•  
E  
•  
A  
•  
M  
•  
A





## Specs. must be Correct

Correct specification of the painting system is essential if the best treatment is to be followed for the surfaces and conditions involved and to ensure easy, economical maintenance.

### BPL PAINTING ADVISORY SERVICE

Paint making is now highly scientific with an ever-increasing range of raw materials for the production of improved coatings. It is important that painting practice should keep pace with these developments. Do not hesitate to make full use of the BPL Painting Advisory Service to assist in deciding the paints most suitable for the project.



### BRITISH PAINTS LIMITED

PORTLAND ROAD, NEWCASTLE UPON TYNE, 2.  
CREWE HOUSE, CURZON STREET, LONDON, W.1  
31, WAPPING, LIVERPOOL.



BELFAST • BIRMINGHAM • BRISTOL • CARDIFF • GLASGOW • LEEDS • MANCHESTER • NORWICH • PLYMOUTH  
SHEFFIELD • SOUTHAMPTON • SWANSEA • and all principal towns,

BPL D 70



*Here are two famous  
BPL paints from a  
comprehensive range  
of fine products  
for protection and  
decoration.*



**'Superlative'**  
THE BEST GLOSS PAINT  
IN THE WORLD  
**'Superlative'**  
EGGSHELL FINISH



This is where  
we call in  
Thermocontrol

Mullard's Simonstone Factory, one of the most modern and efficient Cathode Ray Tube factories in the world.  
Consulting Engineers: Hoare, Lea and Partners.  
Electronic Control of Heating and Air Conditioning,  
Boiler House Instruments by THERMOCONTROL.

*How will you operate your air conditioning and heating plant?*

**The right answer is THERMOCONTROL**

**THERMOCONTROL serves:**

Architects  
Consulting Engineers  
Heating and Air Conditioning  
Contractors  
Factory and Property Owners

**THERMOCONTROL has achieved:**


Temperature and humidity control  
for human comfort  
for scientific processes  
for substantial savings in fuel

**THERMOCONTROL manufactures:**

The most complete range of British  
manufactured electronic controls for  
Air Conditioning  
Heating  
Refrigeration  
Boiler Plant

**THERMOCONTROL provides:**

An unparalleled advisory service by  
qualified electrical, combustion, air  
conditioning and chemical engineers.

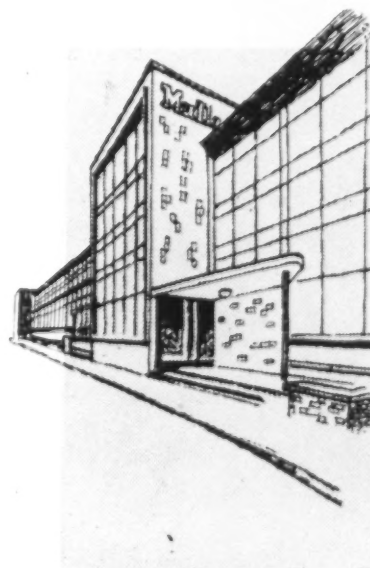

*Have you read the THERMOCONTROL Compendium, Section I  
'The field of Automatic Control in Modern Industry'? If not, please write for a copy.*

**Thermo control**  
INST. CO. LTD.

THERMOCONTROL INSTALLATIONS CO. LTD., 2-10 Valentine Place, London, S.E.1.

Telephone: WATerloo 7356



# Hills Dry Building System

was used in the  
construction of the  
**CITY of LONDON PAVILION**  
at **BRUSSELS**

**HILLS** (WEST BROMWICH)  
**LIMITED**


ALBION ROAD, WEST BROMWICH, STAFFS. TELEPHONE: WEST BROMWICH 1811 (15 lines)

LONDON: CHAPONE PLACE, DEAN STREET, W.1. TELEPHONE GERard 0526/9

BRANCHES AT BIRMINGHAM, MANCHESTER, BRISTOL, NEWCASTLE-ON-TYNE, GLASGOW.



# Glass Cladding today...

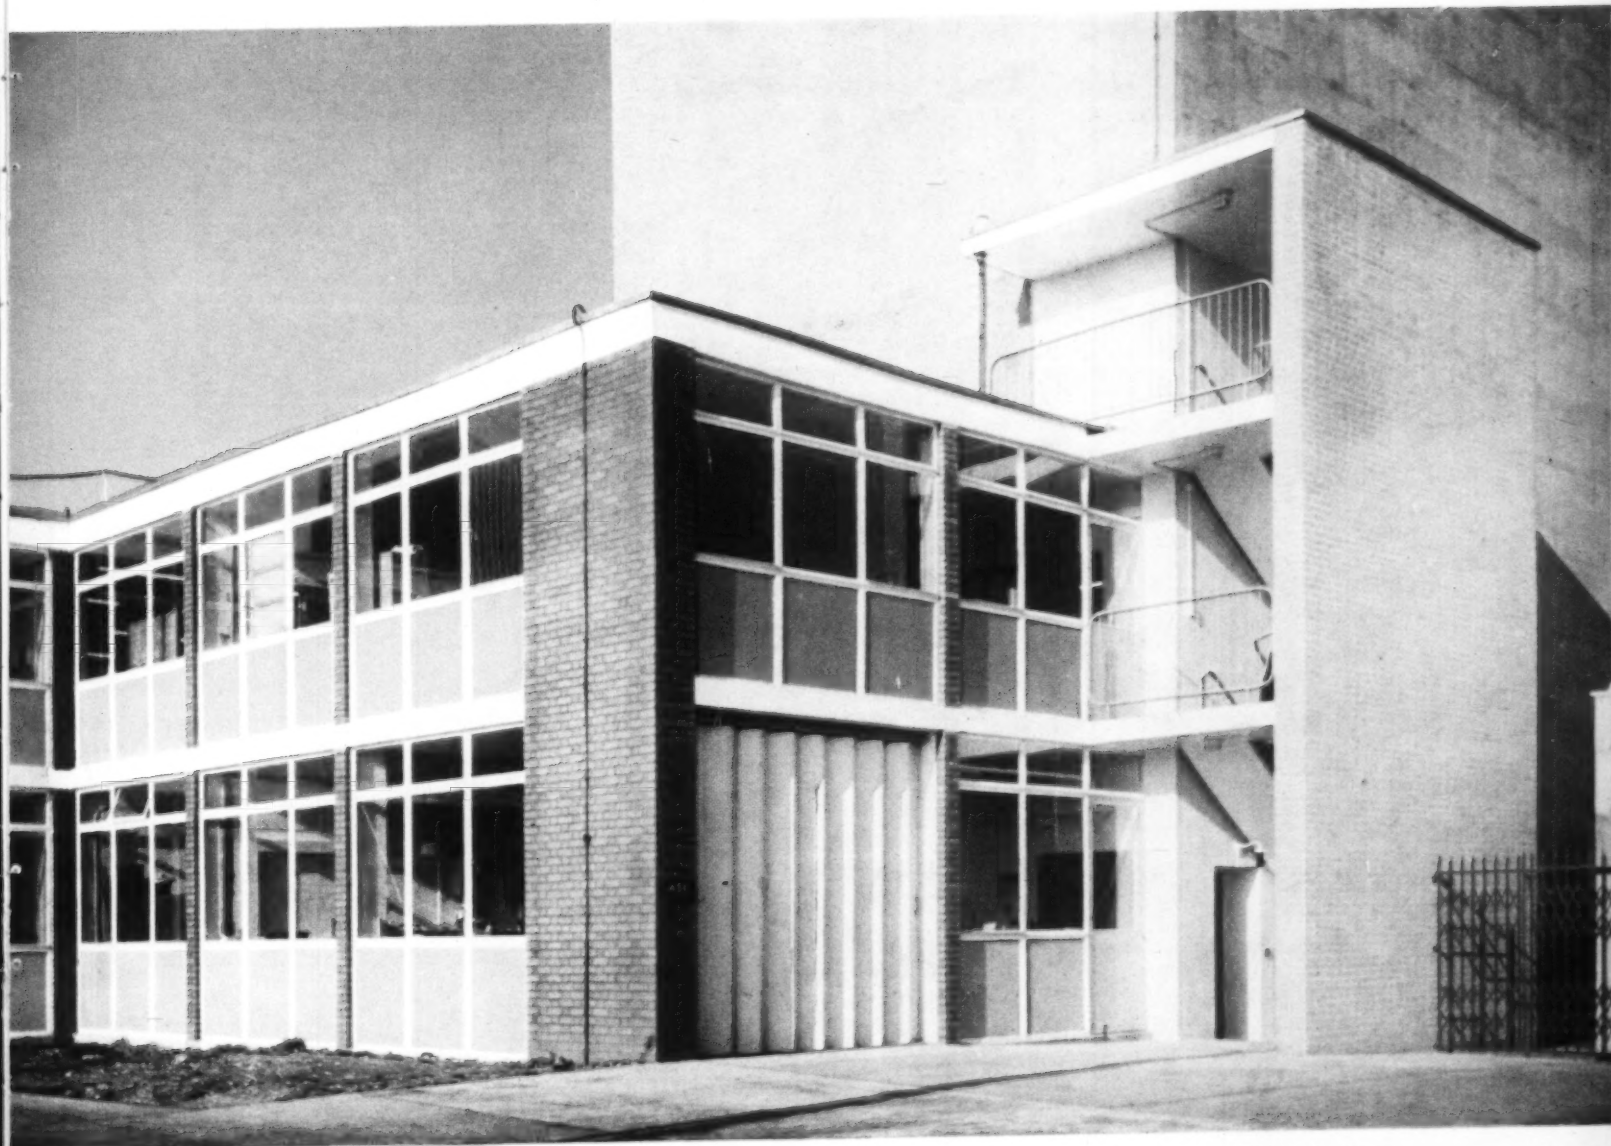

▲ *Atomic Energy Establishment, Aldermaston. Laboratory and Offices.  
Designed by the Chief Architect's Division, Ministry of Works, London;  
Senior Architect: K. H. Choate, A.R.I.B.A. 'MUROGLASS'.*

▼ *Golden Lane Flats, London, E.C.1. Architects:  
Chamberlin, Powell & Bon, A.A.R.I.B.A., London, S.W.3.  
'MUROGLASS'.*

Architects and builders everywhere recognise glass cladding as the ideal material for providing modern buildings with permanent, colourful protection. There is a wide range of glasses manufactured by Pilkington Brothers Limited which can be used for cladding, and these include 'MUROGLASS', 'ARMOURCLAD', 'VITROLITE', Georgian Wired Cast and Rough Cast Glass. Both 'MUROGLASS' and 'ARMOURCLAD' have been specially designed to meet the demand for coloured cladding materials. Both have ceramic colour fused into one face—the former being a Rough Cast annealed glass and the latter, a toughened glass, available with a textured or a polished surface. 'MUROGLASS', 'ARMOURCLAD' and 'VITROLITE' are available in a wide range of attractive colours.

For further information, including glazing recommendations, on glass cladding and any other Pilkington product, please write to the Technical Sales and Service Department:

## PILKINGTON BROTHERS LIMITED




ST. HELENS, LANCs. TEL: ST. HELENS 4001 OR SELWYN HOUSE,  
CLEVELAND ROW, ST. JAMES'S, S.W.1. TEL: WHITEHALL 5672-6


'ARMOURCLAD' and 'VITROLITE' are the registered trade marks of  
Pilkington Brothers Limited. Supplies are available  
through the usual trade channels





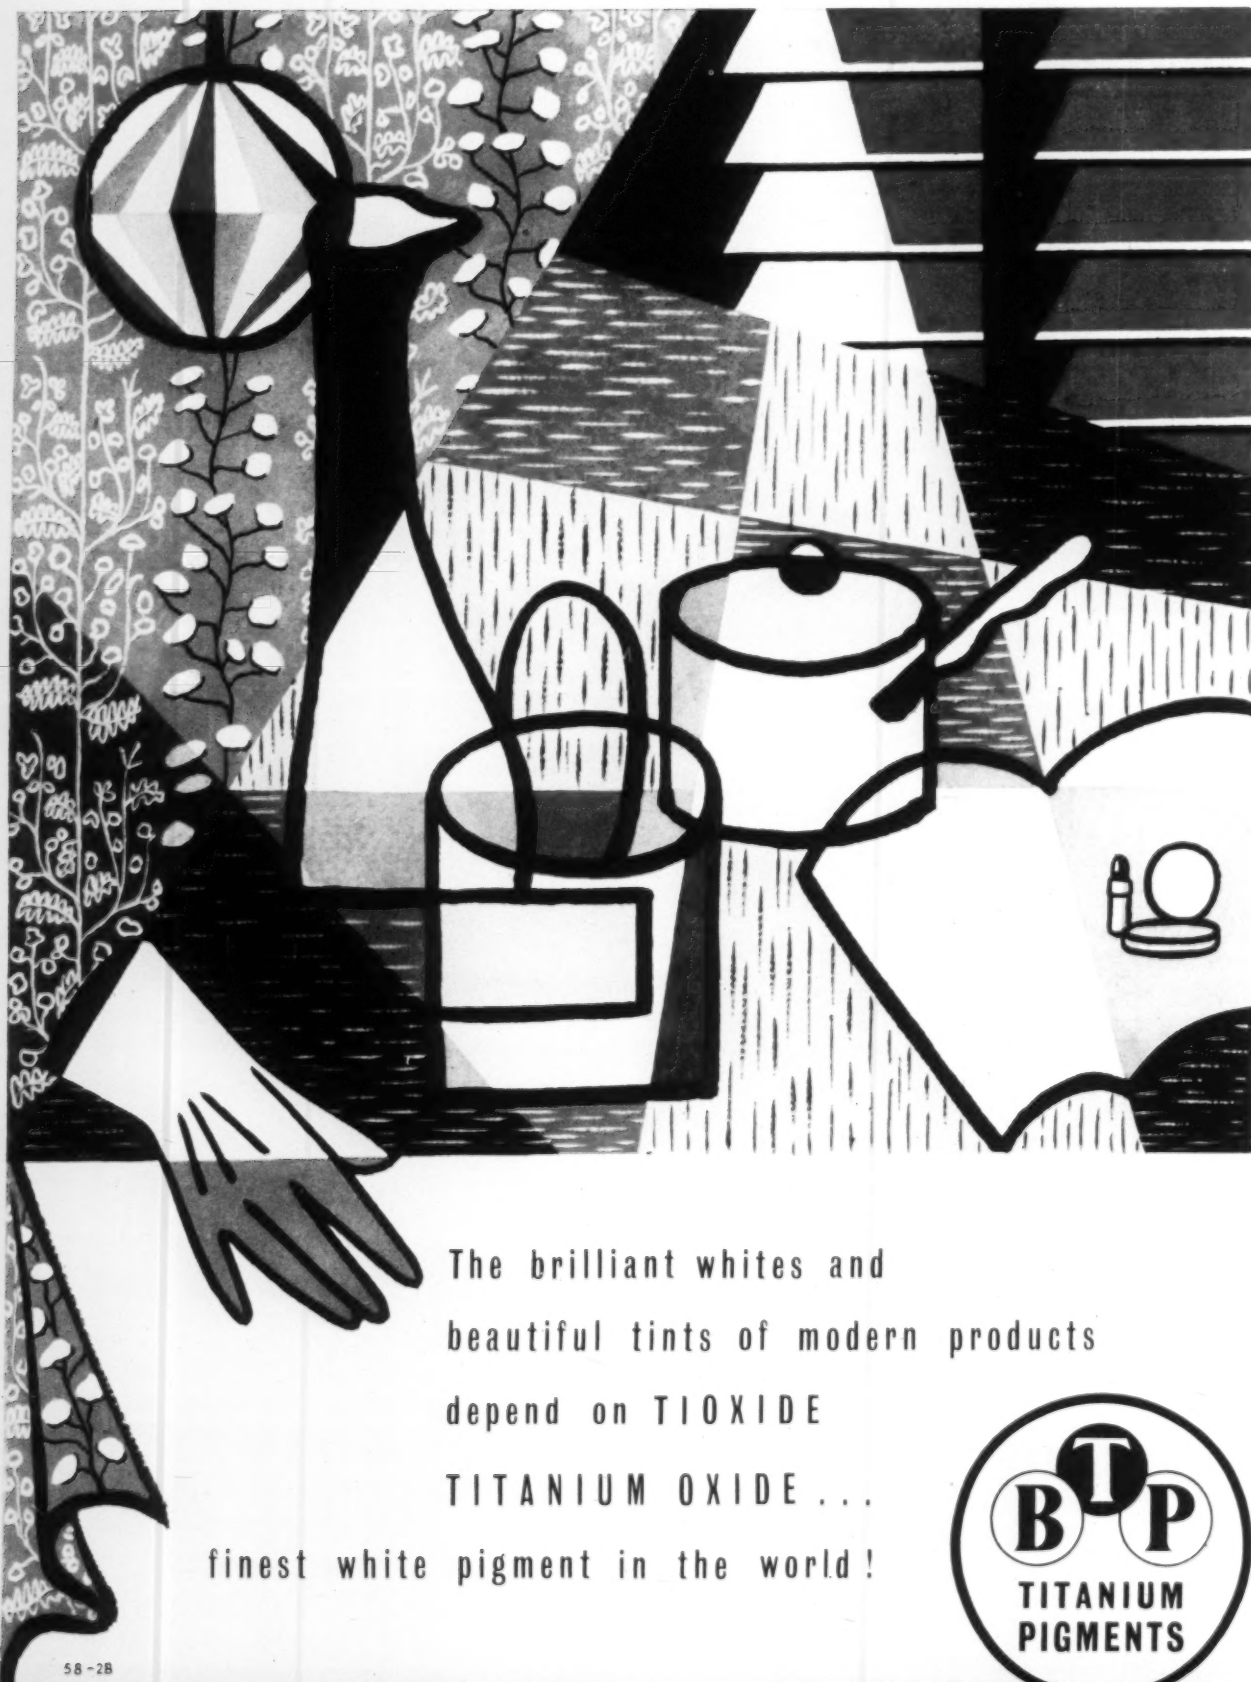


The brilliant whites and  
beautiful tints of modern products  
depend on TIOXIDE  
TITANIUM OXIDE ...  
finest white pigment in the world!



58-28


**BRITISH TITAN PRODUCTS COMPANY LIMITED** 10 Stratton Street London W.1

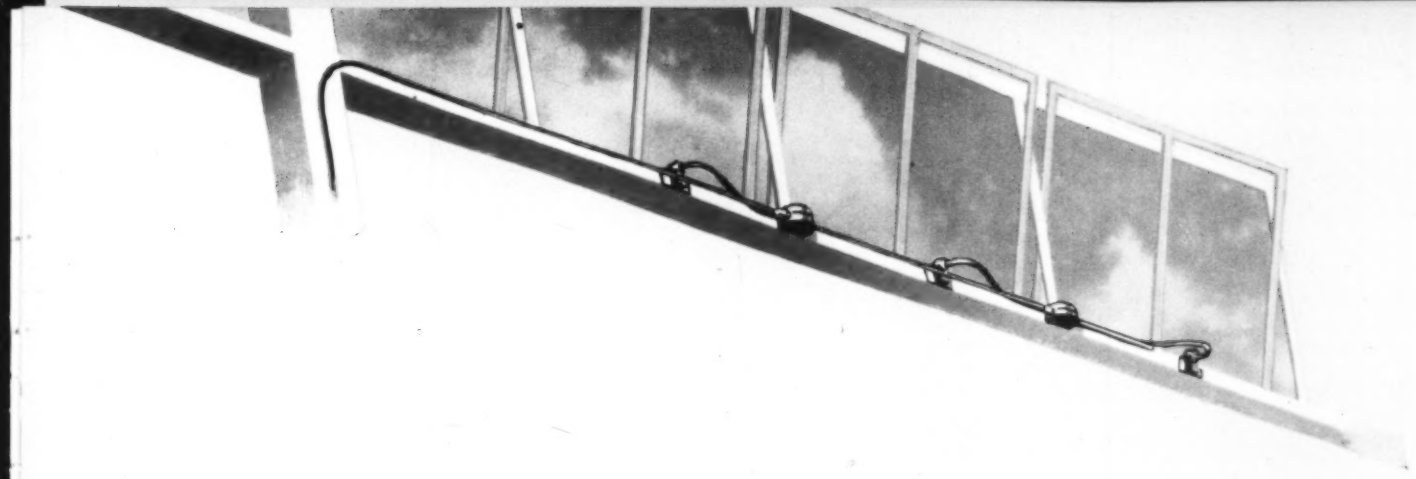

## ***poles apart***

It may be that your windows and ventilators are a pole apart from the hand that opens them. But the modern way is the Teleflex way — easy remote control for out-of-reach windows. Designed for offices, factories, schools, etc. Teleflex is poles apart from any other system. *Write for details.*

### ***these features show why—***

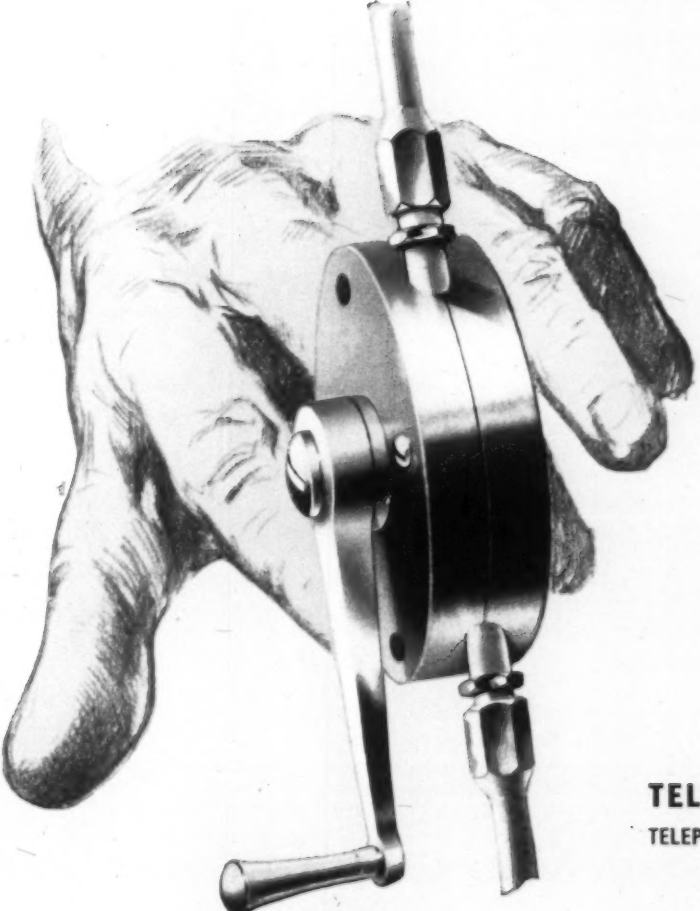

- Neat and unobtrusive
- Simple, positive and efficient
- For rotary or straight line motion
- Simple installation
- Easy, smooth operation

***Teleflex***

***window and ventilator  
remote control***

**TELEFLEX PRODUCTS LIMITED BASILDON ESSEX**  
TELEPHONE: BASILDON 22861 (10 LINES) TELEGRAMS: TELEFLEX PHONE BASILDON



The perfect trio for successful decoration...  
Hadrian Gloss Paint, Synflat P.V.A. Emulsion Paint and  
Ashley Wallpapers—specially produced in matching  
shades for planned colour harmony.



#### THE WESTMINSTER SCHEME

|                                        |                       |
|----------------------------------------|-----------------------|
| Centre panel and wall facing . . . . . | Ashley Wallpaper 2515 |
| Other walls . . . . .                  | Ashley Wallpaper 2582 |
| Ceiling . . . . .                      | Quaker Grey Synflat   |
| Cornice . . . . .                      | Papyrus Synflat       |
| Beams and pilasters . . . . .          | White Synflat         |
| Woodwork . . . . .                     | Papyrus Hadrian       |
| Door . . . . .                         | Blush Stone Hadrian   |

SMITH & WALTON LTD., HALTWHISTLE, NORTHUMBERLAND



## A new approach to the design and installation of Venetian Blinds

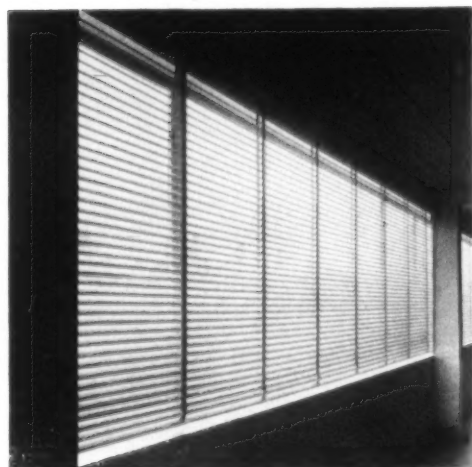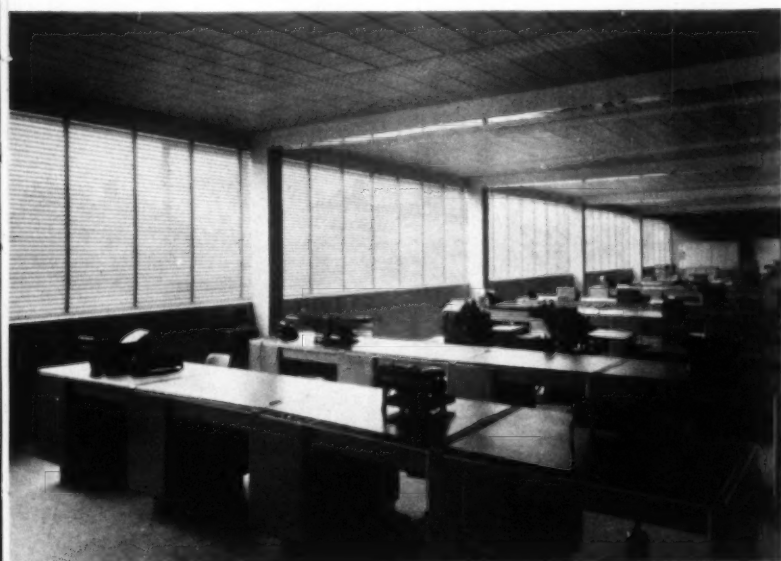

For far too long the many good points of venetian blinds have been overshadowed by unreliability and difficulties of installation. The Crittall Solomatic has been designed to solve these problems.

Its outstanding points are these:



- 1 *There are no cords to dangle, tangle or wear—one single control (single strap, double strap or gear) tilts the slats as well as raising or lowering the blind.*
- 2 *Uneven lowering is made impossible.*
- 3 *A double-cross web ladder tape prevents flutter.*

Every Solomatic blind is made to measure so that it belongs to the window—is not just a patchwork addition to it. Crittall are fully equipped to provide a complete planning and installation service for an entire building—new or old. Write for leaflet.

# CRITTALL Solomatic VENETIAN BLINDS


—made to measure and made to last

 THE CRITTALL MANUFACTURING COMPANY LIMITED · BRAINTREE · ESSEX · *Branches and Depots throughout the country*

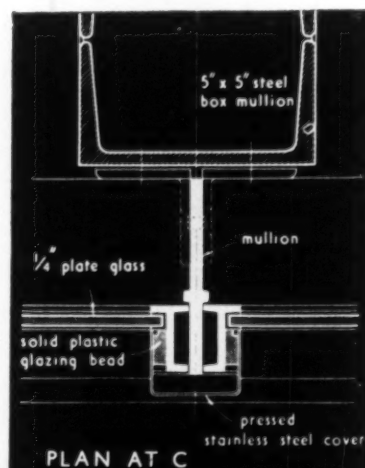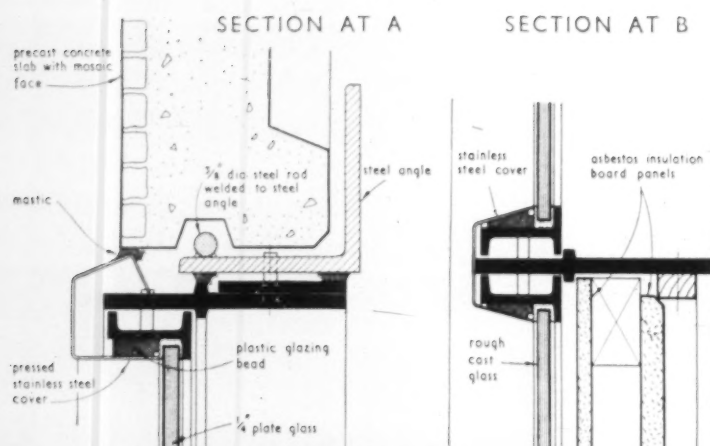

OFFICES OF BOWATER PAPER CORPORATION LTD.  
NORTHFLEET, KENT. Architects: Farmer and Dark F.F.R.I.B.A.  
Sections and Stainless Steel Pressings by the Morris Singer  
Co. Ltd.

Window units fixed to a crate frame of mullions and transoms, have plastic glazing beads. Pressed covers of polished "Silver Fox" stainless steel are mounted on the plastic beads to conceal the crate frame and window sections. The only external painted surfaces are the ventilators.



THE UNITED  
**STEEL**  
COMPANIES LTD

**SAMUEL FOX & COMPANY LIMITED**

*A Subsidiary Company of The United Steel Companies Limited*

STOCKSBRIDGE WORKS · SHEFFIELD · ENGLAND

**STAINLESS  
STEELS**  
in  
architectural  
design

**"SILVER FOX"**



Registered

Trade Marks

**STAINLESS STEELS**

F421



BANBURY

Selected by The Council of Industrial Design for display at  
THE UNIVERSAL & INTERNATIONAL EXHIBITION, BRUSSELS, 1958.

From the range of Fine Wiltons by I. & C. Steele & Co. Ltd.  
The Carpet Mill, Banbury, Oxfordshire.  
All-wool pile Mothproofed for Life with Mitin.



*Carpet*





## rotaflex the exciting lighting

A vast and impressive range of lighting fittings designed by John and Sylvia Reid A ARIBA, M MSIA, FIES, for industrial, commercial and domestic use . . . A large selection of wall brackets, table and floor lamps, display fittings and shades . . .

A complete lighting service geared for the production of lighting fittings for all special schemes. If you have not had a copy of the new Rotaflex Catalogue, ask for one now. Note also to visit the new Rotaflex Showrooms opening early in September at 4, Conduit Street, London, W.1

\* Rotaflex 'Ovoid' won the 1957 Design-of-the-Year award

ROTAFLEX (GREAT BRITAIN) LIMITED, 4-10 NILE STREET, LONDON, N1



Vauxhall Motors Ltd

**choose Ceramic Tiles**

In the planning of the vast, £36,000,000 project comprising the new Factories at Luton and Dunstable, foremost in the minds of the architects and their clients, was the need for Wall and Floor surfaces which would be practical, hygienic, yet decorative—and give lasting service. Ceramic Tiles were the obvious choice.



*Architects: Howard, Fairbairn & Partners  
Main Contractors: Sir Robert McAlpine & Sons  
Tiling Contractors: A. H. Herbert & Co. Ltd.*

**Ceramic** **TILES**

*Glazed & Floor Tile Manufacturers' Association • Federation House • Stoke-on-Trent*



CASERTA



#### AFTER YOU'VE WALKED ROUND THE WORLD AT BRUSSELS . . .

slip through the doors of the Britannia Inn and at once you're "at home" among congenial comforts. Here, away from the clamour of Cosmopolis, is a quiet corner where you can enjoy pleasures you take for granted in Britain—the satisfying refreshment of a Whitbread and, underfoot, the luxury of a fine Wilton carpet in black and persimmon. Design: 'CASERTA'—specially created for the Equerry (regd.) range by Tibor Reich F.S.I.A.


### ***stockwell carpets***

Guaranteed mothproof for life

S. J. Stockwell & Co. (Carpets), Ltd., 16 Grafton Street, London, W.1. Tel: Grosvenor 5734





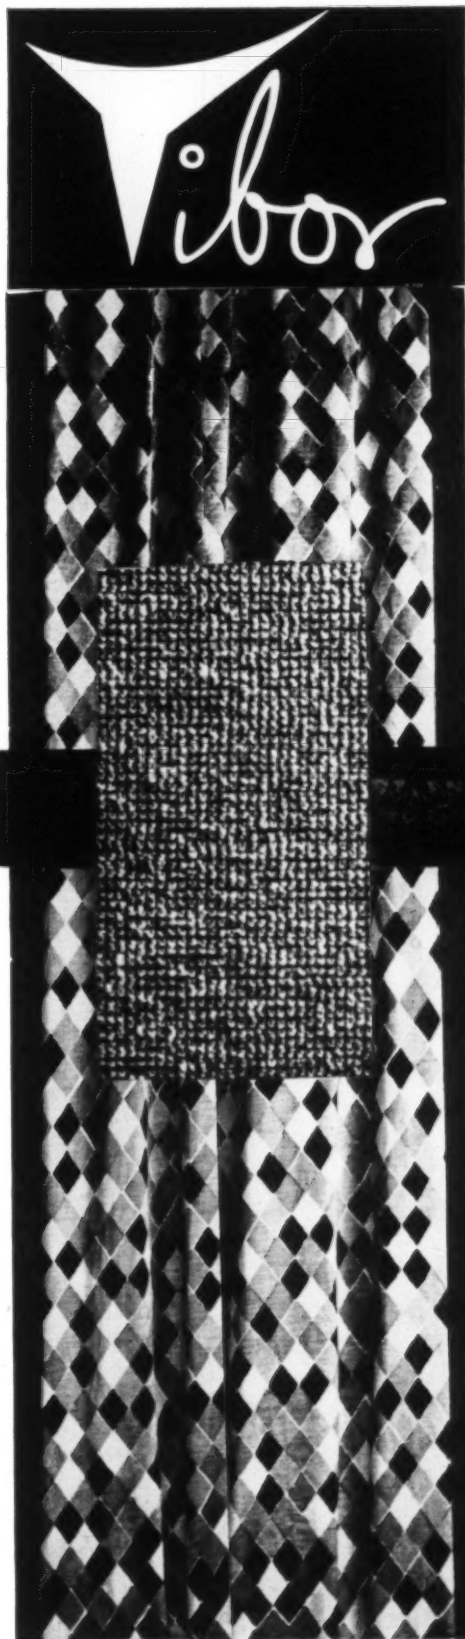

GONDOLA  
Desig. 1958



PAGODA

Amongst the many textures shown at the Brussels Fair a few are illustrated on this page. These are: "Gondola"—hand screen print in 100% cotton, "Isis"—wool face upholstery fabric used for Chairs, The Council of Industrial Design has selected for their Stand at the Fair, "Pagoda" a deep textured tapestry 24" x 36" repeat in cotton and rayon, and "Mantua" Fotexur-drape in brilliant Red and Gold. "Windsor"—lightweight curtain fabric in Natural, interwoven with Gold Lurex has been used in the Britannia Inn to blend with the Stockwell carpet shown on the opposite page.

*Deep Textures, Texture Drapes and Texture Prints are designed by Tibor Reich F.S.I.A. and produced by*  
TIBOR LTD, STRATFORD-ON-AVON

**Exhibited  
at the  
Brussels Fair  
1958**



MANITUA

***textures***

For doing  
things  
in a  
**BIG**  
way

**ROLADOR**  
PAT. NOS. 257850 & 200187

ELECTRICALLY  
OPERATED  
STEEL ROLLING  
SHUTTERS



protect **BIG**  
openings in the  
Larne factory of  
**BRITISH**  
**THOMPSON**  
**HOUSTON**

Staff Architect:  
G.C. Knight A.R.I.B.A.

**Haskins**

Gnome House,  
Blackhorse Lane,  
London, E.17.  
Tel. LARKSWOOD 2622



## Pup in a china shop!

He wants to go, she wants to stay. To him it's dull, to her it's fascinating. Yet what's beneath his paws is well worth looking at . . . one of the magnificent TRINASCOLIN Decorative Floors by Limmer & Trinidad.

These TRINASCOLIN Floors are really something. Not only are they attractive to look at (you can get them in a variety of plain and marbled colours), but they are warm and resilient and superbly comfortable to walk on. And they are produced in several thicknesses.

If you feel, as we do, that the floor of a building should be more than merely a place for your feet, why not write for the Technical Booklets on Limmer & Trinidad Decorative Floorings? Come to think of it, why not write for all our descriptive booklets?

# LIMMER & TRINIDAD

## DECORATIVE FLOORING


THE LIMMER & TRINIDAD LAKE ASPHALT COMPANY LIMITED, TRINIDAD LAKE HOUSE, 232-242 VAUXHALL BRIDGE ROAD, LONDON, S.W.1



# *Beautiful*

The clean, fresh beauty of "Standard" Sanitary Appliances made of Vitreous China is a joy to behold. A brilliant, practical beauty. A modern beauty that has been achieved by years of planning, styling, shaping and re-shaping. And below the surface there is the beauty of a superb craftsmanship. Inside and out, this Vitreous China ware is really beautiful.

# "Standard"

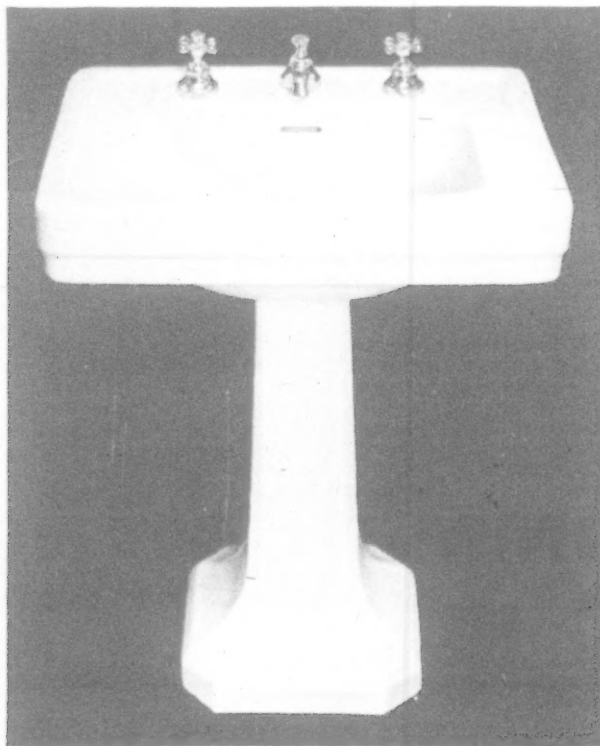

★ In many countries it is officially required that Sanitary Appliances be made of Vitreous China. Many British architects, doctors, and Public Health Authorities would like to see similar legislation in Britain and so, not unnaturally, would the makers of "Standard" Sanitary Appliances.



### *Durable...*

Whilst the beauty of these appliances can be appreciated at a glance, it takes a lifetime to discover how durable they are. For with Vitreous China comes a higher resistance to harsh treatment than with ordinary ware. Much higher. Their beauty lasts; it is difficult to mar even by accident. And because "Standard" Sanitary Ware made of Vitreous China lasts and lasts, its cost for each year of service is much lower.

### *Hygienic...*


Fired at a much higher temperature than ordinary ware, Vitreous China is a dense and non-absorbent material which remains steadfastly hygienic.★ And it does not depend on its glaze to make it watertight. It is non-porous and non-crazing. Germs cannot lodge and breed in it. "Standard" Sanitary Ware made of Vitreous China guarantees hygiene for the lifetime of whatever building it serves.

# Vitreous China

Beauty. Durability. Hygiene. Economy. These are the characteristics of "STANDARD" SANITARY APPLIANCES made of VITREOUS CHINA which appeal to the house owner and builder no less than to the doctor and the architect.




IDEAL BOILERS & RADIATORS LTD., IDEAL WORKS, HULL

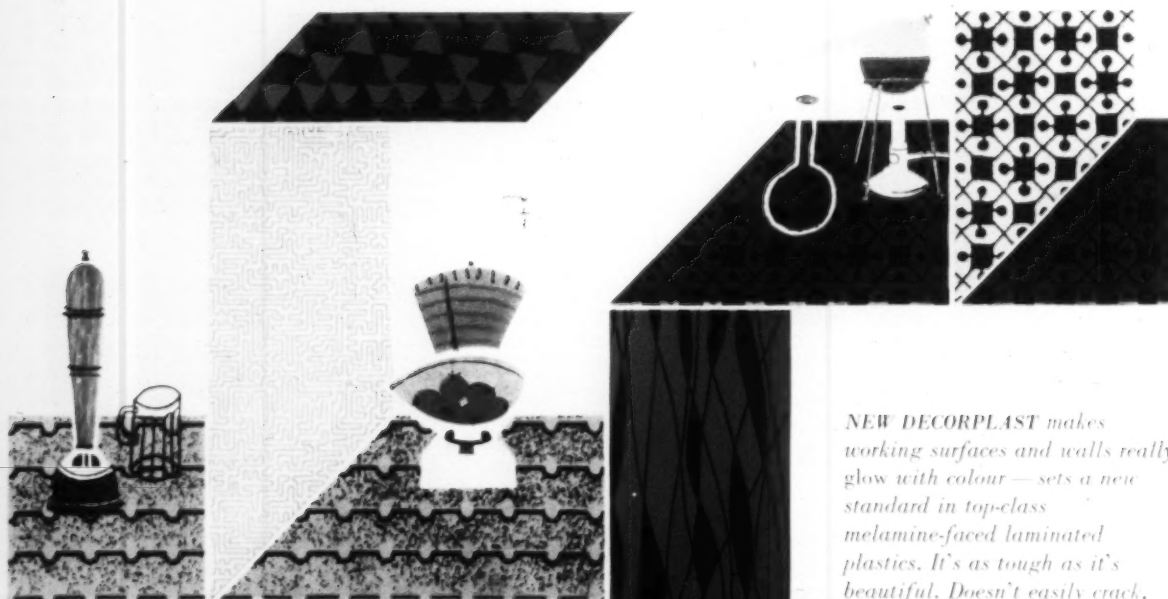

## New Decorplast gives you 47 exciting colours and patterns!

*NEW DECORPLAST makes working surfaces and walls really glow with colour — sets a new standard in top-class melamine-faced laminated plastics. It's as tough as it's beautiful. Doesn't easily crack, chip, stain or fade. It's cleaned with a damp cloth — because dirt cannot stick. Boiling water, grease, spirits, dilute acids and heat up to 310 F leave new Decorplast bright and colourful as the day it was made.*

*The whole new range, now in sheets 9' x 4' as well as 8' x 4', thickness  $\frac{1}{16}$ ", is always available — in matt and gloss finishes — plus new wood veneers that really do look like wood! Write to the address below and ask for facsimile Colour Chart and list of Distributors.*



Reed  
PAPER GROUP


# Decorplast

## LAMINATED PLASTIC

Made by HOLOPLAST LIMITED • DEPT. 11B • SALES OFFICE: 116 VICTORIA STREET • LONDON S.W.1 • VICTORIA 9354/7 & 9981



## FALKS at the Brussels Universal International Exhibition 1958

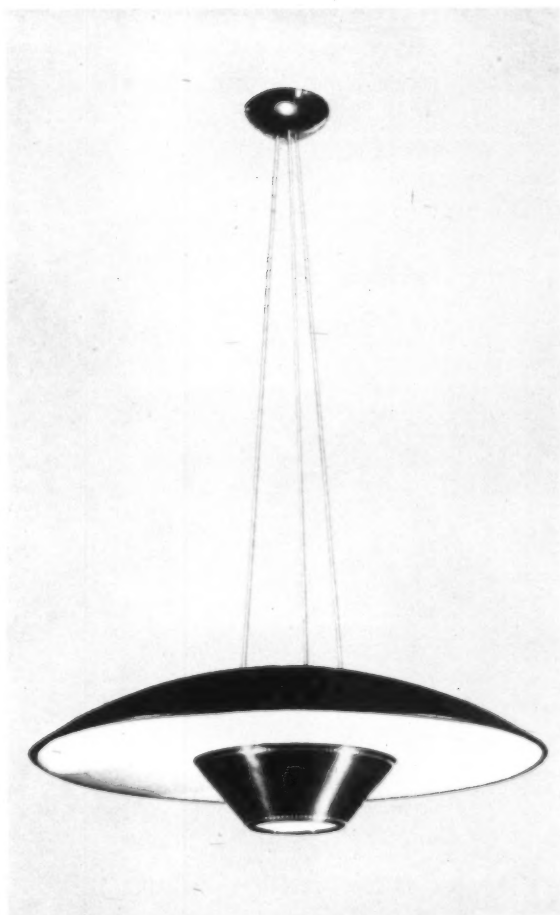

*EUROPA a dining room pendant selected by the Council of Industrial Design for display on their stand.*



*ALTAIR the 4 ft. version of this wall bracket has won an award in an international competition.*



*The Comet Reflector Fire*



LIGHTING ENGINEERS AND MANUFACTURERS OF LIGHTING FITTINGS  
FOR ALL INDUSTRIAL, COMMERCIAL AND DECORATIVE PURPOSES  
91 FARRINGDON ROAD, LONDON, E.C.1. AND BRANCHES Telephone No. HOL. 7654  
London Showrooms: 20/22 Mount Street, Park Lane, London, W.1. Tel. Mayfair 5671/2

AP 56



## RAINHAM TIMBER ENGINEERING COMPANY LIMITED

Ferry Lane, Rainham, Essex. Telephone: Rainham 3311

T·D·A Approved Manufacturer

CONSTRUCTION IN GLUED LAMINATED AND BOLTED & CONNECTED TIMBER



### BRITISH INDUSTRIES PAVILION

Over 60,000 sq. ft. of R.T.E. Timber Curtain Walling was used for this Pavilion.

In competition with other forms of curtain walling in various materials, the R.T.E. method was selected for its low cost, simplicity and speed of erection.

*Architects:*

*Edward D. Mills & Partners, Chartered Architects.*

*Consulting Engineer:*

*Felix J. Samuely, B.Sc.(Eng.), M.I.C.E., M.I.Struct.E.*


*Main Contractors:*

*Richard Costain Ltd., in association with Blaton Aubert.*

### *Curtain Walling in Timber at the Brussels Exhibition*



TIB. 22

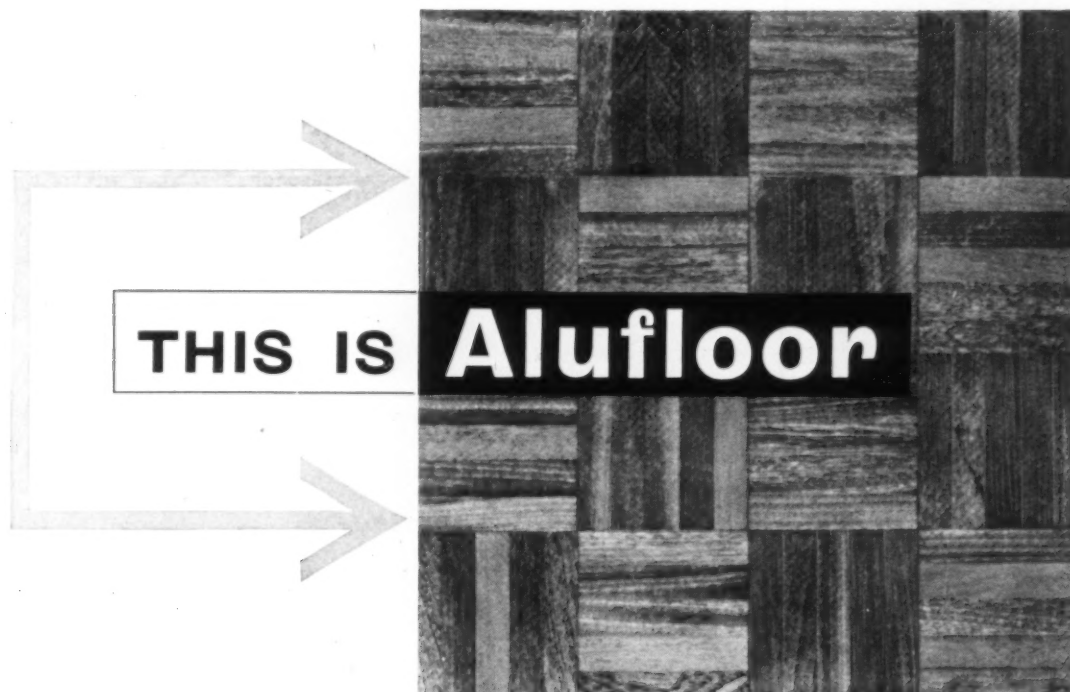

## JUST WHAT YOU'VE BEEN WAITING FOR!

### BECAUSE

Alufloor is *not* expensive. It provides  
a luxury wood block flooring at a real utility price.

### BECAUSE

Alufloor is a prefabricated die-squared parquet  
that's manufactured to a precision *unequalled by any other process.*

### BECAUSE

Alufloor can be laid 50% faster  
and needs no pinning or experimental positioning.

### BECAUSE

Alufloor has the same  
life as 1" conventional wood block flooring.

### BECAUSE

Alufloor is already factory sanded and  
requires only light surface sanding when laid.

### BECAUSE

Alufloor is more flexible, more  
stable and as quiet as cork flooring.

Each section of Alufloor is 18 inches square and comprised of 80 hardwood fingers.

**ALUFLOOR CAN BE PRODUCED FROM ANY HARDWOODS TO ARCHITECT'S SPECIFICATION**

**LUXURY FLOORING AT A UTILITY PRICE**

# Alufloor


British Patent No. 740771

Write for fully descriptive, illustrated booklet to:

**CALDERS LTD**

Plough Way, Rotherhithe, London, S.E.16. Tel: Bermondsey 3535  
Biddick Lane, Washington, Co. Durham. Tel: Washington 2321



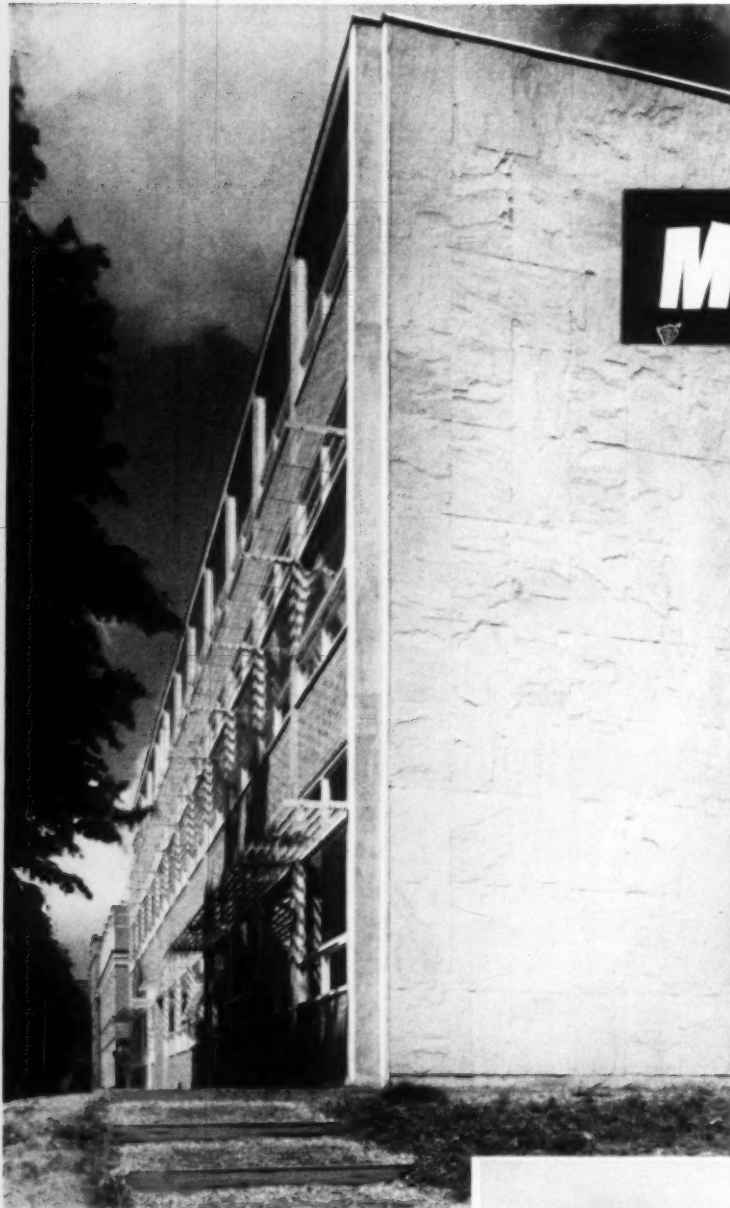

# MARSHALL'S

Producers of

## HARD YORK STONE

from the Elland Edge bed of Flag Rock. A compact stone of fine grain and texture

Weight per cu. ft. 164 lb.


Crushing strength 692 tons per super ft.

Absorption 2.1% of dry weight

**WALLSTONES • STEPS • PAVING  
RIVEN FACING SLABS**

**GARDEN STONE • CRAZY PAVING  
GARDEN WALLING • RECTANGULAR PAVING**

*Garden Layouts to plan*

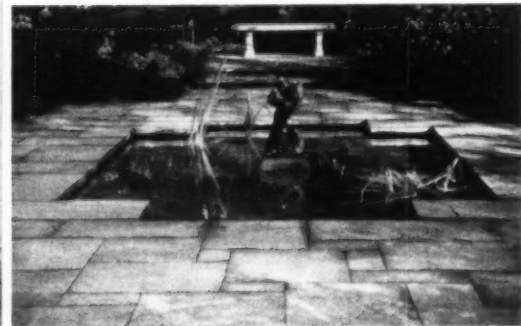

### SOUTHOWRAM STONE

is suitable for all climates and industrial conditions. As used on Bradford Royal Infirmary, in the re-construction of the Free Trade Hall, Manchester, and in numerous schools for West Riding C.C. and other local authorities.



**HYDRAULIC PRESSED CONCRETE FLAGS**

**HYDRAULIC PRESSED KERBS**

**PRECAST CONCRETE UNITS • CILLS**

**LINTOLS • POSTS • STEPS & COPING**




**S. MARSHALL & SONS LTD.**

SOUTHOWRAM QUARRIES

HALIFAX • YORKSHIRE

Tel. Halifax 4788/9

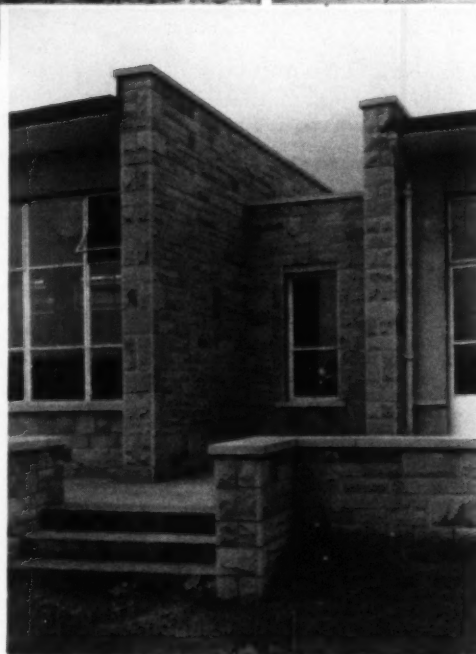

Above, Left: Riven Stone at Southlands College, Wimbledon. Architects: F. R. S. Yorke, E. Rosenberg, C. S. Mardall, F.F.R.I.B.A. Assistant in charge, Lloyd A. Smith.

Above, Right: Rectangular Garden Paving. Garden Architect: Percy S. Cane, Esq., S.W.I.


Left: Stone Walling, Ling Bob Primary School, Halifax. Architect: K. W. Craven, A.R.I.B.A., Dip.T.P., A.M.T.P.I.



*Everybody Knows a Stelrad*

*Ye canna get more  
economical heating  
for the wee bairns*

*Stelrads in the Library  
of a L.C.C. school.*

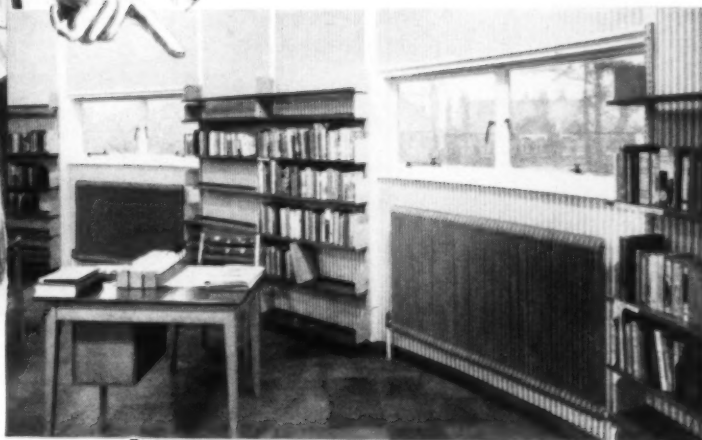

Aye! It's true friends. You cannot get more economical heating than central heating, and you cannot get a better central heating radiator than a Stelrad. A Stelrad is a brawny radiator—made of steel, oxy-acetylene welded for greater strength. Aye! and will ye no remember the Stelrad range?


It's complete with two, three, four and six column types, wall, Easy Clean, angled wall, double, and triple banked wall, each available in many heights and to almost any length. And do ye ken the many Stelrad installations like the one above, and do ye ken the Stelrad Catalogue? Ye should send for that mon—it's free.

**STEEL RADIATORS  
LIMITED**

BRIDGE ROAD · SOUTHALL · MIDDLESEX

Telephone: Southall 2603


## GATWICK FINGERS POINT ...

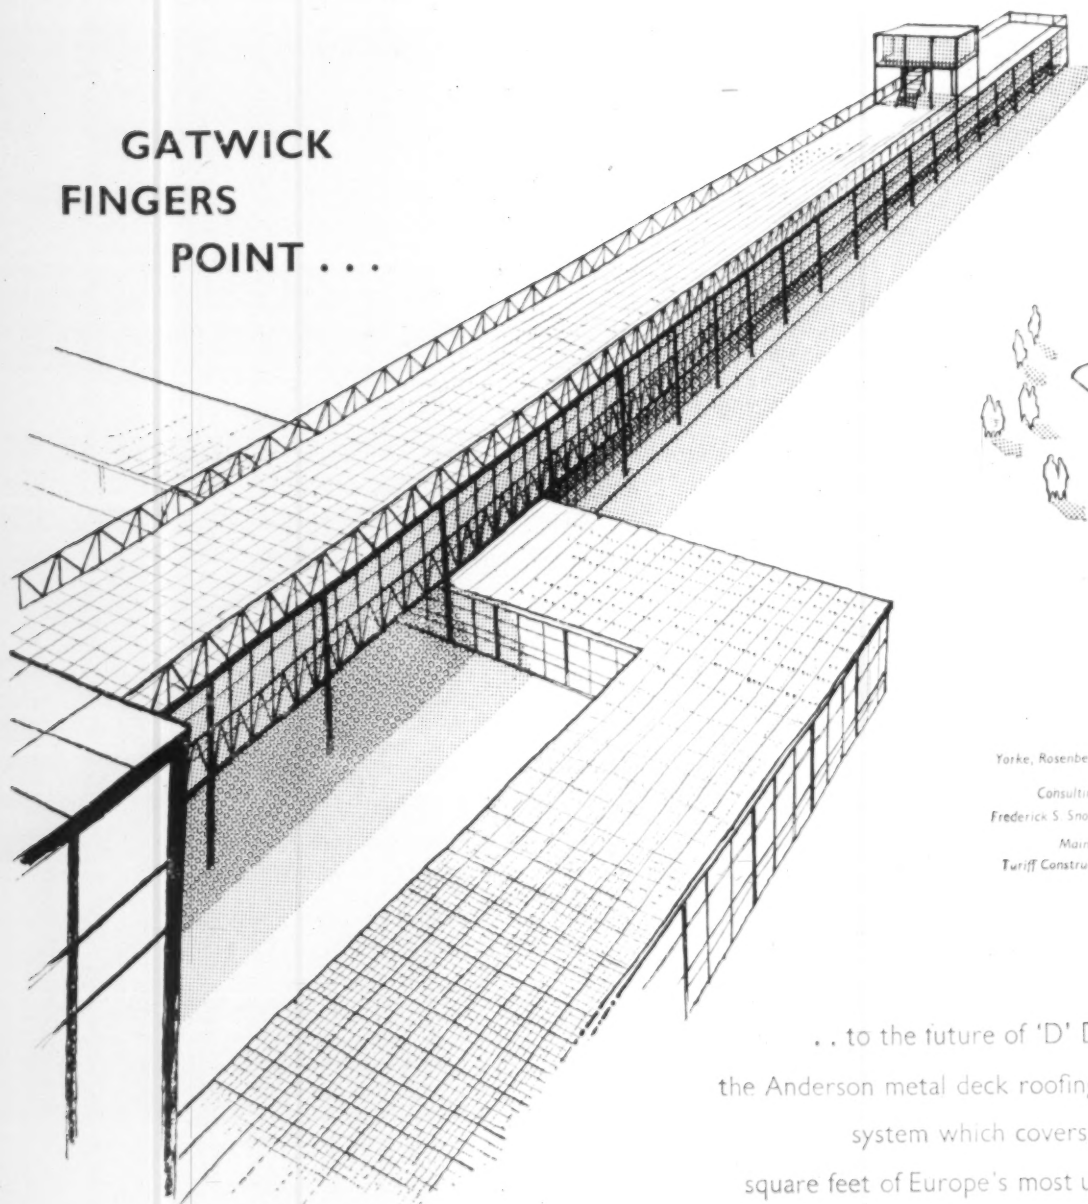

Architects:  
Yorke, Rosenberg & Mardall

Consulting Engineers:  
Frederick S. Snow & Partners

Main Contractors:  
Turiff Construction Co. Ltd

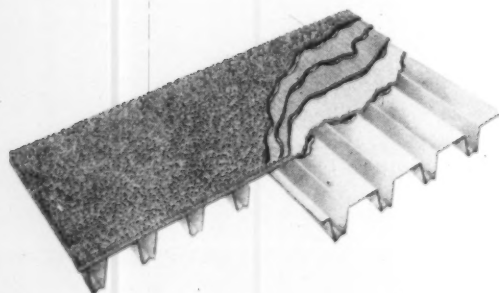

... to the future of 'D' Decking  
the Anderson metal deck roofing  
system which covers over 70,000  
square feet of Europe's most up to  
date air terminal.  
Over 50,000 square feet of Thermotile  
promenade roofing and other Anderson  
Roofing Systems have also contributed  
to this fine airport.

**D. ANDERSON & SON LIMITED**



124/D61


STRETFORD, MANCHESTER Telephone: LONGford 4444 OLD FORD, LONDON, E.3 Telephone: AMHerst 2388




# 'ENGLISH ELECTRIC'

distribution equipment

chosen  
for the  
British Industries Pavilion

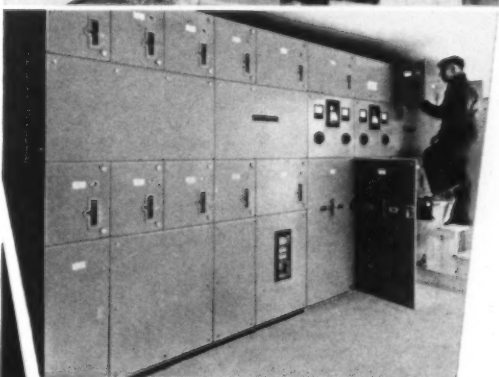

*Some of the 'ENGLISH ELECTRIC' equipment being installed in the sub-station*

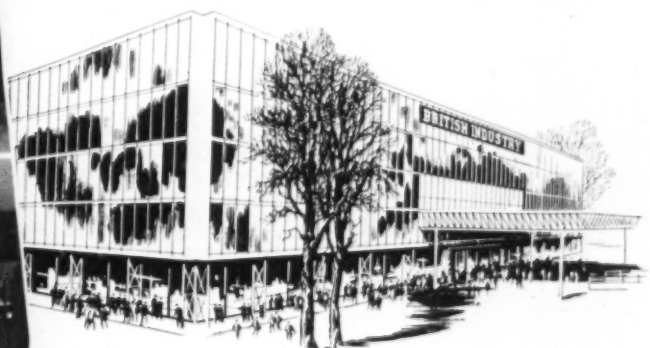

at Brussels

The main substation controlling power and lighting throughout the British Industries Pavilion is equipped entirely by 'ENGLISH ELECTRIC'

This substation has a capacity of 1,000 kVA, taking its supply from a ring main through a six-panel type OLX high voltage switchboard. Two 500 kVA, 11,000/415 volts, 50 cycles transformers feed on to a 'Superform' medium voltage switchboard comprising two 800 amp. type OB.23 air circuit-breakers and 22 outgoing H.R.C. fuse switches.

Like the Pavilion itself, the 'ENGLISH ELECTRIC' substation is virtually a glass showcase where millions of visitors will be able to see the most modern electrical control equipment in actual use.

THE ENGLISH ELECTRIC COMPANY LIMITED, MARCONI HOUSE, STRAND, LONDON, W.C.2  
WORKS: STAFFORD · PRESTON · RUGBY · BRADFORD · LIVERPOOL · ACCRINGTON

MIS 45G8

3 ST. JAMES'S SQ. S.W.1




TRAFALGAR 7833

# THE DEMOLITION & CONSTRUCTION

COMPANY LIMITED

*Building, Civil Engineering  
and Public Works Contractors*

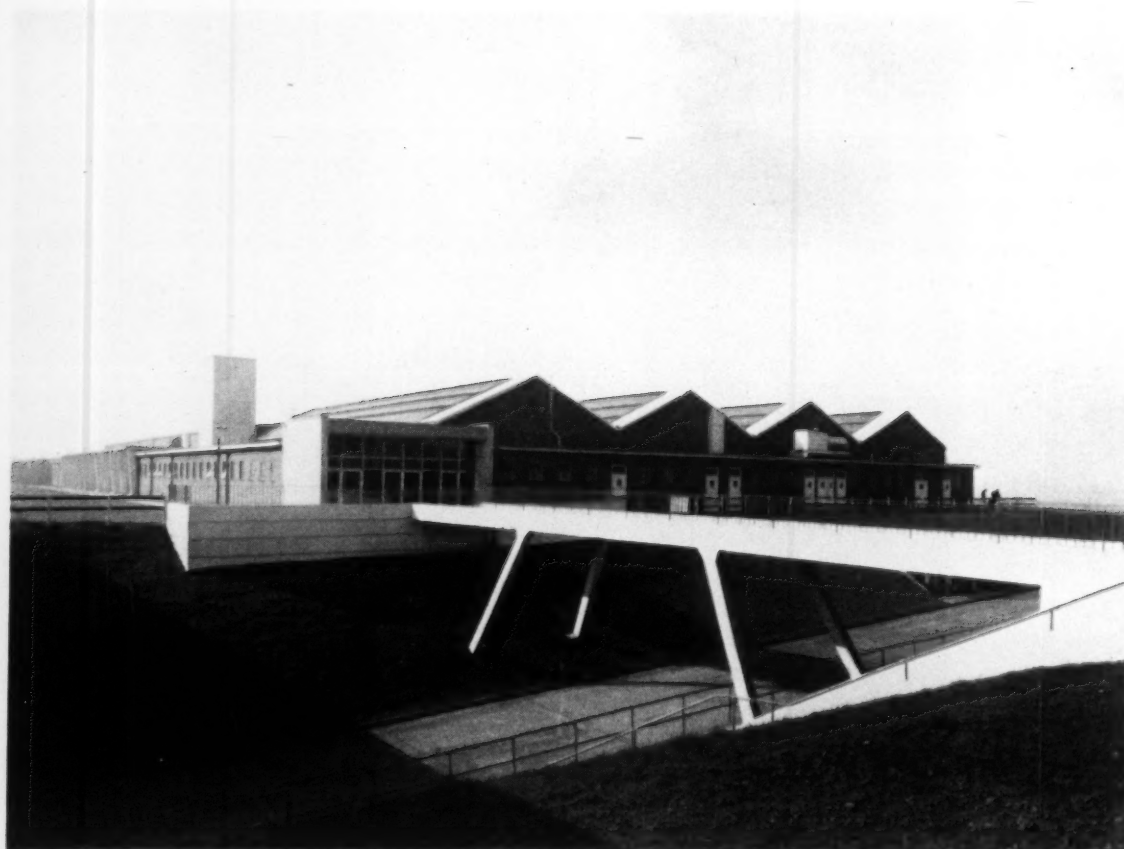

WORKSHOP AND BRIDGE FOR A. REYROLLE & CO. LTD., AT HEBBURN-ON-TYNE

*Architects:*  
*Messrs. Cackett, Burns Dick & MacKellar*

FWS

Protect your Buildings and Plant  
against **FIRE**  
with a MATTHEW HALL  
**SPRINKLER**  
installation.

THE  
**MATTHEW HALL**

GROUP OF COMPANIES

**SPRINKLERS & FIRE PROTECTION**

ESTD. 1848



MATTHEW HALL

MATTHEW HALL HOUSE, DORSET SQUARE, LONDON, N.W.1.

Glasgow

Manchester

Bristol

Belgar

Johannesburg

Germany

Durban

Capetown

Wellington

Bombay

Salisbury (Central Africa)

Natal

West Indies



3 ST. JAMES'S SQ. S.W.1




TRAFALGAR 7833

# THE DEMOLITION & CONSTRUCTION

COMPANY LIMITED

*Building, Civil Engineering  
and Public Works Contractors*

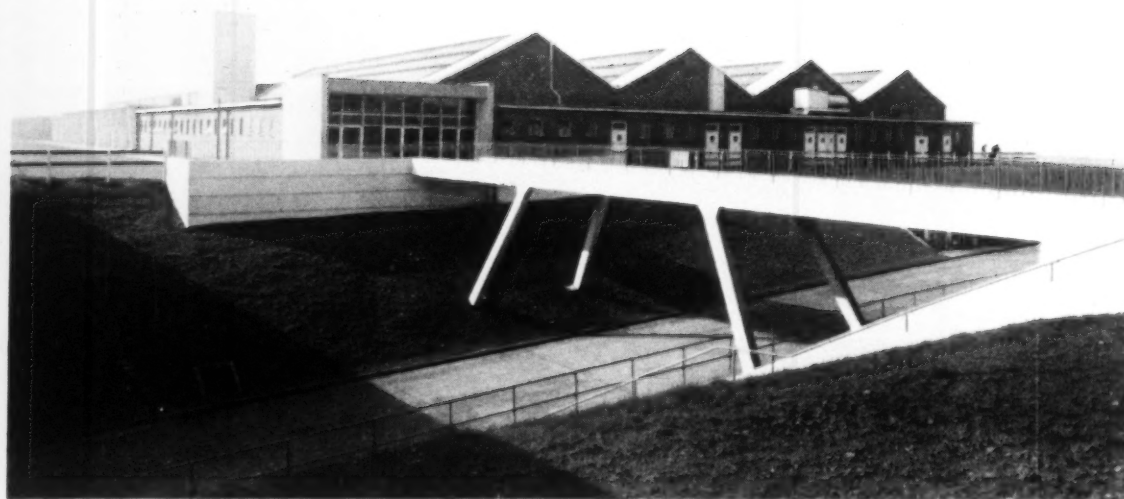

WORKSHOP AND BRIDGE FOR A. REYROLLE & CO. LTD., AT HEBBURN-ON-TYNE

*Architects:  
Messrs. Laing, Beckett & Co. Ltd.*

Protect your Buildings and Plant  
against **FIRE**

with a **MATTHEW HALL**

**SPRINKLER**  
installation.

THE  
**MATTHEW HALL**

GROUP OF COMPANIES

**SPRINKLERS & FIRE PROTECTION**

ESTD. 1848



MATTHEW HALL

MATTHEW HALL HOUSE, DORSET SQUARE, LONDON, N.W.1.

Glasgow

Manchester

Bristol

Belfast

Johannesburg

Germiston

Durban

Cape Town

Welkom

Bulawayo

Salisbury (Central Africa)


Nicola

West Indies

# New

## **WARERITE Wallboard** the low cost, ready-to-fix board for walls and ceilings

Wherever vertical or ceiling surfacings must be moisture resisting, durable and easily cleaned, new colourful WARERITE Wallboard is the obvious and economical choice. Bathroom and kitchen walls, corridors, partitions, cupboard fronts and flush doors are typical applications. WARERITE Wallboard can be screwed or pinned, or fitted into extruded sections.

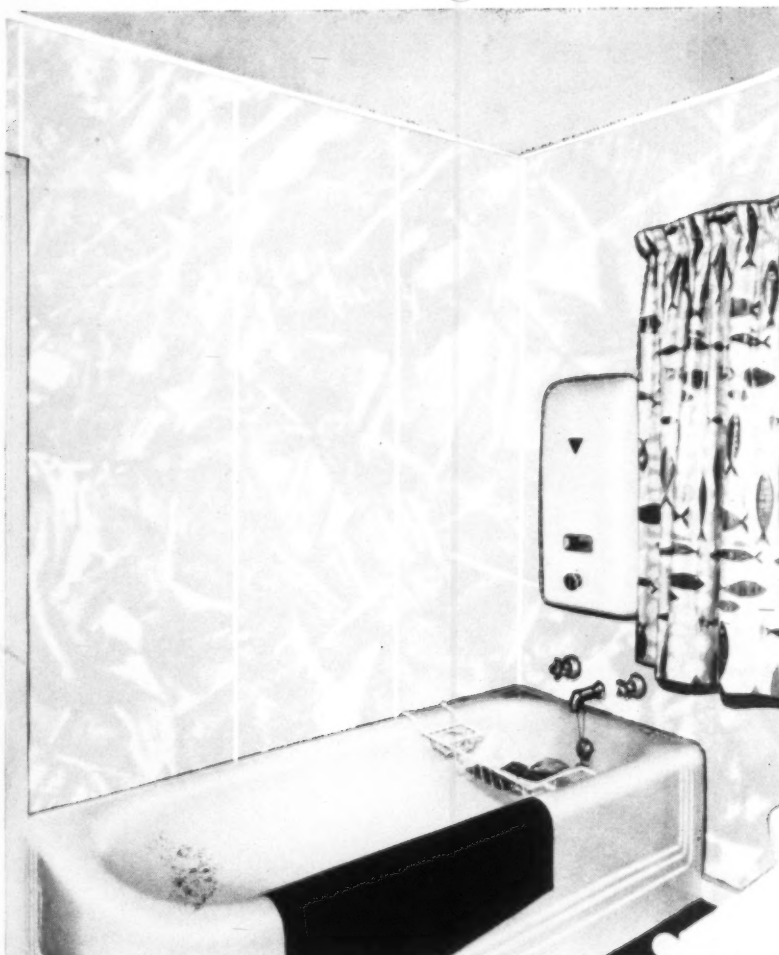

- Melamine-resin surfaced both sides
- Wipes clean instantly
- Resistant to steam and moisture
- Core of high density fibre board
- Easier construction at lower cost — no maintenance
- 16 attractive colours and patterns
- Standard boards 8 ft. x 4 ft.

### **WARERITE Specialist Service**

WARERITE Specialists are located in 150 cities and towns throughout the country, and supply WARERITE Wallboard from stock. Write for literature, samples and the name of your nearest WARERITE Specialist.



**with the lovelier patterns!**



A product of BAKELITE LIMITED • 12-18 GROSVENOR GARDENS • LONDON SW1 • Telephone: SLOane 0898



## SPENCERISMS

*Do you know the Eskimeaux  
Catch fish inside a kettle  
Hang them neatly in a reaux  
Upon expanded mettle  
If your fish are not too fresh  
Add some ice (just boiling hot)  
Dish them up on welded mesh  
Serve to Spencer's — on the spot!  
Other uses may be found  
A seahorse lends endorsement  
Swearing fish are very sound  
For brickwork reinforcement  
Lavish your Exspencercount  
The last disastrous farthing  
Upon a sauce that's tantamount  
To piquant plasterer's lathing!*



Manufacturers of Expanded Metal, Welded Mesh,  
Foundation Bolt Boxes, Brickwork reinforcement  
and Plasterer's Lathing — all to B.S.S.



THE  
**SPENCER WIRE**

COMPANY LIMITED • WAKEFIELD

Telephone • WAKEFIELD 6111 (10 lines) • Telegrams • SPENCER, WAKEFIELD, TELEX  
Telex No. 55,160



# Something's changing the face of Britain

giving a lift  
to the looks and the life  
of new projects  
and conversions  
all over the country

First plastic emulsion paint suitable  
for outside use, Pamastic vastly increases the  
potentialities of exterior colour in architecture. For pointing good features and disguising  
the bad, for achieving new effect of proportion and uniquely interesting colour schemes,  
Pamastic's range of 25 intermixable colours is an unexcelled design medium.

## NO COMPLICATIONS

Pamastic is probably the simplest kind of wall paint ever devised. No undercoat or primer; will not peel or flake; for use on brick, plaster, stucco, cement, concrete, pebbledash, asbestos and cement paint—provided the surface is sound. Perfect, in fact, for outside as well as inside uses.

## TROPICALLY TESTED

Pamastic has proved it remains unaffected by humidity, rain or industrial fumes. It is distinguished for its low dirt retention, great adhesion and fastness to light. Its effective life is far longer than that of conventional outside wall paints. Over the years, it is certainly the most economical kind of exterior wall paint.

# PAMMASTIC


## the world's best Emulsion Paint

Further information from: Blundell, Spence & Co. Ltd., 37 Queen Square, London, W.C.1

# MARGINALIA

## Postable Views

Unlike the best of those available on the Continent and in the USA, most British picture post-cards are neither stimulating nor glamorous—outside the National Gallery and the Tate it is difficult to acquire anything of the quality that can be bought in, say, Florence, and our attempts at king-size views in astounding technicolour have so far been pathetic. In particular, our so-called 'architectural cards' have tended to be dim, uninformative, or both.



1, 2, two of the Gordon Fraser series of postcards.

Now, however, the Gordon Fraser Gallery of Bedford, who wrought a minor revolution in the Christmas card business a few years back, have moved into architectural view cards in a highly promising way, with the beginnings of a series of monochrome photographic views whose visual quality is comparable with that of the highest levels of architectural publishing—and is, indeed, the work of photographers employed in that field. Some of the pictures are already established classics, such as the Gernsheim views of St. Paul's and of effigies in Westminster Abbey, originally made for the Warburg Institute. Others are the work of established leaders in the field, like Eric de Mare, Reece Winstone, and H. F. Kersting.

Not the least remarkable aspect of this new venture is its widening of the established range of subjects,

and a serious attempt has been made to cover modern buildings like the Festival Hall—as a building, 1, and not merely as a piece of riverside scenery—while the even more tricky business of photographing for vernacular or townscape character has also been undertaken. Colin Penn has begun here with views of Hampstead Village, 2, and the terraces of Bath are shortly to be taken in hand. The information given on the backs of these cards, which will sell at the sensible price of sixpence, is genuinely informative but not always as plentiful as it might be—not every card of the Festival Hall, for instance, gives the architects' names. On the other hand, the fact that *any* of the cards should give their names is a measure of what has been attempted, although the actual quality of reproduction still falls (for financial reasons as yet insuperable) below the level of the finest continental cards produced by direct photographic methods.

## Critical Vehicle

At a time when there are probably more working, professional or semi-pro, art critics in England than ever before, much of their output continues to be, of necessity, hit-and-run journalism for the weekly press, or the grand old fortnightly, *Art News and Review*, that bred so many of them. The need for a more slow-moving vehicle, that might encourage the contemplative rather than the descriptive virtues, has been discussed for some time, and seems now to have been answered by the foundation of *The Painter and Sculptor*, a half-crown quarterly whose first issue has recently appeared. Although this first number falls below the visual quality one might have hoped for in a periodical of this kind, and some of the authors have not yet changed down out of overdrive, the two middle essays—one by David Thomas on Ruskin's late preoccupations with industrial smog, and the other by Roger Coleman on Peter Blake, 'a Charing-Cross-Road Pre-Raphaelite'—both show that there are men who can ride this unduly rare kind of critical vehicle as if they had done so all their lives.

## Sloit

Much has been heard recently about 'Sloit' or space-left-over-in-planning, and most of what has been heard has been justifiably hostile. But the unconsidered left-overs of most of the arts require more treatment than they get. In typography, because of their influence on readability, these left spaces have been studied scientifically for some time, but more recently, W. J. Sandberg, director of the Stedelijk Museum in Amsterdam, and creator of the



3, an example of 'sloit', or space-left-over-in-typography.

Typographica 14




5, the fireplace in the Conversation Room, Keio University.

distinctive Stedelijk-style of catalogue design, has published his *Experimenta Typografica*, which make full use of the visual qualities of all aspects of lettering, negative and positive. Thus, the row of abstract shapes resembling an Olivetti poster, 3, reveals itself on a second examination, as the Sloit of a common, and readable English word, set in a species of type-face that the REVIEW has long supported.

## Casa Valsugana all Asiant

It has been observed before now that when architecture looks most irrationally formalist, the most convincing-sounding logical-functional arguments are available for its defence. Nevertheless, the Casa Valsugana, 4, designed by Mario Galvagni, would strain even the most plausible double-talker, and most of the arguments offered on its behalf have stressed its suitability to its site in mountainous country and its use of local materials. In fact, its sections are less illogical than might be supposed, its planning is straightforward, and the biggest adverse criticisms that can be levelled at it are concerned with what seems to be an unduly massive reinforced concrete frame, and the large earth ramp and retaining walls that appear to be necessary to hold it up.



4, Casa Valsugana.

## Best of Both Worlds

In spite of Modern Architecture's heavy debt to the art of Japan, the reintegration of Japanese architecture into the International Style has, with a few exceptions, been clumsy and brutal. One of the most notable exceptions is the Conversation Room,

5, of the faculty retreat of Keio University, near Tokio, where the architect Yoshiro Taniguchi and the Japanese-American sculptor Isamu Noguchi have collaborated to produce an interior of striking grace and spartan ease. Its furnishings are disposed partly in a general scheme



6, 7, two more views of the Conversation Room.

focused concentrically on the fireplace, 6, and partly in two privately-focused corners, of which one is seen in 7, apart from the main area. The design idiom in which the whole is couched is so sensitively adjusted that one is not immediately aware of the extent to which the native manner has been adapted to Western conceptions—yet the whole plan, and each individual piece of furniture, are quite anti-traditional in intention. This sensitive balance between two cultures is undoubtedly due to Noguchi, a man firmly grounded in both.

## High Rise in Harvard

Details have recently been released of Harvard University's scheme for the reconstruction of a whole block lying between The Yard and the Harvard Houses on Massachusetts





8, model for a new block at Harvard.

Avenue. Designed by Harvard's Dean of the School of Design, José Luis Sert, the main H-plan block, 1, rises ten storeys in an area previously of only five floors average height. Overcongestion of the urban scene is avoided by the plan-form which brings only one or two-storey subsidiary buildings, such as shops, up to the old building line, and in other places leaves clear plazas for pedestrians. The scheme also provides for covered pedestrian passages to pass under the blocks, two from side to side, and one lengthwise, providing, in effect, a covered passage from the Yard to the Houses. Inception of the scheme waits on the availability of funds, and it may be carried out in two phases.

## CORRESPONDENCE

Count Rumford

To the Editors,

SIRS.—Mr. Sparrow's recent article on Count Rumford implies that Rumford was responsible for the circular Ionic temple in the Englischer Garten in Munich. It was in fact built nineteen years after Rumford's death by Leo von Klenze, in honour of the Elector Charles Theodore.

This temple is of some importance in the history of architecture, since it may well have been the first Greek Revival building to be coloured in accordance with the principles discovered by Hittorff in 1823, published by him in 1830, and publicized by Kugler in his *Über die Polychromie der Griechischen Architektur* in 1835. In a letter addressed to the RIBA on 2 June, 1837, von Klenze claimed that 'to the best of my knowledge, it constitutes the first example of lithochromy in the present day.'

Yours, etc.,

PETER COLLINS.

Montreal.

### Liturgical Brief

To the Editors,

SIRS.—In his article 'A liturgical brief' in your April issue the Rev. Peter Hammond selects a casual sentence of Professor Basil Spence, treats it as an expression of the chief function of the new Coventry Cathedral and condemns it as inadequate. In answer to this two things must be said.

(1) The basic expression of the function of the new Coventry Cathedral is to be found in the book of conditions given to the competing architects. 'The doctrine and the worship of the Church of England is liturgically centred in the Eucharist. The cathedral should be built to enshrine the altar. . . . In the Anglican liturgy it is the people's altar; the altar should gather the people; it should offer access for worship and invitation to Communion.' And: 'The altar should be placed towards the "East" in such a position that as many as possible of the congregation may have a clear and uninterrupted view.' This is precisely in other words what the Rev. Peter Hammond

says: 'The church is seen first and foremost as the place where the local Christian community gathers for the eucharist.'

The reason why the assessors gave the award to Professor Basil Spence out of two hundred competitors was that they considered that his design most adequately fulfilled the stated liturgical functions of a cathedral. Anyone studying his ground plan side by side with those given by the Rev. Peter Hammond will see that it compares favourably with them. If it does not break violently away from the traditional rectangular shape of the past, if the altar sparkles with beauty, and if there is a sense of vista, these features do not in the least detract from the main function of the cathedral as stated in the conditions.

(2) When Professor Spence says that 'a cathedral in England has a greater purpose than a church in which only to hold services . . . the object of this cathedral is to turn the visitor . . . into a worshipper,' what he has in the forefront of his mind is the sheer fact that for every one person who has the opportunity of joining in liturgical eucharistic worship (admittedly the chief function) there are a hundred persons who hourly throughout every day enter the cathedral as visitors. To ignore these would be a contradiction of the purpose of the Christian church—community or building. The cathedral must adopt a second primary purpose, namely to turn the casual visitor into a worshipper. Hence Professor Basil Spence, in co-operation with the Coventry Cathedral authorities, is planning to make the interior of the cathedral an instrument of teaching and inspiration, bringing various forms of the arts into the service of the people to the glory of God. The great tapestry and the eight mural panels are among the chief of these. It is intended and believed that, moved by these works of art, many who come merely to see will stay to worship. We have no hesitation in placing this as a fundamental function of a cathedral side by side with that of liturgical worship.

R. T. HOWARD,  
Provost of Coventry.

To the Editors,

SIRS.—I feel that it is too much of a generalisation to say that, 'the most successful churches of recent years have been inspired by . . . the Liturgical Movement.' If this is true, the churches the Reverend Peter Hammond selects to illustrate his article fail to support his argument.

If we take as orthodox, or non-Liturgical, churches where the congregation sit more or less facing the front of the Altar, or Altar Table, which is placed near to, or against a wall, 17 out of the 25 churches shown (where an Altar can be identified) are of this type. Of the 8 which are Liturgical (congregation on three sides of Altar, or Altar in centre) 2 appear to be projects and in 7 of the 8 examples only plans are shown.

I have seen about half of all the churches illustrated, including SS Felix and Regula at Zurich and find it difficult to see just how this differs from the orthodox church plan except that it is wider and shorter.

The point of all this is that it is inaccurate, and in my view, unfortunate, to try and equate good church design with a particular theological movement. I entirely agree with Mr. Hammond that there are very few successful modern

churches in this country and several good ones on the Continent but I think this can be blamed quite simply on the traditional machinery of the English churches for selecting and briefing architects, and the shortage of able, sensitive and established designers.

Yours, etc.,

TOM MELLOR.

Lytham St. Annes.

Peter Hammond replies,

I entirely agree with Mr. Mellor that the rarity of successful modern churches in this country is due largely to the Church's failure to provide the architect with an adequate brief: the Coventry 'conditions' are a case in point. What he fails to recognize, however, is that it is precisely here that the crucial problems arise. It is not a matter of machinery. The depressing irrelevance of most of our post-war churches reflects our failure to come to grips with certain very fundamental problems of theology and liturgy which the design of a church inevitably involves. The liturgical renewal on the Continent is not, as Mr. Mellor seems to suppose, a movement for 'pushing' a particular arrangement of church furniture—a sort of continental Warham Guild. It cannot be identified with a particular 'liturgical' plan. On the contrary, the architectural experiments which are among its most striking symptoms are of a quite remarkable diversity. What the liturgical movement is doing is rather to provide the radical theological thinking which is the first and indispensable requirement for the formulation of an adequate programme.

The Provost of Coventry's astonishing assertion, that anyone comparing the plan of the new cathedral with those illustrated in my article 'will see that it compares favourably with them,' seems to me sheer wishful thinking. It is not self-evident that a long, narrow, rectangular plan provides the most satisfactory architectural expression of the biblical and patristic—not to say Anglican—conception of the eucharistic action, however admirably it is adapted to the clericalized liturgy of the high middle ages: as at Albi, for example. Far more is involved than the ability to see a distant altar. The avowedly medieval sources of Professor Spence's inspiration are extremely significant in this context.

I would agree with the Provost that many of the works of art which are to find a place in the cathedral are likely to be a source of inspiration to those for whom ecclesiastical art is commonly associated with sham-Gothic horrors. Whether their teaching value will prove to be as great as he supposes is another matter. Much of the symbolism seems to me to be far too subjective, insufficiently informed by any real grasp of the theological and liturgical principle. The function of sacred art involves a great deal more than the provoking of an aesthetic *frisson*. Again, the failure is largely the result of inadequate briefing. General statements of principle are not enough. What is required is a labour of systematic rethinking and research comparable to that which has been carried out since the war in the field of school building. This is likely to prove a considerable undertaking calling for collaboration between experts in many different fields: theologians, architects, sociologists and parish priests, to mention only a few. It is

a task which we have as yet scarcely begun to tackle on this side of the Channel. I hope that the next few months may see a modest step in the right direction with the formation of a church architecture research group, but we desperately need some kind of centre with the means for promoting research of this nature. Such institutions abound on the Continent and their work is proving quite invaluable.

Coventry cathedral may well prove to be a kind of English Assy—both as regards its virtues and its limitations. Let us hope that, like Assy, it may lead to an Audincourt.

## MEMORIAL

Wells Coates

As a founder member of the MARS Group, and the designer of the first modern block of flats in London, Wells Coates has a secure place in the history of the Modern Movement in England, and his recent death in Vancouver at the age of 62 has robbed British architecture of one of its most distinctive and original minds. He had a wide—indeed worldwide—education, having been born in Japan and graduating from McGill, and he brought to problems of planning and structure a kind of ingenuity and logical method that had more in common with his French than his English contemporaries, and ideas of economy that he himself used to refer back to his early experiences of the architecture of Japan. He became one of the most characteristic figures of the intellectual life of the Thirties—Lawn Road Flats, which he built for Jack Pritchard and soon became a regular roosting-place for migratory architects, had exactly that blend of alert sociology and advanced abstract aesthetics that trade-marked the epoch. His later block of flats in Princes Gate was less tough-minded to outward view, but more ingenious in both structure and in the planning (or, rather, section) of the apartments. Ingenuity of section was a notable feature of his most noticed post-war building, the Telekinema for the Festival of Britain, with its projection booths in the thickness of the balcony. Most of his energies since the war, however, were devoted to town planning in Canada, where he tended to spend more and more time in the last years of his life. Many legends gathered around his name, as is so often the case with pioneers, but students who consulted him on points of architecture or recent history, found—not an irascible eccentric—but a man of forthright, well-reasoned and firmly-held ideas, and a sympathetic hearing for their own views.


## INTELLIGENCE

The Government have agreed to contribute up to £250,000 over ten years for the repair of historic buildings in Oxford, provided that the Trustees can raise £1,500,000. Grants for individual college buildings will be made by the Minister of Works, on the advice of the Historic Buildings Council.

## ACKNOWLEDGMENTS

MARGINALIA, pages 71-72: 5-7, Chuji Hirayama; 8, Robert D. Harvey Studio. EXPO 58, pages 75-140: page 79, bottom right and left; page 83, bottom left and centre; page 95, middle right; page 97, top; page 104, 12; page 109, 21; Sam Lambert: page 88, bottom, Sado Bruxelles; page 89, top right; page 90, top left, Fox Photos: page 106, 18; page 109, 22; page 114, 40, 41; page 118, 46, Browne Arphot.

# Construction in progress

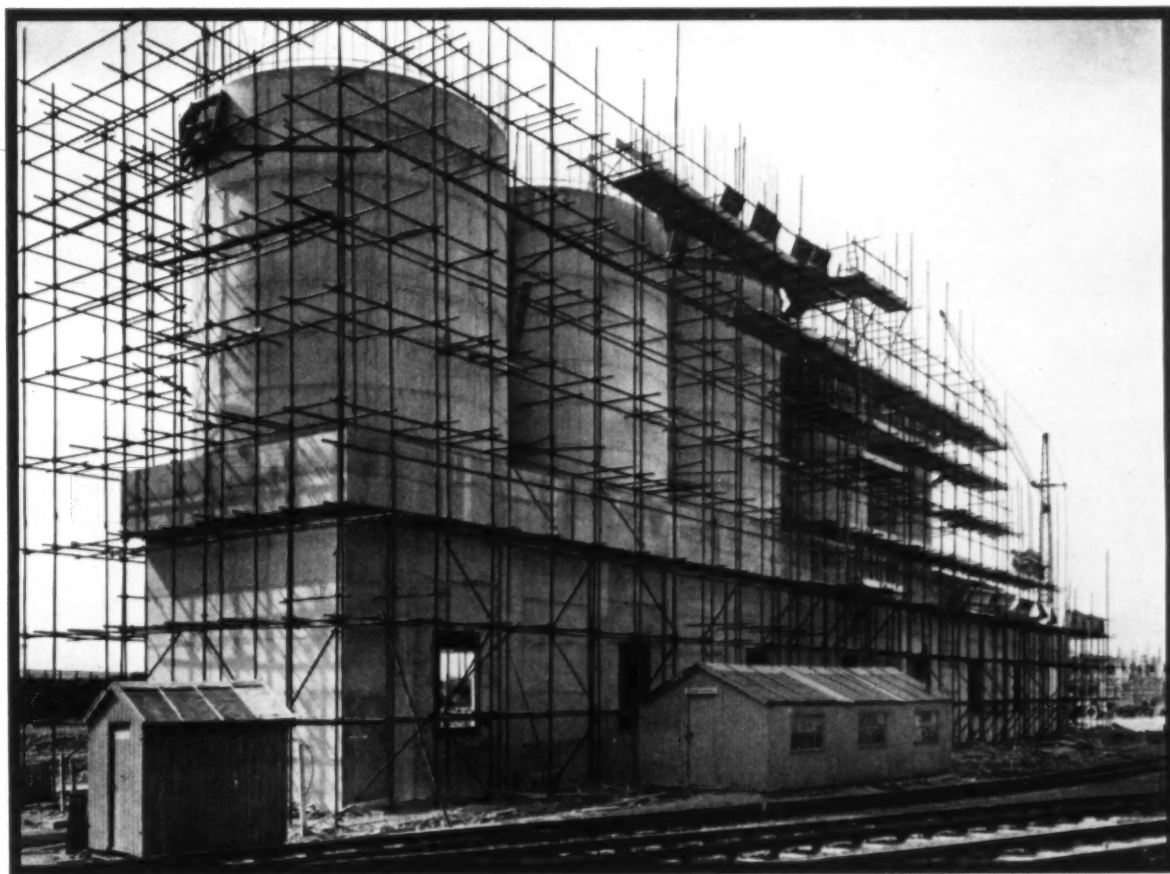

*Blending Bunkers at Merton Coking Plant of the National Coal Board,  
Durham Division.*

*(Photo reproduced by permission of N.C.B.)*

*Main Contractors: Woodall-Duckham Construction Co. Ltd.  
Concrete Structure by Truscon.*

Reinforced concrete by specialists. The product of a co-ordinated construction and design team, progressive in its approach, yet schooled in the styles, skills, and economies arising from Truscon's fifty years' specialist experience. In short, concrete of character

by **Truscon**

The Trussed Concrete Steel Company Limited, Truscon House, Lower Marsh, London SE.1

Telephone: WATERloo 6922

## MARLEY at Brussels



A corner of the United Kingdom Government Pavilion showing the Marley Tile floor. (This photograph was taken in the evening when the Pavilion is closed down. During the day the entire floor area is thronged with people.)

*Architects:*  
Howard V. Lobb, C.B.E., F.R.I.B.A., A.I.Struct.E.  
John Ratcliff, O.B.E., F.R.I.B.A., A.M.T.P.I.  
*Display Designer:* James Gardner, O.B.E., R.D.I.

IN the first six weeks of the Exhibition three-quarters of a million people have walked over the Marley Floor Tiles laid in the Government Pavilion and Crystalline Hall. After cleaning each night they look as good as the day they were laid. By the time the Exhibition closes some 3½ to 4 million people will have walked over this Marley floor—and it will still look all that a good floor should—equal to 60 years of heavy commercial wear.

Other Marley Floors were laid for:

|                                     |   |                                      |   |               |
|-------------------------------------|---|--------------------------------------|---|---------------|
| CLARKE CHAPMAN & COMPANY LIMITED    | • | COURTAULDS LIMITED                   | • | KODAK LIMITED |
| GAGE ENTERPRISES (BRUSSELS) LIMITED | • | IMPERIAL CHEMICAL INDUSTRIES LIMITED |   |               |

London Showrooms: 251 Tottenham Court Road, W.1

THE MARLEY TILE COMPANY LIMITED · RIVERHEAD · SEVENOAKS · KENT · Sevenoaks 55255




# THE ARCHITECTURAL REVIEW

Volume 124

Number 739

August 1958

## SPECIAL ISSUE: THE BRUSSELS EXHIBITION

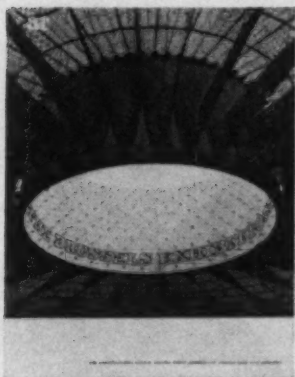

The Cover is a close-up from beneath the metal drum, open to the sky, in the centre of the roof of the United States pavilion, and its surrounding translucent ceiling of wire mesh. It is one of several ambitious and ingenious roof structures that are the Brussels exhibition's chief contributions to building technique and are the subject of an article beginning on page 133.

Edited and written by J. M. Richards

Photographs by de Burgh Galwey

Drawings by Kenneth Browne

### 71 Marginalia

### 72 Correspondence

### 73 Acknowledgments

74 **Frontispiece** The civil engineering exhibit in the Belgian section: architect, *J. van Doosselaere*; engineer, *A. Paduart*

75 **EXPO 58:** an introductory commentary

### 76 Plan of the exhibition

86 **The Foreign Section** An illustrated commentary on the forty-two foreign pavilions, following an itinerary beginning at the *Porte du Benelux*

### Six Outstanding Pavilions

100 **West Germany:** architects, *Egon Eiermann and Sep Ruf*

104 **Switzerland:** architect, *Werner Gantenbein*

108 **Japan:** architect, *Kunio Mayekawa*

110 **The Netherlands:** architects, *J. H. van den Broeck, J. B. Bakema, J. W. C. Boks, and G. T. Rietveld*

112 **Spain:** architects, *R. Vasquez-Molezun and J. Antonio Corrales*

116 **Jugoslavia:** architect, *V. Richter*

119 **Townscape and Other Details.** An anthology in close-up photographs and sketches of noteworthy details, outdoor and indoor, found in the exhibition, with a few cautionary examples: temporary structures; street furniture; buildings and trees; the timber ceiling; the window wall; steps; paving patterns; stones and water; lettering on buildings; interior lighting; door details; technique of display; indoor planting; seats and chairs; sculpture for display; barriers; walls as decoration; technique of mural decoration; use of photography.

132 **Technical: The Hanging Roof** by *Renate Prince and Richard Hobin* From the point of view of building technique the most interesting things in the exhibition are a number of experimental or original roof structures, especially the 'hanging roofs' of the U.S.A., Brazilian, Vatican, French and O.E.E.C. pavilions. These are the subject of an article contributed by Renate Prince and Richard Hobin. Miss Prince is an architect of German origin, now practising in Britain. Mr. Hobin is a New Zealander and is qualified as an engineer as well as an architect.

136 **Contractors, etc.,** for the British pavilions.

Directing Editors J. M. Richards  
Nikolaus Pevsner  
H. de C. Hastings  
Hugh Casson  
Executive Editor Ian McCallum  
Art Editor Gordon Cullen  
Technical Editor Lance Wright

Assistant Editors production, William Mackie.  
research, S. Lang. literary, Reynet Banham.  
Editorial Secretary Whi 0611-9

**SUBSCRIPTION RATE:** The annual post free subscription rate, payable in advance, is £3 8s. 0d. sterling, in U.S.A. and Canada \$10.50, in Italy Lire 6940, elsewhere abroad £3 10s. 0d. Italian subscription agents: A. Salto, Via Santo Spirito 14, Milano; Libreria Dedalo, Via Barberini 75-77, Roma. An index is issued half-yearly and is published as a supplement to the REVIEW.

THE ARCHITECTURAL REVIEW

9-13 Queen Anne's Gate, Westminster, SW1 Whitehall 0611

FIVE SHILLINGS

## MARLEY at Brussels



A corner of the United Kingdom Government Pavilion showing the Marley Tile floor. This photograph was taken in the evening when the Pavilion is closed down. During the day the entire floor area is thronged with people.

*By 6.15*  
Howard A. Todd, C.I.E., F.R.I.B.A., A.S.A. & F.  
John R. R. O.P.F. F.R.I.B.A., A.M.I.P.I.  
Design: *By 6.15* James G. G. O.P.F., R.D.I.

In the first six weeks of the Exhibition three-quarters of a million people have walked over the Marley Floor Tiles laid in the Government Pavilion and Crystalline Hall. After cleaning each night they look as good as the day they were laid. By the time the Exhibition closes some 3½ to 4 million people will have walked over this Marley floor—and it will still look all that a good floor should—equal to 60 years of heavy commercial wear.

Other Marley Floors were laid for:

|                                     |                                      |               |
|-------------------------------------|--------------------------------------|---------------|
| CLARKE CHAPMAN & COMPANY LIMITED    | CORRENT LTD LIMITED                  | KOPAK LIMITED |
| GAGE ENTERPRISES (BRUSSELS) LIMITED | IMPERIAL CHEMICAL INDUSTRIES LIMITED |               |

London Showrooms: 281 Tottenham Court Road, W.1

THE MARLEY TILE COMPANY LIMITED RIVERHEAD, SUSSEX KENT, NCT 000000 002000


# THE ARCHITECTURAL REVIEW

Volume 124

Number 739

August 1958

## SPECIAL ISSUE: THE BRUSSELS EXHIBITION



The Cover is a close-up from beneath the metal drum, open to the sky, in the centre of the roof of the United States pavilion, and its surrounding translucent ceiling of wire mesh. It is one of several ambitious and ingenious roof structures that are the Brussels exhibition's chief contributions to building technique and are the subject of an article beginning on page 133.

Edited and written by J. M. Richards

Photographs by de Burgh Galwey

Drawings by Kenneth Browne

71 Marginalia

72 Correspondence

73 Acknowledgments

74 Frontispiece The civil engineering exhibit in the Belgian section: architect, *J. van Doosselaere*; engineer, *A. Paduart*

75 EXPO 58: an introductory commentary

76 Plan of the exhibition

86 The Foreign Section An illustrated commentary on the forty-two foreign pavilions, following an itinerary beginning at the *Porte du Benelux*

### Six Outstanding Pavilions

100 West Germany: architects, *Egon Eiermann and Sep Ruf*

104 Switzerland: architect, *Werner Gantenbein*

108 Japan: architect, *Kunio Mayekawa*

110 The Netherlands: architects, *J. H. van den Broeck, J. B. Bakema, J. W. C. Boks, and G. T. Rietveld*

112 Spain: architects, *R. Vazquez-Molezun and J. Antonio Corrales*

116 Yugoslavia: architect, *V. Richter*

119 Townscape and Other Details. An anthology in close-up photographs and sketches of noteworthy details, outdoor and indoor, found in the exhibition, with a few cautionary examples: temporary structures; street furniture; buildings and trees; the timber ceiling; the window wall; steps; paving patterns; stones and water; lettering on buildings; interior lighting; door details; technique of display; indoor planting; seats and chairs; sculpture for display; barriers; walls as decoration; technique of mural decoration; use of photography.

132 Technical: The Hanging Roof by *Renate Prince and Richard Hobin* From the point of view of building technique the most interesting things in the exhibition are a number of experimental or original roof structures, especially the 'hanging roofs' of the U.S.A., Brazilian, Vatican, French and O.E.E.C. pavilions. These are the subject of an article contributed by Renate Prince and Richard Hobin. Miss Prince is an architect of German origin, now practising in Britain. Mr. Hobin is a New Zealander and is qualified as an engineer as well as an architect.

136 Contractors, etc., for the British pavilions.

Directing Editors J. M. Richards  
Nikolai Pevsner  
H. de C. Hastings  
Hugh Casson  
Executive Editor Ian McCallum  
Art Editor Gordon Cullen  
Technical Editor Lance Wright  
Assistant Editors production, William Mackie.  
research, S. Lang. library, Reynier Braham.  
Editorial Secretary Whit 9811-9



SUBSCRIPTION RATE: The annual post free subscription rate, payable in advance, is £3 3s. 0d. sterling, in U.S.A. and Canada \$10.50, in Italy Lire 6040, elsewhere abroad £3 10s. 0d. Italian subscription agents: A. Sella, Via Santo Spirito 14, Milano; Libreria DeBolsi, Via Barberini 75-77, Roma. An index is issued half-yearly and is published as a supplement to the REVIEW.

THE ARCHITECTURAL REVIEW

9-13 Queen Anne's Gate, Westminster, SW1 Whitehall 0611

FIVE SHILLINGS



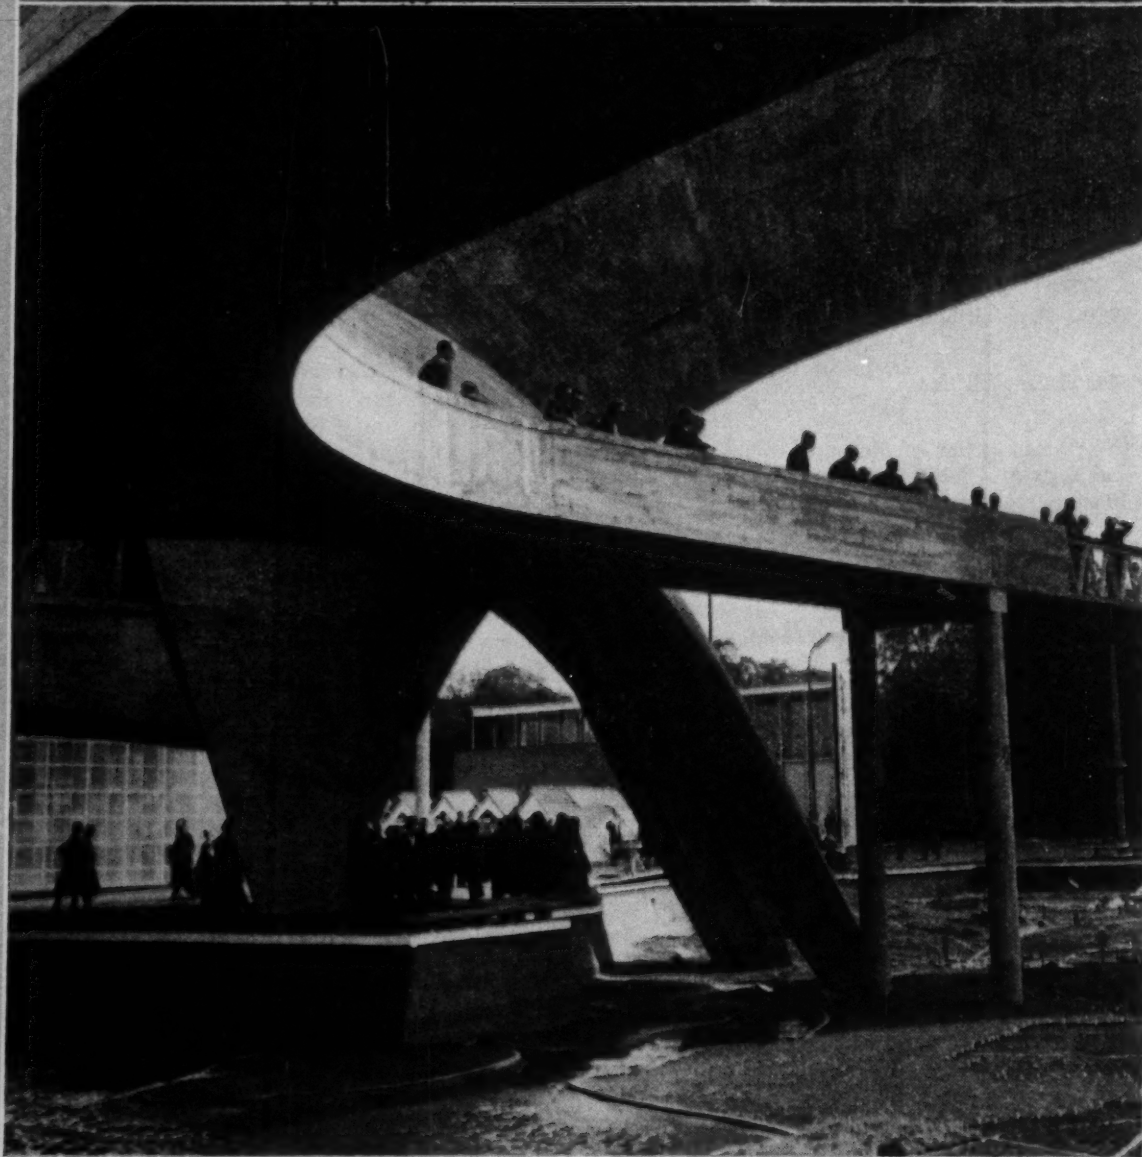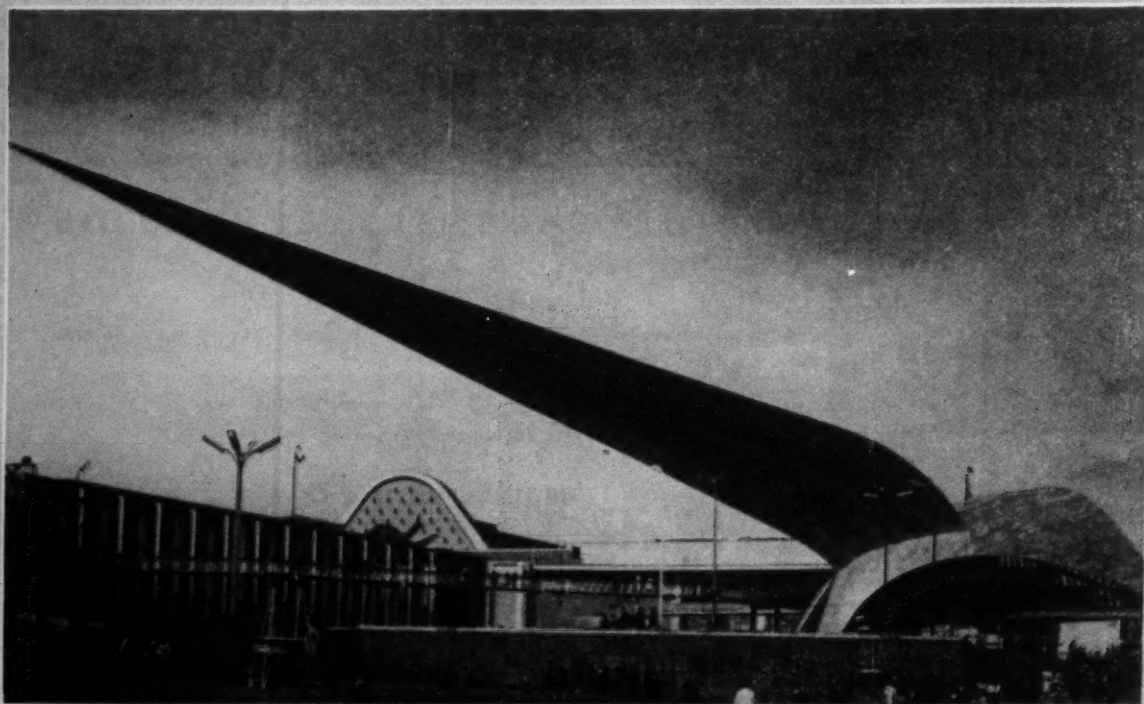

*Belgium, the host country at the international exhibition to which this issue is devoted, has contributed one remarkable structure, a civil engineering exhibit designed to show off the possibilities of modern reinforced concrete construction. A pointed spear, top picture, is cantilevered from a hollow convex base and both are poised above a huge relief map of the country (bottom picture) showing among other things the new system of major motor-roads which visitors to the exhibition should take the opportunity to admire. See also page 80.*

## EXPO 58


Exhibitions have much more than an entertainment value. To architects they present an opportunity of, as it were, flexing their muscles in public and showing what feats they are capable of when uninhibited by the responsibilities of permanence; to the public they offer an experience of a world where everything is modern. And in the grounds of an exhibition the public approaches a building with fewer preconceptions about what buildings ought to look like. There is therefore, or should be, some useful *rapprochement* between modern architecture and its public, which is endangered only by the fact that exhibition buildings are, by their nature, somewhat fantastic and showy, and the public's erroneous impression that outrageous constructions and outlandish forms are what modern architecture is all about may be confirmed by what it sees there.

At the Brussels exhibition—known locally as Expo 58—there is a good deal of this, and who can say whether it is a reflection of a tendency among contemporary architects to over-indulge in structural acrobatics or whether it should be tolerated as the emphasis on showmanship proper to exhibitions? Some of the acrobatics, especially in the shape of roof-structures, have nevertheless their own interest and value, and are the subject of a technical article at the end of this issue. Apart from these, the predominance of the glass-box-curtain-wall theme suggests that Brussels is not one of those exhibitions to which history will look back as the starting point of some new stylistic trend or as the occasion of important experiments.

Other exhibitions have played this role and exerted a lasting influence while doing so, the classic example being the Stockholm exhibition of 1930, which is one of the major landmarks in the history of modern architecture. Similarly the 1951 Festival of Britain is a landmark as regards this country. While it contained little that was revolutionary, it offered the British public, which had previously seen modern buildings only as isolated objects in confused and unsympathetic settings, its first experience of an environment created wholly in the spirit of modern architecture. What had been a specialist taste in architecture, furniture and so on became, after 1951, popularly acceptable and commercially saleable, and many recent improvements in everyday design—for example in café furniture and display lettering—are due to the example set on the South Bank.

The style of design that predominates at Brussels has less to contribute to the evolution of modern architecture, since the ideas displayed there are now freely accepted; indeed they largely consist of the ideas with which modern architecture is most closely identified



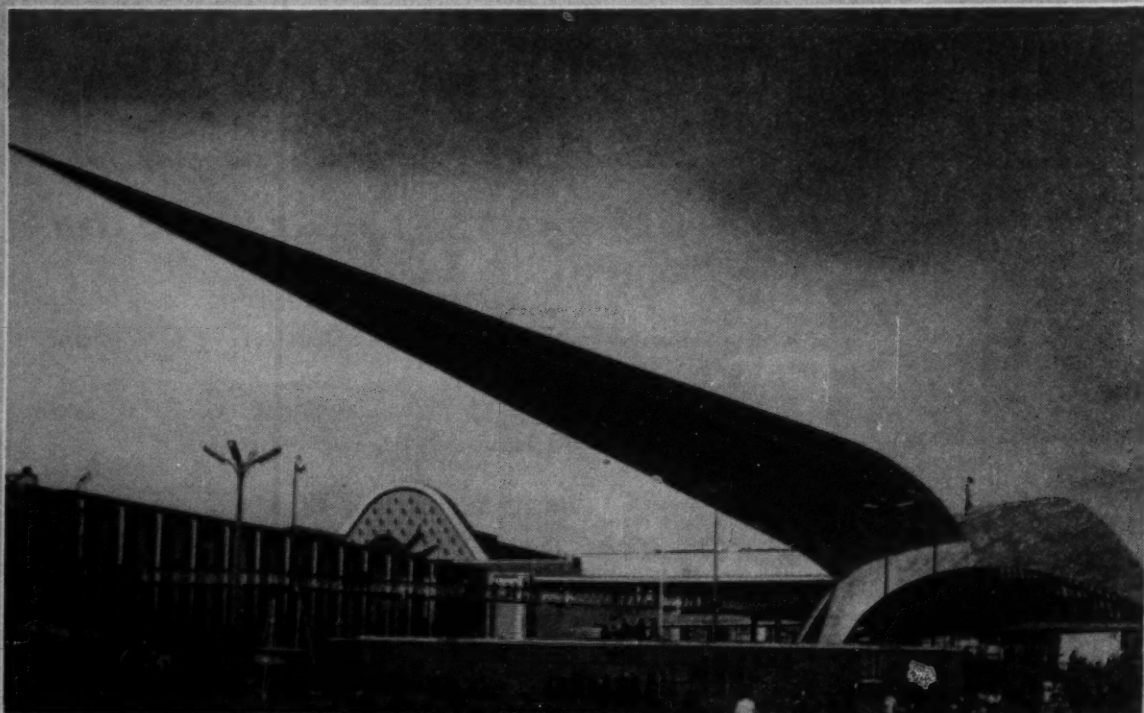

*Belgium, the host country at the international exhibition to which this issue is devoted, has contributed one remarkable structure, a civil engineering exhibit designed to show off the possibilities of modern reinforced concrete construction. A pointed spear, top picture, is cantilevered from a hollow convex base and both are poised above a huge relief map of the country (bottom picture) showing among other things the new system of major motor-roads which visitors to the exhibition should take the opportunity to admire. See also page 80.*



## EXPO 58

Exhibitions have much more than an entertainment value. To architects they present an opportunity of, as it were, flexing their muscles in public and showing what feats they are capable of when uninhibited by the responsibilities of permanence; to the public they offer an experience of a world where everything is modern. And in the grounds of an exhibition the public approaches a building with fewer preconceptions about what buildings ought to look like. There is therefore, or should be, some useful *rapprochement* between modern architecture and its public, which is endangered only by the fact that exhibition buildings are, by their nature, somewhat fantastic and showy, and the public's erroneous impression that outrageous constructions and outlandish forms are what modern architecture is all about may be confirmed by what it sees there.

At the Brussels exhibition—known locally as Expo 58—there is a good deal of this, and who can say whether it is a reflection of a tendency among contemporary architects to over-indulge in structural acrobatics or whether it should be tolerated as the emphasis on showmanship proper to exhibitions? Some of the acrobatics, especially in the shape of roof-structures, have nevertheless their own interest and value, and are the subject of a technical article at the end of this issue. Apart from these, the predominance of the glass-box-curtain-wall theme suggests that Brussels is not one of those exhibitions to which history will look back as the starting point of some new stylistic trend or as the occasion of important experiments.

Other exhibitions have played this role and exerted a lasting influence while doing so, the classic example being the Stockholm exhibition of 1930, which is one of the major landmarks in the history of modern architecture. Similarly the 1951 Festival of Britain is a landmark as regards this country. While it contained little that was revolutionary, it offered the British public, which had previously seen modern buildings only as isolated objects in confused and unsympathetic settings, its first experience of an environment created wholly in the spirit of modern architecture. What had been a specialist taste in architecture, furniture and so on became, after 1951, popularly acceptable and commercially saleable, and many recent improvements in everyday design—for example in café furniture and display lettering—are due to the example set on the South Bank.


The style of design that predominates at Brussels has less to contribute to the evolution of modern architecture, since the ideas displayed there are now freely accepted; indeed they largely consist of the ideas with which modern architecture is most closely identified

## LAY-OUT PLAN

1. The Belgian section.
2. The foreign section.
3. Amusement park.
4. "Belgique Joyeuse": reproduction of the centre of an old market-town.
5. The Belgian Congo and Ruanda Urundi.
6. The international section.

Across the top of the plan can be seen the new double-track Brussels—Antwerp highway with its flyover crossings, etc. In the bottom left-hand corner is the Heysel sports stadium. The symmetrical group of buildings within the left-hand boundary are those that survive from the Brussels exhibition of 1935. The plan of the foreign section (the right-hand portion, crossed by the high-level passerelle) is shown in more detail on page 86.


Chief architect for the exhibition, M. Van Goethem (successor to P. Bonduelle, originally appointed chief architect, who died in 1955 when the planning of the exhibition had only just begun). Chief engineer, E. Valcke. Garden architect, R. Péchère.

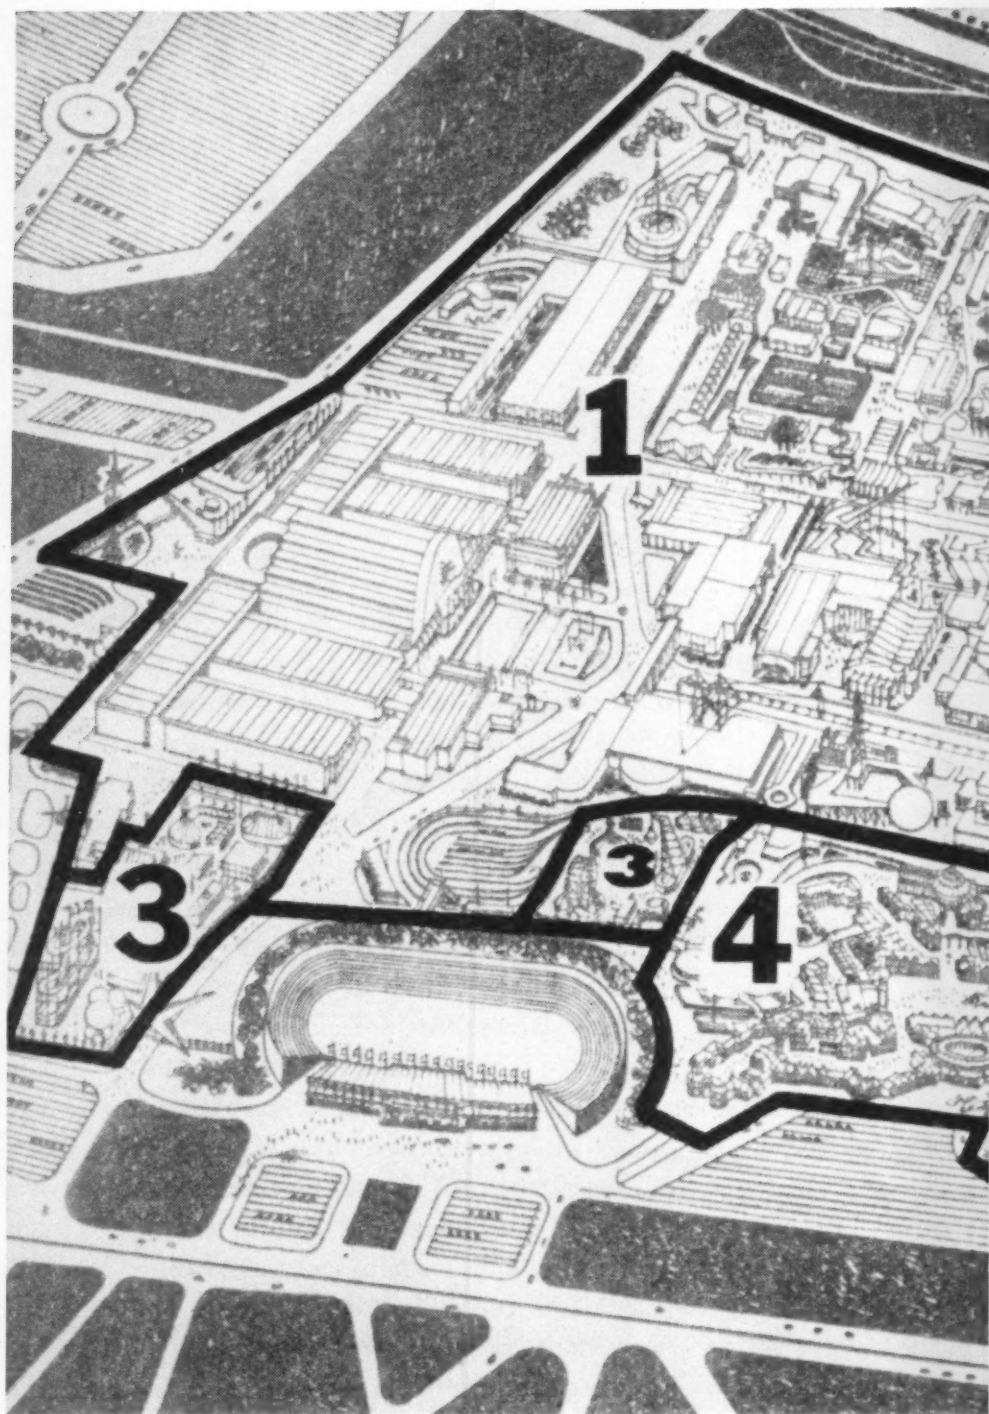

in the public mind: smooth expanses of glass; buildings raised on stilts; exposed metal frames; stairs without risers; together with all the clichés that the designer who wants to be up to date has taken over from the technologist, by whom they were conceived as tools rather than as effects. So ubiquitous are certain familiar forms, like the exposed steel frame clad with curtain walling—the glass box—that it may be predicted that if the exhibition has any influence of a general kind, the form it will take will be to hasten the decease of the glass box as the accepted pattern of modern building. It is utilized *ad nauseam*, and its limitations are exposed as fully as its potentialities are exploited.

This is truest of the Belgian sections of the exhibition, a large part of the whole, where not only are the buildings (with the few exceptions noted on the next few pages) composed of clichés; they are themselves clichés, and since the purpose of this issue is to



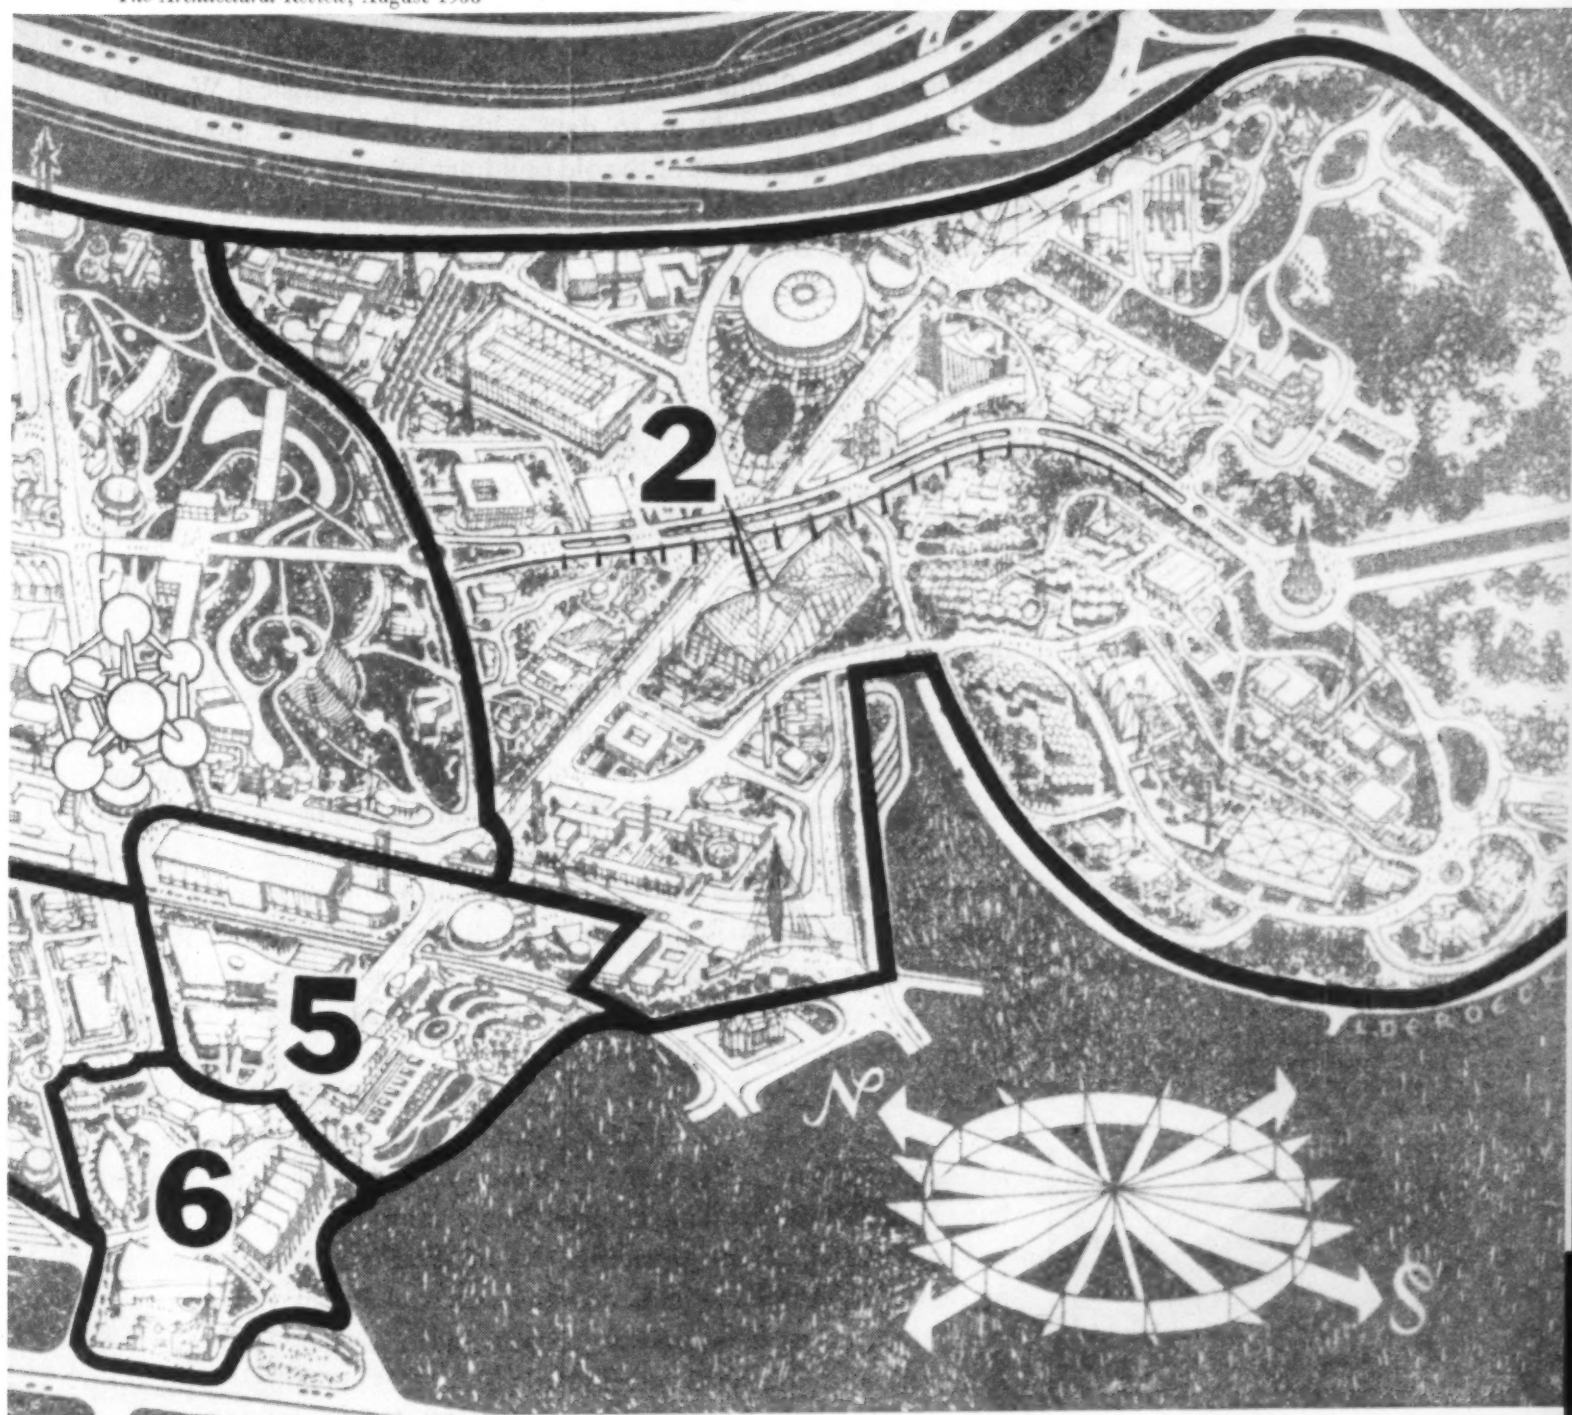

put on record the good things to be found at the exhibition, the greater part of it is devoted to the foreign section where the best buildings (glass-box-wise and otherwise) are gathered together, and which is also the most rewarding section for the pursuit of good detail and well-conceived example of townscape and trim—these being other fields in which exhibitions have, in the past, served the useful purpose of trying out and disseminating ideas. A separate section of this issue is devoted to details of this kind.

Before close attention is paid to the foreign section, something must, however, be said about the exhibition as a whole. The site is one of about 500 acres on the northern outskirts of the city, twenty minutes away by tram. It is the same site—or, rather, an extension of the same site—that was used for the exhibition of 1935, and part of the Belgian Government exhibit is installed in the surviving 1935 buildings placed round




three sides of a square on the north-western edge of the grounds: rectangular concrete halls, fronted with porticoes and flights of steps in the heavy neo-classical Wembley style. One of them only has been brought up to date with a bright blue modernistic frontispiece. The formal, axial arrangement of the old buildings is continued in the new in so far as they are lined up on either side of a number of radiating avenues, creating vistas duly closed by vertical features. But this boring type of layout does not, fortunately, impose itself on the whole exhibition. Much of the ground, especially in the east and the south-east (where the foreign pavilions are situated), has an undulating park-like character, with plenty of well-grown trees. It was indeed originally the Heysel Park, and adjoins Laeken, one of the Belgian royal estates. This landscape has been well used, and the picturesque qualities thereby given to the layout fully compensate, over a great part of the exhibition, for the absence of those natural sheets of water—the Seine at the many Paris exhibitions, the Thames at the South Bank, the water-front at Stockholm and the harbour at Hälsingborg in 1955—which have proved such an asset in the past.


This beautifully formed landscape has permitted not only a more informal grouping of buildings and the introduction of such devices dear to the Picturesque planner as concealment and surprise, but also continual changes of level in the pathways by which the pavilions are approached, giving a refreshing variety of view. This quality has been intensified by one bold addition to the natural landscape: a pedestrian viaduct, about a third of a mile long, which leads from the high ground at the edge of the Laeken park, crosses the valley in which the biggest foreign pavilions are sited and swings westwards and downwards on to another ridge of high ground running from the north-

east boundary towards the centre of the exhibition. From it commanding views are obtained, down on to crowded avenues, pools and fountains and the roofs and terraces of pavilions, and obliquely over other pavilions glimpsed distantly between trees. Flights of steps descend from it at several points to connect with the lower avenues and pathways. It is an admirable conception, though its concrete structure is too heavy to give it the inspiring scale it might have had, and the detailing is forbiddingly clumsy.

The drama inherent in multiplicity of level is also well exploited by one of the three methods of transport available to visitors to the exhibition: an aerial tramway, constructed after the fashion of an Alpine ski-lift. Overhead wires, strung on branching concrete pylons, carry gaily-coloured metal tubs, each holding two people, between elevated stations at several points in the grounds—see map on page 81. The wires pass under the aforementioned pedestrian viaduct (or *passerelle*), sometimes higher than the roofs of buildings (though not directly above them, since the routes follow the main avenues) and sometimes alongside them, so that the occupants of the tubs can peer from a high level through their curtain walls. These rides have no great utility as a means of transport, since the distances they convey their passengers are short, but they add greatly to the gaiety and the three-dimensional complexity of the scene, they provide exciting and unexpected moving viewpoints and they also provide the refreshing experience of temporary isolation from the pushing,


*The pedestrian overpass or passerelle which crosses the foreign section. In the top picture the aerial tramway is seen passing beneath it and continuing alongside the Vatican restaurant beyond. In the bottom picture the little Siamese pavilion can be distantly seen on the right.*

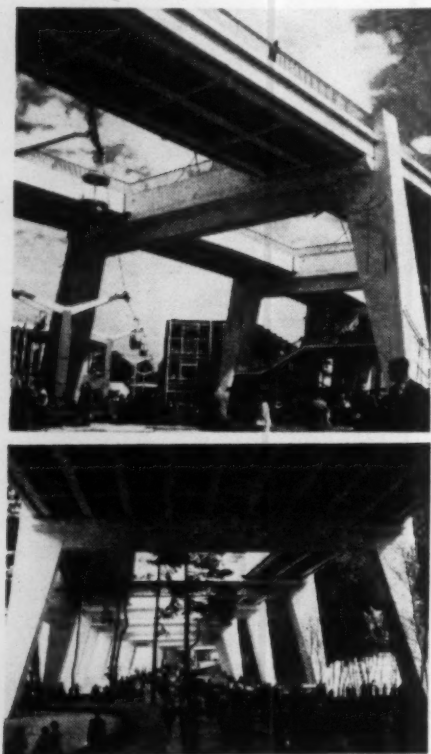




The exhibition's central feature, the 360 ft. high 'atomium,' is an enlarged model (165 million times) of a molecule of iron. It consists of nine spheres: one at the base, on which the structure rests, one in the centre, one at the top and two circles of three spheres each. It is given additional stability by steel bipod legs (small picture on left) reaching from each of the three lower spheres to the ground, housing staircases for descent. Ascent is by a central lift shaft, and by escalators (lower picture on left) connecting the base sphere with one of the lower circle of spheres and this with the centre sphere. The top and centre spheres are divided internally into two floors, each with a circle of windows, the lower floors being viewing platforms and the top floors a restaurant and a bar respectively. The structure generally, and the tubes that connect the spheres and contain the lifts and escalators, are of steel. The spheres are clad in aluminium alloy, with an outer layer of highly polished aluminium foil. Between spheres and tubes are rubber mountings to take up differential expansion. The aluminium cladding of each sphere consists of narrow bands forming nine great circles, dividing the surface into forty-eight spherical triangles which are themselves each sub-divided into fifteen triangles. The bands and triangles (which are visible in the top picture) are bolted to a light aluminium frame. Into the triangles small lights are recessed—see the night view on the right.


*Architects, A. and J. Polak; engineer, A. Waterkeyn.*

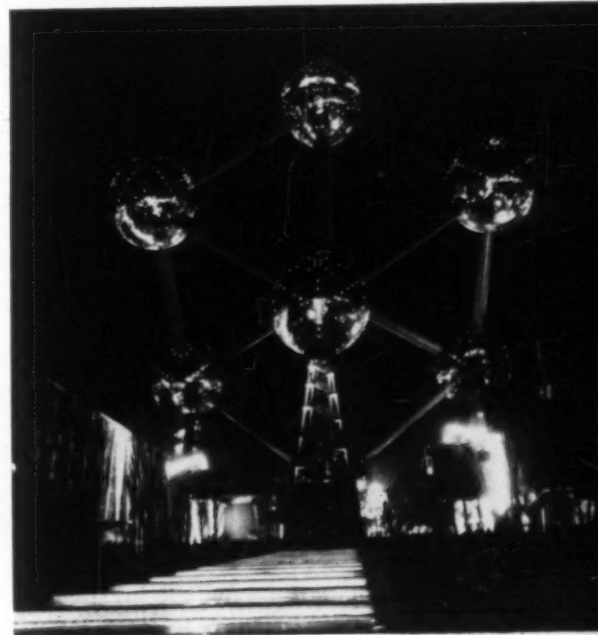



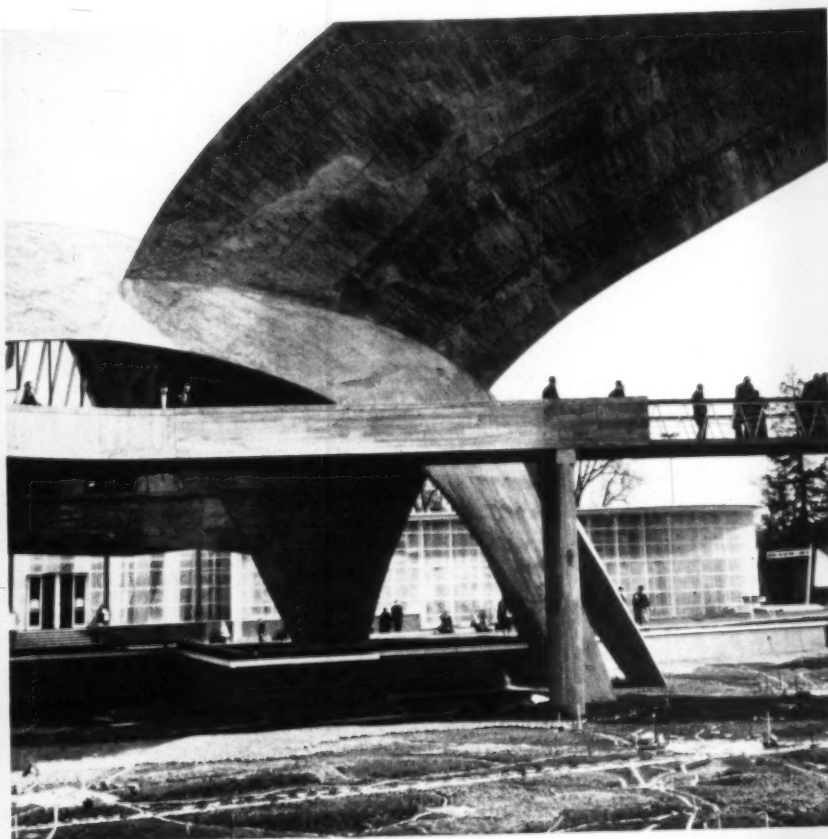

The civil engineering exhibit (see also frontispiece) is in the centre of the Belgian section, due north of the atomium, towards which the reinforced concrete spear points. This spear is cantilevered over a relief map of Belgium (shown top right and shaded in the plan below) and from it is suspended a gangway (see picture above) leading to the main rectangular exhibition hall

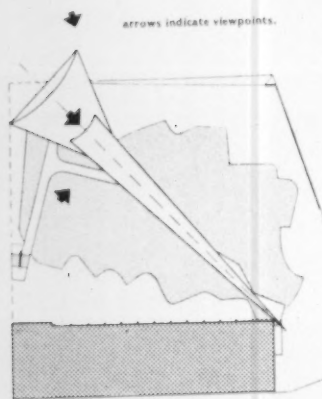


(shaded darker in plan). The spear (an inverted A in section) springs from a domed concrete hall (right-hand pictures), the floor of which is cantilevered away from a central pivot in the opposite direction from the spear. Together with two stilts continuing the curve of the dome, this pivot furnishes a tripod support for the whole structure.

Architect, J. Van Doosselaere; engineer, A. Paduart.





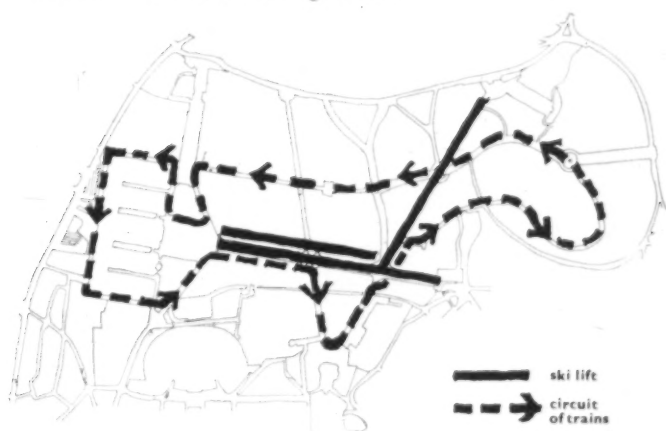


Left, the exhibition grounds showing the routes of the aerial tramway (or ski-lift) and the ground-level trains of cars. In the centre is the atomium. On the right: top, a ski-lift tub arriving at one of its terminal stations; centre, tricycle taxi; bottom, train of cars (atomium in background).

chattering crowds. The other two means of transport are two-seater motor-tricycles that can be hired by the half-hour like taxis, and trains of open-sided cars, painted blue, following fixed routes.


The other structure which occupies the sky and dominates over the *passerelle*, the ski-lift, the high roofs of the bigger buildings and the many smaller vertical features—and indeed which presides grandly over the whole exhibition grounds, in most of the near and all the distant views—is the ‘atomium,’ the exhibition’s symbolic central feature (see page 79). It has defects as a design, but must yet be counted a success, if only because its great bulk (it is 360 ft. high) creates a genuine sense of drama when it is seen from underneath and because the shining surface of the aluminium alloy with which it is sheathed glitters prettily among the trees and can look beautiful, mysterious and even sinister when the sky behind it is dark in tone. Its principal defects are first its somewhat ungainly proportions, due to the fact that the tubes that connect the spheres have been made larger than structural considerations demanded, in order to give room for escalators inside them, and secondly the imprecise quality of some of the detailing. The atomium is placed at the intersection of four main avenues, one of which has a cascaded pool of water rippling down its centre. The whole area between it and the formal group of 1935 buildings already mentioned (that is, the north-western half of the grounds) and the area east of this, up to where the exhibition comes to an end alongside the new Brussels-Antwerp highway, constitute the Belgian section. Here are buildings devoted to industries and government undertakings (metallurgy, hydraulic energy, forestry, telecommunications and so on) together with a few exhibits by commercial and industrial firms.

Few of these buildings are of any architectural interest, the outstanding exception being the civil engineering exhibit (see frontispiece and facing page), which consists of a fairly conventional two-storey hall alongside which is a spectacular structure in reinforced concrete containing a smaller exhibition hall within its base but chiefly designed to display the potentialities of its material. A pointed triangular spear in the form of a cantilevered arm rises steeply into the sky and from it is suspended a gangway which leads visitors to the upper level of the main hall. The whole composition—the soaring arm, the exhibition chamber at its base, its supports, ramps and staircases—has been designed with real sculptural feeling. Apart from its didactic purpose it is, from every viewpoint, a strikingly dynamic object. On page 83 are illustrated two or three



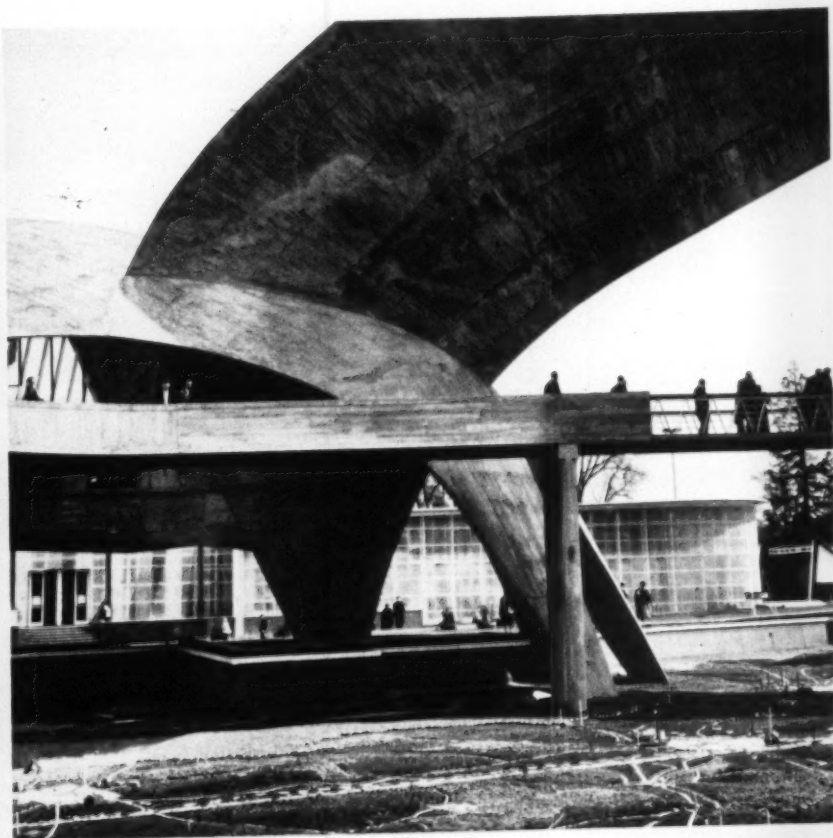

The civil engineering exhibit (see also frontispiece) is in the centre of the Belgian section, due north of the atomium, towards which the reinforced concrete spear points. This spear is cantilevered over a relief map of Belgium (shown top right and shaded in the plan below) and from it is suspended a gangway (see picture above) leading to the main rectangular exhibition hall

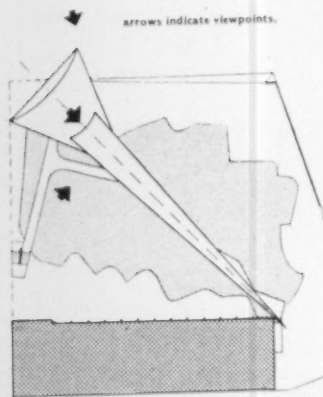


(shaded darker in plan). The spear (an inverted A in section) springs from a domed concrete hall (right-hand pictures), the floor of which is cantilevered away from a central pivot in the opposite direction from the spear. Together with two stilts continuing the curve of the dome, this pivot furnishes a tripod support for the whole structure.

Architect, J. Van Doosselaere; engineer, A. Paduart.





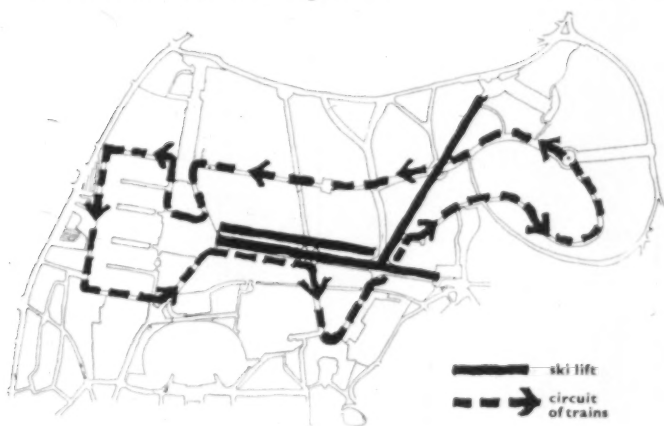


Left, the exhibition grounds showing the routes of the aerial tramway (or ski-lift) and the ground-level trains of cars. In the centre is the atomium. On the right: top, a ski-lift tub arriving at one of its terminal stations; centre, tricycle taxi; bottom, train of cars (atomium in background).


chattering crowds. The other two means of transport are two-seater motor-tricycles that can be hired by the half-hour like taxis, and trains of open-sided cars, painted blue, following fixed routes.

The other structure which occupies the sky and dominates over the *passerelle*, the ski-lift, the high roofs of the bigger buildings and the many smaller vertical features—and indeed which presides grandly over the whole exhibition grounds, in most of the near and all the distant views—is the ‘atomium,’ the exhibition’s symbolic central feature (see page 79). It has defects as a design, but must yet be counted a success, if only because its great bulk (it is 360 ft. high) creates a genuine sense of drama when it is seen from underneath and because the shining surface of the aluminium alloy with which it is sheathed glitters prettily among the trees and can look beautiful, mysterious and even sinister when the sky behind it is dark in tone. Its principal defects are first its somewhat ungainly proportions, due to the fact that the tubes that connect the spheres have been made larger than structural considerations demanded, in order to give room for escalators inside them, and secondly the imprecise quality of some of the detailing. The atomium is placed at the intersection of four main avenues, one of which has a cascaded pool of water rippling down its centre. The whole area between it and the formal group of 1935 buildings already mentioned (that is, the north-western half of the grounds) and the area east of this, up to where the exhibition comes to an end alongside the new Brussels-Antwerp highway, constitute the Belgian section. Here are buildings devoted to industries and government undertakings (metallurgy, hydraulic energy, forestry, telecommunications and so on) together with a few exhibits by commercial and industrial firms.


Few of these buildings are of any architectural interest, the outstanding exception being the civil engineering exhibit (see frontispiece and facing page), which consists of a fairly conventional two-storey hall alongside which is a spectacular structure in reinforced concrete containing a smaller exhibition hall within its base but chiefly designed to display the potentialities of its material. A pointed triangular spear in the form of a cantilevered arm rises steeply into the sky and from it is suspended a gangway which leads visitors to the upper level of the main hall. The whole composition—the soaring arm, the exhibition chamber at its base, its supports, ramps and staircases—has been designed with real sculptural feeling. Apart from its didactic purpose it is, from every viewpoint, a strikingly dynamic object. On page 83 are illustrated two or three

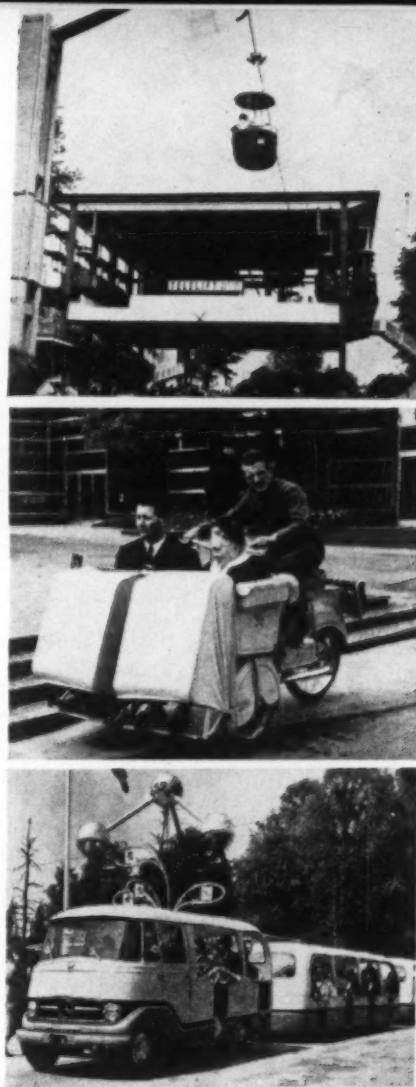



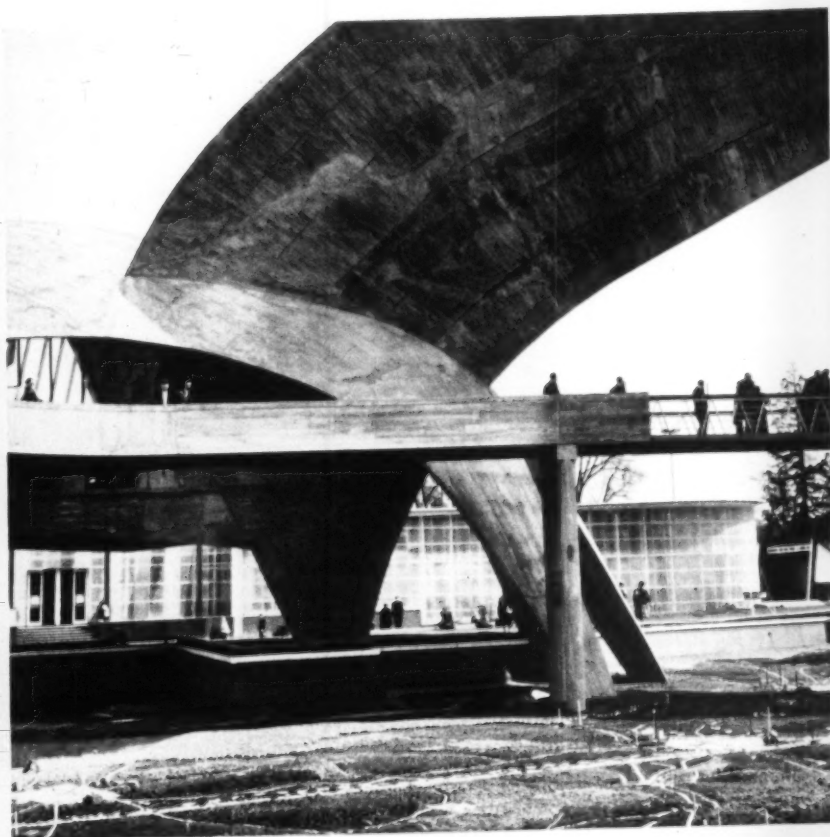


The civil engineering exhibit (see also frontispiece) is in the centre of the Belgian section, due north of the atomium, towards which the reinforced concrete spear points. This spear is cantilevered over a relief map of Belgium (shown top right and shaded in the plan below) and from it is suspended a gangway (see picture above) leading to the main rectangular exhibition hall

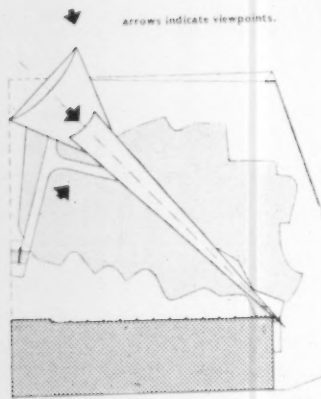

(shaded darker in plan). The spear (an inverted A in section) springs from a domed concrete hall (right-hand pictures), the floor of which is cantilevered away from a central pivot in the opposite direction from the spear. Together with two stilts continuing the curve of the dome, this pivot furnishes a tripod support for the whole structure.

Architect, J. Van Doosselaere; engineer, A. Paduart.



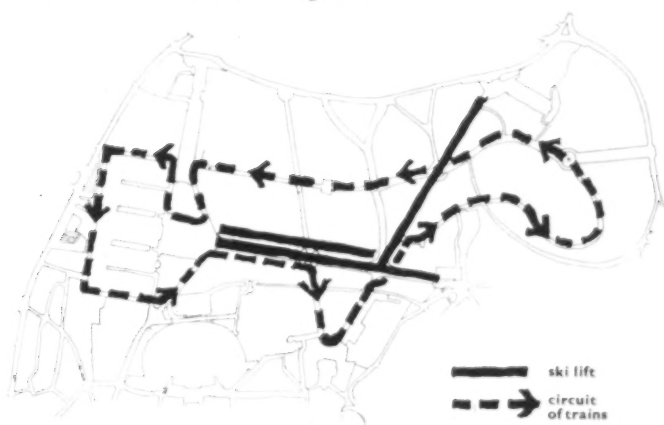

Left, the exhibition grounds showing the routes of the aerial tramway (or ski-lift) and the ground-level trains of cars. In the centre is the atomium. On the right: top, a ski-lift tub arriving at one of its terminal stations; centre, tricycle taxi; bottom, train of cars (atomium in background).

chattering crowds. The other two means of transport are two-seater motor-tricycles that can be hired by the half-hour like taxis, and trains of open-sided cars, painted blue, following fixed routes.

The other structure which occupies the sky and dominates over the *passerelle*, the ski-lift, the high roofs of the bigger buildings and the many smaller vertical features—and indeed which presides grandly over the whole exhibition grounds, in most of the near and all the distant views—is the ‘atomium,’ the exhibition’s symbolic central feature (see page 79). It has defects as a design, but must yet be counted a success, if only because its great bulk (it is 360 ft. high) creates a genuine sense of drama when it is seen from underneath and because the shining surface of the aluminium alloy with which it is sheathed glitters prettily among the trees and can look beautiful, mysterious and even sinister when the sky behind it is dark in tone. Its principal defects are first its somewhat ungainly proportions, due to the fact that the tubes that connect the spheres have been made larger than structural considerations demanded, in order to give room for escalators inside them, and secondly the imprecise quality of some of the detailing. The atomium is placed at the intersection of four main avenues, one of which has a cascaded pool of water rippling down its centre. The whole area between it and the formal group of 1935 buildings already mentioned (that is, the north-western half of the grounds) and the area east of this, up to where the exhibition comes to an end alongside the new Brussels-Antwerp highway, constitute the Belgian section. Here are buildings devoted to industries and government undertakings (metallurgy, hydraulic energy, forestry, telecommunications and so on) together with a few exhibits by commercial and industrial firms.

Few of these buildings are of any architectural interest, the outstanding exception being the civil engineering exhibit (see frontispiece and facing page), which consists of a fairly conventional two-storey hall alongside which is a spectacular structure in reinforced concrete containing a smaller exhibition hall within its base but chiefly designed to display the potentialities of its material. A pointed triangular spear in the form of a cantilevered arm rises steeply into the sky and from it is suspended a gangway which leads visitors to the upper level of the main hall. The whole composition—the soaring arm, the exhibition chamber at its base, its supports, ramps and staircases—has been designed with real sculptural feeling. Apart from its didactic purpose it is, from every viewpoint, a strikingly dynamic object. On page 83 are illustrated two or three





*In the section entitled 'Belgique Joyeuse,' a reconstruction of a traditional market-square. Architect, Y. Blomme.*


other buildings in the Belgian section which also show some architectural quality.

West of the Belgian section, in the corner of the grounds, are a helicopter station and the amusement park. On the other side of the Heysel sports stadium is a small area given to an exhibit of the kind that all exhibition organizers feel compelled (and find it profitable) to provide: a traditional Belgian market-square with the surrounding houses and adjoining streets meticulously reproduced as they would have looked in 1900, and embellished with peasant costumes, folk cookery, local handicrafts and the like. The popularity of such side-shows among the less sophisticated visitors is the organizers' answer to the scorn poured on them by those who find them only sentimental. This example is efficiently and picturesquely done.


Alongside it, immediately south of the atomium, occupying the angle between two important avenues, is the area given to the Belgian Congo and Ruanda Urundi. Although the story of their flora, fauna, mineral wealth and missionary enterprises have their own importance and are properly told in some detail, neither the style in which the exhibits are displayed nor the buildings that contain them are of interest, and so need not be dwelt on here. The same must regretfully be said of the international section, situated south-west of the atomium at the point where the two avenues bounding the Congo section converge. It is the first time that the international organizations have been catered for in an exhibition like this. Pavilions devoted to the United Nations, the Council of Europe, Benelux, OEEC and ECSC are symmetrically grouped round a large courtyard. This could have been a highly significant development calling for and creating an appropriate architectural impact. Disappointingly, this group of large buildings makes hardly any impact. Except in the Council of Europe building the displays contained therein are uninspiring, and the architecture, though an attempt has obviously been made to create a monumental version of the contemporary exhibition idiom with the aid of striking modernistic roof-structures, is utterly sterile. It illustrates the paradox that designs representing an abstraction and emanating from a source as impersonal as a committee seem to turn out to be the most elaborately self-conscious.

On the opposite side of the atomium to the Congo and international sections, stretching north-eastwards, like the Belgian industrial section, as far as the Brussels-Antwerp road, there is hilly, thickly wooded ground, cut up by narrow lakes and deep ravines, which provides a refreshingly calm green contrast to the glitter and garrulity of the


*In the international section: left, the CECA (European Iron and Steel Council) building (architects, E. Delatte and R. Maquestieau); right, the United Nations building (architect, H. van Kuyck). The roof of another of the buildings in this section—for OEEC—is described in the technical article beginning on page 133.*

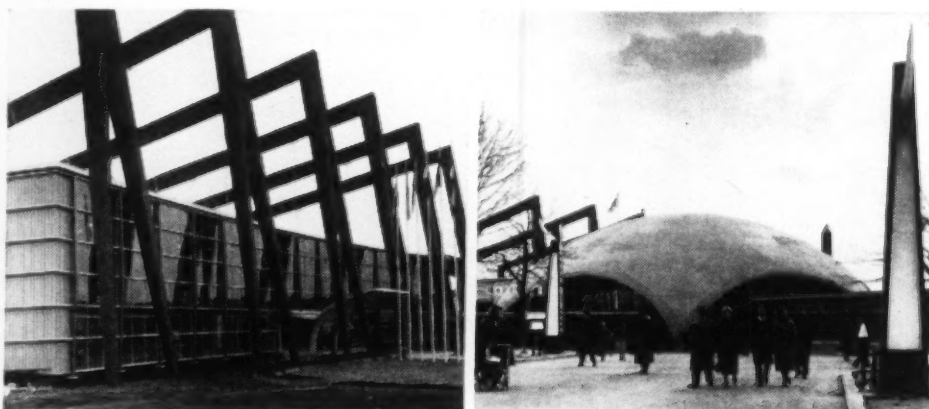




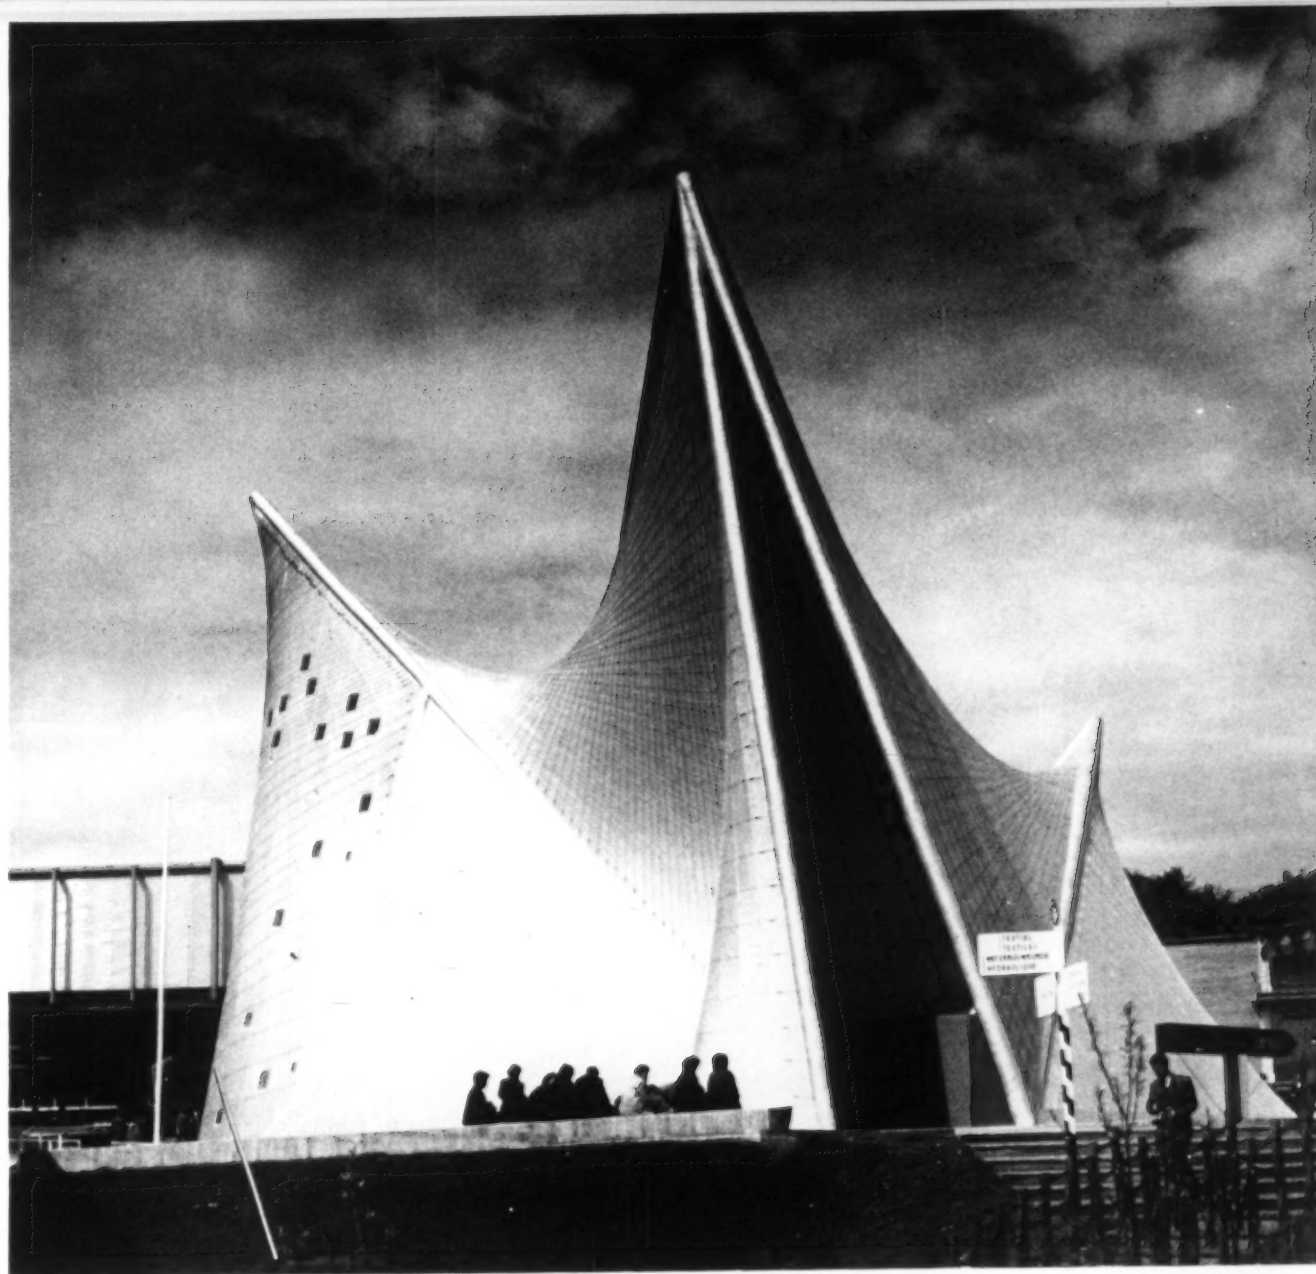

The Philips pavilion, above, housing a *poème électronique*, adjoins the Netherlands pavilion in the foreign section. It is a reinforced concrete rib structure, with a freely curved plan shape (plan on right), determined by acoustic and lighting requirements, rising to three peaks of 65 ft., 60 ft. and 42 ft. The structure is clothed with a concrete envelope formed of twelve hyperbolic paraboloids and consisting of thin slabs laid on pretensioned cables anchored to the ribs. The inner walls are lined with sound absorbent material and have three hundred loudspeakers built into them. Architect, Le Corbusier; engineer, H. C. Duyster.

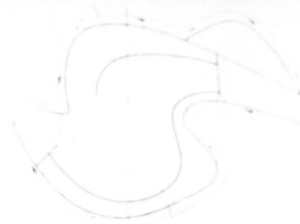

Below, three of the more successful buildings in the Belgian section. Left, glass-walled showroom of International Business Machines (architects, E. Naves and A. and J. Polak) and cylindrical display by the electronic industry (architects, J. Thiron and J. Wybauw). Centre, mining pavilion, sheathed in copper, in the Congo section (architects, Delcourt and de Nayer). Right, Government research building with exposed frame of polished timber (architects, M. Lambrichs and P. Dumont).

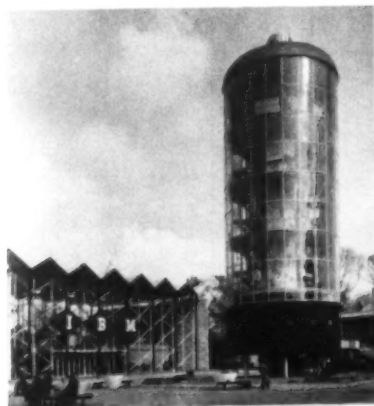



*In the section entitled 'Belgique Joyeuse,' a reconstruction of a traditional market-square. Architect, Y. Blomme.*



other buildings in the Belgian section which also show some architectural quality.

West of the Belgian section, in the corner of the grounds, are a helicopter station and the amusement park. On the other side of the Heysel sports stadium is a small area given to an exhibit of the kind that all exhibition organizers feel compelled (and find it profitable) to provide: a traditional Belgian market-square with the surrounding houses and adjoining streets meticulously reproduced as they would have looked in 1900, and embellished with peasant costumes, folk cookery, local handicrafts and the like. The popularity of such side-shows among the less sophisticated visitors is the organizers' answer to the scorn poured on them by those who find them only sentimental. This example is efficiently and picturesquely done.


Alongside it, immediately south of the atomium, occupying the angle between two important avenues, is the area given to the Belgian Congo and Ruanda Urundi. Although the story of their flora, fauna, mineral wealth and missionary enterprises have their own importance and are properly told in some detail, neither the style in which the exhibits are displayed nor the buildings that contain them are of interest, and so need not be dwelt on here. The same must regretfully be said of the international section, situated south-west of the atomium at the point where the two avenues bounding the Congo section converge. It is the first time that the international organizations have been catered for in an exhibition like this. Pavilions devoted to the United Nations, the Council of Europe, Benelux, OEEC and ECSC are symmetrically grouped round a large courtyard. This could have been a highly significant development calling for and creating an appropriate architectural impact. Disappointingly, this group of large buildings makes hardly any impact. Except in the Council of Europe building the displays contained therein are uninspiring, and the architecture, though an attempt has obviously been made to create a monumental version of the contemporary exhibition idiom with the aid of striking modernistic roof-structures, is utterly sterile. It illustrates the paradox that designs representing an abstraction and emanating from a source as impersonal as a committee seem to turn out to be the most elaborately self-conscious.

On the opposite side of the atomium to the Congo and international sections, stretching north-eastwards, like the Belgian industrial section, as far as the Brussels-Antwerp road, there is hilly, thickly wooded ground, cut up by narrow lakes and deep ravines, which provides a refreshingly calm green contrast to the glitter and garrulity of the

*In the international section: left, the CECA (European Iron and Steel Council) building (architects, E. Delatte and R. Maquestieau); right, the United Nations building (architect, H. van Kuyck). The roof of another of the buildings in this section—for OEEC—is described in the technical article beginning on page 133.*

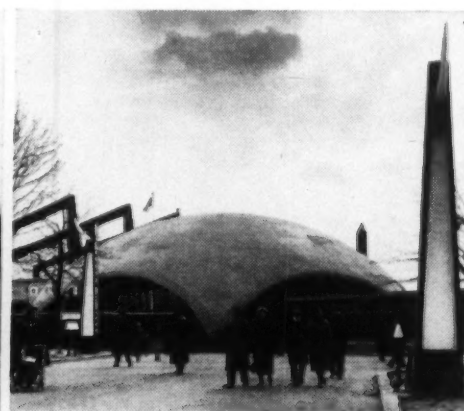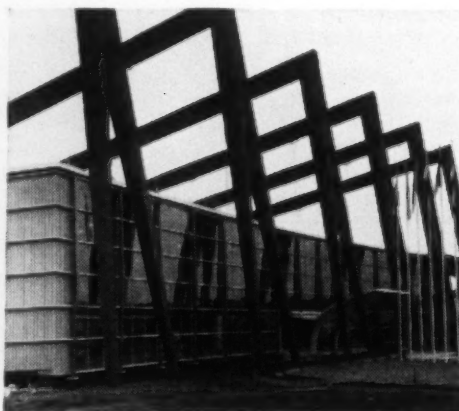





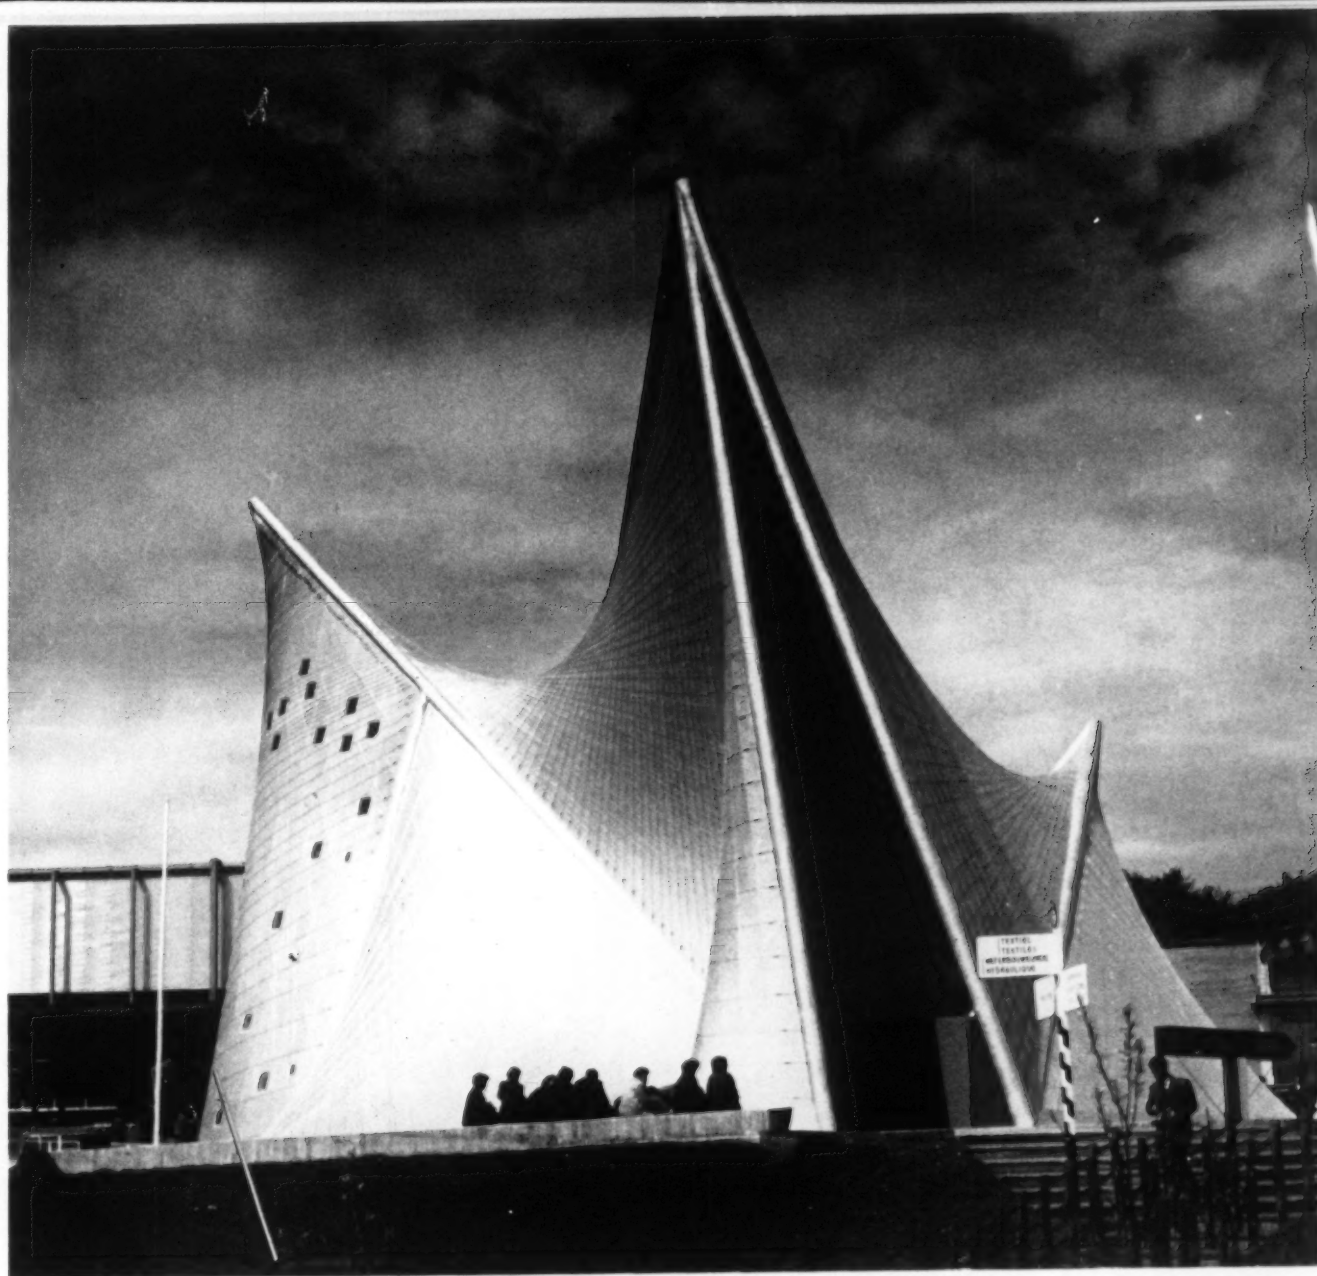


The Philips pavilion, above, housing a *poème électronique*, adjoins the Netherlands pavilion in the foreign section. It is a reinforced concrete rib structure, with a freely curved plan shape (plan on right), determined by acoustic and lighting requirements, rising to three peaks of 65 ft., 60 ft. and 42 ft. The structure is clothed with a concrete envelope formed of twelve hyperbolic paraboloids and consisting of thin slabs laid on pretensioned cables anchored to the ribs. The inner walls are lined with sound absorbent material and have three hundred loudspeakers built into them. Architect, Le Corbusier; engineer, H. C. Duyster.




Below, three of the more successful buildings in the Belgian section. Left, glass-walled showroom of International Business Machines (architects, E. Noyes and A. and J. Polak) and cylindrical display by the electronic industry (architects, J. Thiron and J. Wybauw). Centre, mining pavilion, sheathed in copper, in the Congo section (architects, Delcourt and de Nayer). Right, Government research building with exposed frame of polished timber (architects, M. Lambrichts and P. Dumont).

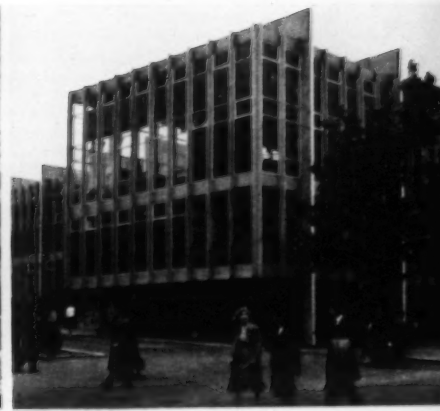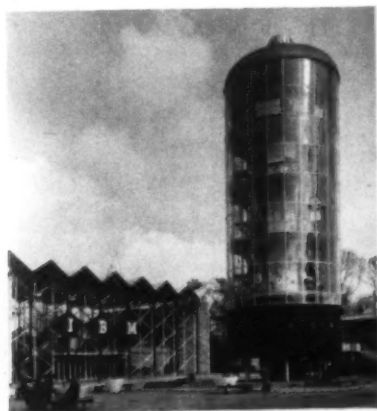



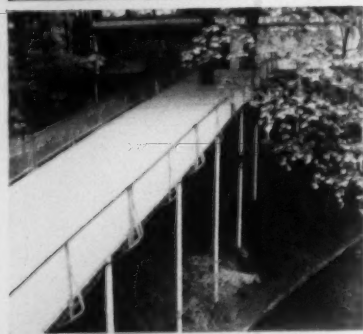

This restaurant, the *Pavillon du Champagne*, is part of a group of buildings devoted to French foods and drink in the thickly wooded area bounded by the northern part of the foreign section, the Brussels-Antwerp highway, the avenue leading from the atomium to the *Porte de l'Atomium* and the pathway that continues the line of the *passerelle* after it touches ground at its western end. The long narrow building is enclosed by trees and spans over a lake (top picture above). Here a lower floor is fitted between the steep banks on either side (top right). The several entrances to the restaurant are reached by boarded walkways (above) perched over the shores of the lake and in one case passing first beneath a bridge (right) which takes one of the avenues over the lake. The building has a simple timber frame, painted white, with large windows from floor to ceiling.

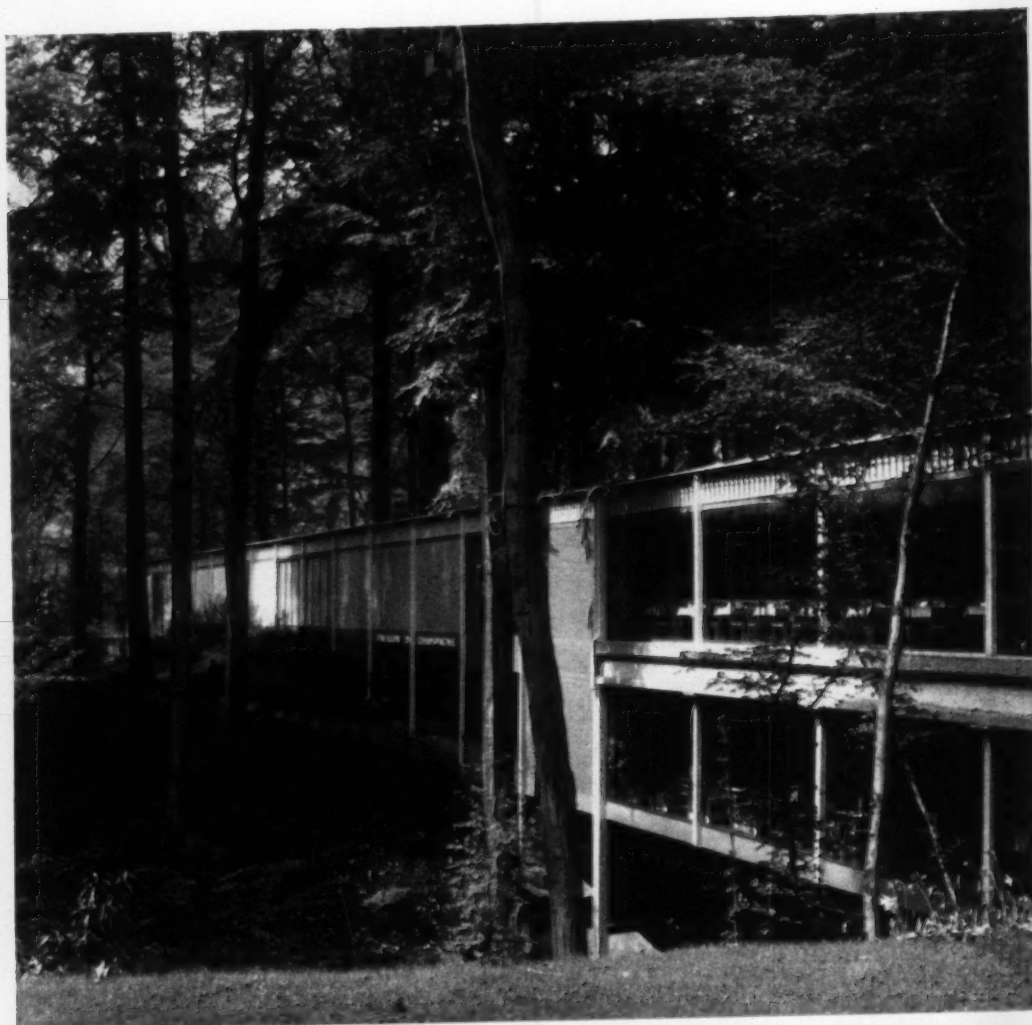

crowded avenues. This area is sparsely built on, but contains one of the most successful buildings outside the foreign section—successful not on account of any originality of its architecture but because of the skilful use it makes of the site and of its simple unassuming scale and proportions: a restaurant, to which is attached an exposition of the merits of French provincial food and drink—see facing page. The building—called the *Pavillon du Champagne*—is set astride the water and weaves its great length between the stems of trees. It is approached by bridges and causeways of a suitably robust rural character, but sensitively detailed and again making imaginative use of the landscape.

All the area east and south of this—about a third of the whole site—is occupied by the foreign section; that is, by the pavilions contributed by the forty-two nations participating, together with two or three additional small buildings (such as that of the International Red Cross). Of these latter the only one requiring attention in an architectural survey is the highly original structure—looking like a collapsed aluminized tent—put up by the Philips radio company. Though somewhat out of context, it is presumably placed here because the company is Dutch, not Belgian. It is, indeed, next door to the Dutch pavilion. The Philips pavilion aroused much interest in advance because of its designer—Le Corbusier. At the time of writing the *poème électronique*, devised by the architect to be exhibited inside, was not regularly on show. The outside is ingenious as an exercise in free architectural shape, but the relationship between shape and structure is not made clear enough for the exercise to be altogether successful. It is the type of structure that would be ten times as effective if it were only twice as large.


The greater part of this issue is devoted to the foreign pavilions, as being the most interesting buildings and the most productive source of townscape details, so nothing need be said about them here, except perhaps to make the comment\* that the buildings which attain the highest standards of architecture and design are not always those best liked by the public, yet obvious popular appeal does not provide a justification for inadequate or commonplace design. The least worthy aim of an exhibition is to put forward already accepted standards—to rest on old and time-worn laurels. Its proper role is to earn new laurels by putting forward higher standards which, with the help of the impetus the exhibition itself gives, will come to be accepted one day. Criticism and discussion of exhibition architecture must bear this principle in mind.

\* Also one other comment, which is not a matter of architecture but of policy. It concerns the British exhibit only. This is included in the architectural survey on the following pages, but attention must be drawn here to the fact that it is the only foreign exhibit which has given a large part of its space to a frankly commercial display of products. The British industrial pavilion is simply a hall in which the Federation of British Industries has sold space by the square yard to firms willing to put up their own stands. The result, in spite of much skill and ingenuity in the design of the stands, is as chaotic as the British Industries Fair—which it closely resembles—and strikes an altogether inappropriate note in an exhibition whose purpose is not the direct sale of goods. Britain has been much criticized in Brussels for this commercial approach to the opportunities the exhibition offered, and loses prestige thereby. Britain did the same thing at the Brussels Exhibition of 1935, and THE ARCHITECTURAL REVIEW played a leading part in a campaign against such a narrowly commercial policy. As a result a big step forward was made at the Paris Exhibition of 1937 and the New York World Fair of 1939, where Britain had a selective, officially


sponsored, display of products like everyone else. Now Britain has stepped back again. Must it be said all over again that an international exhibition, where the nations compete to set the highest standards, is not the place for a commercial free-for-all at which the man who pays gets his goods shown? Rightly or wrongly visitors take these goods to represent the best Britain can make, and it is the Government's duty to make sure that they really do.

This is, one suspects, a failure of organization rather than of intention. This and other defects that have been apparent recently when Britain has represented herself inadequately abroad (or in some cases failed to represent herself at all) indicate an absence of direction that is perhaps inevitable when policy, and decisions about implementing it, rest simultaneously in the hands of the Central Office of Information, the Board of Trade, the Foreign Office, the Federation of British Industries and several other bodies, each guided by its own interests and prejudices. It is time the Government set up one responsible and far-sighted permanent commission and entrusted to it the task of formulating a positive British policy towards representation at exhibitions abroad.



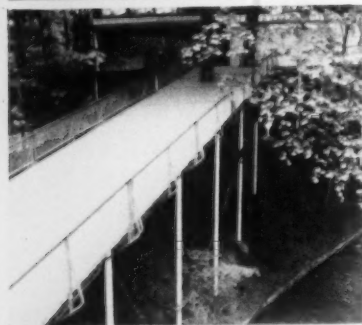

This restaurant, the *Pavillon du Champagne*, is part of a group of buildings devoted to French foods and drink in the thickly wooded area bounded by the northern part of the foreign section, the Brussels-Antwerp highway, the avenue leading from the atomium to the *Porte de l'Atomium* and the pathway that continues the line of the *passerelle* after it touches ground at its western end. The long narrow building is enclosed by trees and spans over a lake (top picture above). Here a lower floor is fitted between the steep banks on either side (top right). The several entrances to the restaurant are reached by boarded walkways (above) perched over the shores of the lake and in one case passing first beneath a bridge (right) which takes one of the avenues over the lake. The building has a simple timber frame, painted white, with large windows from floor to ceiling.

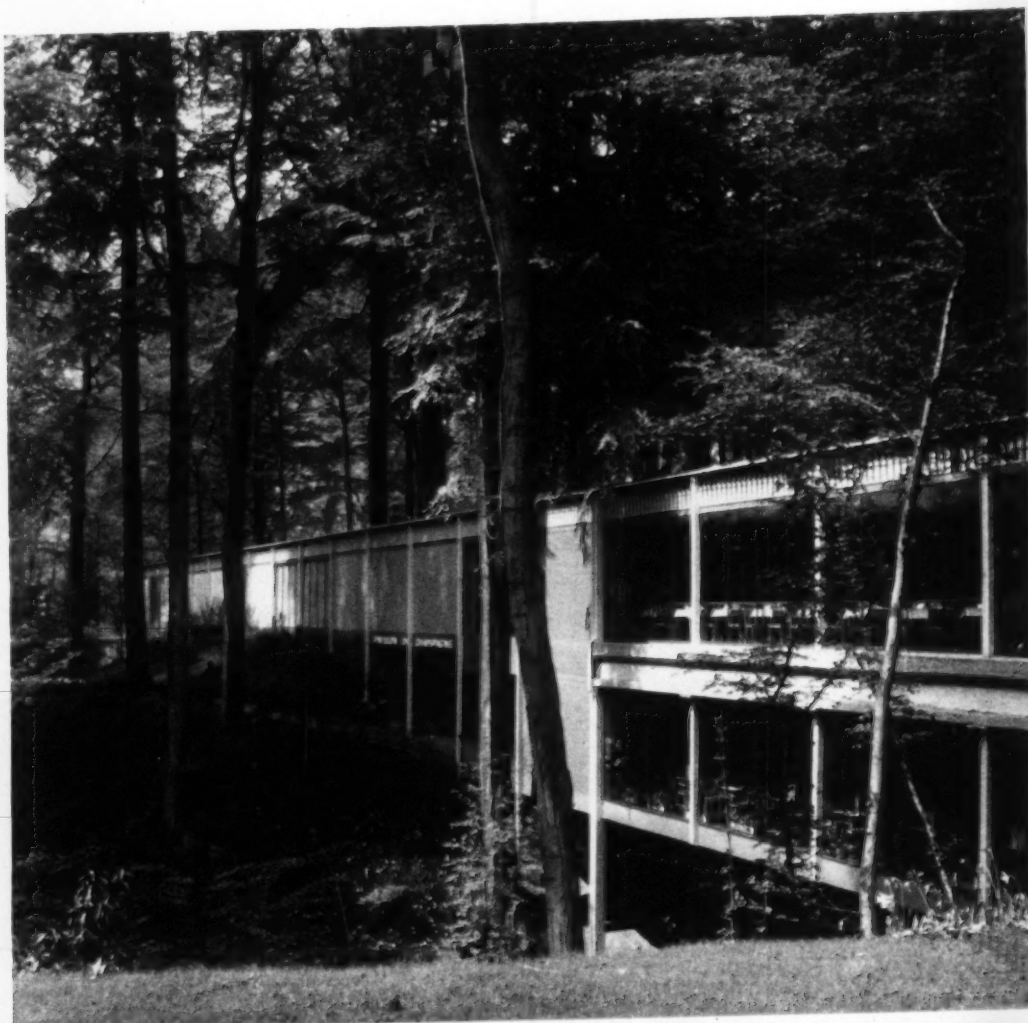



crowded avenues. This area is sparsely built on, but contains one of the most successful buildings outside the foreign section—successful not on account of any originality of its architecture but because of the skilful use it makes of the site and of its simple unassuming scale and proportions: a restaurant, to which is attached an exposition of the merits of French provincial food and drink—see facing page. The building—called the *Pavillon du Champagne*—is set astride the water and weaves its great length between the stems of trees. It is approached by bridges and causeways of a suitably robust rural character, but sensitively detailed and again making imaginative use of the landscape.


All the area east and south of this—about a third of the whole site—is occupied by the foreign section; that is, by the pavilions contributed by the forty-two nations participating, together with two or three additional small buildings (such as that of the International Red Cross). Of these latter the only one requiring attention in an architectural survey is the highly original structure—looking like a collapsed aluminized tent—put up by the Philips radio company. Though somewhat out of context, it is presumably placed here because the company is Dutch, not Belgian. It is, indeed, next door to the Dutch pavilion. The Philips pavilion aroused much interest in advance because of its designer—Le Corbusier. At the time of writing the *poème électronique*, devised by the architect to be exhibited inside, was not regularly on show. The outside is ingenious as an exercise in free architectural shape, but the relationship between shape and structure is not made clear enough for the exercise to be altogether successful. It is the type of structure that would be ten times as effective if it were only twice as large.

The greater part of this issue is devoted to the foreign pavilions, as being the most interesting buildings and the most productive source of townscape details, so nothing need be said about them here, except perhaps to make the comment\* that the buildings which attain the highest standards of architecture and design are not always those best liked by the public, yet obvious popular appeal does not provide a justification for inadequate or commonplace design. The least worthy aim of an exhibition is to put forward already accepted standards—to rest on old and time-worn laurels. Its proper role is to earn new laurels by putting forward higher standards which, with the help of the impetus the exhibition itself gives, will come to be accepted one day. Criticism and discussion of exhibition architecture must bear this principle in mind.

\* Also one other comment, which is not a matter of architecture but of policy. It concerns the British exhibit only. This is included in the architectural survey on the following pages, but attention must be drawn here to the fact that it is the only foreign exhibit which has given a large part of its space to a frankly commercial display of products. The British industrial pavilion is simply a hall in which the Federation of British Industries has sold space by the square yard to firms willing to put up their own stands. The result, in spite of much skill and ingenuity in the design of the stands, is as chaotic as the British Industries Fair—which it closely resembles—and strikes an altogether inappropriate note in an exhibition whose purpose is not the direct sale of goods. Britain has been much criticized in Brussels for this commercial approach to the opportunities the exhibition offered, and loses prestige thereby. Britain did the same thing at the Brussels Exhibition of 1935, and THE ARCHITECTURAL REVIEW played a leading part in a campaign against such a narrowly commercial policy. As a result a big step forward was made at the Paris Exhibition of 1937 and the New York World Fair of 1939, where Britain had a selective, officially

sponsored, display of products like everyone else. Now Britain has stepped back again. Must it be said all over again that an international exhibition, where the nations compete to set the highest standards, is not the place for a commercial free-for-all at which the man who pays gets his goods shown? Rightly or wrongly visitors take these goods to represent the best Britain can make, and it is the Government's duty to make sure that they really do.


This is, one suspects, a failure of organization rather than of intention. This and other defects that have been apparent recently when Britain has represented herself inadequately abroad (or in some cases failed to represent herself at all) indicate an absence of direction that is perhaps inevitable when policy, and decisions about implementing it, rest simultaneously in the hands of the Central Office of Information, the Board of Trade, the Foreign Office, the Federation of British Industries and several other bodies, each guided by its own interests and prejudices. It is time the Government set up one responsible and far-sighted permanent commission and entrusted to it the task of formulating a positive British policy towards representation at exhibitions abroad.

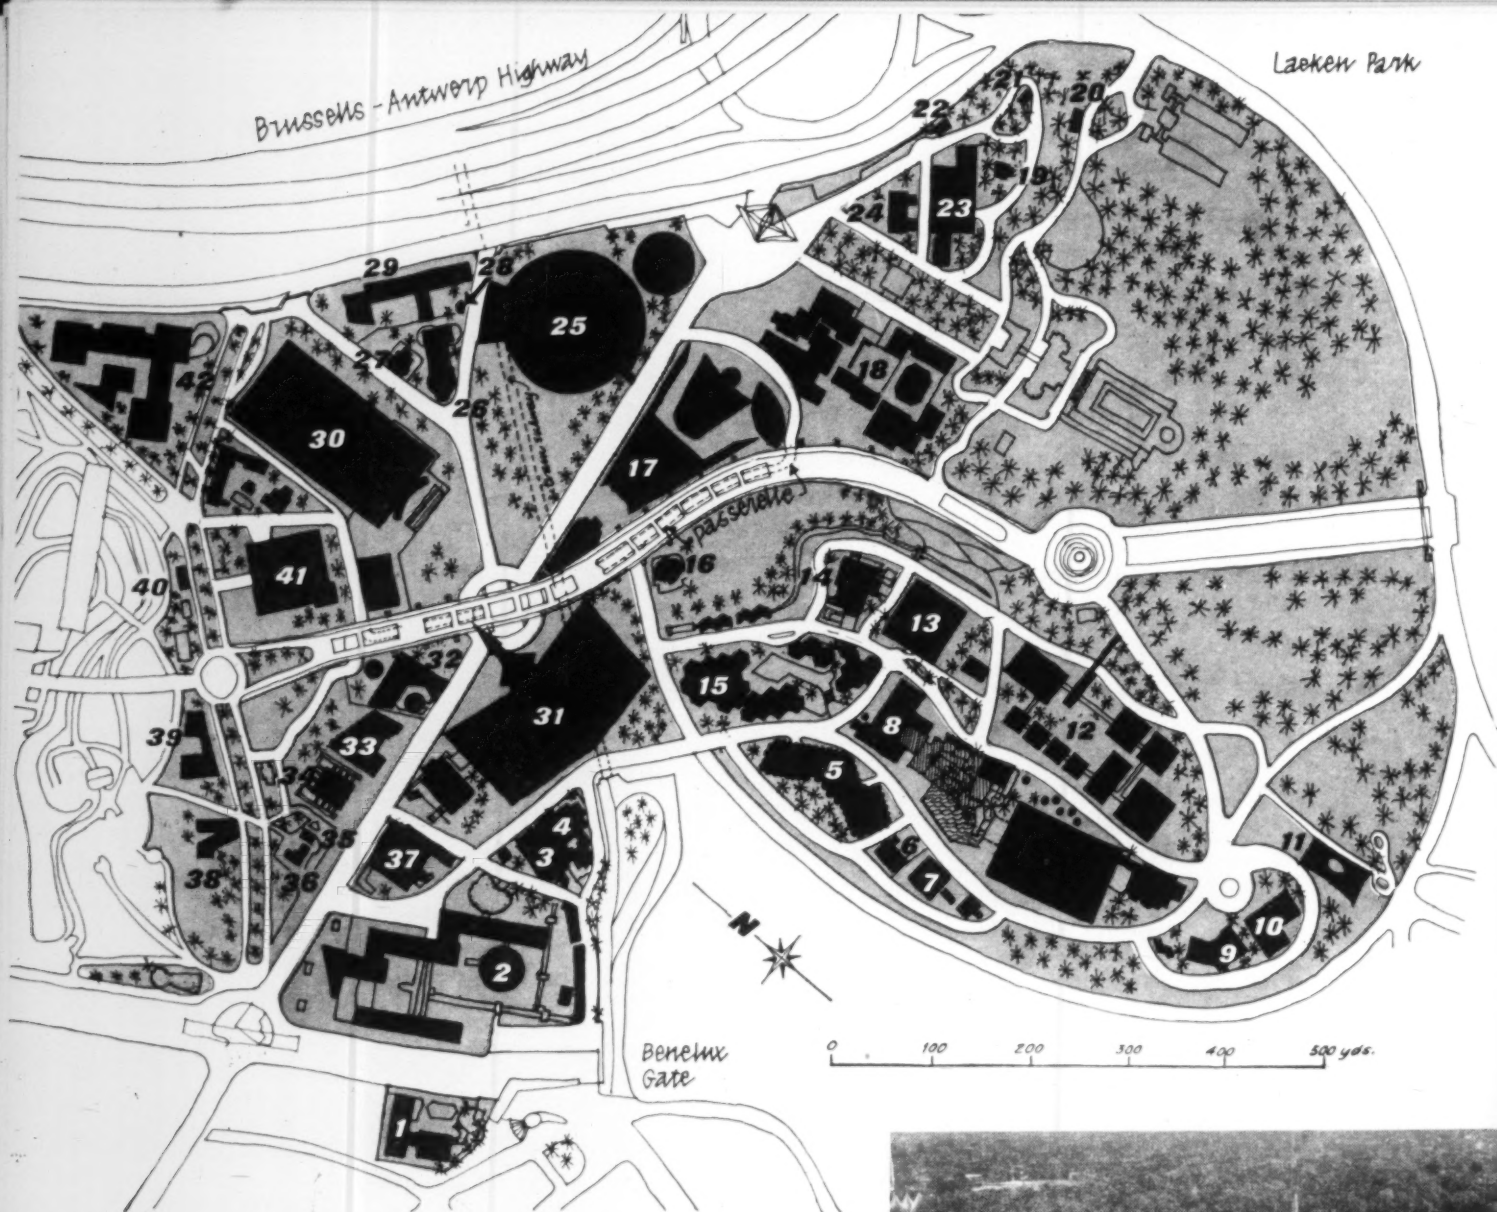

## THE FOREIGN PAVILIONS AND THEIR ARCHITECTS

The numbers on the plan and on the list below also indicate the itinerary the visitor can conveniently follow in looking at the buildings. The same itinerary is followed in the illustrated commentary that begins on the facing page.

- |                                                                                                                                                                                                                                             |                                                                                                                                                                  |                                                                                                                               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| 1. Luxembourg<br><i>R. Mailliet and<br/>P. Reuter</i>                                                                                                                                                                                       | 9. Venezuela<br><i>D. Savino</i>                                                                                                                                 | 20. Cambodia<br><i>A. Boudart</i>                                                                                             |
| 2. The Netherlands<br><i>J. H. van den Broeck,<br/>J. B. Bakema, J. W. C.<br/>Boks, and G. T. Riet-<br/>veld</i>                                                                                                                            | 10. Mexico<br><i>R. M. Alcerrecá and<br/>P. Ramírez Vasquez</i>                                                                                                  | 21. Ecuador                                                                                                                   |
| 3. Tunisia<br><i>V. Valenti and<br/>R. Bouraoui</i>                                                                                                                                                                                         | 11. Brazil<br><i>S. Bernades</i>                                                                                                                                 | 22. Dominican<br>Republic<br><i>A. Barrez</i>                                                                                 |
| 4. Morocco<br><i>A. Faraoui and<br/>H. Delval</i>                                                                                                                                                                                           | 12. West Germany<br><i>Egon Eiermann and<br/>Sep Ruf</i>                                                                                                         | 23. Japan<br><i>K. Mayekawa</i>                                                                                               |
| 5. Spain<br><i>R. Vasquez-Molezun<br/>and J. A. Corrales</i>                                                                                                                                                                                | 13. Portugal<br><i>P. Cid</i>                                                                                                                                    | 24. Iran<br><i>A. A. Sadegh</i>                                                                                               |
| 6. Monaco<br><i>Ch. Gamba</i>                                                                                                                                                                                                               | 14. Yugoslavia<br><i>V. Richter</i>                                                                                                                              | 25. U.S.A.<br><i>E. D. Stone (Interior<br/>by B. Rudofsky)</i>                                                                |
| 7. Turkey<br><i>U. Izgi, M. Turkmen,<br/>H. Sensoy and I.<br/>Turegun</i>                                                                                                                                                                   | 15. Switzerland<br><i>W. Gantenbein</i>                                                                                                                          | 26. Egypt, Syria and<br>Iraq<br><i>Sayed Kerim</i>                                                                            |
| 8. Great Britain<br><i>H. Lobb &amp; Partners<br/>(Government pavilion<br/>and site architects),<br/>Royal College of Art,<br/>G. &amp; U. Bowyer, E. D.<br/>Mills (Industrial pavil-<br/>ion) and James Gard-<br/>ner (chief designer)</i> | 16. Siam<br><i>B. Samphaisiri</i>                                                                                                                                | 27. Sudan                                                                                                                     |
|                                                                                                                                                                                                                                             | 17. The Vatican<br><i>P. Rome</i>                                                                                                                                | 28. Saudi Arabia<br><i>Sayed Kerim</i>                                                                                        |
|                                                                                                                                                                                                                                             | 18. Italy<br><i>L. Belgioioso, I. Gar-<br/>della, A. Lucichenti,<br/>V. Monaco, E. Perez-<br/>sutti, G. Perugini, L.<br/>Quaroni, E. Rogers<br/>and U. Sacco</i> | 29. Hungary<br><i>L. Gadoros</i>                                                                                              |
|                                                                                                                                                                                                                                             | 19. Philippines<br><i>F. Gelush and E. S.<br/>San Juan</i>                                                                                                       | 30. Russia<br><i>Y. Abramov, A. Boretski,<br/>V. Doubrov and<br/>A. Polanski (Y. Ratskevitch and K. Vassiliev, engineers)</i> |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 31. France<br><i>G. Gillet (P. Sonrel,<br/>consultant)</i>                                                                    |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 32. Argentina<br><i>R. Quiroz and F. C.<br/>Sabate</i>                                                                        |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 33. Finland<br><i>R. Pietilä (Interior by<br/>Tapio Wirkkala)</i>                                                             |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 34. Norway<br><i>S. Fehn</i>                                                                                                  |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 35. Andorra                                                                                                                   |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 36. San Marino<br><i>E. Stassin and<br/>L. Momont</i>                                                                         |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 37. Austria<br><i>K. Schwanzer</i>                                                                                            |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 38. Liechtenstein<br><i>B. Ospelt and<br/>H. Rheinberger</i>                                                                  |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 39. Israel<br><i>A. El-Hanani and<br/>A. Sharon</i>                                                                           |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 40. Nicaragua<br><i>A. Barrez</i>                                                                                             |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 41. Canada<br><i>Charles Greenberg</i>                                                                                        |
|                                                                                                                                                                                                                                             |                                                                                                                                                                  | 42. Czechoslovakia<br><i>F. Cubr, J. Hruby and<br/>Z. Pokorny</i>                                                             |

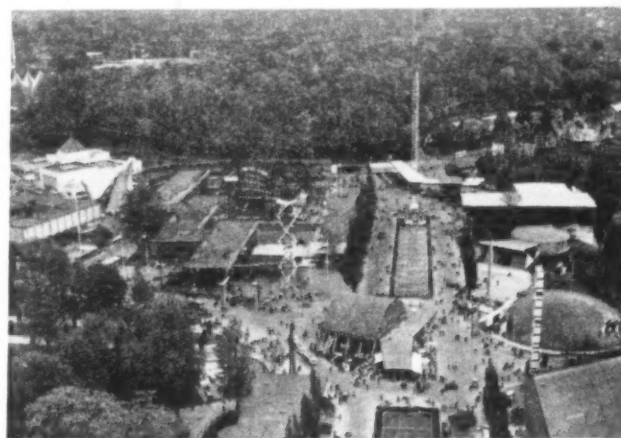

Looking towards the foreign section from the top of the atrium. On the right is the Benelux gate; centre-left The Netherlands; left Austria, with the white-walled Tunisia and Morocco behind.


# THE FOREIGN PAVILIONS

The foreign section, in the western part of the exhibition grounds, gains enormously from the beautiful landscaping that already existed in this area: undulating grassland, clumps of tall beech-trees and streams flowing through steep stony ravines. A ridge of high ground divides the pavilions of the forty-two participating countries into two main groups and two smaller ones at the northern and western corners. The high ground begins in the adjoining royal park of Laeken, and from this point starts the high pedestrian viaduct which crosses the foreign section and bisects the largest group of buildings. The foreign section is most conveniently reached from the Benelux Gate at its southern corner, which is also the nearest gate to the centre of Brussels. On the following pages the reader is taken on a pictorial tour of the foreign pavilions and given a commentary on their design; afterwards the six best pavilions architecturally—those of Germany, Holland, Yugoslavia, Spain, Switzerland and Japan—are illustrated more fully.

Immediately alongside the *Porte du Benelux* is Luxembourg, a steel-framed curtain wall building like many others, but a neater and more elegant specimen than most, marred only by the rather heavy internal structure in the upper level exhibition hall (the lower level is a restaurant). It lights up well at night.

Facing the visitor as he comes through the gate is The Netherlands, one of the most ambitious of the foreign pavilions, and one that differs from most of the others in that, instead of being conceived as a container for the exhibits, the architecture is largely formed out of the exhibits themselves. They are arranged, some under cover, some in the open air, in a descending series of loosely planned courtyards, planted with grass and linked by brick-paved causeways. Pools with artificial waves form part of a demonstration of the technique of land reclamation, and reproduce in miniature the structure of the Dutch landscape. There are ships, an Archimedeian screw and a lighthouse. Apart from the close integration of form and theme, giving the display a tough dynamic quality, the merits of the Dutch pavilion are its spacious planning, its use of levels, the vigorous handling of the materials used (except for some rather arty brick walling near the main entrance) and the robust but sensitive design of details like seats and flower-boxes, good examples of the functional tradition. The pavilion is more fully illustrated on pages 110-112.

Neither Tunisia nor Morocco, in the fanciful-reminiscent style, need detain the visitor. Passing them, he climbs a steep avenue with France (see page 96) towering up on his left and finds Spain, set against rising tree-planted ground, on his right. This is a cleverly worked-out building based on a hexagonal plan-unit, each of which is supported by a central steel column. This forest of columns, and the layers of clerestory lighting formed by stepping up the height of the units towards the centre, create an intriguing interior, which is almost empty. The display amounts to no more

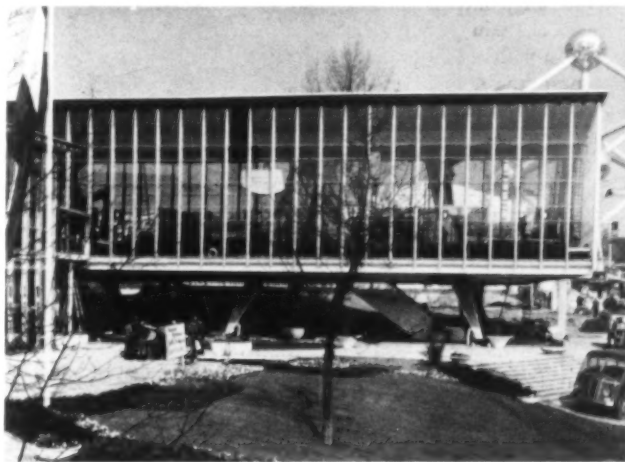


1. Luxembourg

Main exhibition gallery from garden. The restaurant is on the left.



2. Netherlands


One of the courtyards, enclosed by glass-walled galleries. Beyond, shipping exhibit, with mast and lighthouse tower.

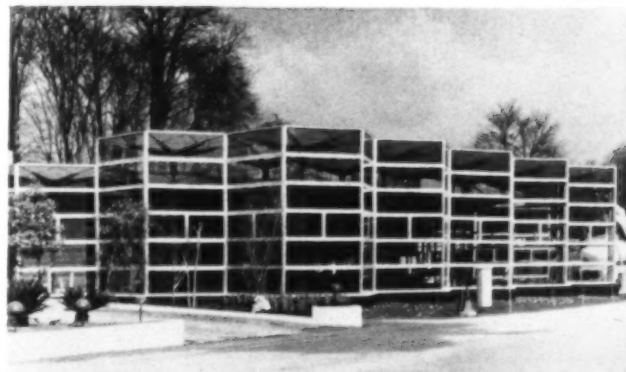

5. Spain

The fully glazed east facade, as seen from the British pavilion.




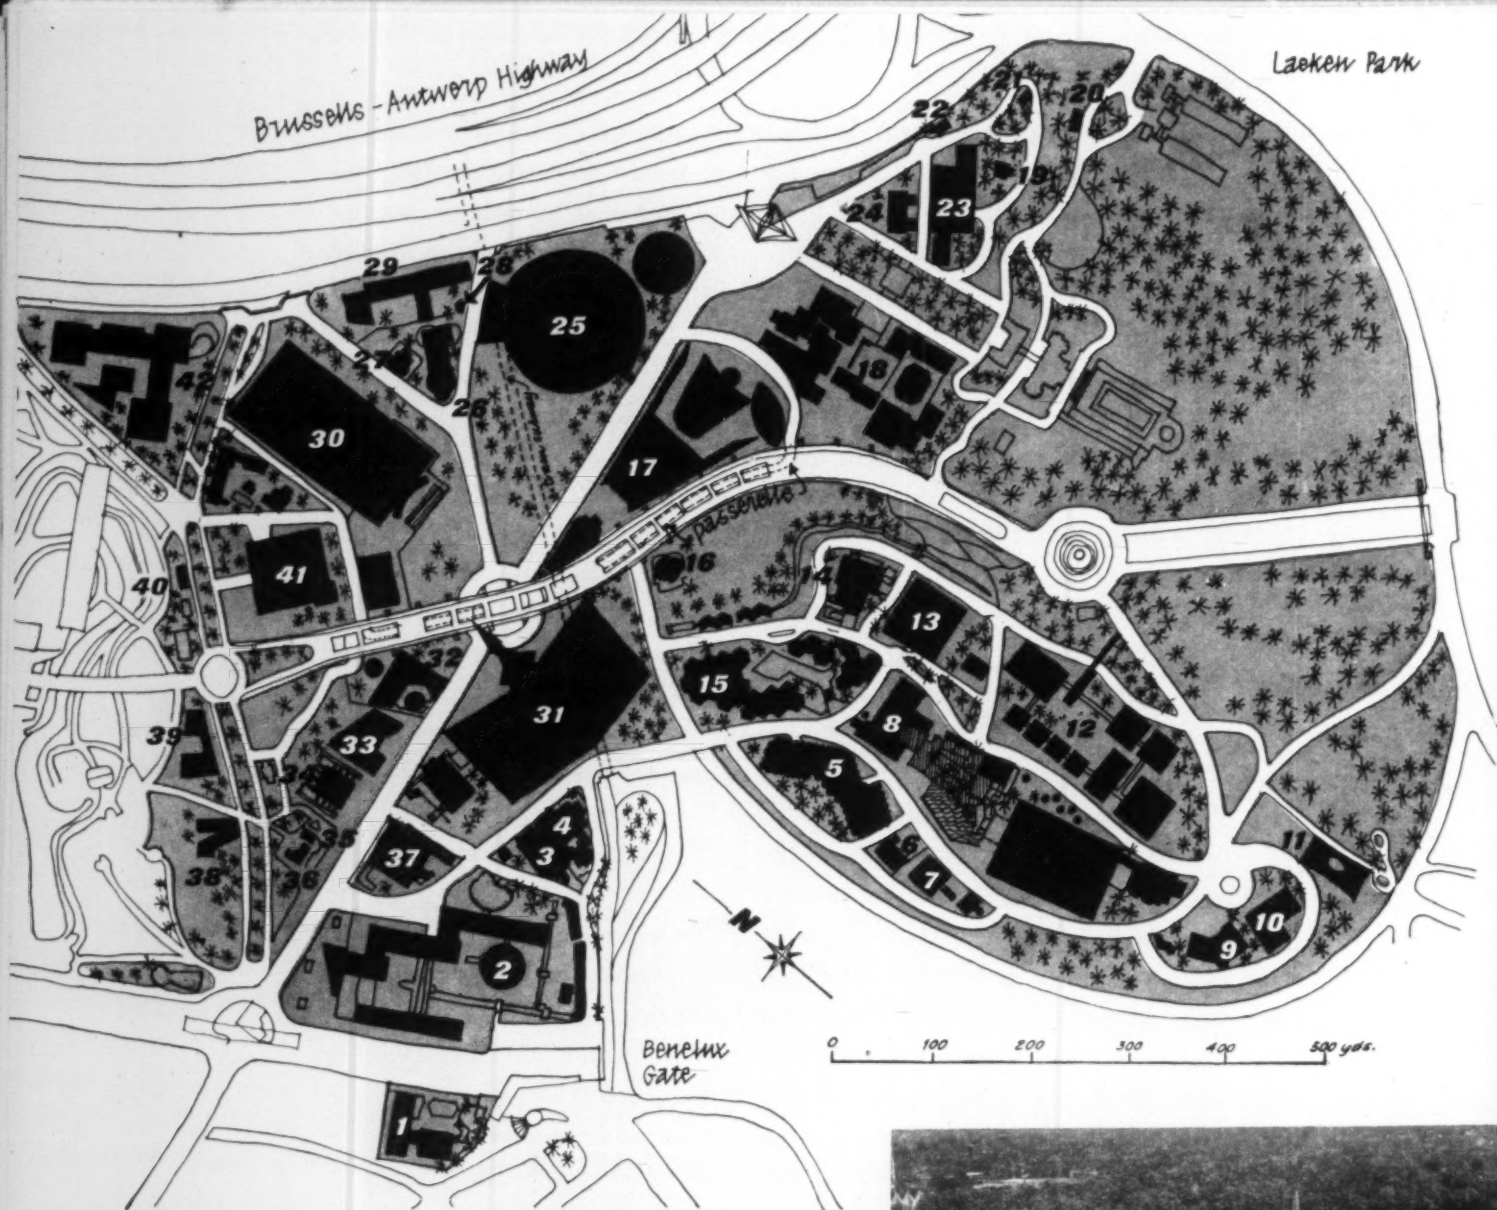

### THE FOREIGN PAVILIONS AND THEIR ARCHITECTS

The numbers on the plan and on the list below also indicate the itinerary the visitor can conveniently follow in looking at the buildings. The same itinerary is followed in the illustrated commentary that begins on the facing page.

- |                                                                                                                                                                                                                                         |                                                                                                                                                          |                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| 1. Luxembourg<br><i>R. Mailliet and<br/>P. Reuter</i>                                                                                                                                                                                   | 9. Venezuela<br><i>D. Savino</i>                                                                                                                         | 20. Cambodia<br><i>A. Boudart</i>                                                                                               |
| 2. The Netherlands<br><i>J. H. van den Broeck,<br/>J. B. Bakema, J. W. C.<br/>Boks, and G. T. Rietveld</i>                                                                                                                              | 11. Brazil<br><i>S. Bernades</i>                                                                                                                         | 21. Ecuador                                                                                                                     |
| 3. Tunisia<br><i>V. Valenti and<br/>R. Bouraoui</i>                                                                                                                                                                                     | 12. West Germany<br><i>Egon Eiermann and<br/>Sey Ruf</i>                                                                                                 | 22. Dominican Republic<br><i>A. Barrez</i>                                                                                      |
| 4. Morocco<br><i>A. Faraoui and<br/>H. Delval</i>                                                                                                                                                                                       | 13. Portugal<br><i>P. Cid</i>                                                                                                                            | 23. Japan<br><i>K. Mayekawa</i>                                                                                                 |
| 5. Spain<br><i>R. Vasquez-Molezun<br/>and J. A. Corrales</i>                                                                                                                                                                            | 14. Yugoslavia<br><i>V. Richter</i>                                                                                                                      | 24. Iran<br><i>A. A. Sadegh</i>                                                                                                 |
| 6. Monaco<br><i>Ch. Gamba</i>                                                                                                                                                                                                           | 15. Switzerland<br><i>W. Gantenbein</i>                                                                                                                  | 25. U.S.A.<br><i>E. D. Stone (Interior<br/>by B. Rudofsky)</i>                                                                  |
| 7. Turkey<br><i>U. Isgi, M. Turkmen,<br/>H. Sensoy and I.<br/>Turegun</i>                                                                                                                                                               | 16. Siam<br><i>B. Sampatsiri</i>                                                                                                                         | 26. Egypt, Syria and Iraq<br><i>Sayed Kerim</i>                                                                                 |
| 8. Great Britain<br><i>H. Lobb &amp; Partners<br/>(Government pavilion<br/>and site architects),<br/>Royal College of Art,<br/>G. &amp; U. Bowyer, E. D.<br/>Mills (Industrial pavilion)<br/>and James Gardner<br/>(chief designer)</i> | 17. The Vatican<br><i>P. Rome</i>                                                                                                                        | 27. Sudan                                                                                                                       |
|                                                                                                                                                                                                                                         | 18. Italy<br><i>L. Belgiojoso, I. Gardella,<br/>A. Lucichenti, V. Monaco,<br/>E. Perissutti, G. Perugini,<br/>L. Quaroni, E. Rogers<br/>and U. Sacco</i> | 28. Saudi Arabia<br><i>Sayed Kerim</i>                                                                                          |
|                                                                                                                                                                                                                                         | 19. Philippines<br><i>F. Gielush and E. S.<br/>San Juan</i>                                                                                              | 29. Hungary<br><i>L. Gadoros</i>                                                                                                |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 30. Russia<br><i>Y. Abramov, A. Boretzki,<br/>V. Doubov and A. Polanski<br/>(Y. Ratkevitch and K. Vassiliev,<br/>engineers)</i> |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 31. France<br><i>G. Gillet (P. Sonrel,<br/>consultant)</i>                                                                      |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 32. Argentina<br><i>R. Quilroz and F. C. Sabate</i>                                                                             |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 33. Finland<br><i>R. Pietila (Interior by<br/>Tapio Wirkkala)</i>                                                               |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 34. Norway<br><i>S. Fehn</i>                                                                                                    |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 35. Andorra                                                                                                                     |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 36. San Marino<br><i>E. Stassin and L. Momoni</i>                                                                               |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 37. Austria<br><i>K. Schwanzer</i>                                                                                              |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 38. Liechtenstein<br><i>B. Ospelt and H. Rheinberger</i>                                                                        |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 39. Israel<br><i>A. El-Hanani and A. Sharon</i>                                                                                 |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 40. Nicaragua<br><i>A. Barrez</i>                                                                                               |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 41. Canada<br><i>Charles Greenberg</i>                                                                                          |
|                                                                                                                                                                                                                                         |                                                                                                                                                          | 42. Czechoslovakia<br><i>F. Cubr, J. Hruby and Z. Pokorny</i>                                                                   |

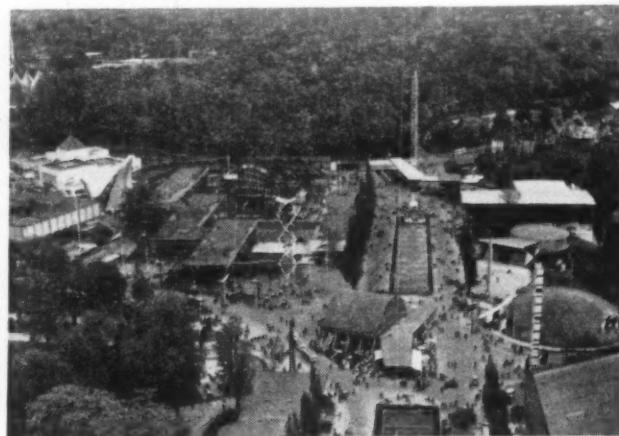

Looking towards the foreign section from the top of the atomium. On the right is the Benelux gate; centre-left The Netherlands; left Austria, with the white-walled Tunisia and Morocco behind.


# THE FOREIGN PAVILIONS

The foreign section, in the western part of the exhibition grounds, gains enormously from the beautiful landscaping that already existed in this area: undulating grassland, clumps of tall beech-trees and streams flowing through steep stony ravines. A ridge of high ground divides the pavilions of the forty-two participating countries into two main groups and two smaller ones at the northern and western corners. The high ground begins in the adjoining royal park of Laeken, and from this point starts the high pedestrian viaduct which crosses the foreign section and bisects the largest group of buildings. The foreign section is most conveniently reached from the Benelux Gate at its southern corner, which is also the nearest gate to the centre of Brussels. On the following pages the reader is taken on a pictorial tour of the foreign pavilions and given a commentary on their design; afterwards the six best pavilions architecturally—those of Germany, Holland, Yugoslavia, Spain, Switzerland and Japan—are illustrated more fully.


Immediately alongside the *Porte du Benelux* is Luxembourg, a steel-framed curtain-wall building like many others, but a neater and more elegant specimen than most, marred only by the rather heavy internal structure in the upper level exhibition hall (the lower level is a restaurant). It lights up well at night.

Facing the visitor as he comes through the gate is The Netherlands, one of the most ambitious of the foreign pavilions, and one that differs from most of the others in that, instead of being conceived as a container for the exhibits, the architecture is largely formed out of the exhibits themselves. They are arranged, some under cover, some in the open air, in a descending series of loosely planned courtyards, planted with grass and linked by brick-paved causeways. Pools with artificial waves form part of a demonstration of the technique of land reclamation, and reproduce in miniature the structure of the Dutch landscape. There are ships, an Archimedean screw and a lighthouse. Apart from the close integration of form and theme, giving the display a tough dynamic quality, the merits of the Dutch pavilion are its spacious planning, its use of levels, the vigorous handling of the materials used (except for some rather arty brick walling near the main entrance) and the robust but sensitive design of details like seats and flower-boxes, good examples of the functional tradition. The pavilion is more fully illustrated on pages 110-112.


Neither Tunisia nor Morocco, in the fanciful-reminiscent style, need detain the visitor. Passing them, he climbs a steep avenue with France (see page 96) towering up on his left and finds Spain, set against rising tree-planted ground, on his right. This is a cleverly worked-out building based on a hexagonal plan-unit, each of which is supported by a central steel column. This forest of columns, and the layers of clerestory lighting formed by stepping up the height of the units towards the centre, create an intriguing interior, which is almost empty. The display amounts to no more

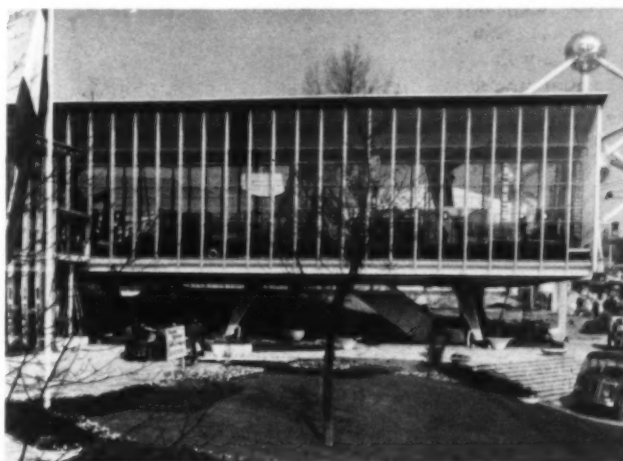

1. Luxembourg  
Main exhibition gallery from garden. The restaurant is on the left.

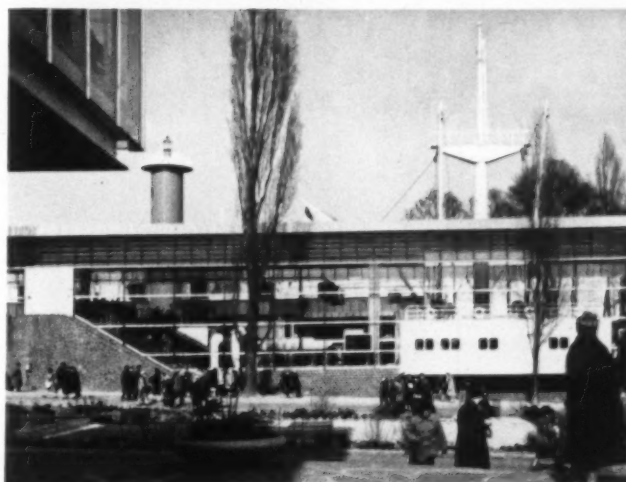

2. Netherlands  
One of the courtyards, enclosed by glass-walled galleries. Beyond: shipping exhibit, with mast and lighthouse tower.

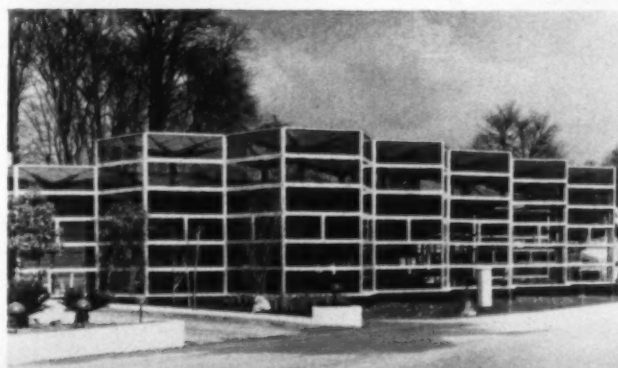

5. Spain  
The fully glazed east facade, as seen from the British pavilion.






than a few enlarged photographs, and only when the raised stage is in use for an exhibition of Spanish dancing does the stepped interior (part of which is a bar and restaurant) come into its own as an auditorium. The hexagonal motif is repeated throughout the interior—in the café-tables, the horizontally displayed photographs and even the floor-tiles. Externally, the faceted walls are either of brick or of superimposed horizontal aluminium window-units. This Spanish pavilion, unexpectedly distinguished considering the conservative nature of most contemporary Spanish architecture, is also among those picked out for fuller illustration later (pages 112–117).

Next door to Spain is Monaco, which again deserves little attention. It is a moderately florid example of Riviera-modernistic, perched above a rock-garden, and has a minaret topped by a giant ceramic letter M. Beyond it again is Turkey—another very successful building, surprising for the same reason as Spain. The main pavilion is simply a cube of glass curtain-walling supported on a charmingly elegant and unobtrusive steel frame. Penetrating this at the side, where the entrance is placed, is a long wall bearing coloured mosaics. In front is a planted terrace. The displays and exhibits behind the wall are spaci-ously set out, but conventional in character. At the end



plan of the British pavilions.

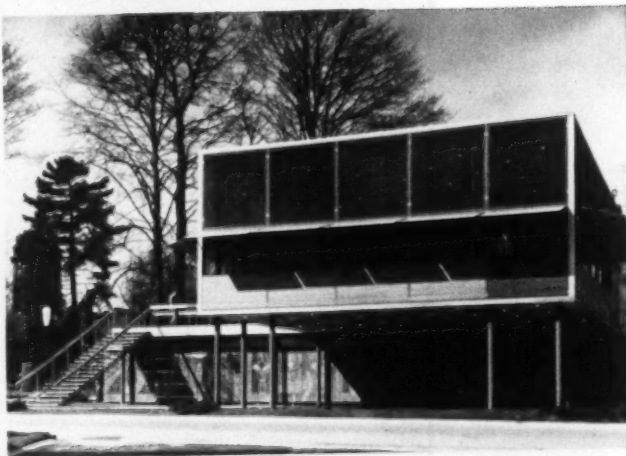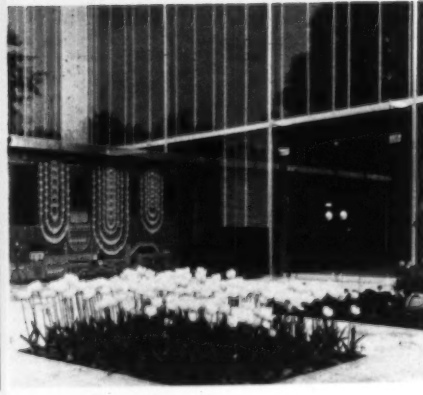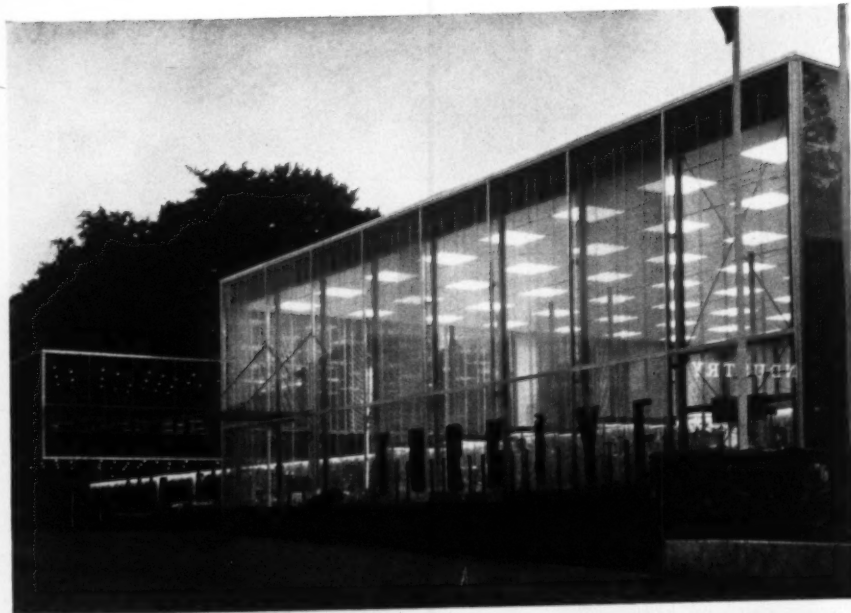

#### 7. Turkey


Top, at night—restaurant building on left. Centre, mosaic wall (by B. R. Eyubollu) from inside and outside. Bottom, the timber-screened restaurant.



#### 8. Gt. Britain

The triple-spired Hall of Tradition from across the pool. On the right, open-air exhibits among the trees.



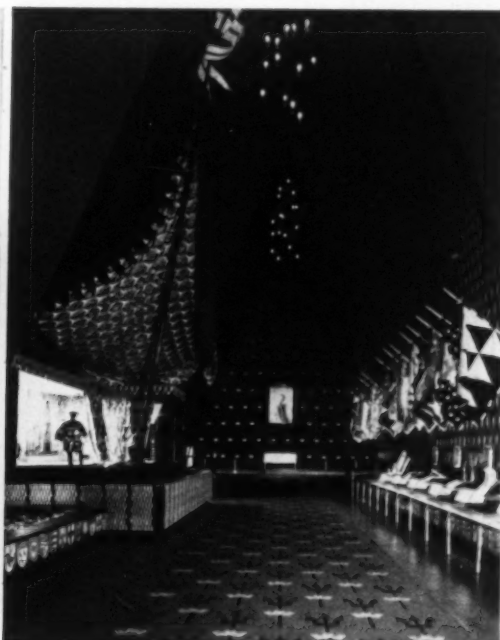

#### 8. Gt. Britain


Left, entrance and interior of Hall of Tradition (the foreground pool belongs to Switzerland). Below, in the tree-planted courtyard (see plan on facing page), devoted to cultural and similar aspects of British life. Bottom picture, the Britannia Inn.

of the terrace is a second Turkish pavilion, with a wooden sun-screen covering the upper portion, like a modern version of the traditional *mush-rabbiyah*, containing a restaurant.

Across the road from Turkey, but with its main entrance a short way down the hill, is Great Britain, which is of minor interest architecturally. It consists of a number of separate units, planned in sequence, the first being a Hall of Tradition exhibiting costumes, regalia, etc. It is roofed by a trio of spires which are not large enough to make a dramatic piece of architectural scenery, and do not exploit their light plywood construction well enough to establish an interesting relationship between form and structure. Inside, the darkness and solemnity of style emphasize a reverential presentation of old ceremonies and traditions that no other country has attempted.

Next is a series of lower-ceilinged halls containing scientific exhibits, well contrived but somewhat underlit, and from here the visitor finds his way among clumps of beech-trees through a number of courtyards formed of whitewashed brick walls and with glimpses across a pool of water alongside. These are devoted to inventions and discoveries and various aspects of British life. There is considerable taste and ingenuity in these displays, but much whimsicality and an emphasis on the 'amusing' and odd which is more suitable for home consumption than for export.

Emerging from this open-air exhibit, the visitor crosses a pool and finds himself in a larger tree-planted courtyard with the Britannia pub on his left (a good contemporary exercise in the less fanciful pub vernacular) and the British Industry pavilion opposite. This is a large, fully glazed rectangular building with a tubular steel roof divided into six compartments and a neatly detailed curtain wall. It is crowded with stands put up by industrial and commercial firms (see comments on page 85). Alongside it are kiosks for

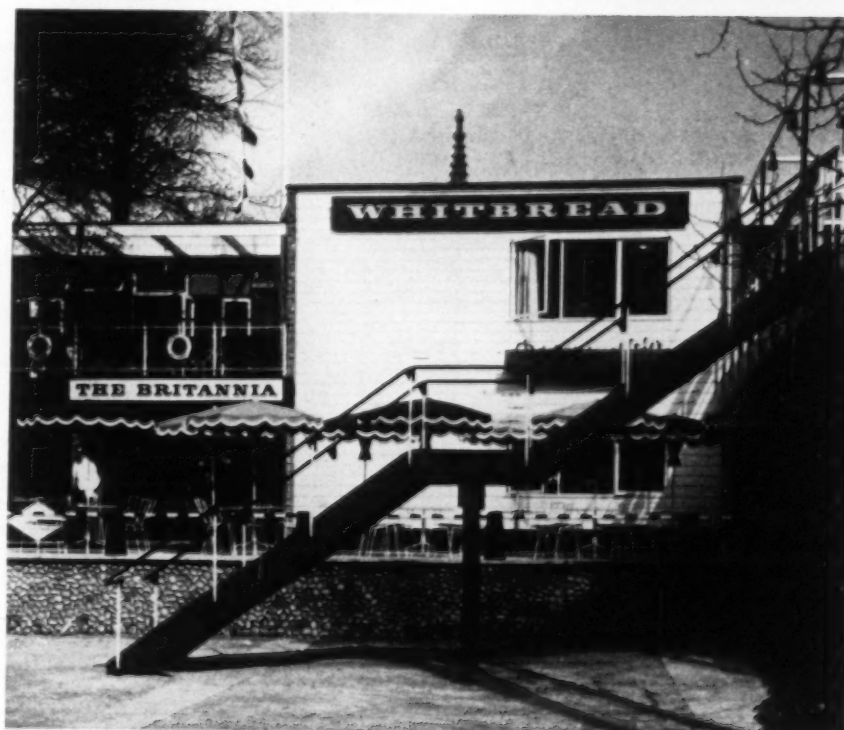

#### 8. Gt. Britain

Entrance front of industrial pavilion (night view) and the confusion of stands inside.




the sale of goods and, forming an annexe at the far end, are a cinema, another pub and a rather tastelessly furnished pavilion belonging to the City of London.

Emerging from the back of the British Industry pavilion the visitor strikes the road again as it curves away to the east. Rather obscurely placed on the other side of it are three Latin American pavilions. The first he comes to, Venezuela, is sunk below the level of the road and approached by a bridge across a forecourt. It has a confused exterior crowned by the segmented concrete roof of the main hall, which is placed at an angle. The hall has clerestory lighting and contains an unusually well thought-out exposition of the character and economy of the country.

Mexico hides behind a screen of cedar slats terminated by a large pictorial mosaic of the kind Mexican architecture has favoured for twenty years. Inside is a hall with an open steel roof. The best things in a somewhat overcrowded display are the pre-Columbian sculpture and the naïvely macabre folk-art.


The last of this row of pavilions is Brazil, a building whose site makes it difficult to see outside, but one of considerable structural interest with a spectacular interior. The roof (see page 134) curves sharply upwards towards either end, and is structurally independent of the walls. It is slung between triangular steel corner-stanchions and is of lattice-steel and concrete supported on high-tension cables. Inside is one large hall, mostly occupied by an elliptical ramp, descending from the entrance level and curving round a tropical garden. As in the British pavilion, visitors are expected to follow a one-way circulation. Above the tropical garden is a circular aperture open to the sky. This can be closed-in when the weather demands it by an unusual and entertaining device: a balloon, slightly larger in diameter than the aperture, is tethered above it and can be hauled down to fit into it like a stopper into a bottle.

Beyond Brazil the road rises and therefore passes above the West German pavilion, which can be reached from this side by means of a narrow bridge leading on to its upper deck. The

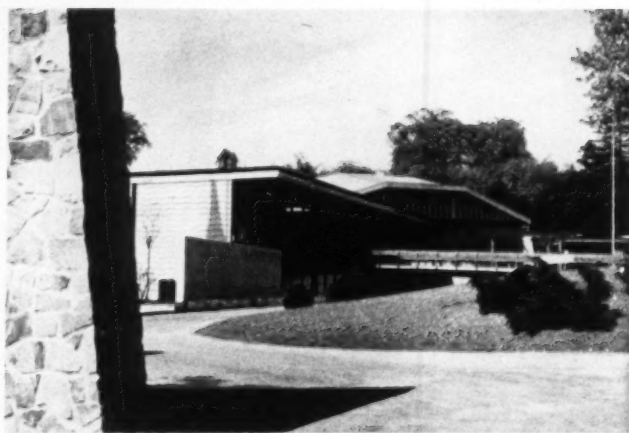


#### 9. Venezuela

From the approach, showing footbridge over sunken forecourt. The stone wall at left belongs to Mexico.

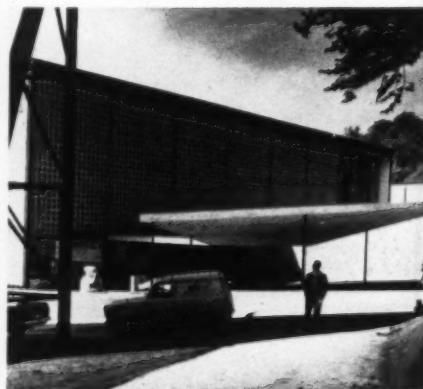

#### 10. Mexico



Entrance front (above left) with cedar grille, and garden court (above right) displaying sculpture.

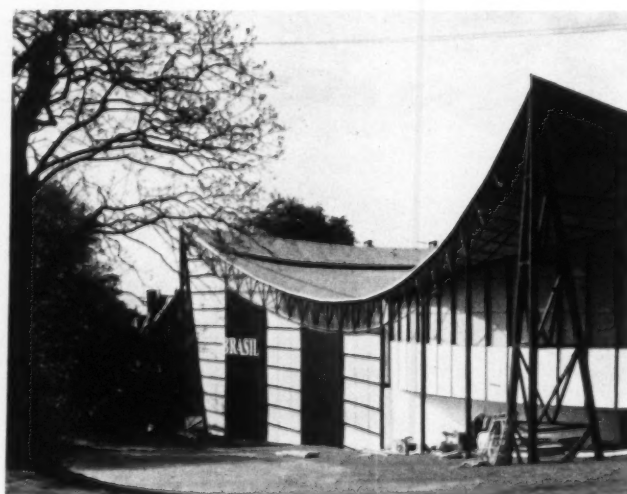

#### 11. Brazil


From the lawns on the east side, showing the hanging roof.

most sophisticated work of architecture in the exhibition, in the form of eight pavilions connected by bridges at different levels with lawns between, this German pavilion is wholly prefabricated and has been designed for re-erection as a school when the exhibition is over. Its notable qualities are the precise elegance of its steel-framed structure, the aptness and thoroughness with which every detail, and every juxtaposition

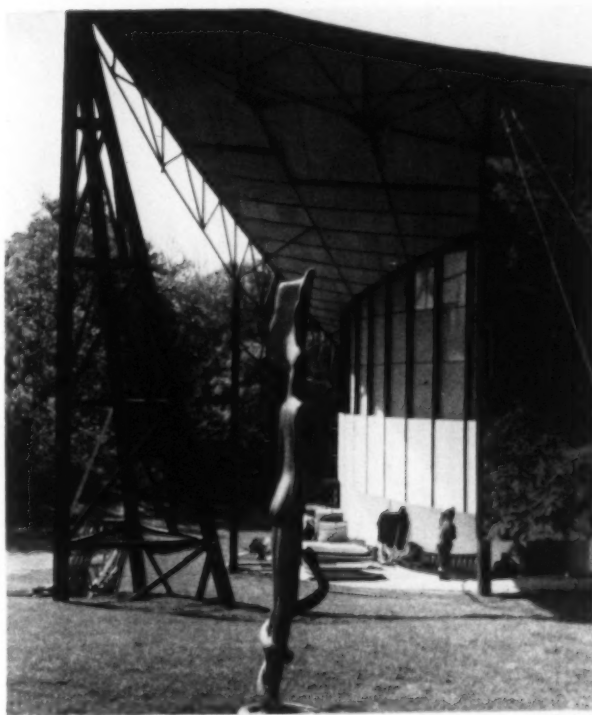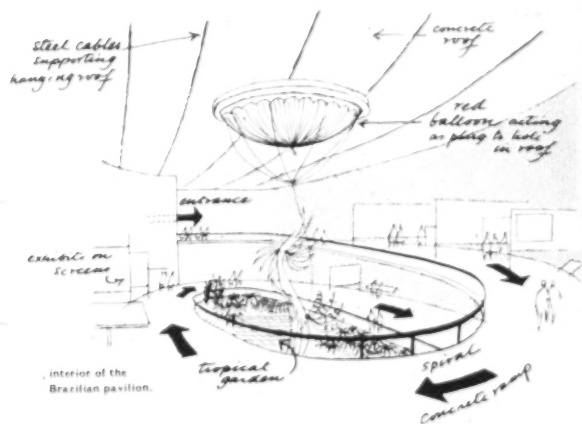

# 11. Brazil


Left, the entrance (right of picture), showing hanging roof, forming a canopy, supported on triangular stanchion. Below, interior with ramp descending round tropical garden. In the large picture the circular aperture is open; in the smaller it is partly and fully closed by its balloon.





position of materials, has been worked out and the poetic effect of its transparency, revealing the internal geometry to the external eye. The interior displays—mostly scientific and industrial—are competently done in a style sympathetic to the architecture, but to the untutored eye may appear somewhat arid and unforthcoming. The building is more fully illustrated on pages 100–104.

Alongside Germany is Portugal, which shares with Yugoslavia the most charmingly landscaped part of this park-like corner of the grounds, com-

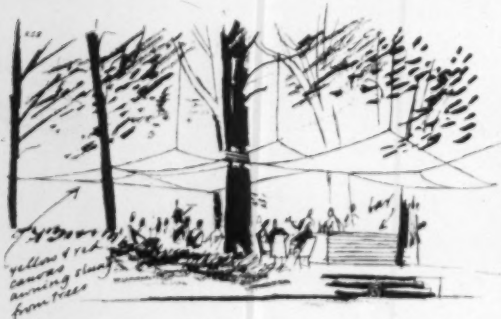


Open-air cafe near the Portuguese pavilion.

prising lawns bordered by beech-trees, flowing to the edge of a steep ravine. The Portuguese pavilion is a competent if uninspired example of the predominant glass cage, with a ceramic *brise-soleil* along the south front. It is another with a ramped one-way circulation, which brings the visitor back to the entrance, of which there is only one. Adjoining the main pavilion is a smaller one of similar character containing a restaurant. Close by, among the trees, is a charmingly informal open-air café with screens and awnings of coloured sail-cloth.


The Yugoslav pavilion makes an even more imaginative use of its pastoral setting, and also has a separate restaurant on the far side of the roadway, charmingly sited across the ravine with the stream flowing underneath it. This and the main pavilion (more fully illustrated on pages 116–118) have much of the sophistication of the German pavilion with an equally interesting use of levels, but without the latter's poetic simplicity, some of the roof-shapes being over-elaborate. The Yugoslav interior, though spatially effective, is even more arid than the German, some galleries containing nothing but a few enlarged photographs.

Switzerland occupies the remaining site in this well landscaped corner of the foreign section. It is somewhat chilly in character at first sight, but has many good qualities that emerge on acquaintance, notably the carefully studied relationship between the changing facets of the building and the surrounding trees and the way the forested landscape is framed in the open ends of the

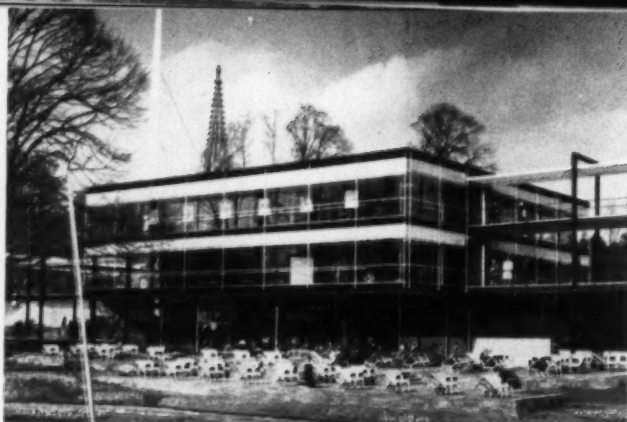

12. W. Germany

From the west (the side facing Gt. Britain). The distant gothic spire belongs to the Leopold I monument on the hill.

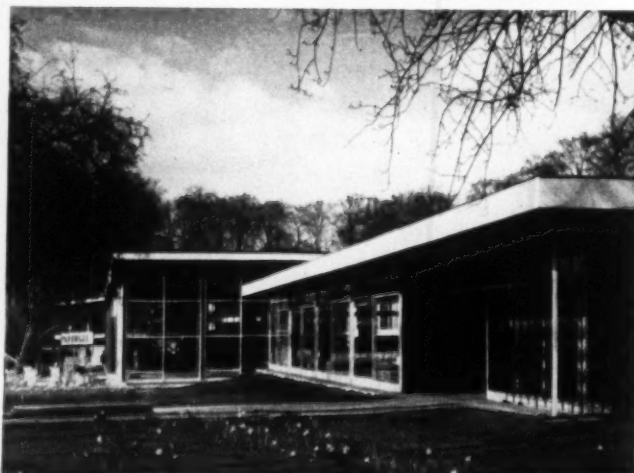

13. Portugal

Looking towards the main exhibition building, with Porto restaurant on right.




14. Yugoslavia

First-floor gallery overhanging entrance terrace.




15. Switzerland

From west, showing entrance bridge across pool.

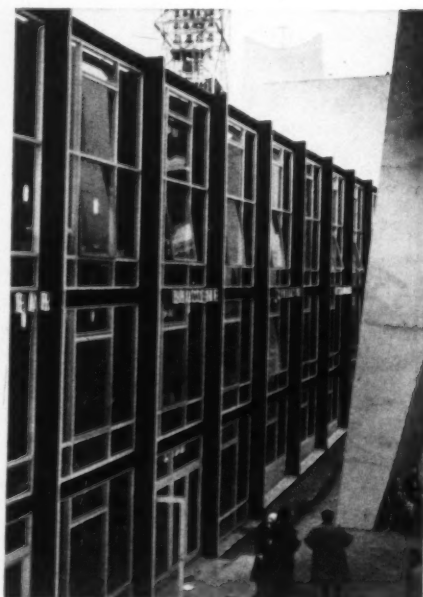

17. The Vatican

Right, steel-framed restaurant. Far right, church with hanging roof. On right of picture is a corner of one of the ski-lift terminal stations.

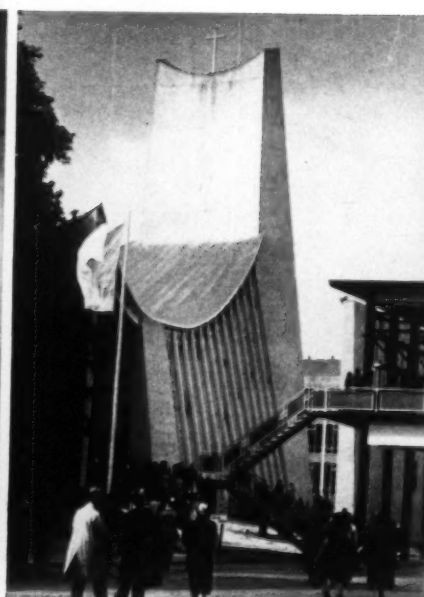

covered galleries. The pavilion (which again is more fully illustrated later—see pages 104-106) consists of a chain of hexagonal halls with a geometrically effective triangular roof-structure surrounding a pool. They are sheathed in aluminium. The detailing and the interior displays are well designed in the puritanical Swiss style. Semi-open-air displays, mostly with an industrial theme, step up the ravine on the far side of a boarded, tree-shaded walk. Both the Swiss and the Yugoslav pavilions look well lit up after dark.



On the way to the next group of pavilions the visitor passes Siam perched on a little hillock. Though a mere period reconstruction, of the kind sophisticated countries nowadays eschew (it is a miniature version of a traditional Siamese temple, in teak, much gilded), it is fresh and gay, sits well in the landscape and furnishes an entertaining contrast to the prevailing mechanistic styles—it exemplifies the same approach as the British Hall of Tradition, but has a lighter touch.

Immediately ahead is the large triangular site occupied by the Vatican. This is the first time the Holy See has been represented at an international exhibition. Of an ambitious group of four buildings (church, conference-hall, exhibition-hall and restaurant) three use the old exhibition technique of timber framing covered with expanded metal and sprayed with plaster. The resulting structures, ungainly in shape and coarse in detail, are of little architectural account, but the church, fan-shaped in plan, has an interesting hanging roof (see page 134) and an agreeably furnished interior, and the exhibition hall a notable collection of art treasures. The three-storey restaurant has a quite different and a




fresher character, being of steel and glass with the exposed steel frame painted black and white. —

Beyond the Vatican is Italy—one of the puzzles of the exhibition. It is the work of some of the best Italian architects but completely turns its back on the style of architecture, derived from modern technology, to which they have made such a notable contribution. Perhaps it should be regarded as a declaration of independence of glass-box fashions in architecture, and a re-assertion of the significance of the outdoor, as well as the indoor, spaces that it is architecture's

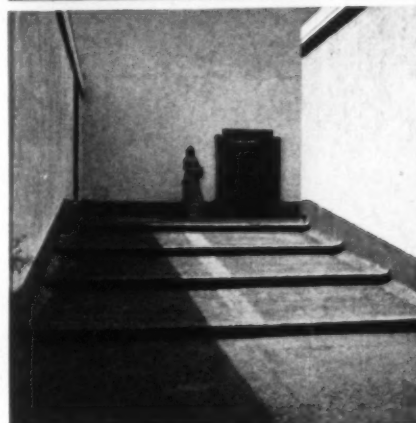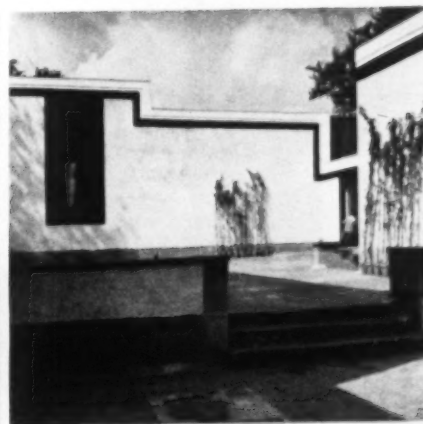

#### 18. Italy

Above, four typical views of spaces enclosed by the buildings. Right, inside the conference hall. Foot of page, conference hall building (with angle windows) and stairs down from hall.

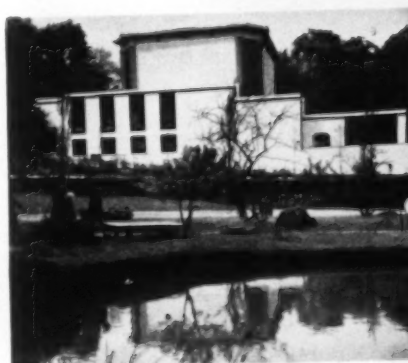



traditional role to define. The steep hillside site is covered by a sequence of smallish rectangular compartments separated by courts and alleyways, paved with red brick and linked by flights of steps. As an exercise in townscape this has many charms, but the simple form of the buildings, which are of solid brick construction, plastered white, is confused by the vaguely reminiscent profiles given to their parapets, to which is applied a broad blue band. This band is also taken round the doors and occasional windows, which are filled with a single sheet of plate glass, but it is not clear enough what architectural element it is meant to emphasize, and it has the result of coarsening the forms it outlines. The top-most compartment, which alone is two storeys high, has its corners cut off and filled with tall windows, giving it a rather ungainly silhouette.

The upper floor of this compartment is occupied by one bare brick-paved hall with a great chandelier hanging from the ceiling—a most impressive interior made the more so by the way the staircases dive dramatically downwards without parapets or handrails. The other interiors, which are given consistency by their timber ceilings, have a pleasant scale and workmanlike character and are full of interesting detail.

Still further up the hill, in the eastern corner of the grounds, are four little pavilions of no great interest: the Philippines, Cambodia, Ecuador and the Dominican Republic. Below them is one of the most successful, and certainly the most consistent, of all: Japan. This pavilion (the last of those chosen for fuller illustration—see pages 109-110) is timber framed with a spreading butterfly roof, and displays that subtle sense of space typical of the best Japanese architecture, traditional and modern; also a typically spontaneous use of natural materials like timber and stone. It is beautifully integrated with its garden, which is, indeed, an essential part of the exhibit. Established Belgian trees have somehow been made to take on a Japanese aspect.

Close to Japan, and almost hiding it from the main line of approach, is the clumsy and garish pavilion of Iran, which is illustrated here to represent those pavilions (which include Tunisia, Morocco, and other eastern countries) that employ the old fanciful-reminiscent style made familiar at Wembley and elsewhere. Passing beside it the visitor finds himself by the *Porte des Nations* and at the head of the broad avenue that will lead him back to his starting-point by way of the three largest foreign pavilions.

The first of these, on the right, is the U.S.A., an enormous circular building alongside which is a smaller circular cinema. The main building is most effective as a spectacle at night, when the illuminated interior defines the scale and archi-



18. Italy

Typical pavilion interior, with screens hung by iron straps from timber-raftered ceiling.



23. Japan

From entrance pathway, showing timber screen walls and concrete roof-support.



24. Iran

Forecourt and portico. The columns are red and gold.



25. U.S.A.


Looking across forecourt with oval pool containing Calder mobile.



## 25. U.S.A.


Right, photographic displays viewed from pool edge and balcony. Below, concrete platform floating over pool.

tectural character of the roof-structure. It consists of a drum of steel trellis, filled with transparent plastic and surrounded by gilded columns, which give it a formal neo-classical air. A projecting balcony widens into terraces where it meets higher ground at the sides and back of the building, and these provide the visitor with welcome sitting-space—in most other pavilions he

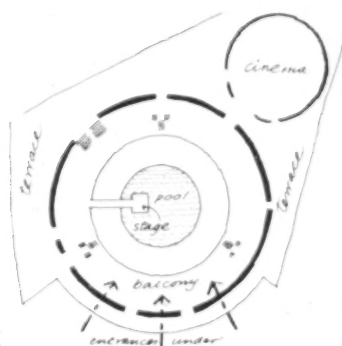

plan of the U.S.A. pavilion.  
below, structural diagram.


can only sit down in the café terraces, restaurants and bars. The roof (see cover and page 134) is ingenious: a steel drum in the centre is connected to a steel rim round the top of the walls by two layers of cables; steel mesh is draped from the top layer, enclosing the bottom, producing a translucent ceiling with a deeply corrugated surface,



and across the top are laid plastic panels. Inside the central drum the building is open to the sky; rain is caught in a circular pool.

The displays, largely photographic, surrounding this pool, are seen from ground level and from a circular balcony. The whole interior is airy and spacious and invites a freedom of movement that contrasts refreshingly with the claustrophobic, compulsory one-way circulation in some pavilions. The theme of the displays (which include some brilliant satirical murals by Saul Steinberg) is domestic and light-hearted. A mannequin show takes place on a concrete platform suspended over the pool, and there are a working drug-store and day-nursery; also a serious exhibition of modern art such as few other pavilions have, surprisingly, thought worth giving space to. The cinema, and a smaller circular building behind, housing a 'Circarama,' are faced with a patterned ceramic grille.

Just beyond the U.S.A.—and sandwiched rather significantly between it and Russia—are several small and not very interesting pavilions belonging to the Middle East countries. Behind them is the larger Hungarian pavilion in a somewhat modernistic idiom, with its main two-storey block strikingly clad in aluminium. It is well laid

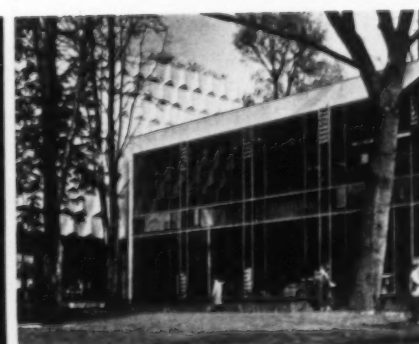

## 29. Hungary

Left, corner of main building with aluminium wall facing. Beyond (left of picture) is Russia. Above, garden court showing glass-walled industrial gallery.

out inside, especially the industrial exhibits, but the most interesting architectural feature of the interior is an upper-floor art-gallery with unusual clerestory lighting.

Returning to the large forecourt, filled with apple-trees surrounding an oval pool, on to which the United States faces, the visitor finds himself at the foot of the steps leading up to Russia. These are flanked by a separate Russian building containing a cinema. The main Russian pavilion is large and rectangular and, like the German, has been designed for re-erection after the exhibition is over. Although fully glazed, it manages by the use of obscured glass and close subdivision to obtain an opposite effect to that of lightness and fragility which most architects welcome as the consequence of using curtain-wall construction. The structure of the building is a notable engineering achievement. Two lines of steel lattice stanchions rise through the roof and support hinged trusses which project outwards and slightly upwards. These carry the aluminium framed curtain-wall. Similar trusses projecting inwards carry a central lantern. The trusses are held in position by cables from the top of the stanchion. The lantern is formed of more lattice trusses inclined towards one another and glazed to form a ridge-and-furrow pattern down the length of the pavilion.


There is little sympathy of feeling, however, between this impressive engineering and the architectural embellishments. The lattice stanchions are cased in characterless marble slabs, the foot of the curtain wall terminates in a coarsely moulded decorative aluminium band and in front of the entrance stands a monumental portico with dumpy stone columns. The powerful industrial exhibits inside are of the greatest interest, but the pavilion is overloaded with embellishments in the familiar, unchanging Russian style: heroic bronze statues, naturalistic murals of extraordinary banality and statistics by the square yard set out in raised white lettering on marble panels.



**16. Siam**  
Gilded temple on a podium  
(see page 93).


West of the Russian pavilion the main avenue passes beneath the *passerelle*, beyond which, on the left, is France, the third of the major pavilions from the point of view of size. This is an enor-

**31. France**  
From the main avenue,  
where it passes beneath the  
*passerelle*.

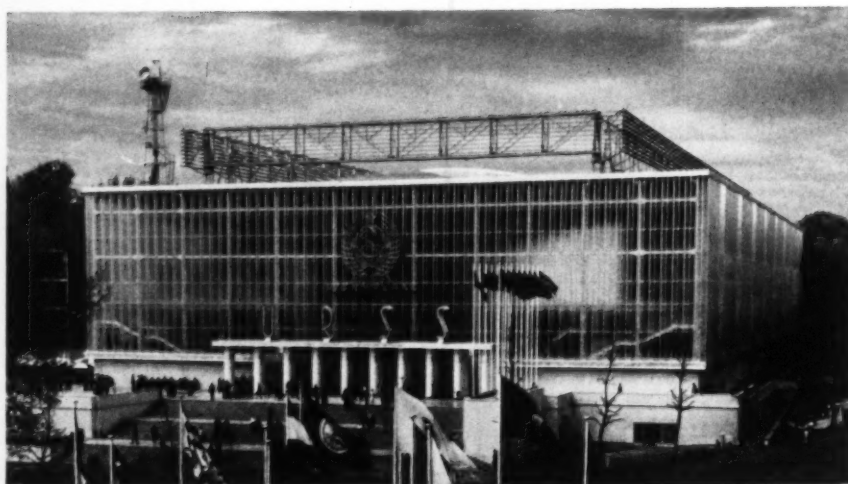


### 30. Russia

Above, main front with  
exposed roof-structure.  
Left, interior with industrial  
exhibits, showing ridge-  
and-furrow lantern.

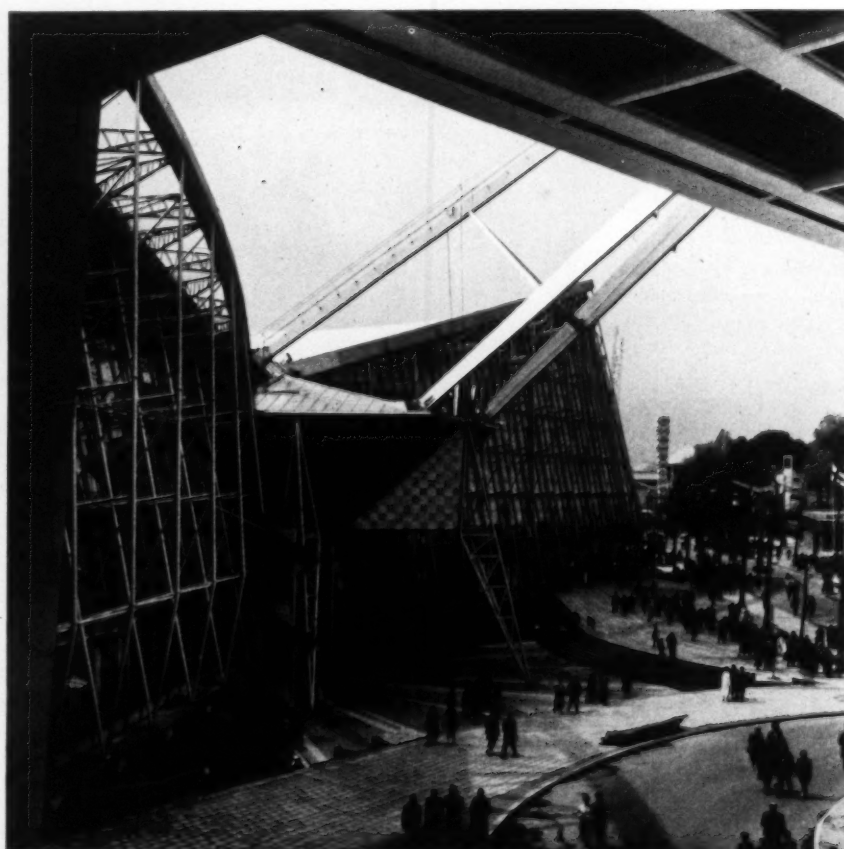



mously ambitious steel structure, which sacrifices almost every architectural consideration to a demonstration of the fact that, with the aid of a counterbalancing arm, most of the weight of a large roof can be taken down to the ground at a single spot. It consists of two twisted rectangles, meeting at a slight angle and with roofs sloping

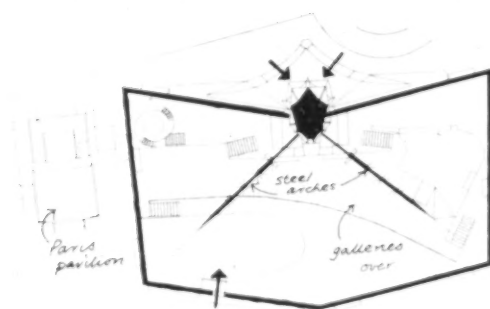

plan of the French pavilions.

towards one another. The roofs are of steel cable covered with plastic sheeting. These span between edge-beams supported by two steel arches springing diagonally across the two rectangles, balanced by the steel arm that reaches upwards and outwards from the face of the building and also serves as a television mast.

This structural tour-de-force (see also page 136) hardly justifies itself architecturally because the broken-backed shape of the building is ungainly and the high, lattice-steel wall-structure, clad with corrugated plastic, is clumsy and visually confused. The interior, when first entered, gives a breath-taking impression of size, and its upper floor (whose weight is also counterbalanced by the projecting arm) and galleries, reached by escalators, give it additional scale. But the pavilion is so overcrowded with miscellaneous displays as to produce a quite bewildering effect. If the visitor can find his way to them, there are a well-designed art gallery and a sequence of interesting furnished rooms on the lower ground floor. Alongside the main French pavilion is a separate building devoted to the city of Paris, with a roof cantilevered forward from piers at the back and an all-glass front. The proportions are not very happy and the inside is dull.


Across the avenue from it is Argentina, one of the less successful of the glass-box pavilions, with a coarsely shaped curved roof not well related to the type of structure or to the crude shapes of the ancillary buildings (which include a domed cinema) in the foreground. An odd feature of the planning is that the only doorway readily seen from the forecourt is that of the restaurant, the entrance to the exhibition hall itself, which is on an upper level, being out of sight round a corner at the side.

Finland, which is next to Argentina, can always be counted on to produce an interesting demonstration of the architectural possibilities of timber. This pavilion is no exception, though its exterior is not wholly successful from all angles. Set



### 31. France

Left, detail of external wall (south-west corner). Below, inside the main entrance showing base from which whole steel structure springs. Beneath this, general interior showing multi-level balconies, and exterior of Paris pavilion.

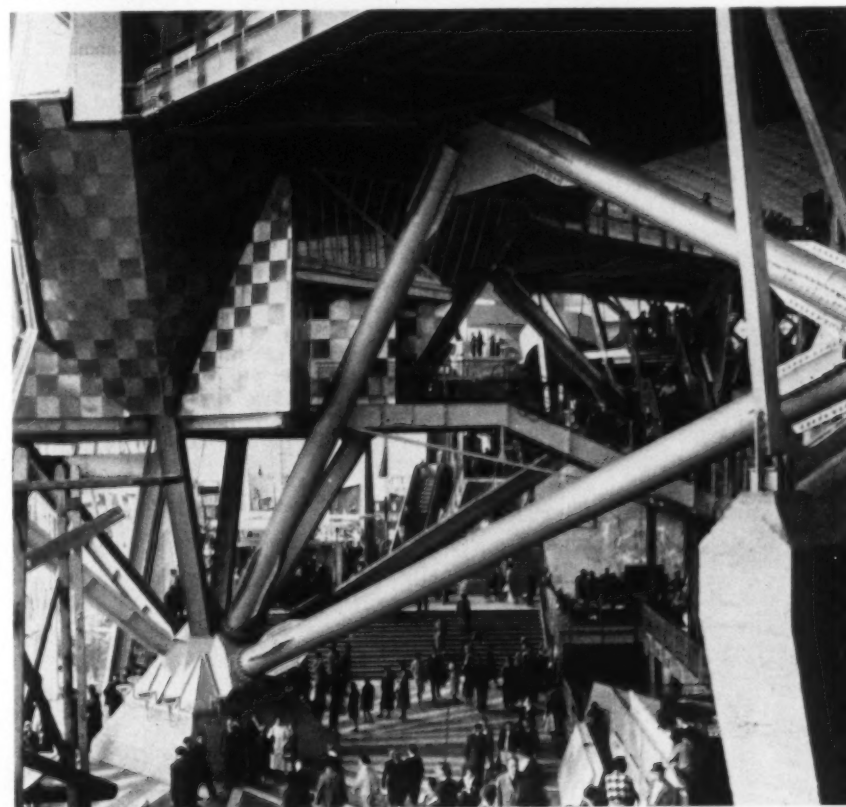


### 32. Argentina

From main avenue. Entrance is behind screen on right. Domed building on left is cinema. At top of picture is part of one of the ski-lift tubes.




against a steep hillside, it is a building of some geometrical complexity, serrated on plan with a roof serrated in profile, providing continuous clerestory windows at several levels. The interior, however, relies largely on artificial lighting, with

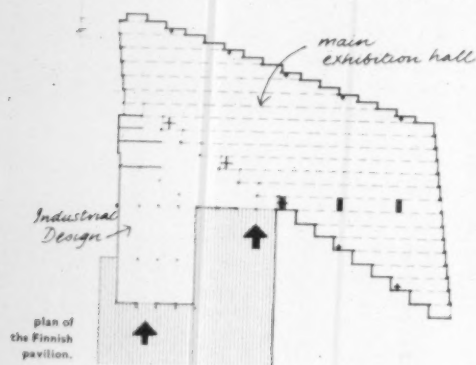

lights concealed behind slatted timber troughs. Steeply sloping ceiling rafters conceal the roof structure and create an interesting interior space: high on one side, where huge photographs are mounted on the wall; low on the other. The detailing is simple and consistent and the interior smells delightfully of newly sawn wood.

Alongside Finland is Norway, a modest pavilion roofed with huge beams of laminated pine with parchment-like plastic stretched between them, lit from above at night. It is a building of subtlety and charm, and comes unexpectedly from a country that has not made much contribution to modern architecture. A good sense of space is achieved in a smallish interior by all display stands being kept low. Across the front is a

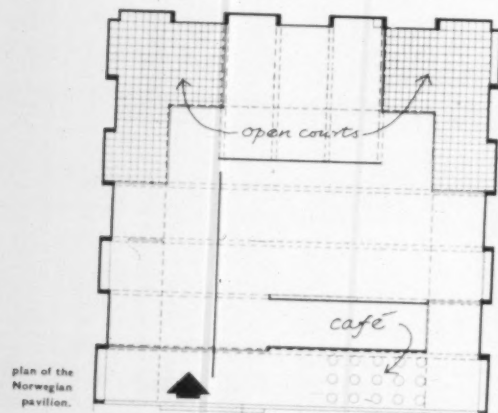


stone-paved terrace sheltered by the overhang of the roof, the front wall being of plate glass and vertical boarding.

Down this side of the avenue the ground rises to form a little hill, on top of which are a couple of rather comical little concrete forts representing Andorra and San Marino. On the opposite side is Austria, the last of this main group of foreign pavilions, since beyond it is The Netherlands (already discussed) where the avenue emerges at the *Porte du Benelux*, the starting-point of this itinerary. The Austrian pavilion is a building of some sophistication, notable for its dignity and




### 33. Finland

Above, timber-clad exterior, with clerestory roof-lighting. Left, interior, with sloping raftered ceiling and low display tables.

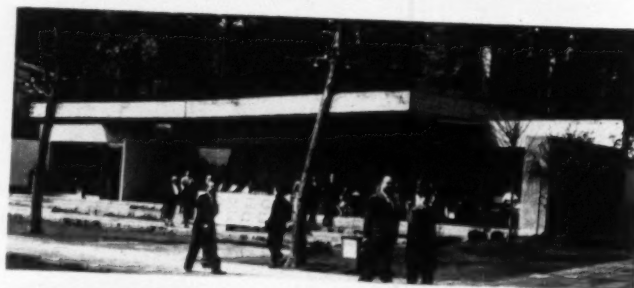

### 34. Norway

Left, exterior from main avenue. Below, detail of entrance and interior showing built-up timber beams; open courtyard (see plan) at extreme left.

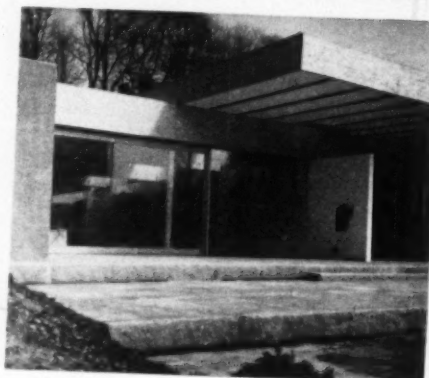

restraint and for the sense of quality apparent in every detail of the design. The exhibition galleries are almost wholly on the first floor, planned round a square paved courtyard. They are supported only on four steel stanchions at the internal corners. The superstructure is welded steel. Inside the exposed frame, which is painted grey, are walls of corrugated glass-fibre sheeting. These are translucent, so that the galleries are well lighted, but not transparent enough to see out. The exhibits are mostly cultural in character, emphasizing Austria's role as a bridge between east and west, and are beautifully designed with a notably successful use of etched copper plates. The visitor can see and hear music-lessons being given in a timber-panelled conservatoire. Austria is the only country that has made its girl attendants part of the design of the building. They are dressed in brilliant yellow which is well set off by the calm greys, whites and blacks of the architecture.

The remaining foreign pavilions are sited in the thickly wooded area between the main avenue in which Austria stands and the Belgian sections of the exhibition. They are reached by a steep pathway from the *ronde-point* by the Dutch pavilion, which passes behind San Marino and Andorra. Along the pathway on the left are three small pavilions: Liechtenstein, Nicaragua and Israel, of which only the last holds any interest. This is a narrow glass-walled building on a sloping site. The plan skilfully uses the slope of the ground to bring the visitor through the main hall, down a flight of stairs into an open courtyard and out by a passage beneath the entrance gallery.


Beyond Israel, on the right, is Canada, a quite ambitious pavilion whose architects can hardly have realized when they designed it that the front, facing towards the centre of the foreign section, was going to be masked by the high blank wall of the Russian cinema. It can only with difficulty be approached from this side and since the adjoining side is below the level of the *passerelle* the pavilion finds itself somewhat cut off from the rest. It is a competent building with an orthodox steel frame, partly glazed and partly open, providing airy wood-decked terraces. These are reached by ingeniously constructed ramps and staircases, supported on steel channels and suspension cables. The exhibits are competently but conventionally displayed.

The last of the foreign pavilions is Czechoslovakia, tucked away among the trees in the northernmost corner of the foreign section, beside the *Porte du Parc*. It is a large affair in a rather self-conscious modern idiom, resembling the Hungarian but more ponderous. The detailing is heavy and there are large expanses of solid mosaic-faced walling. But the planning is good, with two storeys of galleries glazed on the side that faces a garden court. The industrial exhibits are impressive in themselves, but, perhaps owing to lack of variety of scale, the cumulative effect of the interior is one of dullness.



37. Austria

Left, exterior (with one of the ski-lift tubs travelling along its cable). Below, inside the courtyard with supporting corner stanchion at right.

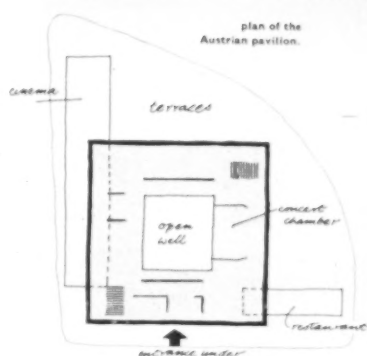



39. Israel

Right, entrance gallery with (left of picture) exit from low-level courtyard beneath.



41. Canada

Below, exterior. Below right, looking outwards showing circular steel staircase.

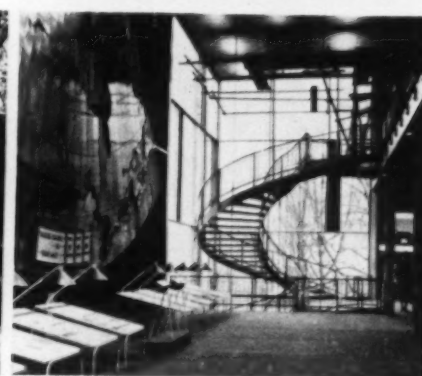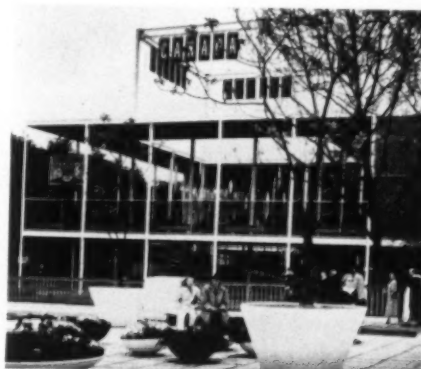

42. Czechoslovakia


Entrance forecourt; industrial sculpture on right.

**SIX OUTSTANDING PAVIL**






**I O N S**

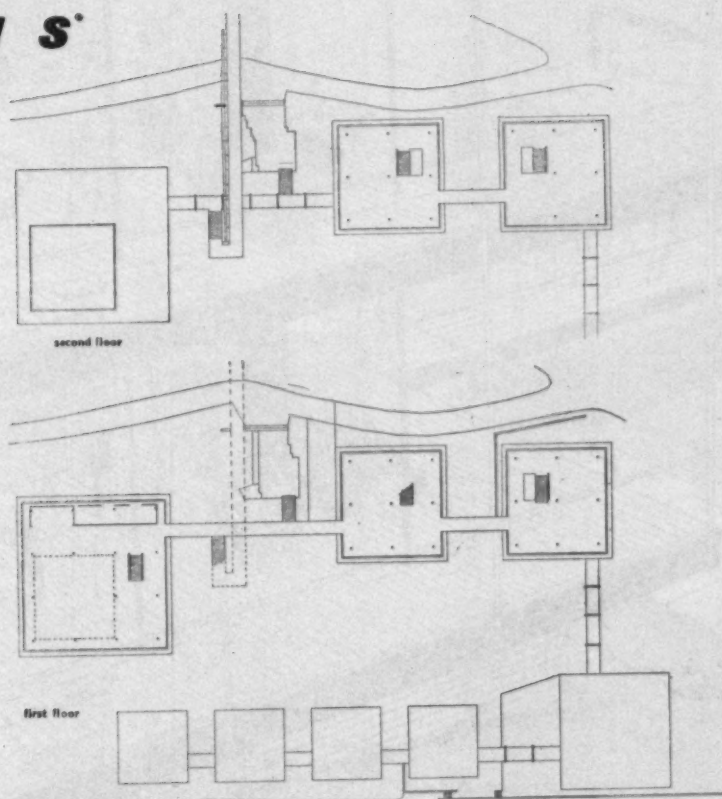

scale: 1/24 in. = 1 ft.

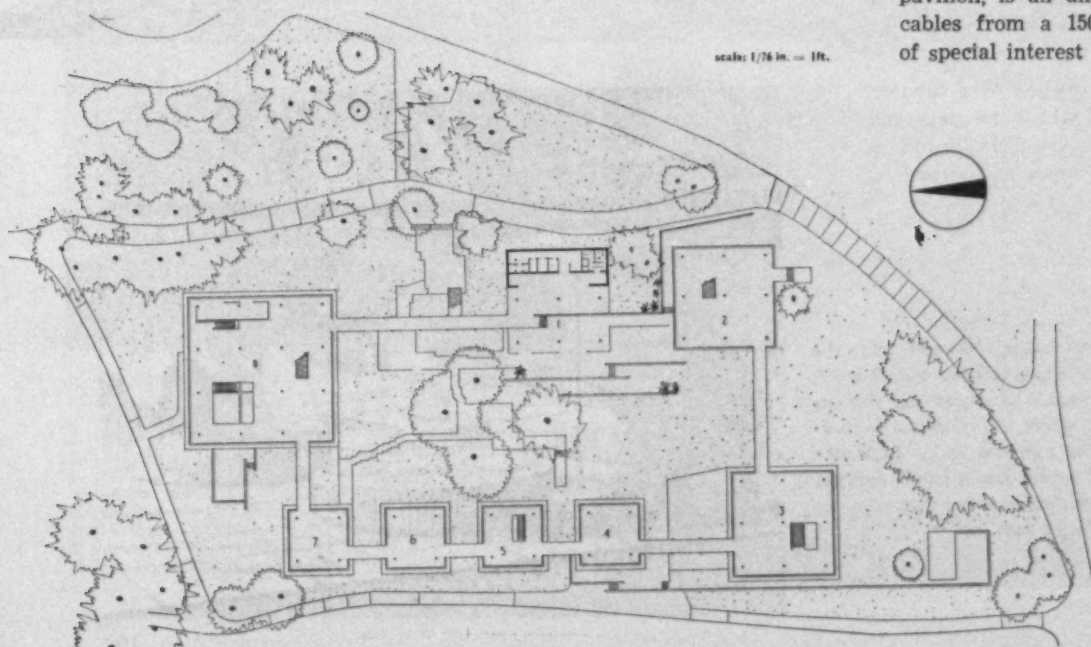

## 1. W. GERMANY

architects: Egon Eiermann and Sep Ruf


The pavilion consists of a chain of eight fully glazed square buildings, each a self-contained unit but linked by bridges, surrounding and spanning over a tree-planted sloping lawn. The five units on the lower side are two-storeyed; the three on the upper side are three-storeyed. The construction, completely prefabricated, is of welded steel, each pavilion being supported on 4, 9 or 16 box stanchions. These are set at about 30-ft. centres, the outside stanchions being invariably placed some six feet inside the glazed wall, which is itself placed three feet inside the roof and floor edge to give room for an outside passage-way. The steel fascias which conceal floors and roofs are linked together by steel stiffeners bracketed out an inch or so from the fascia line and to these is welded a line of tubular rails. The fascias are painted black and the stiffeners white. The floors are of white pine decking (which in the connecting bridges and in areas open to the weather is caulked); an exception being the industrial pavilion where they are of steel plate. The glass stops short of the ceiling to ensure natural ventilation, and every façade is provided with electrically-controlled white venetian blinds which operate as a single unit.

The entrance bridge, connecting the top floor with the high ground which rises steeply up to the east of the pavilion, is an unusual structure, being suspended by cables from a 150-ft. high steel pylon. Other details of special interest are the canopies over the connecting

1 (facing page), a corner of one of the eight units of which the West German pavilion is composed, showing the black-painted exposed steel frame, white-painted stiffeners and the glass line set back 3 ft. inside the frame. On the ground-floor plan on the left the contents of the units is as follows: 1, restaurant (enclosed kitchen beside it); 2, industry; 3, housing and town-planning; 4, wine-bar; 5-6, recreation; 7, health and welfare; 8, education. On the first floor of unit 8 is an assembly hall.

**SIX OUTSTANDING PAVIL**

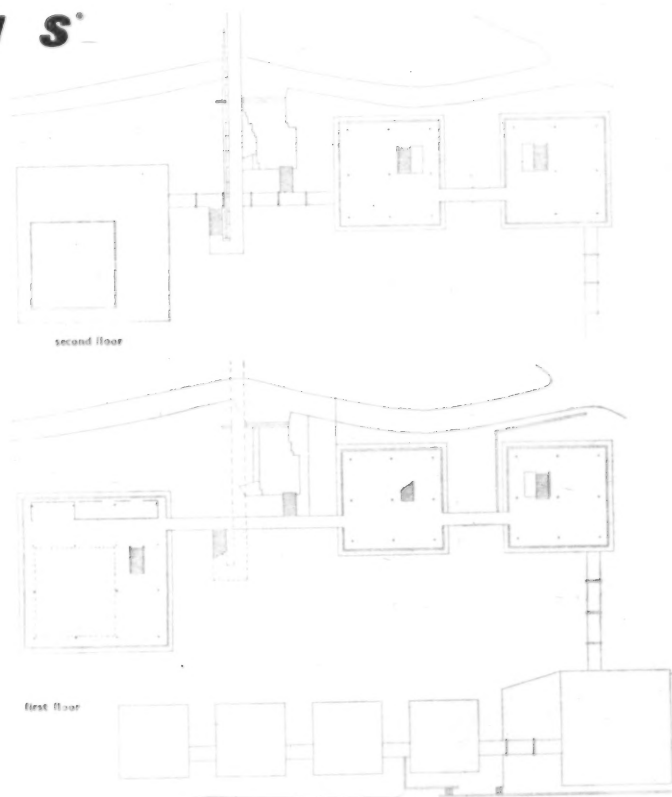

**I O N S**


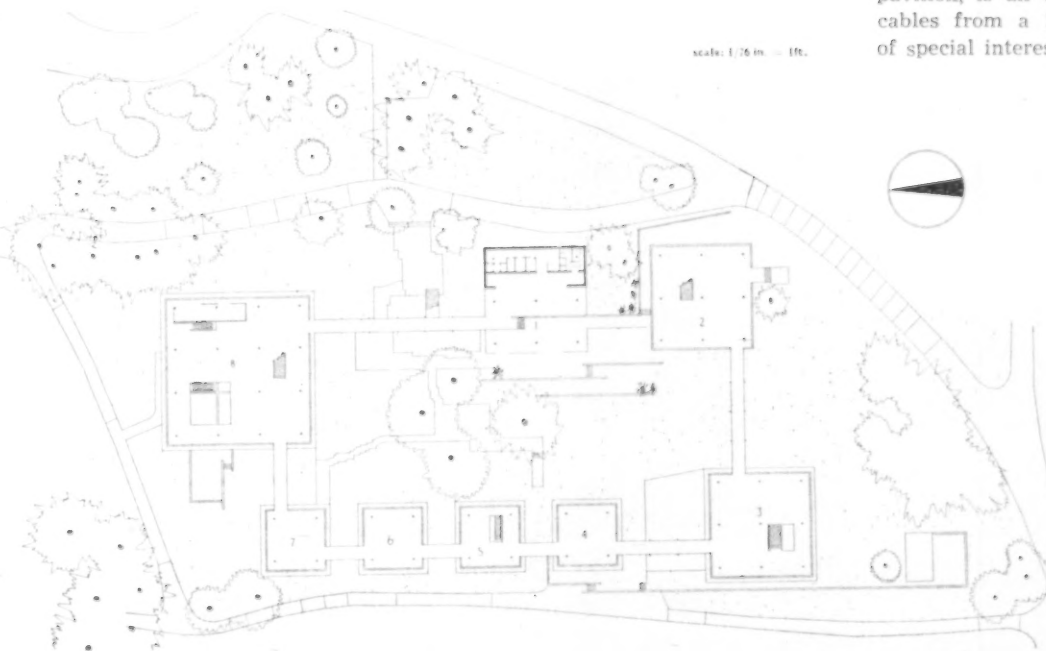
scale: 1/16 in. = 1 ft.

# 1. W. GERMANY

architects: Egon Eiermann and Sep Ruf


The pavilion consists of a chain of eight fully glazed square buildings, each a self-contained unit but linked by bridges, surrounding and spanning over a tree-planted sloping lawn. The five units on the lower side are two-storeyed; the three on the upper side are three-storeyed. The construction, completely prefabricated, is of welded steel, each pavilion being supported on 4, 9 or 16 box stanchions. These are set at about 30-ft. centres, the outside stanchions being invariably placed some six feet inside the glazed wall, which is itself placed three feet inside the roof and floor edge to give room for an outside passage-way. The steel fascias which conceal floors and roofs are linked together by steel stiffeners bracketed out an inch or so from the fascia line and to these is welded a line of tubular rails. The fascias are painted black and the stiffeners white. The floors are of white pine decking (which in the connecting bridges and in areas open to the weather is caulked); an exception being the industrial pavilion where they are of steel plate. The glass stops short of the ceiling to ensure natural ventilation, and every façade is provided with electrically-controlled white venetian blinds which operate as a single unit.

The entrance bridge, connecting the top floor with the high ground which rises steeply up to the east of the pavilion, is an unusual structure, being suspended by cables from a 150-ft. high steel pylon. Other details of special interest are the canopies over the connecting




1 (facing page), a corner of one of the eight units of which the West German pavilion is composed, showing the black-painted exposed steel frame, white-painted stiffeners and the glass line set back 3 ft. inside the frame. On the ground-floor plan on the left the contents of the units is as follows: 1, restaurant (enclosed kitchen beside it); 2, industry; 3, housing and town-planning; 4, wine-bar; 5-6, recreation; 7, health and welfare; 8, education. On the first floor of unit 8 is an assembly hall.




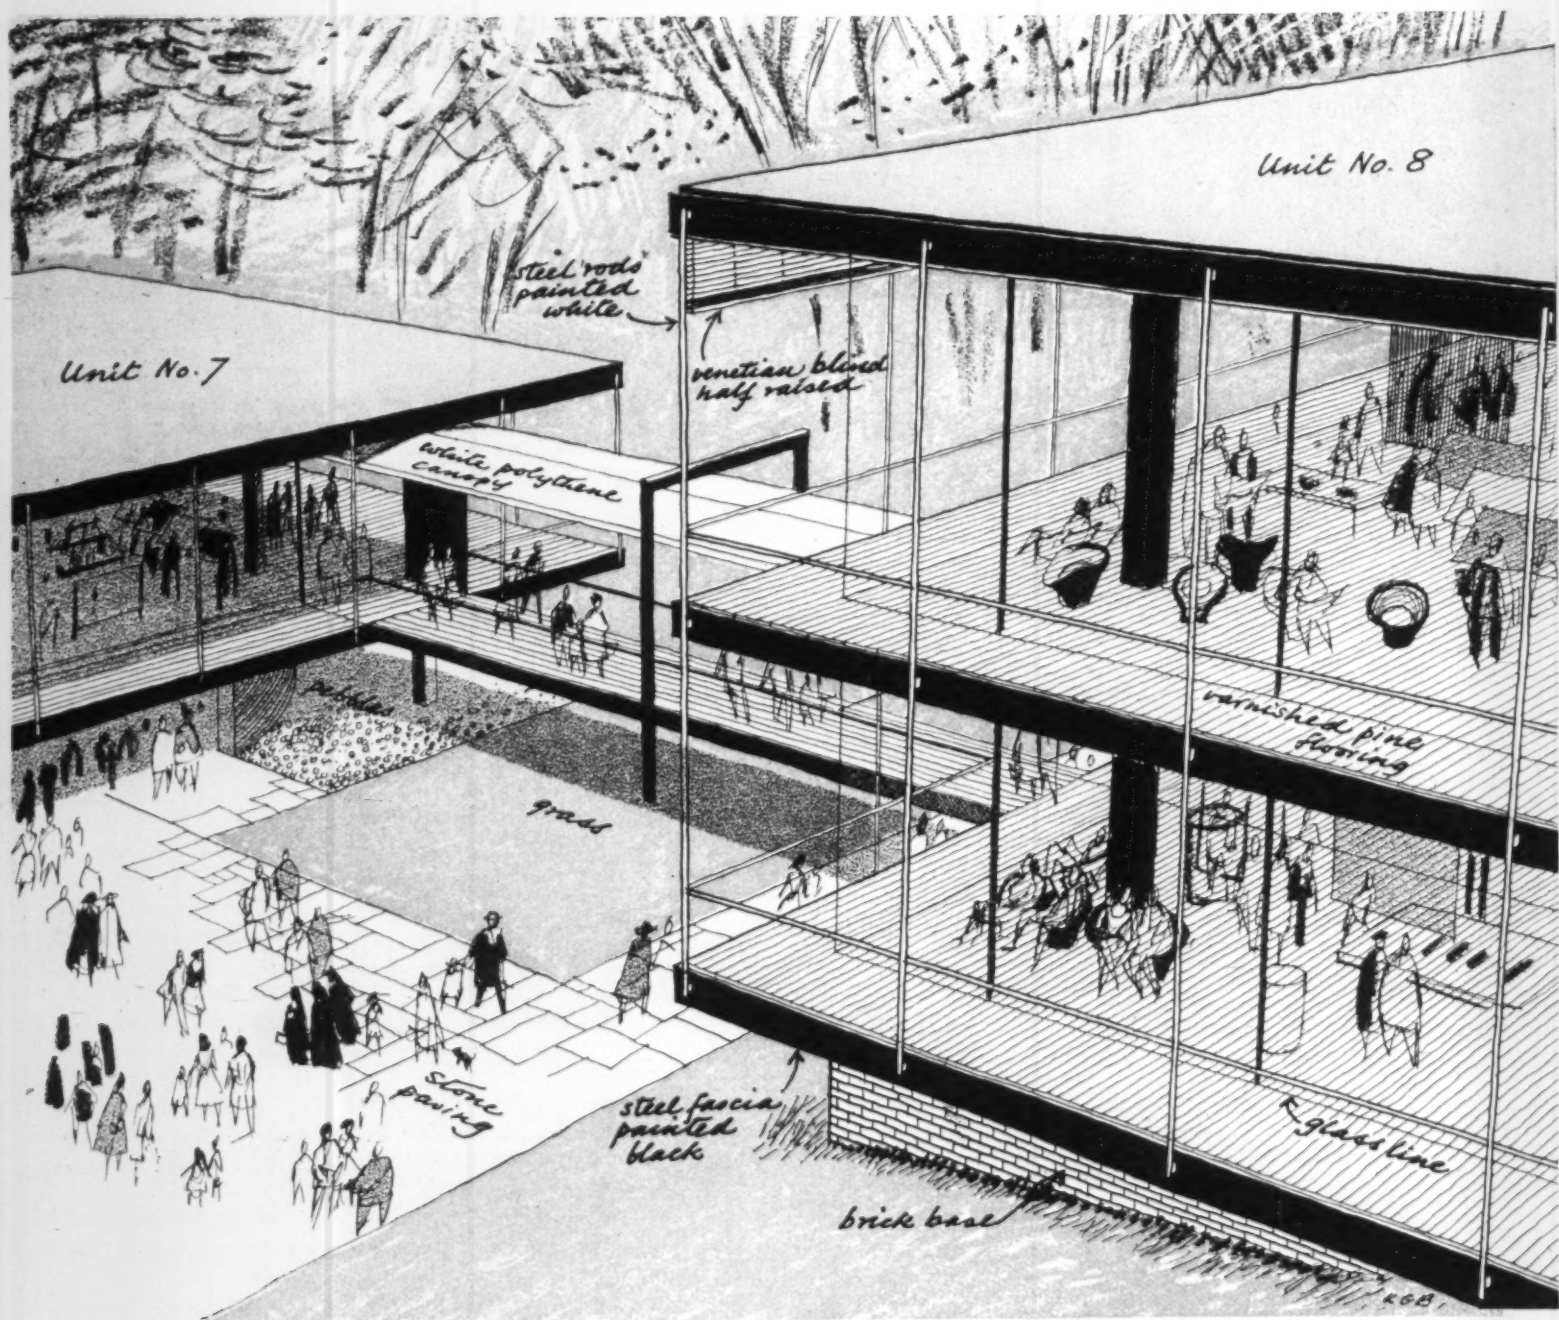


bridges which are of polythene stretched over tubular steel frames, the internal stairs, of which the steps are of solid timber, and the centrally pivoted double doors which face on to the connecting bridges and served to close the separate units at night.

Above, looking outwards from the central court, between units 7 and 8 (see ground-floor plan on previous page) which are connected at floor level by a covered bridge. Right, the paved terrace outside unit 8, equipped with wicker seats and umbrellas (see also facing page).

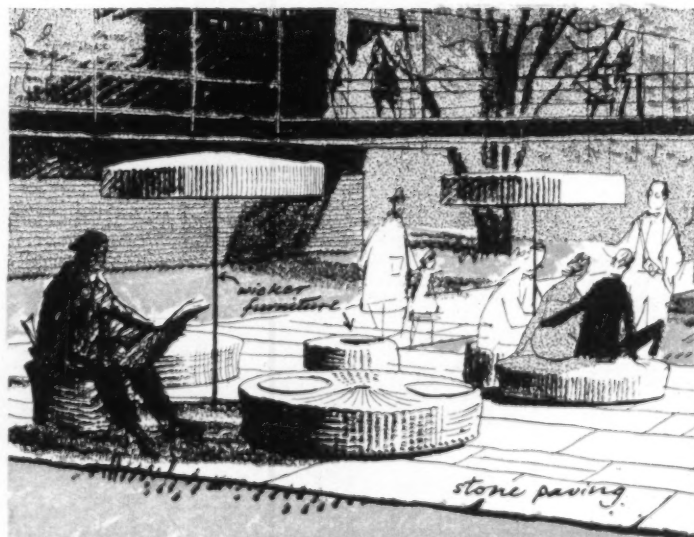


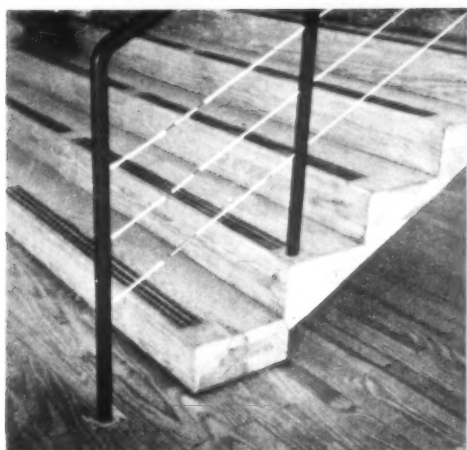


2

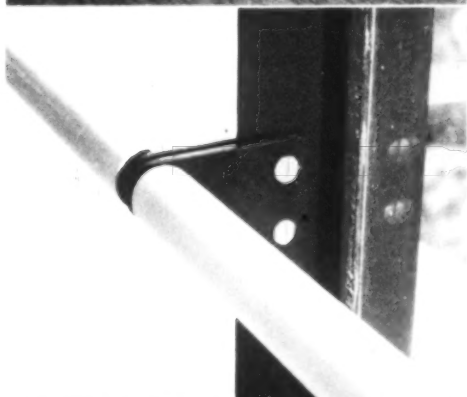

3

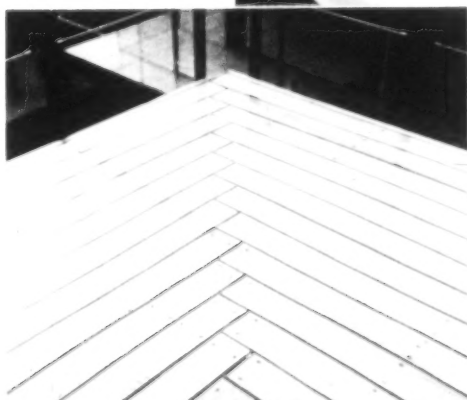


4

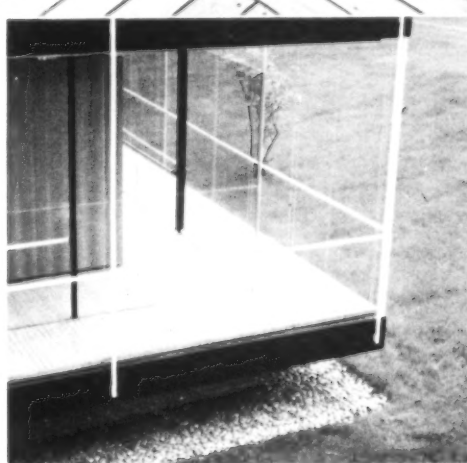

5

The German pavilion is notable for the precision and aptness of its standardized details. Four examples:


- 2. wooden stairs with steps of solid timber and handrails of steel tube and chain-link wires.
- 3. handrail which protects the inside face of the glass.
- 4. wire mesh railing bracketed from either side of the flange of the steel upright.
- 5. wire mesh railing bracketed from the outside of the flange of the steel upright.

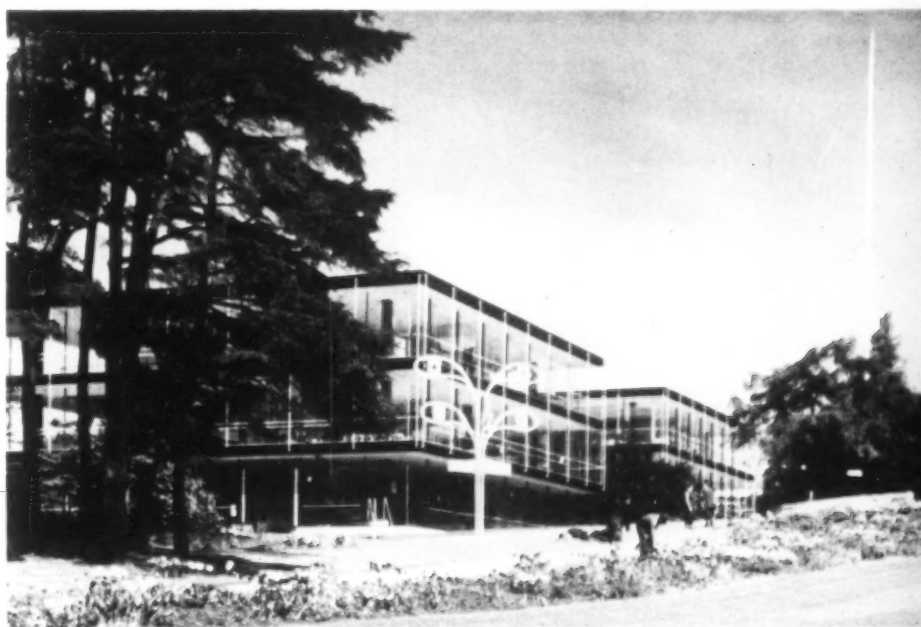

6

## WEST GERMANY

6. From left to right: view of the pavilion from the street, view of the pavilion from the street, view of the pavilion from the street, view of the pavilion from the street.




7




8



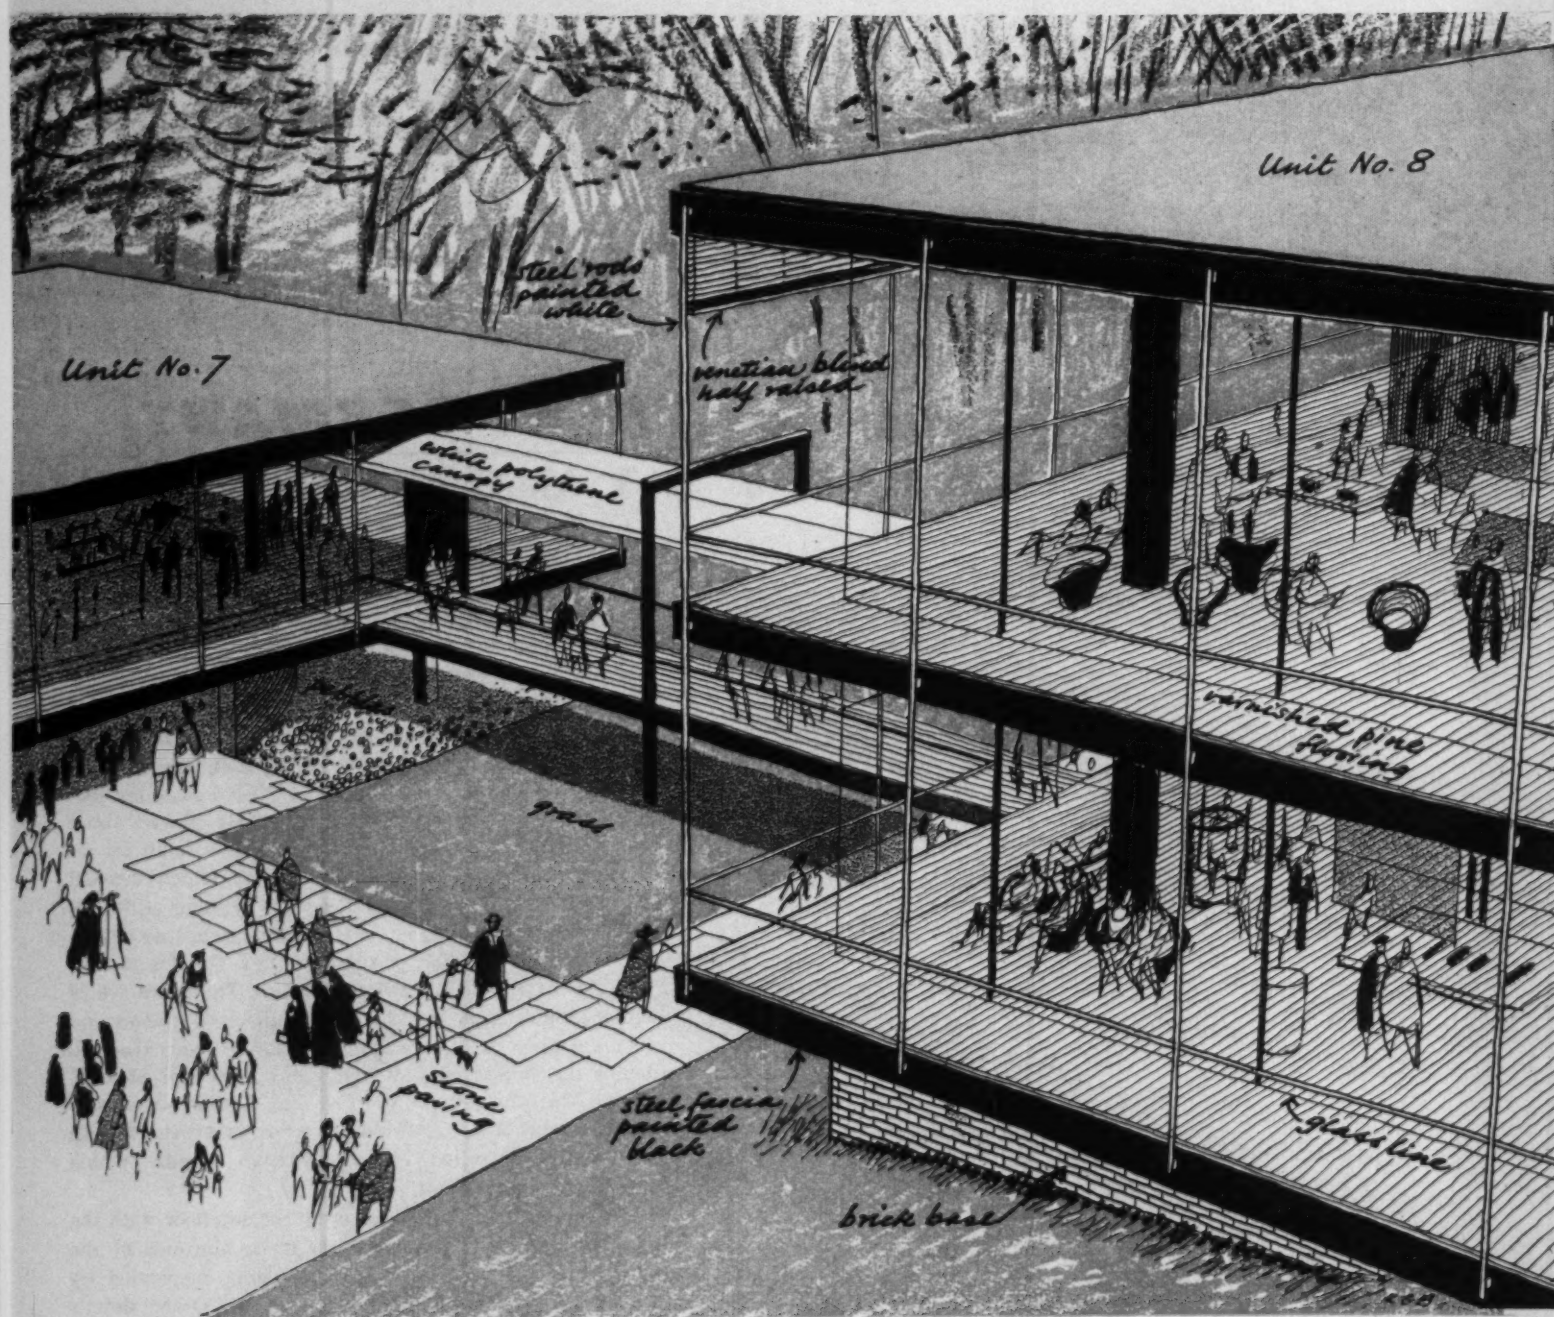


bridges which are of polythene stretched over tubular steel frames, the internal stairs, of which the steps are of solid timber, and the centrally pivoted double doors which face on to the connecting bridges and served to close the separate units at night.


Above, looking outwards from the central court, between units 7 and 8 (see ground-floor plan on previous page) which are connected at floor level by a covered bridge. Right, the paved terrace outside unit 8, equipped with wicker seats and umbrellas (see also facing page).

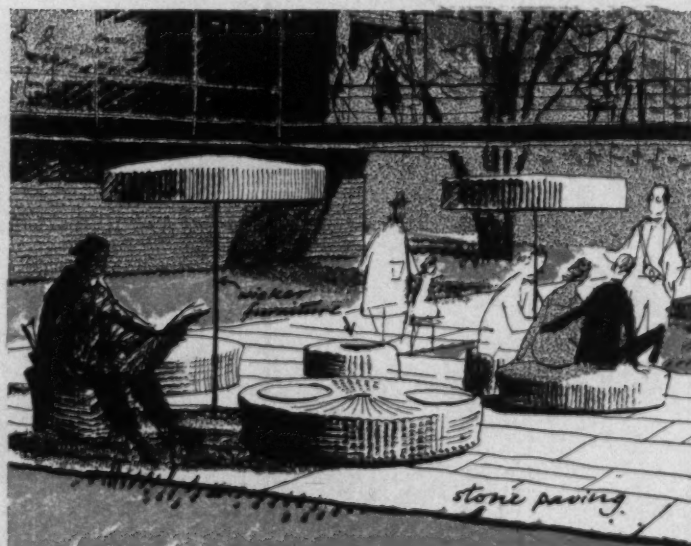




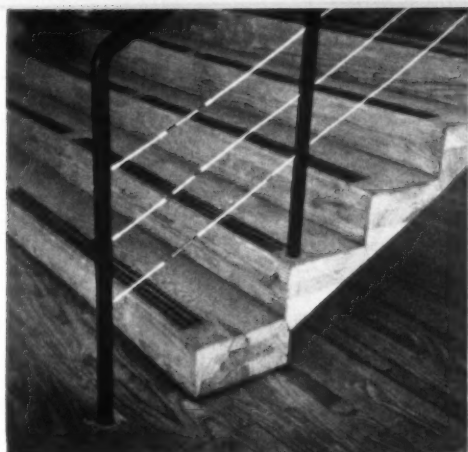


2

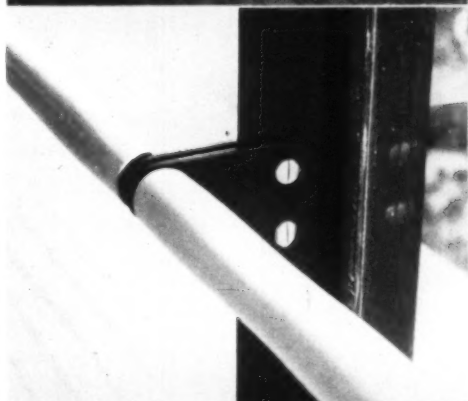

3

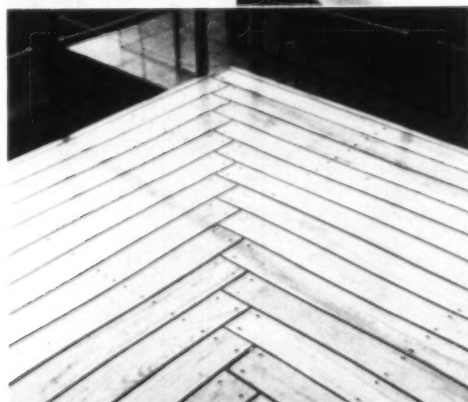


4

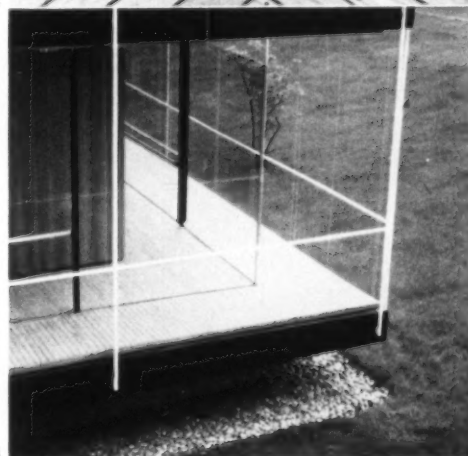

5


The German pavilion is notable for the precision and aptness of its standardized details. Four examples:  
 2, internal stairs with steps of solid timber and balustrade of steel tube and tensioned wires;  
 3, the handrail which protects the inside face of the glass wall—a wooden bar, bracketed from either side of the flange of the steel upright;  
 4, pine floor decking;  
 5, the same from outside, showing the profile of the base of the building.

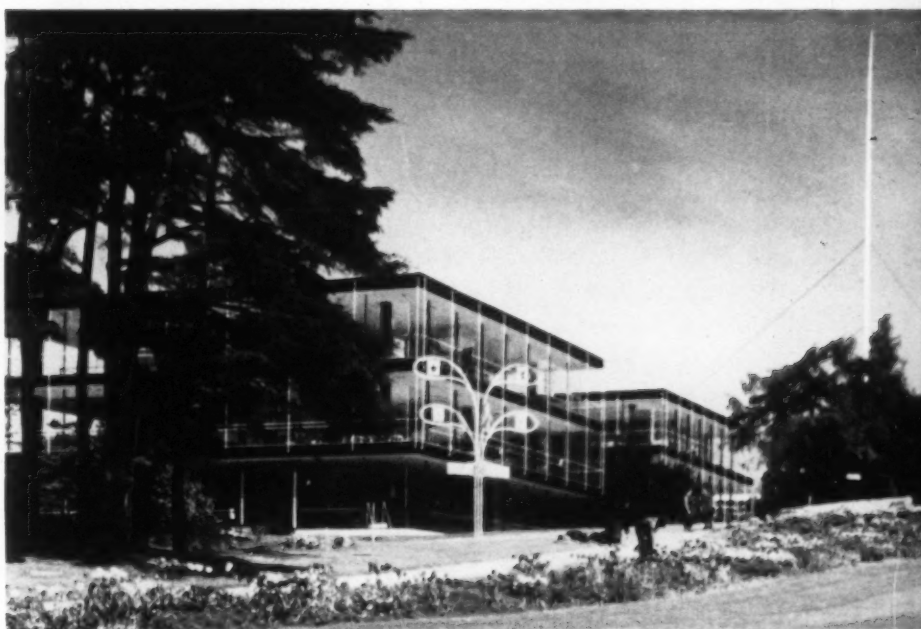

6

#### WEST GERMANY

6, from the south-west. The units shown are nos. 3 and 2 (see plan). The weakly designed sign-post in front is Belgian.  
 7, the bridge connecting units 1 and 8 with, on the right, the cantilevered staircase leading down from the high-level bridge approach (at top of plan).  
 8, paved area in front of unit 8, with wicker furniture.




7



8



9

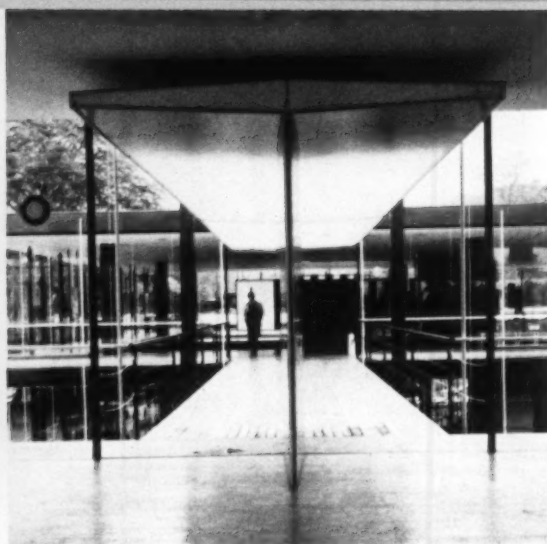

10

## WEST GERMANY

9, a typical first floor interior view, showing the open-air passage-way that surrounds each unit outside the glass-line. The handrail seen on the left, just inside the glass, is that of which the fixing is shown in detail on the preceding page.

10, looking from one unit to another along the connecting bridge. The roof of the bridge, which penetrates beneath the ceiling of the building at either end, is of white polythene stretched over tubular steel frames.

11, one of the connecting bridges from outside; also the cantilevered staircase leading down from the high-level entrance. Where the bridge enters the building can be seen one of the centre-pivoted, blue-painted doors (only visible end-on in 10) by which each unit can be closed at night.




11

## 2. SWITZERLAND

architect: Werner Gantenbein

The pavilion is composed of large hexagonal units planned round an irregular shaped pool with stone-paved surrounds. Each unit (there are 31 in all, plus one double unit to form an assembly room) is six-sided with a double pitch roof which invariably runs on the north-east-south-west axis, an arrangement which enables contiguous hexagons to obtain clerestory lighting along the planes of the roof verge. The structure consists of tubular columns, placed one inside each external angle, with a seventh column beneath the centre of the floor. The roof of each unit is spanned by lattice timber trusses and clad in aluminium sheet. The external walls are mostly glazed, and where opaque are also clad with sheet aluminium. This same metal is used for the wall framing, for which a set of extrusions was specially designed. These comprise uprights and head and sill members which are substantially of I-section with finned webs to receive clip-in aluminium beads in two alternative positions, according to whether

12, close-up of the corner of the main Swiss pavilion showing the standard hexagonal unit, with double-pitch roof, of which it is composed. The wall sheathing is aluminium.

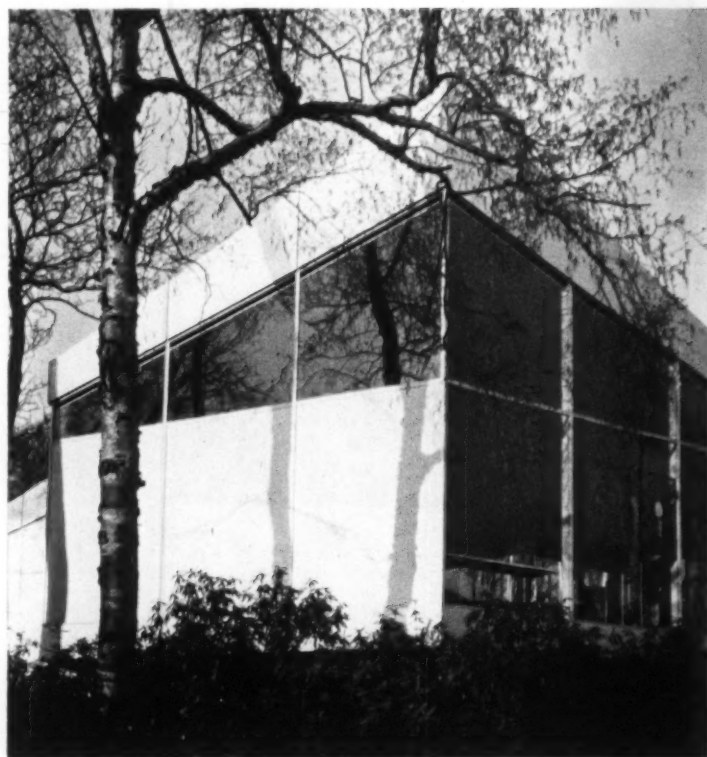


12

104



13

the panel to be received is opaque or glazed. The separate pavilions perched over the ravine on the other side of the boarded pedestrian walk along the north-east side of the main pavilion are similarly constructed.

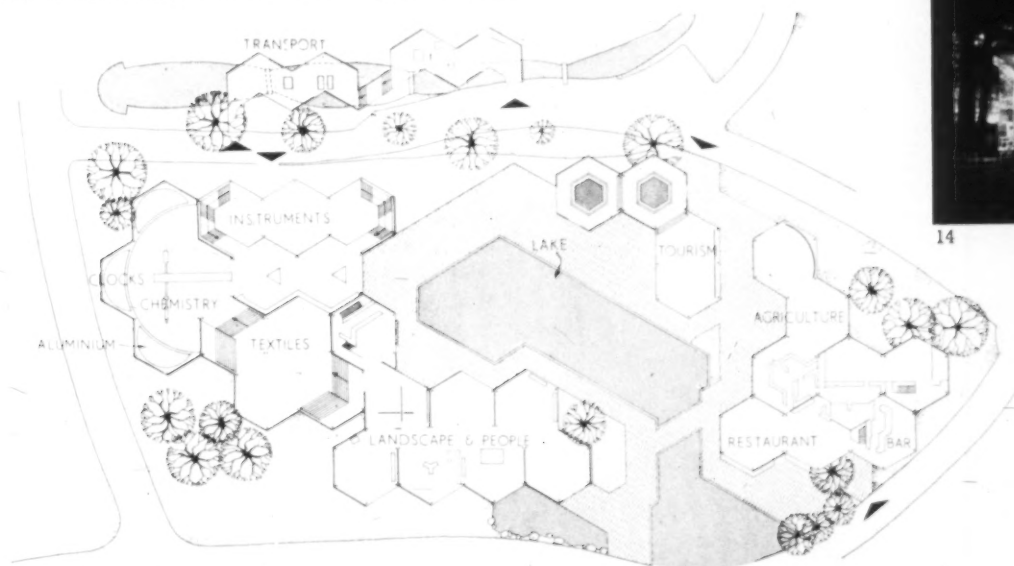

plan—scale: 1/16 in. = 1 ft.

105

13. the aluminium-sheathed galleries seen from across the pool; i.e. from the paved terrace between the tourism and agriculture exhibits (see plan on this page).  
14. night view from outside showing ceiling illumination.  
15. inside the gallery entitled 'Instruments.' Outside the windows a pathway slopes down towards the French pavilion.




14




15




SWITZERLAND

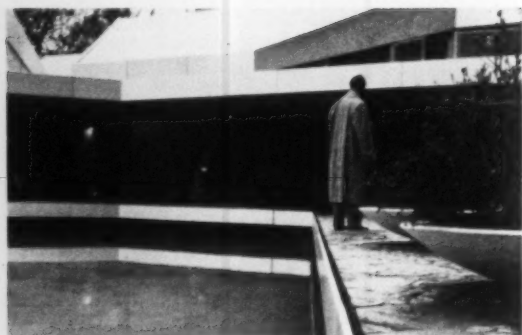


16

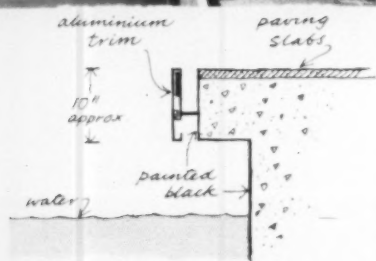

16. edge of central pool showing stone paving finished with aluminium fascia (see sketch).  
17. paved terrace with boarded ceiling and forest view framed in the opening beyond.

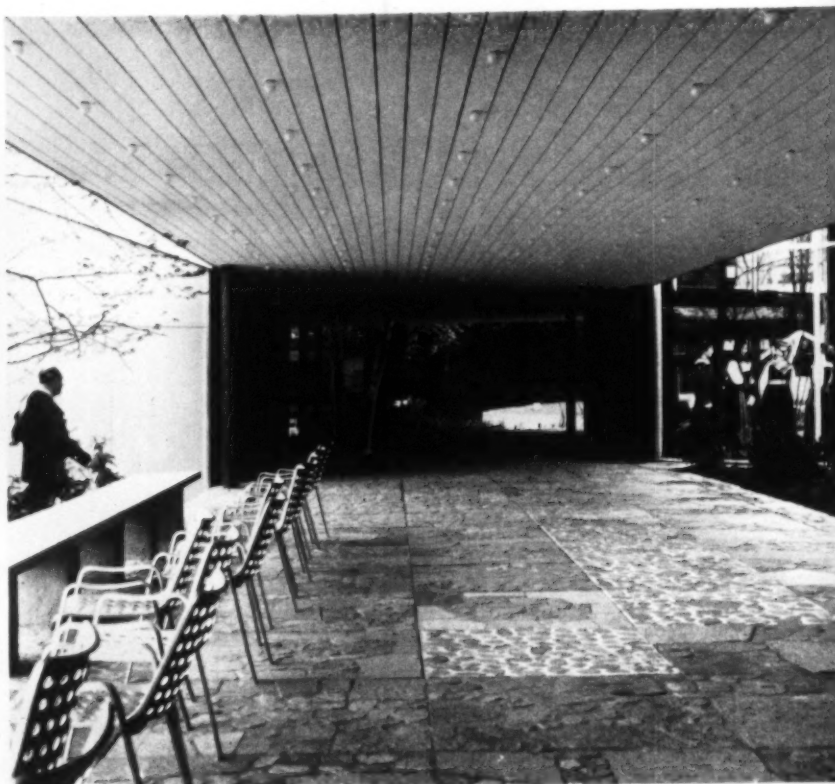

17

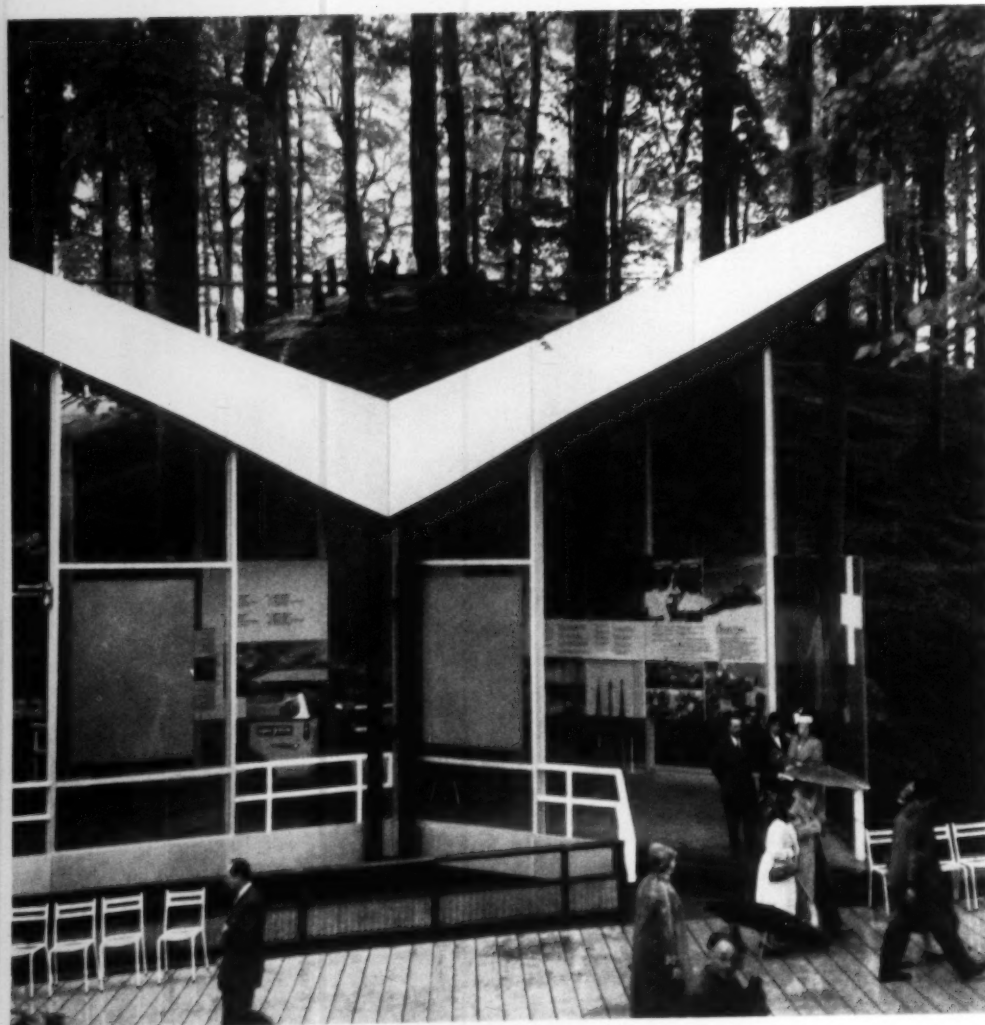


18




19

Across a boarded pathway from the main Swiss pavilion is a subsidiary semi-open-air exhibit dealing with transport, based on the same type of aluminium and glass unit, 18. A wooded hill climbs steeply behind, and the galleries are built over a ravine, 19. Their siting is shown also in the lower drawing opposite.

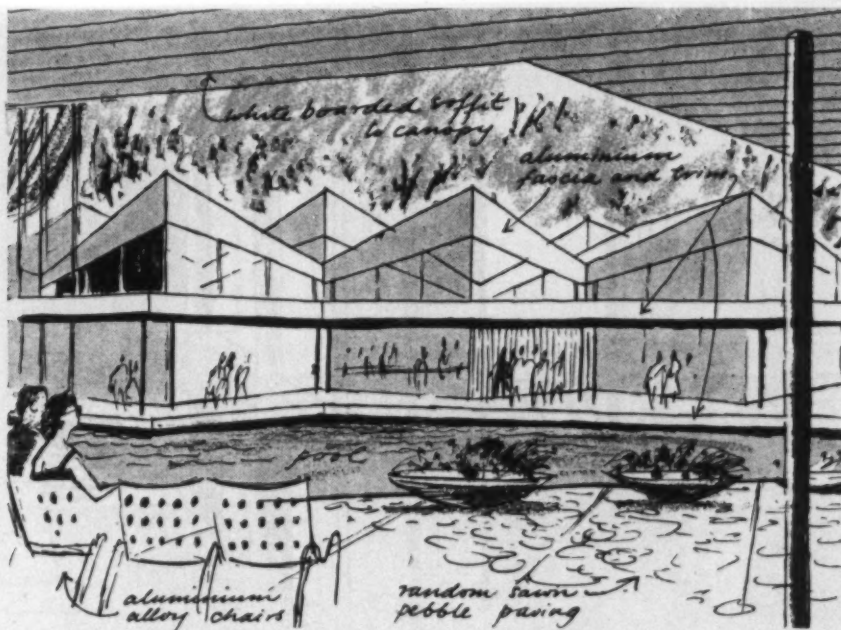


Left, the main Swiss pavilion surrounding its pool from beneath one of the covered terraces. These have boarded ceilings painted white (see also photograph opposite) and are paved with irregularly shaped stones and sawn pebbles.

Below, the transport exhibit, perched above a stream, across a boarded walk from the main pavilion.

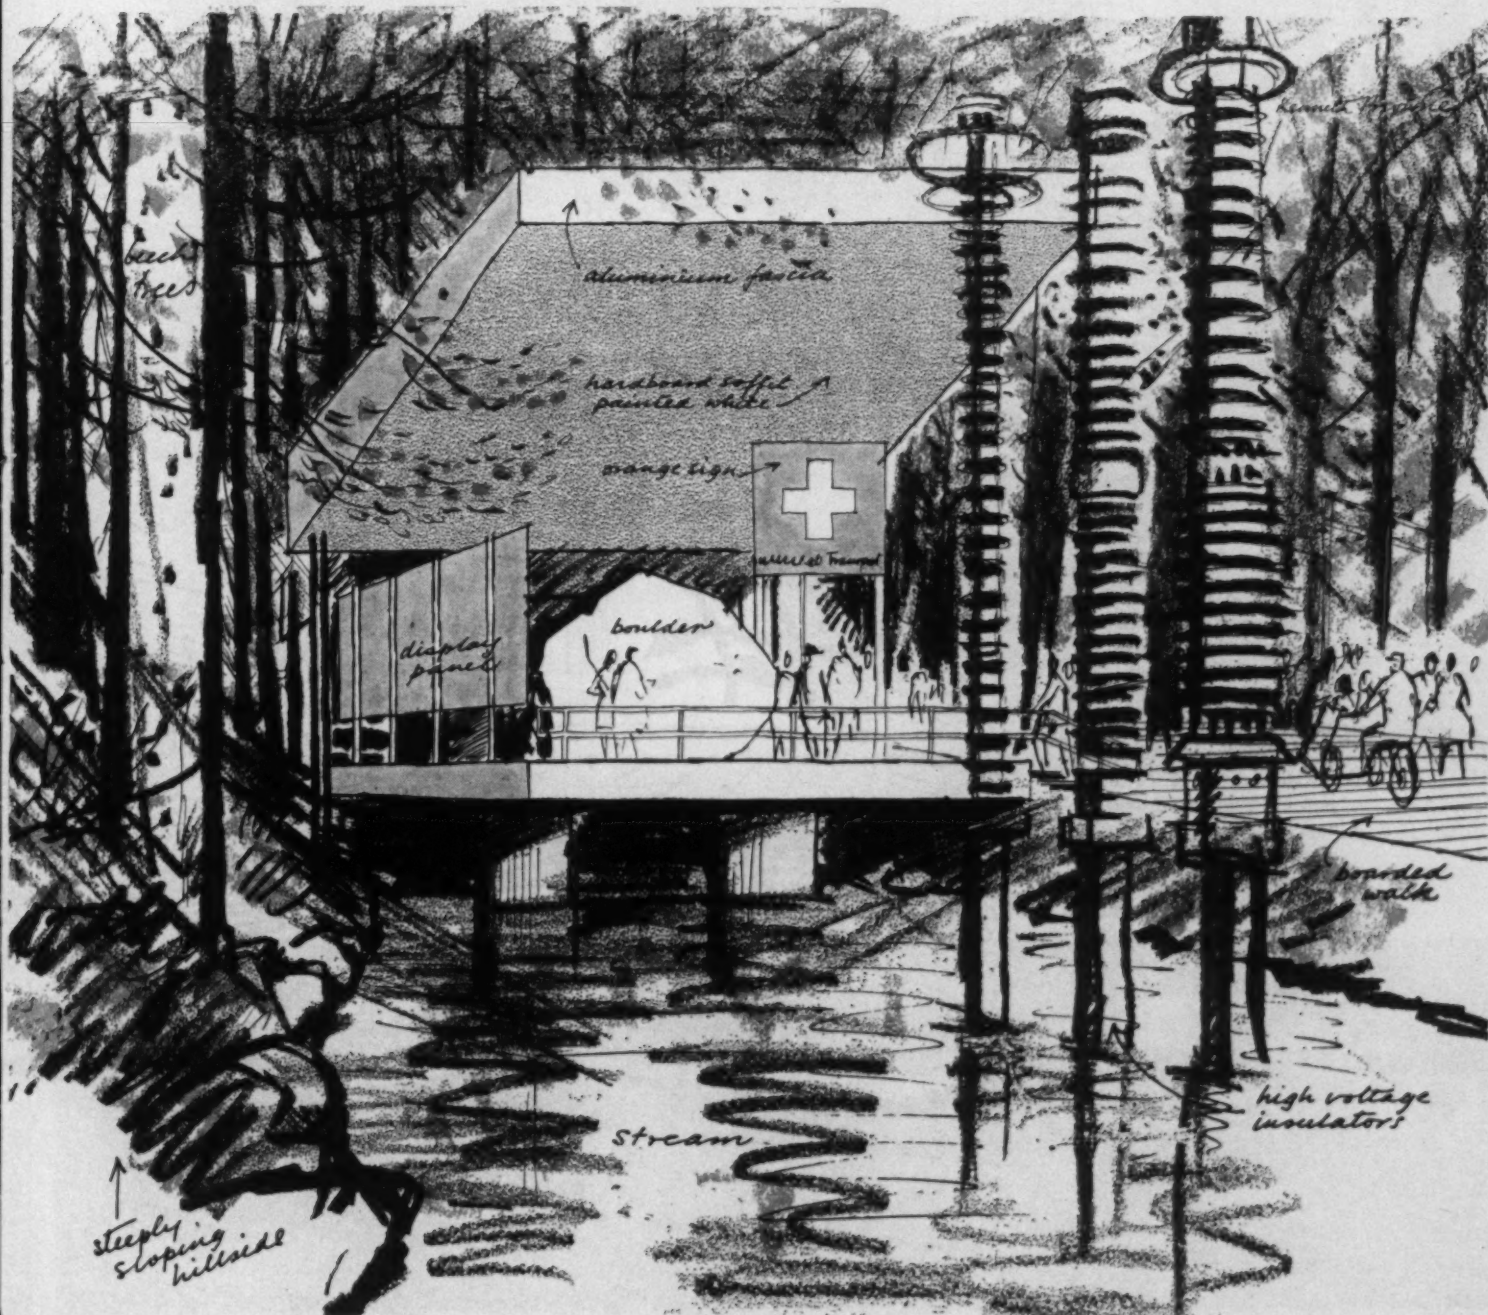





# SWITZERLAND

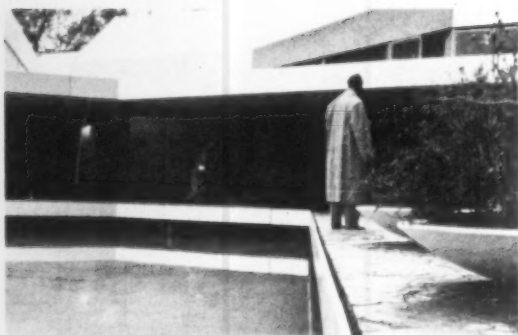


16



In edge of central post, showing stone paving finished with aluminum fascia (see sketch).  
In paved terrace with boarded ceiling and forest view framed in the opening to road.

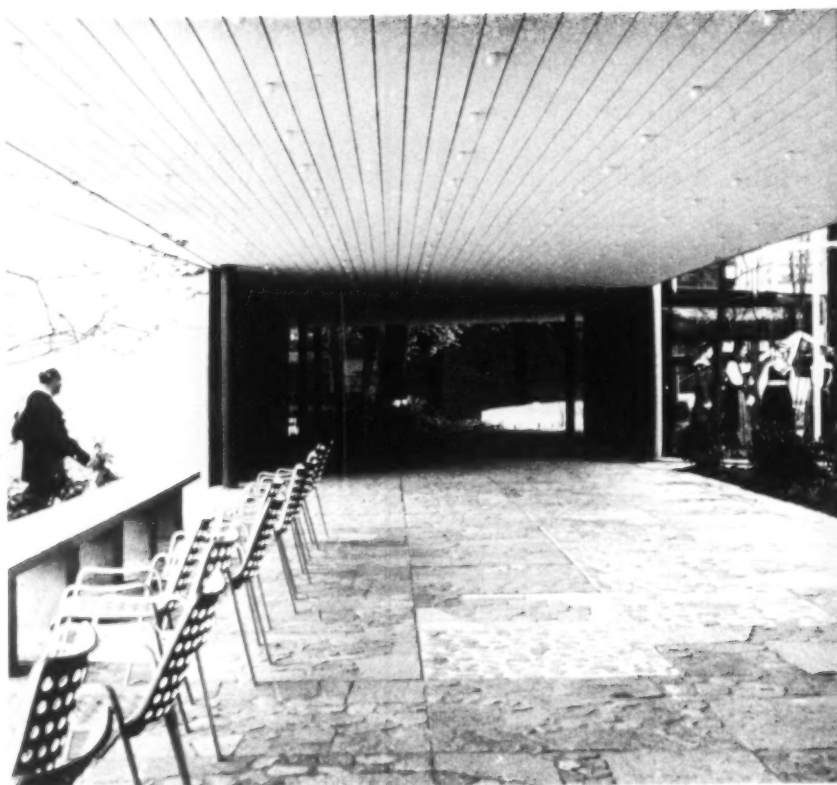

17

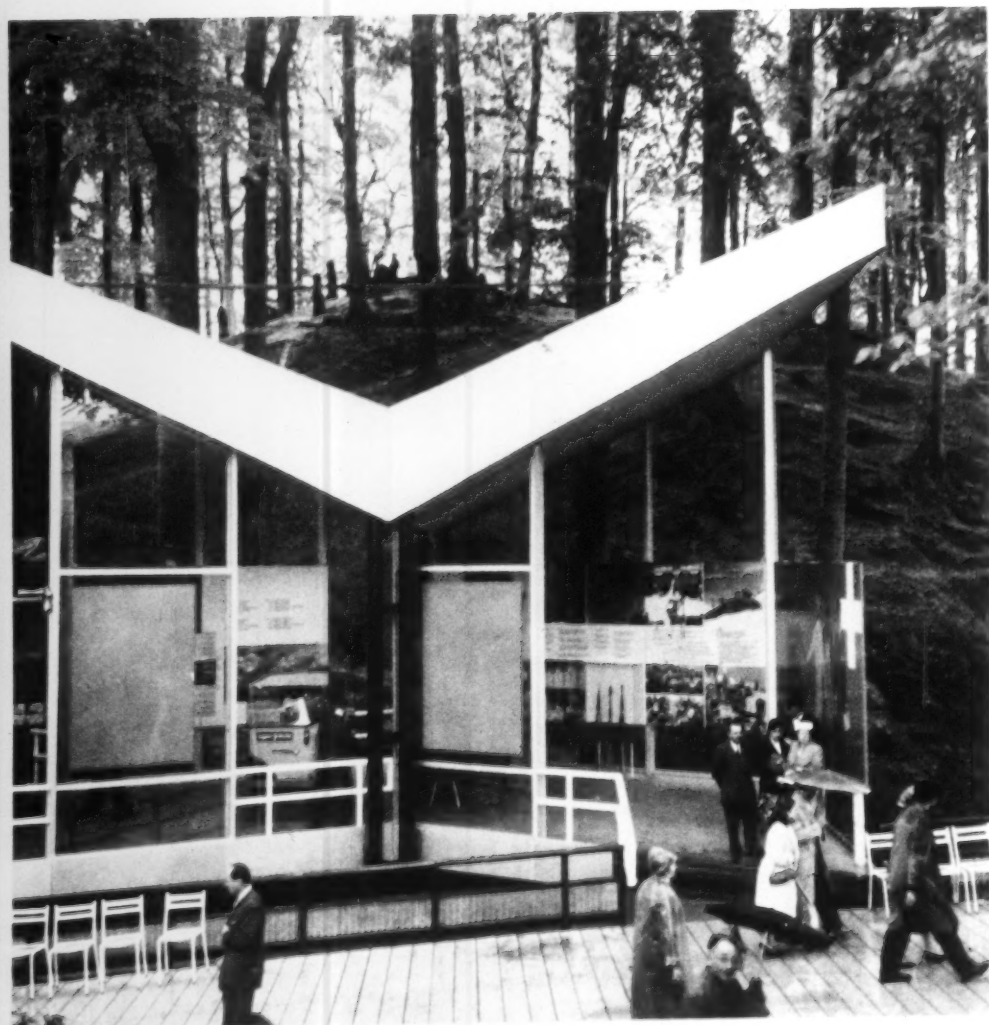


18



19


Across a boarded pathway from the main Swiss pavilion is a subsidiary, semi-open air exhibit devoted with transport, based on the same type of aluminum and glass unit 18. A wooded hill rims steeply behind and the galleries are built over a ravine 19. Their spring is contained in the lower drawing opposite.




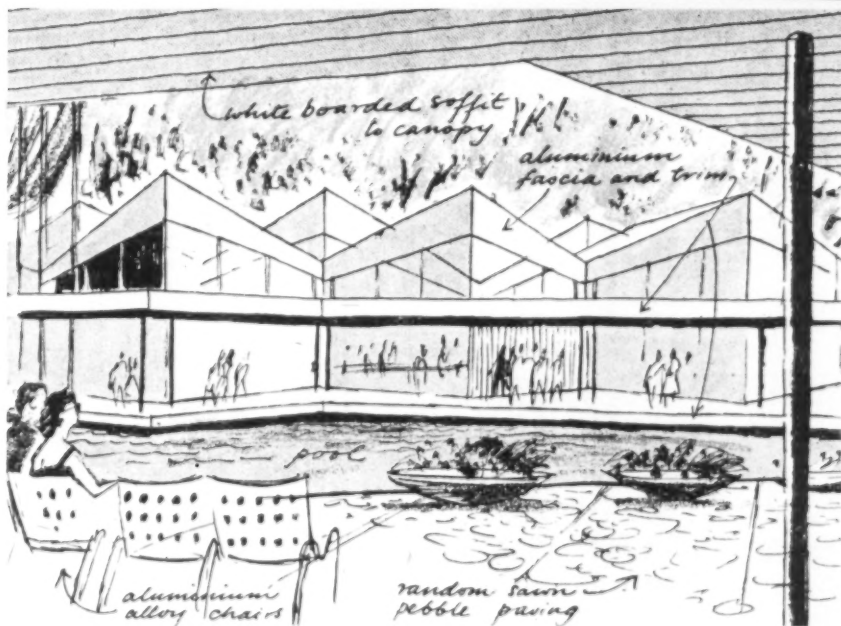


Left, the main Swiss pavilion surrounding its pool from beneath one of the covered terraces. These have boarded ceilings painted white (see also photograph opposite) and are paved with irregularly shaped stones and sawn pebbles.

Below, the transport exhibit, perched above a stream, across a boarded walk from the main pavilion.

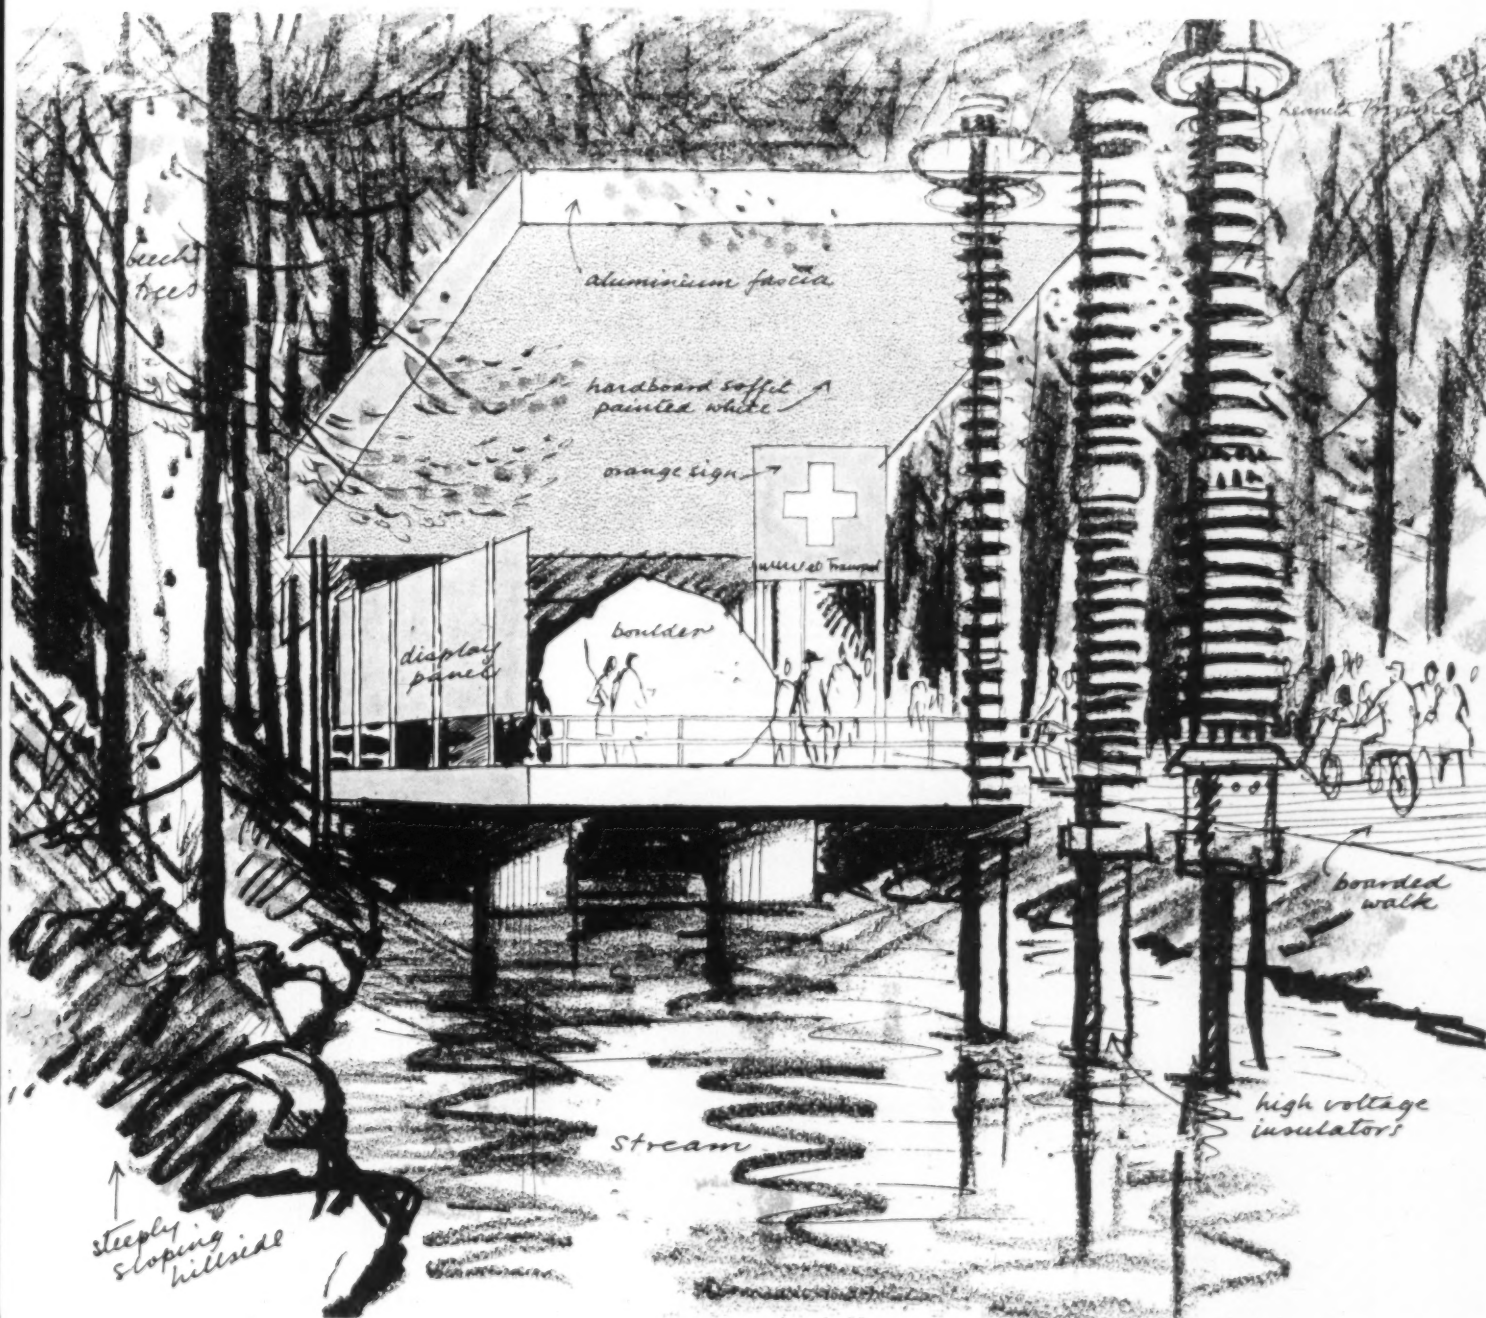

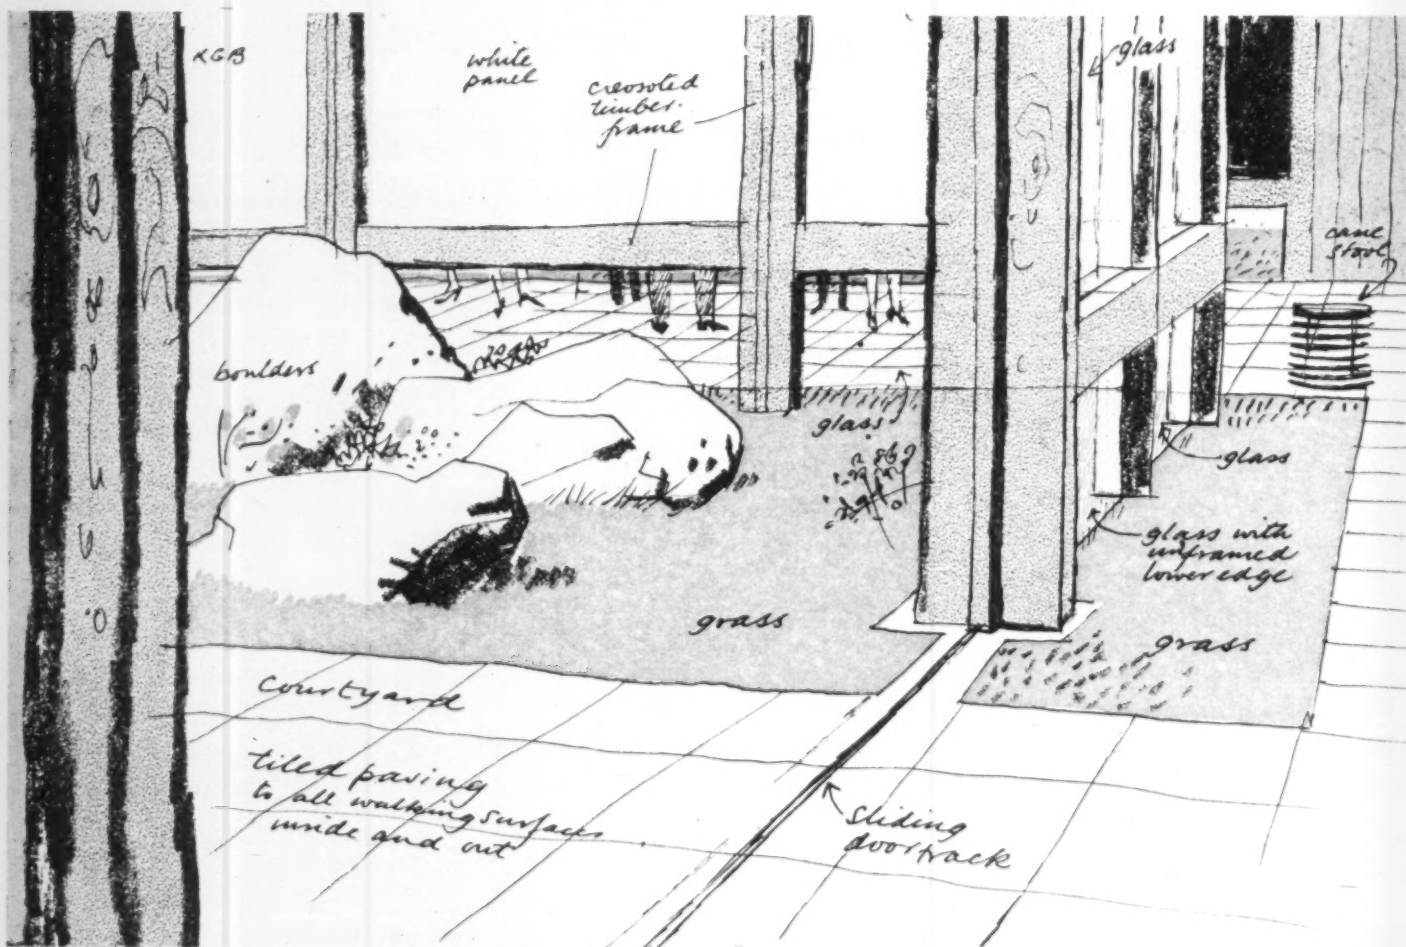

The Japanese pavilion, besides making much of its garden, brings the elements of nature into the building itself. The timber-framed walls, top picture, are open (though glazed) at the bottom, and the grass and stone paving of the courtyard and surrounding terraces flow continuously beneath them. In the exhibition galleries rocks, grass and pebbles, bottom picture, provide a floor-scaped setting for the exhibits which are set out on low wooden platforms.

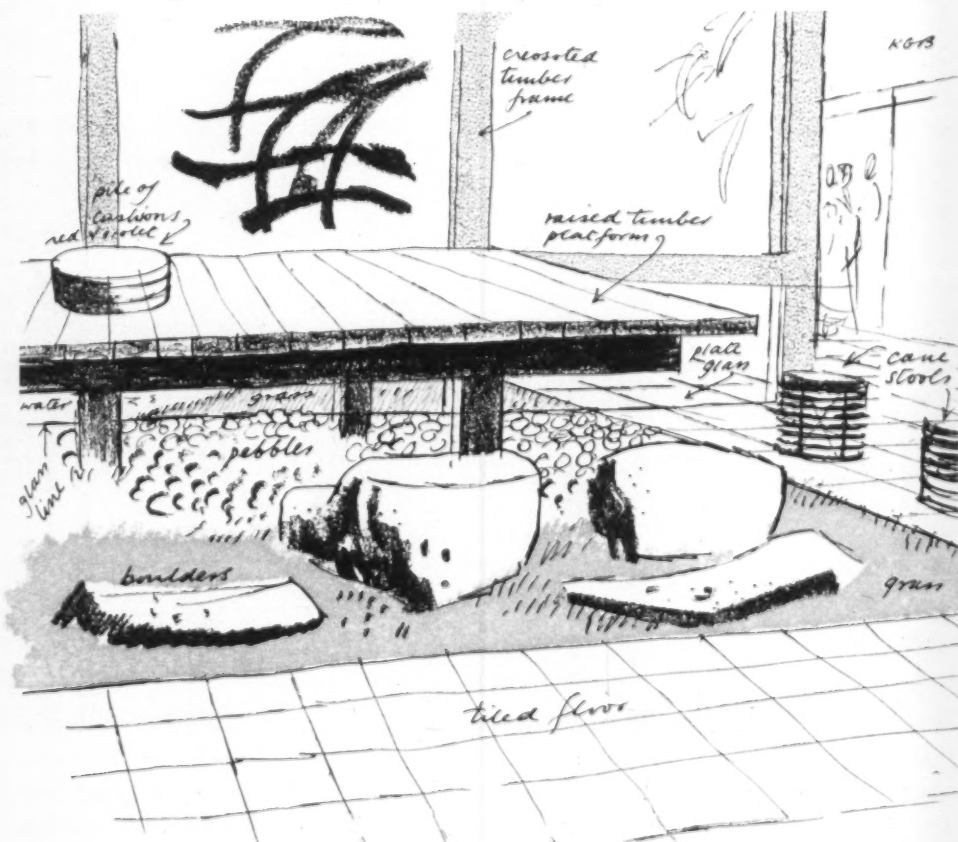





### 3. JAPAN

architect: Kumo Mayekawa

The pavilion is a heated rectangle with smaller units projecting from the two shorter sides. The main rectangle is covered with a butterfly roof which is open over the central courtyard. The principal support for the roof is a pair of parallel concrete beams over which pass two I-section deep steel girders resting on steel pads. Additional support is provided by columns placed at 10 ft centers around the enclosed area. These columns are made from 12 in. by 3 in. mild steel flats stiffened through the bottom part of their height by timber bracing. It was originally intended that the roof should be supported in large prefabricated units, but in the event it was site fabricated. Lattice girders run down the length of the roof. These are connected laterally by tie beams and stiffened by diagonal tie rods. Since the roof is open at both ends along the long axis, it is held down at these ends by four pairs of cross-braces. The greater part of the walls which enclose the pavilion are of plate glass and the floor has been made of a contrived so that the traditional Japanese garden of cranes, moss, pebbles and white gravel pass freely inside the enclosing walls. The fascias are of sheet steel, the floors are sheathed in copper, and the timber is untreated. The smaller units at either end are of traditional Japanese timber construction, one of them being an restaurant and the other stall accommodation and an electrical substation. The garden, with pool and concrete bridge, also penetrates into the central courtyard, being reached by crossing the terrace beneath the end of the main roof and passing beneath it between the two projecting and the central unit.

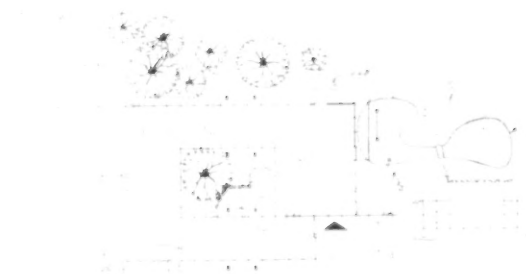

scale: 1/8" = 1'-0"

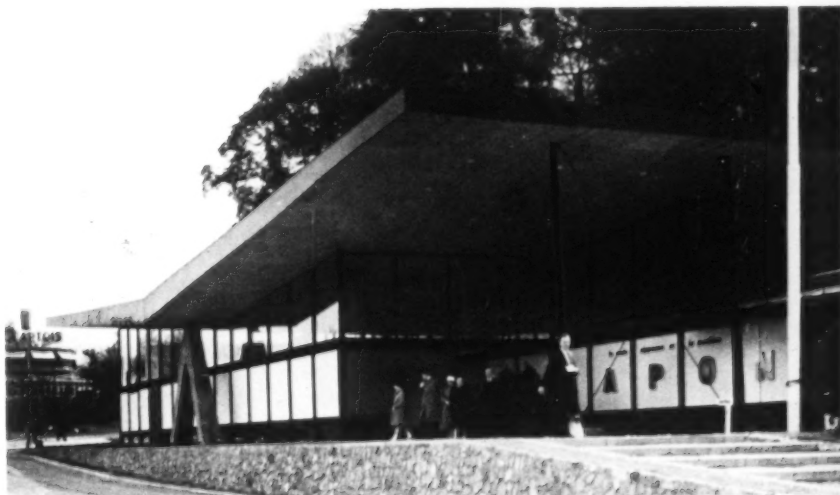

20



21

20 exterior from terrace. The way through to the garden is on the right.  
21 detail of roof structure, garden side of the pavilion.

Below: 22 and 23 rocks and floor textures in the garden, which penetrates beneath the building.

24 the garden from the covered terrace, with background of rocks.  
25 rocks are used even inside the exhibition galleries.



22



23




24




25



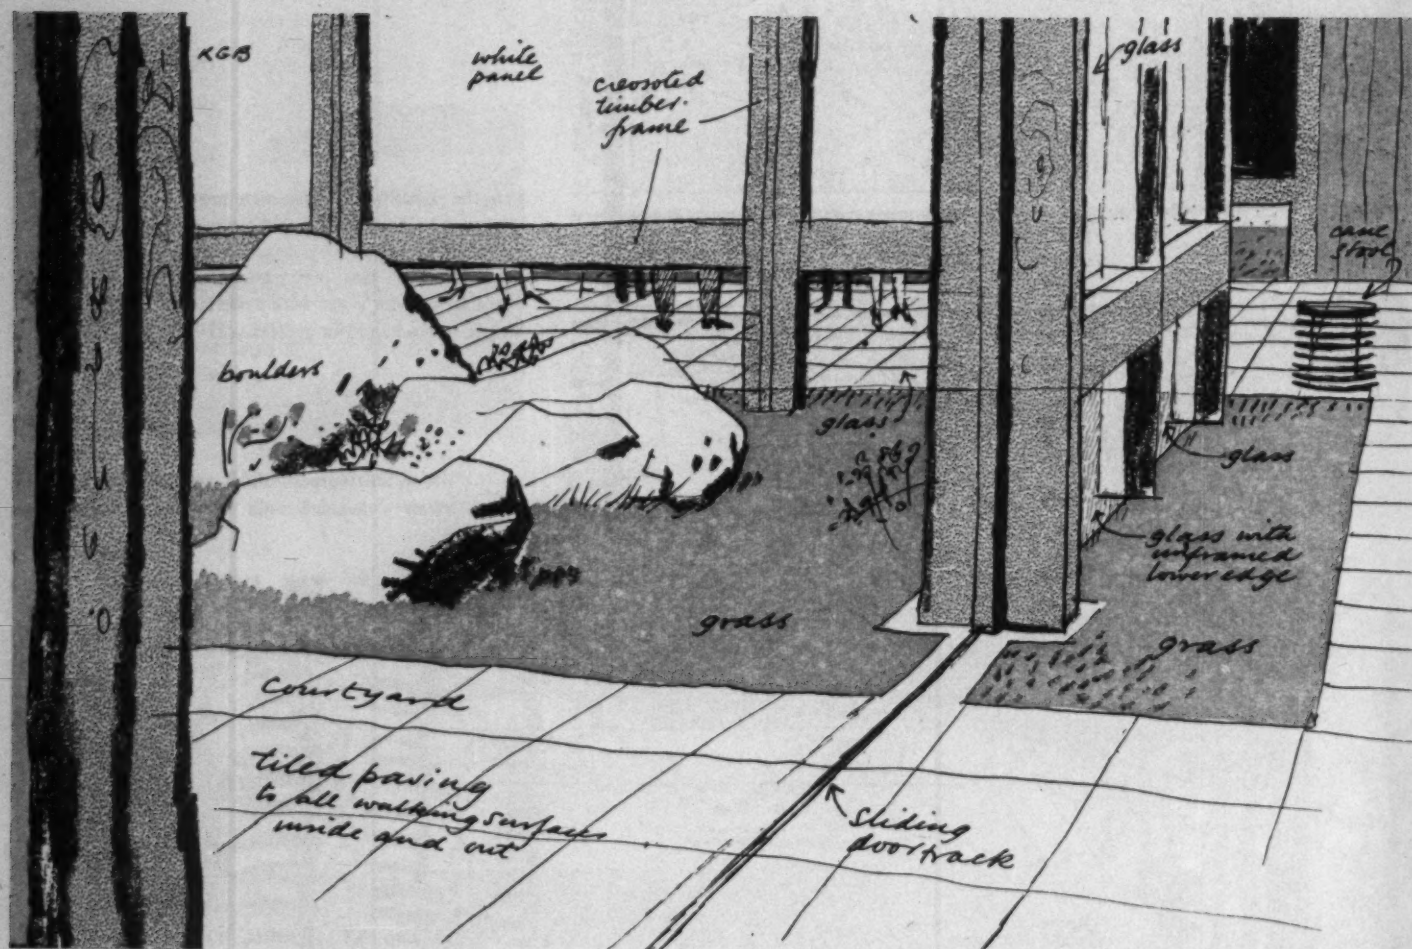


The Japanese pavilion, besides making much of its garden, brings the elements of nature into the building itself. The timber-framed walls, top picture, are open (though glazed) at the bottom, and the grass and stone paving of the courtyard and surrounding terraces flow continuously beneath them. In the exhibition galleries rocks, grass and pebbles, bottom picture, provide a floor-scaped setting for the exhibits which are set out on low wooden platforms.

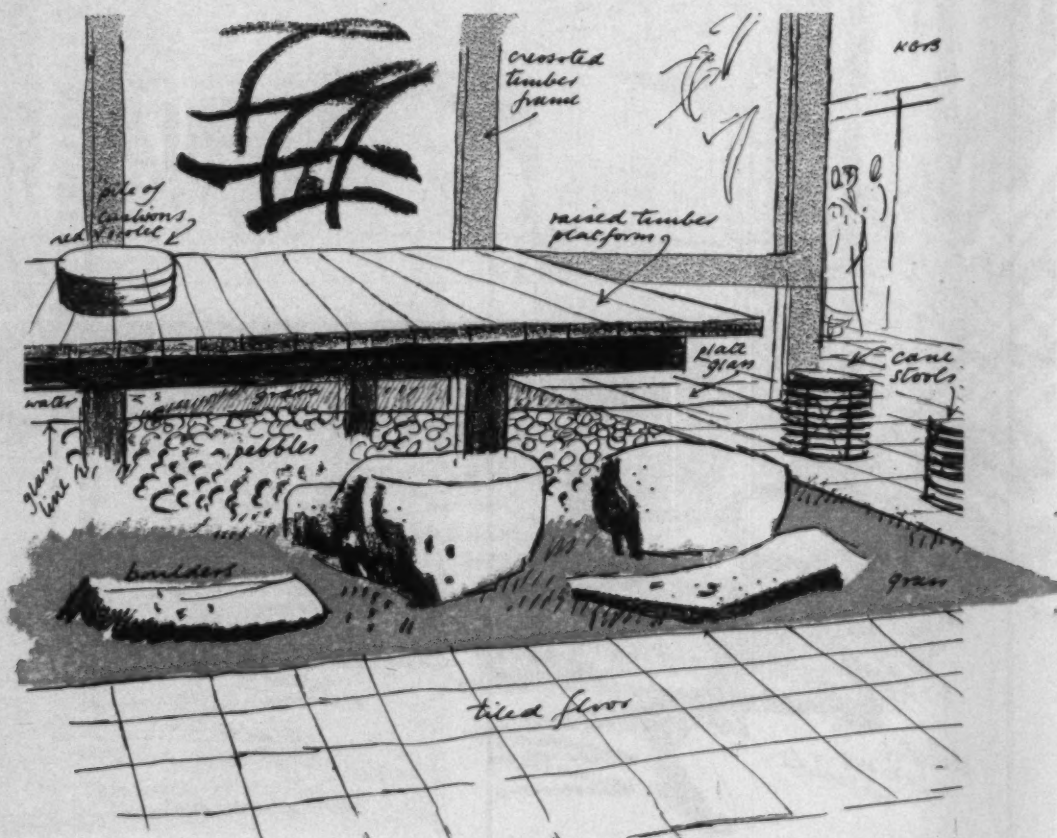


### 3. JAPAN

architect: Kunio Mayekawa

The plan is a hollow rectangle with smaller units projecting from the two shorter sides. The main rectangle is covered with a butterfly roof which is open over the central courtyard. The principal support for the roof is four pairs of reinforced concrete 'legs' over which pass two I-section deep steel girders resting on steel pads. Additional support is provided by columns placed at 8-ft. centres round the enclosed area. These columns are made from 1½ in. by 3 in. mild steel flats stiffened through the bottom half of their height by timber framing. It was originally intended that the roof should be assembled in large prefabricated units, but in the event it was site fabricated. Lattice girders run down the length of the roof. These are connected laterally by tie beams and stiffened by diagonal tie rods. Since the roof oversails the walls at both ends along the long axis, it is held down at these ends by four pairs of cross wires. The greater part of the walls which enclose the pavilion are of plate glass and the floor has been deliberately contrived so that the traditional Japanese garden floorings—moss, pebbles and white gravel—pass freely inside the enclosing walls. The fascias are of sheet steel, the roofs are sheathed in copper, and the timber is creosoted. The smaller units at either end are of traditional Japanese timber construction, one of them housing the restaurant and the other staff accommodation and an electrical sub-station. The garden, with pool and concrete bridge, also penetrates into the central court. It is reached by crossing the terrace beneath the end of the main roof and passing beneath it, between the main building and the small end unit.

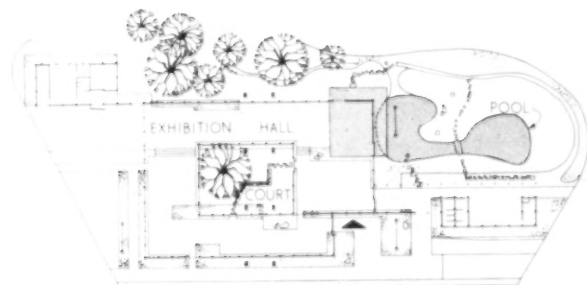

layout plan scale: 1/96 in. = 1 ft.

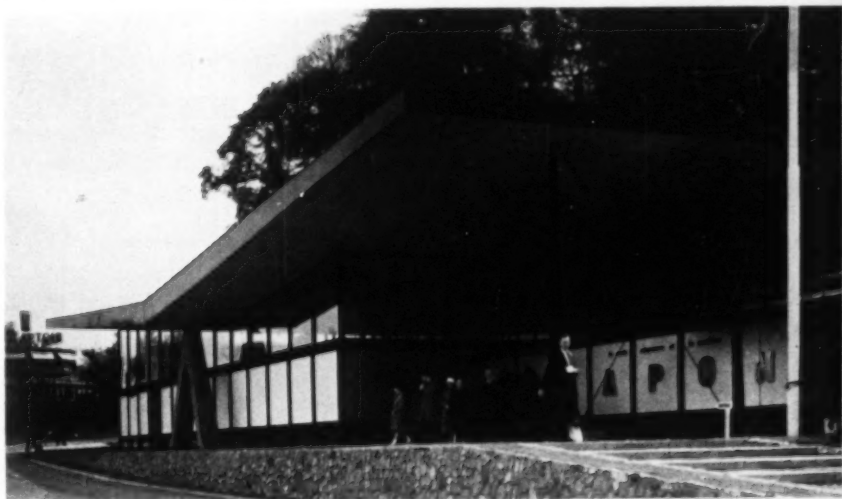

20



21

20, exterior from terrace. The way through to the garden is on the right.  
21, detail of roof structure: garden side of the pavilion.  
Below: 22 and 23, rocks and floor textures in the garden, which penetrates beneath the building;  
24, the garden from the covered terrace, with foreground of rocks;  
25, rocks are used even inside the exhibition galleries.



22



23




24




25



## JAPAN

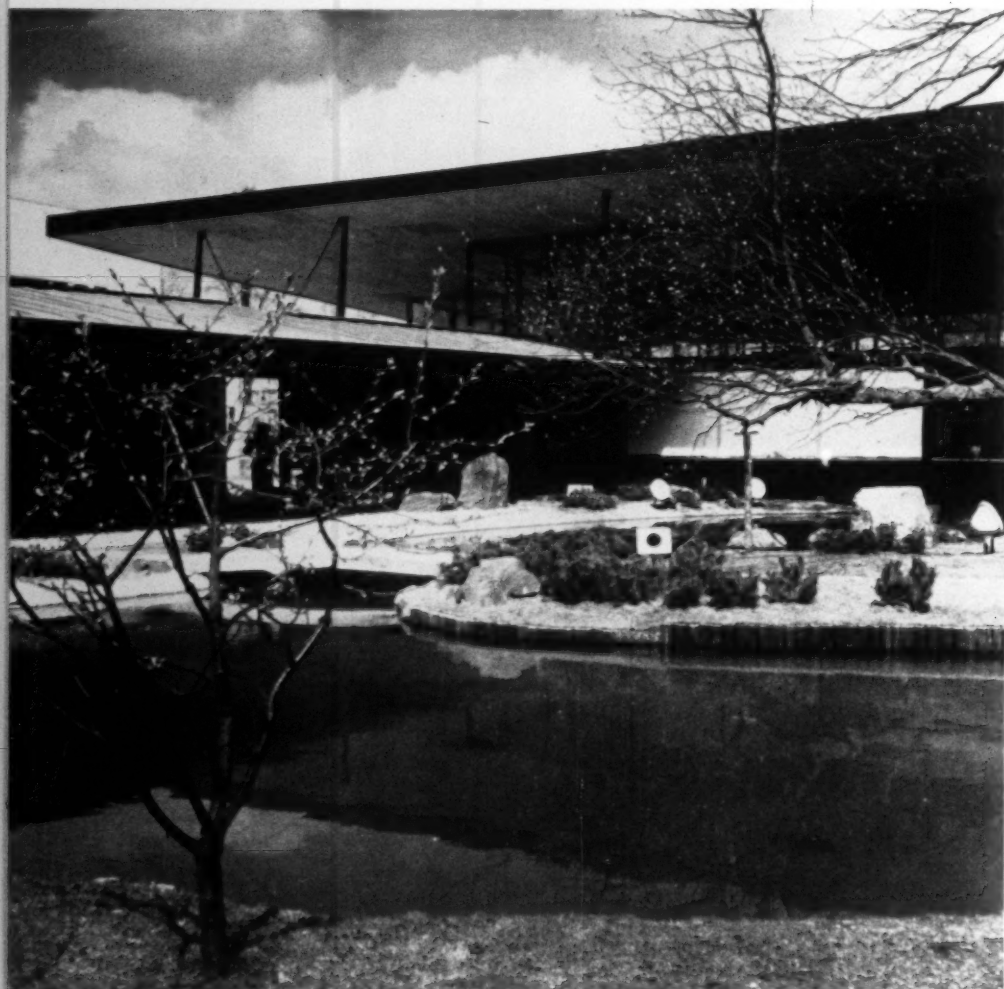

26

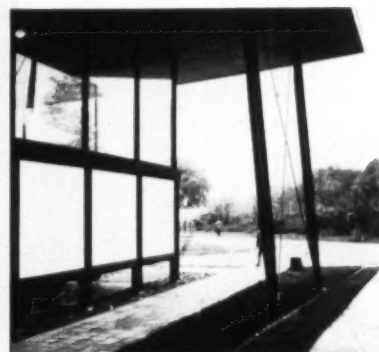

27



28


26, from across the garden pool. On the left is the café.

27, the oversailing end of the roof, held down by cross wires. Note the continuous clerestory lighting and, in 28, its effect inside a typical exhibition gallery.


## 4. THE NETHERLANDS

architects: van den Broeck, Bakema, Boks & Rietveld

29, inside the entrance hall: narrow bricks laid with artful unevenness; brick paving; boarded ceiling; panels of stained glass with thick lead comes. 30, exhibition gallery: courtyard side (nos. 6 and 7 in plan on facing page). The clear glass wall is topped by glass louvres for ventilation. The same system of louvres forms an overhang in the open-fronted galleries.

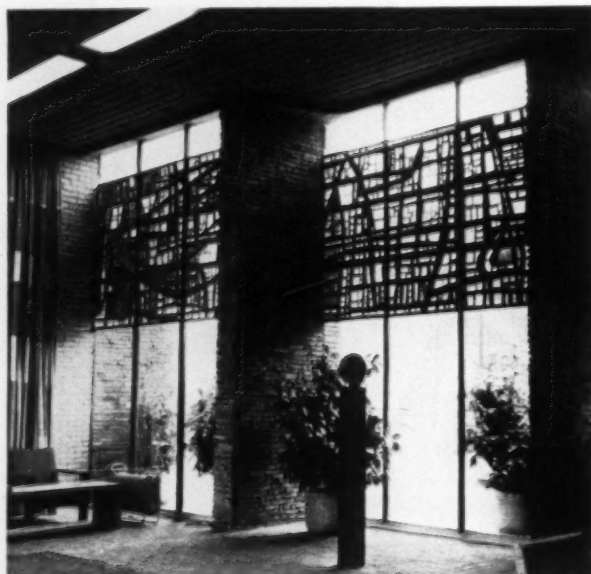

29

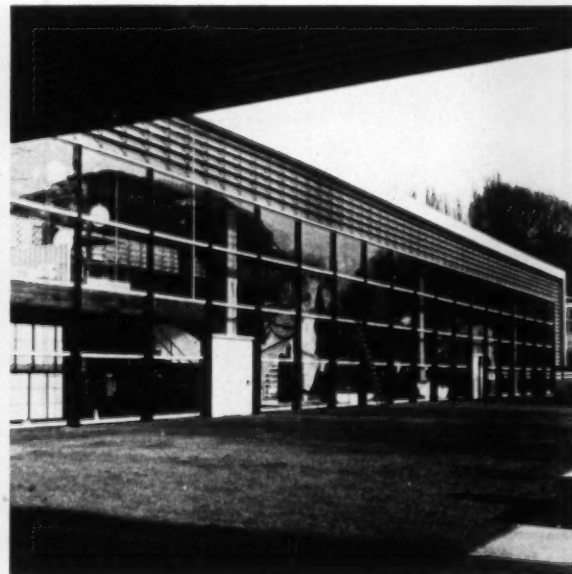

30

110




# key

1. pavilion of the Netherlands Kingdom.
2. information centre.
3. metal industry.
4. chemical industry.
5. modern house-furnishing.
6. glass industry.
7. textile industry.
8. pigs and poultry.
9. cattle.
10. agricultural research.
11. cafe-restaurant.
12. watermill.
13. Zuider Zee.
14. wave channel.
15. shipping.
16. pumping station.
17. dike.
18. lighthouse.
19. pier with beacon.
20. harbour.
21. aviation.
22. carillon.

# layout plan

Scale: 1/128 in. 1 ft.

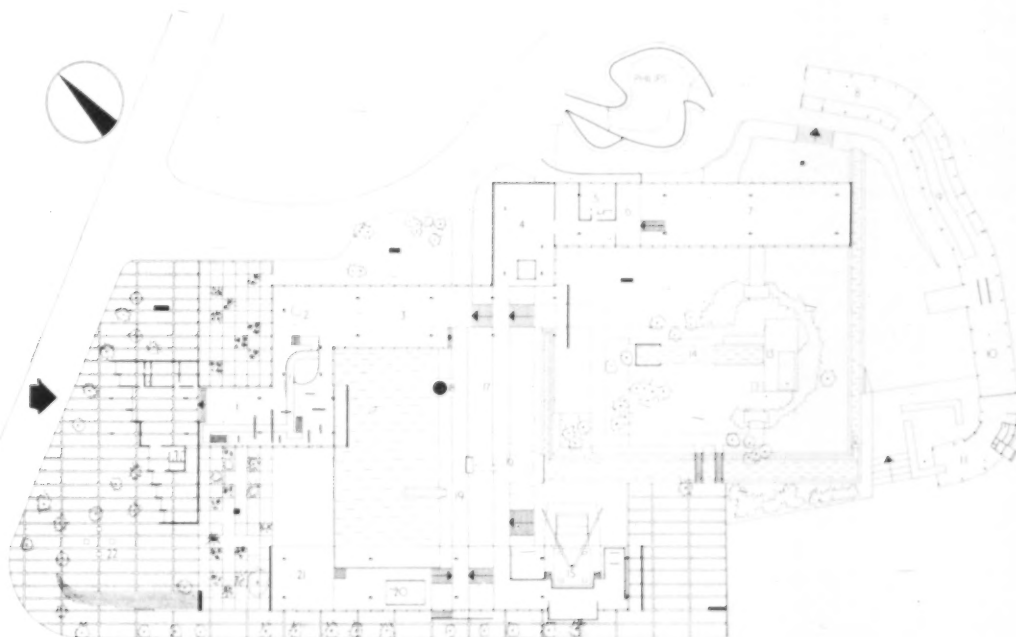

Covered exhibition galleries surround a series of descending terraces, partly paved, partly grassed, with pools of water. These (one of which has artificial waves) are part of the central outdoor exhibit dealing with land-reclamation and similar subjects, and illustrating the system of dykes, canals and polders which determine the character of the Dutch landscape. Although freely planned, so that the visitor is not confined to a one-way circulation, the pavilion is designed to be seen in a definite sequence, starting at the main entrance (arrowed on plan) and continuing clockwise.

Apart from a lighthouse and a carillon tower, the buildings comprise three types of structure: three long exhibition galleries, walled with glass, which run against the contours and are joined by connecting links of similar section; next a round shell-like structure in the middle of the layout which shelters the Zuider Zee exhibit; lastly, the long, curving timber building which runs along the bottom of the site and houses the agricultural sections and a restaurant. The glass-walled galleries have steel-frame roofs, the construction of which is concealed by a small-scale pattern of painted slats. The roofs are supported by two lines of precast post-tensioned concrete beams running the length of each pavilion (one pair of beams is 280 ft. long) and supported at 70-ft. centres by columns of the same material. The glazed walls are in two parts: the wall proper is formed of sheets of plate glass held in timber transoms supported on welded steel mullions. The top part of each glazed wall comprises a range of glass louvres suspended from the roof. These also serve to provide a louvred overhang at the ends of each block and to close the surrounding wall surfaces wherever a linking section runs into a main block at a low level.

Inside the shell-like structure which stands in the middle of the site artificially-produced waves break continuously in a glass-sided trough, so that each wave is seen in section. The structure owes its shape to the desire to reproduce the reverberant sound effect of waves breaking on the shore. It is built up of a series of welded lattice steel trusses with curving top and bottom booms which rise at each end from an



31, looking down the stepped terraces crossed by brick pathways and intersected by canals, that occupy the centre of the Netherlands pavilion. Note the neat barked timber edging to the raised lawns. Beyond the trees is the shell-like structure containing the Zuider Zee exhibit, 13 on plan, which is shown close-to in 32. On the left is the pumping-station for the wave-making machinery. The photograph is taken from within the shipping exhibit, 15 on plan, whose louvred overhang (see facing page) can be seen at the top.

31




32

## THE NETHERLANDS

*in situ* steel 'hub.' Brackets project from the bottom booms of the trusses and to these is welded the steel mesh reinforcement of the shell itself. Concrete is then sprayed on to this, both sides, to give a skin of about 2-in. thick. The concrete shell stops short at the two top segments to give light inside and these are covered with translucent canvas.

The timber agricultural pavilion, which houses livestock, is of virtually constant cross-section throughout its length and is formed by a long series of raking trusses designed to give a deep clerestory to light the passage-way and to give good ventilation and shading control for the animals.


33 and 34, outside and inside of the agriculture building (8-10 on plan) on the south-eastern boundary of the Netherlands site, which has the form of a winding timber barn, housing livestock. 35, looking across the pool with artificial waves, towards the carillon which stands in the terrace by the entrance to the pavilion. On the left is one of the open-fronted galleries, 21 on plan, devoted to aviation.

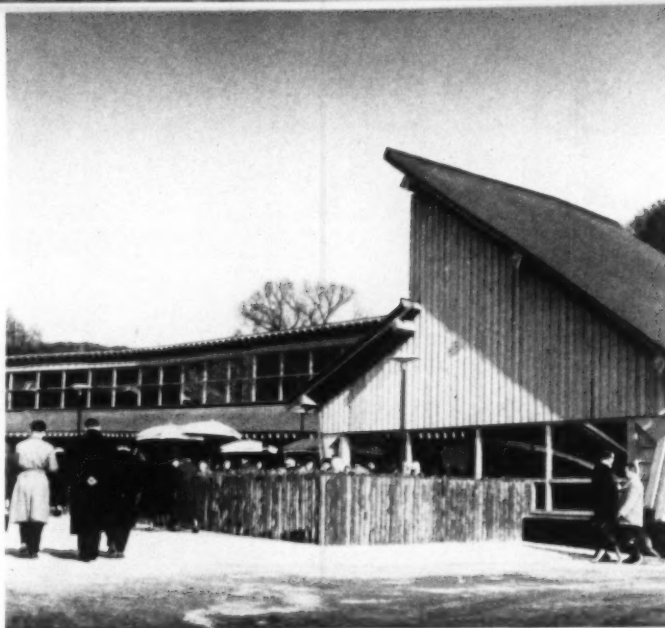

33



34

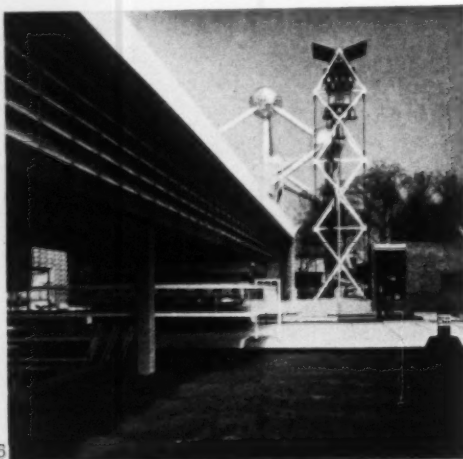


35

## 5. SPAIN

architects: R. Vasquez-Molezun and J. Antonio Corrales

Standard hexagonal units are placed contiguously to form an irregularly shaped hall, and are raised or lowered to suit the uneven site and to form a stepped-up roof, providing clerestory lighting. The units are best described as a series of umbrellas. In the centre of each, on plan, is a tube support. The head of this tube is stiffened by six welded steel fins. This stiffened tube head then receives the roof proper which comprises six triangular frames formed of welded mild steel T-sections with timber infilling panels. These are bolted to a central hub with six supporting arms welded to a central tube,

36, from the north, showing (right) the part of the building where brick panels alternate with glazed panels.

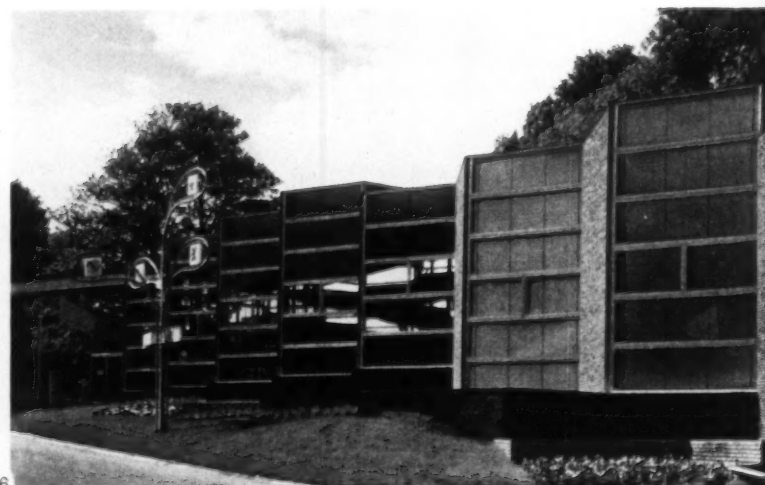

36

which drops inside the column. Each triangular section of roof is bolted along its edges to adjacent triangular sections and the whole is covered with aluminium. The tubular columns also serve as down pipes and, as they are in line, they are connected beneath the floor by a drain laid to falls.

The walls of the building are partly of brickwork and partly glazed. Along certain sections of the façade the


glazing alternates with the brickwork. At night the pavilion is lit by screened fluorescent tubes which follow the bounding lines of the hexagons.

Inside the floor is built up in stages, the topmost stages being occupied by a bar. These are designed to give a view of the raised dance-floor in the centre of the building. The only totally enclosed part of the pavilion is a cinema.

developed elevation



roof plan showing  
levels of hexagon units

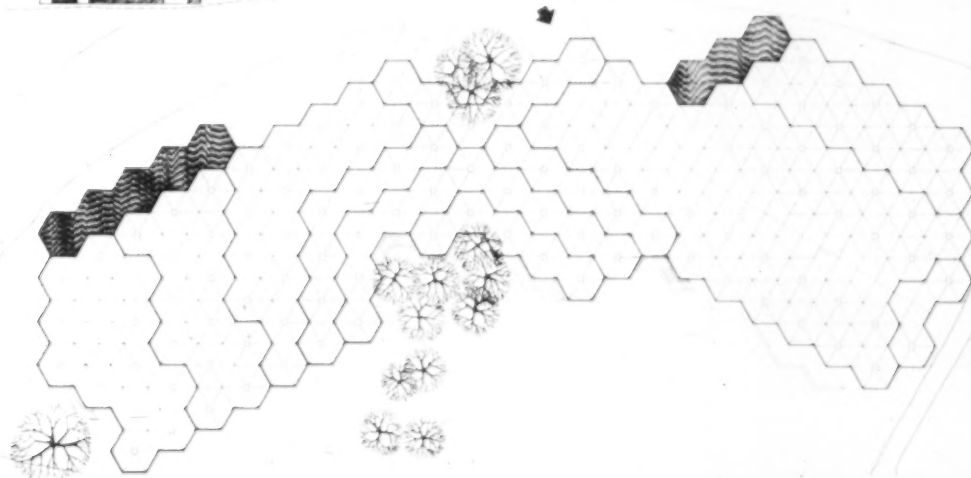

38




39

37 (left), the almost empty interior from the raised platform containing the bar, showing the clerestory lighting provided by the changing levels of the umbrella-like roof-units.


38, close-up of exterior, showing the faceted glass wall-structure.

39, another interior, looking up the terraced platforms towards the bar. In the foreground are some of the low hexagonal stands displaying photographs.



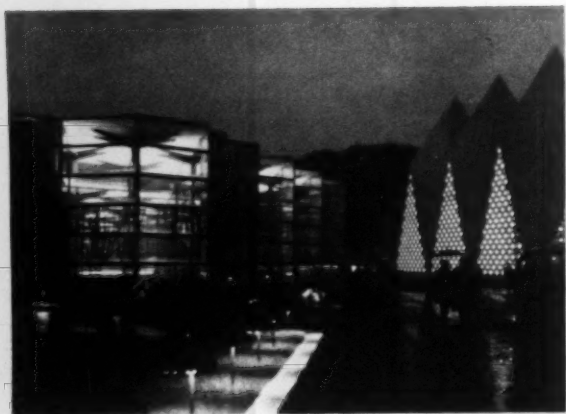

40

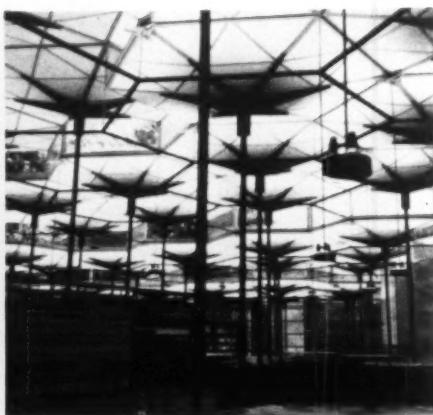

41


## SPAIN

40, the Spanish pavilion at night, showing the effect of the ceiling illumination. The photograph is taken looking northwards down the avenue that separates Spain from Gt. Britain, and on the right are the lighted-up triangular side walls of the British Hall of Tradition.



41, inside the Spanish pavilion when the ceiling lighting is switched on.  
42, a centre-pivoted plate-glass door leading direct on to the upper platform, where the bar is placed, from a garden behind the pavilion, to which the ground rises steeply. This photograph also illustrates the transparency in all directions, and the sense the visitor has of the presence of trees, seen through the glass or reflected in it, which are among the charms of the Spanish pavilion.



42

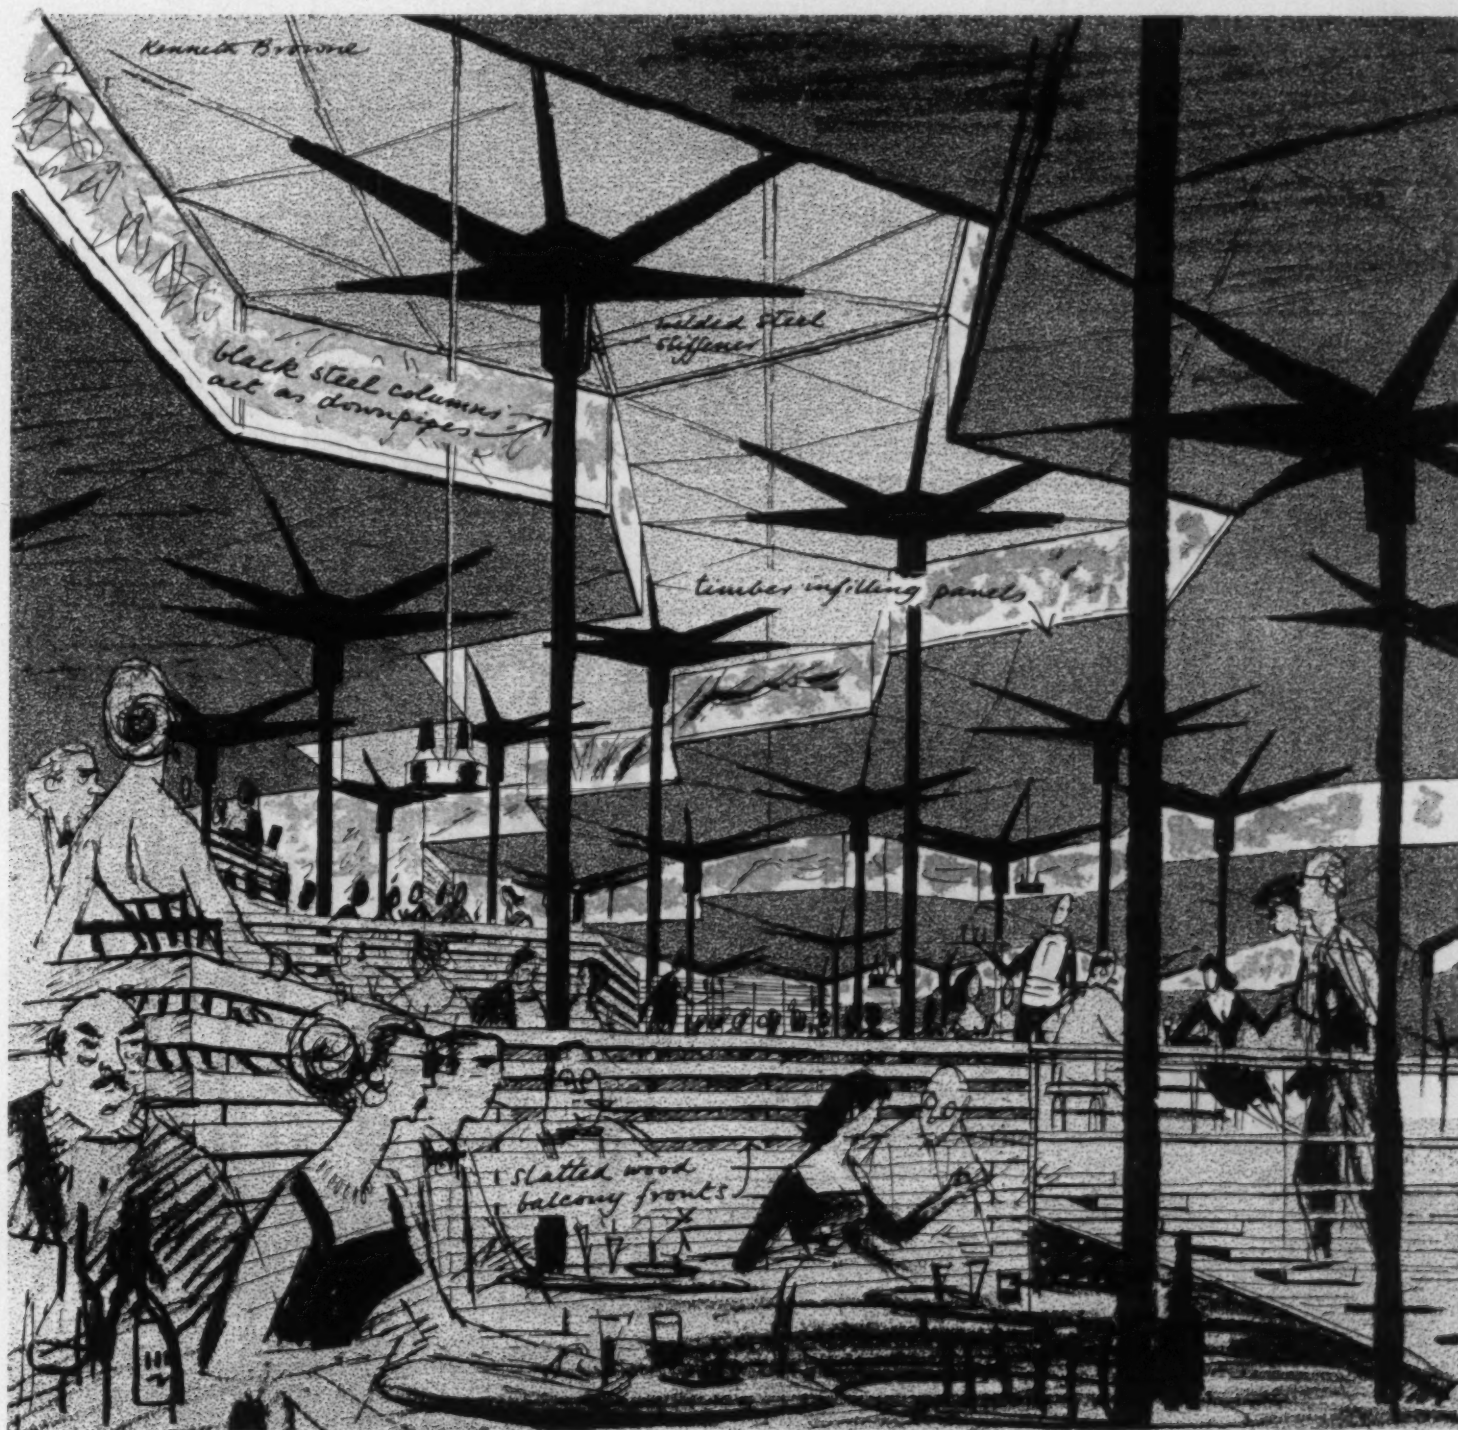


Interior of the Spanish pavilion, drawn from the foot of the wooden staging that builds up towards the back of the building and on which is placed the bar.

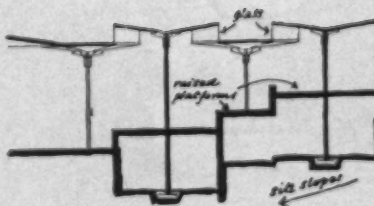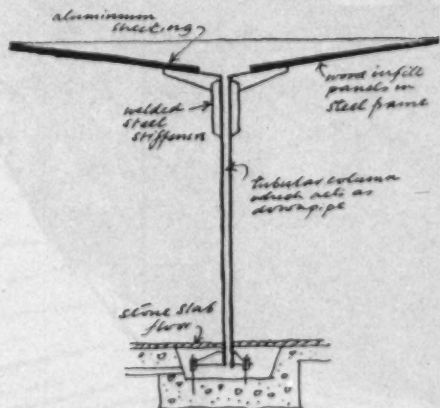

Left, section through the standard umbrella-like roof unit of which the whole structure of the building is composed, and a cross-section through the building showing how these units are stepped up the slope (the length of the stem being varied as necessary) and differ in height to provide clerestory lighting.



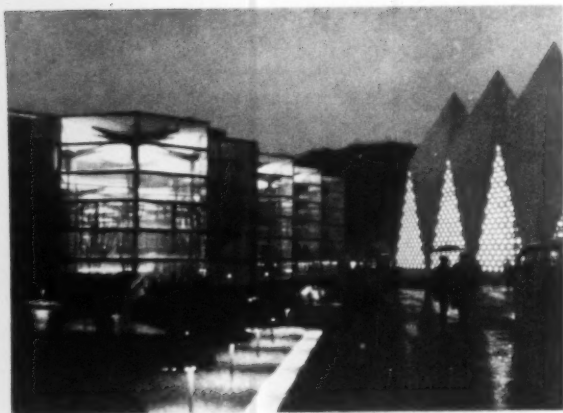

40



41

## SPAIN

40. the Spanish pavilion at night, showing the effect of the ceiling illumination. The photograph is taken looking northwards down the avenue that separates Spain from Gt. Britain, and on the right are the lighted-up triangular side walls of the British Hall of Tradition.


41. inside the Spanish pavilion when the ceiling lighting is switched on.

42. a centre-pivoted plate-glass door leading direct on to the upper platform, where the bar is placed, from a garden behind the pavilion, to which the ground rises steeply. This photograph also illustrates the transparency in all directions, and the sense the visitor has of the presence of trees, seen through the glass or reflected in it, which are among the charms of the Spanish pavilion.





42



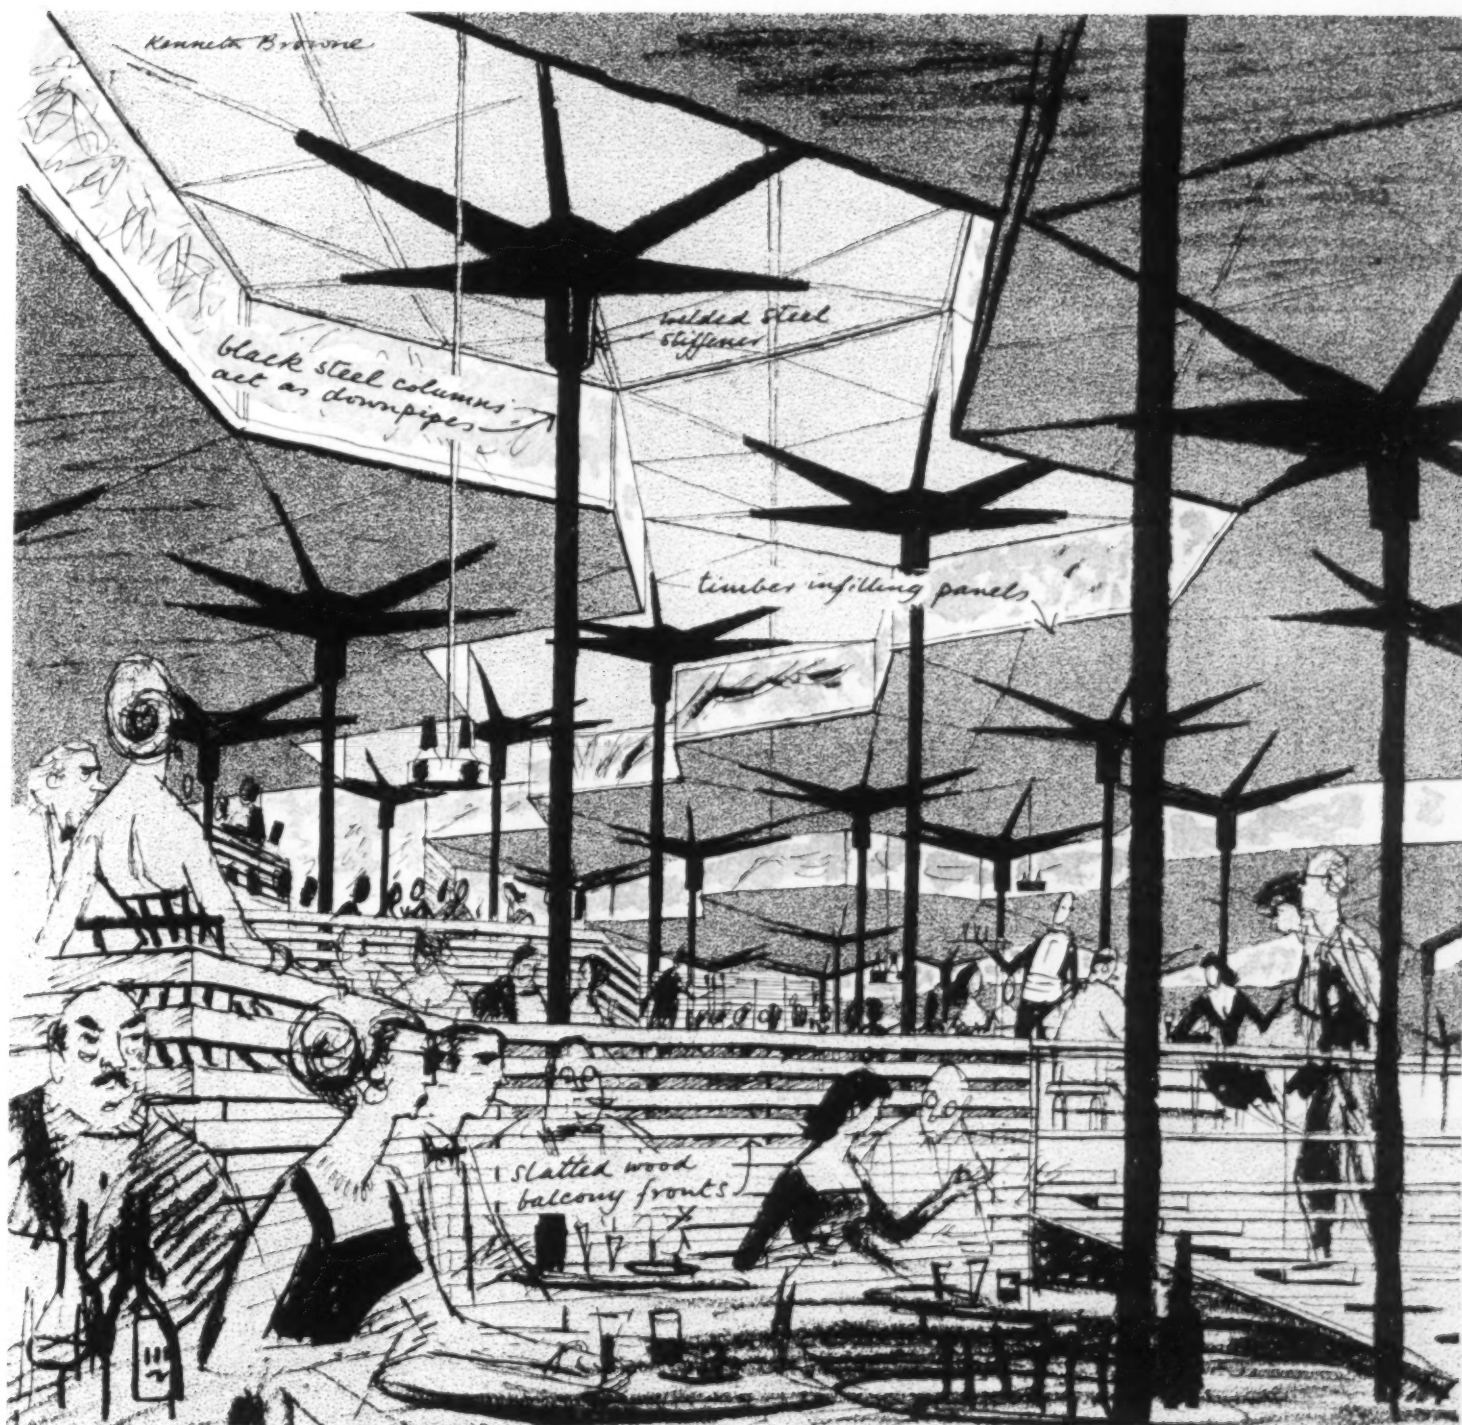

Interior of the Spanish pavilion, drawn from the foot of the wooden staging that builds up towards the back of the building and on which is placed the bar.

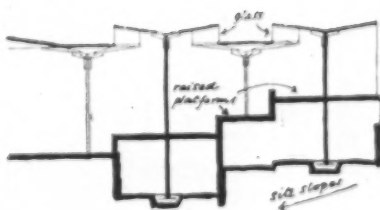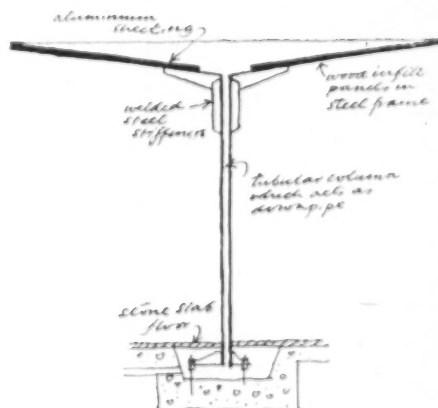


Left, section through the standard umbrella-like roof unit of which the whole structure of the building is composed, and a cross-section through the building showing how these units are stepped up the slope (the length of the stem being varied as necessary) and differ in height to provide clerestory lighting.

## 6. JUGOSLAVIA

architect: Vjenceslav Richter


Three rectangular galleries of different heights and at different levels are raised above ground and interpenetrate round a common staircase. The structure is of steel throughout, the steel stanchions being placed invariably some 14 ft. inside the building line. Another, outside, staircase leads direct from the upper galleries

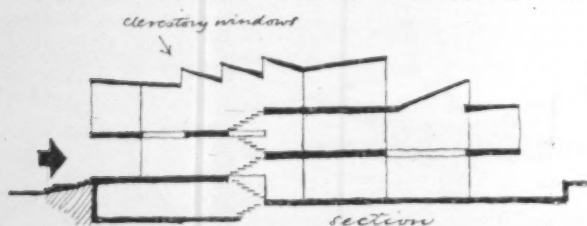


to the paved terrace across the front of the building. This is protected by the cantilevered overhang of the superstructure and has a timber boarded soffit.

The upper galleries are lit through a series of clerestory windows curved in elevation which create interesting geometrical shapes where their inside surfaces intersect the ceilings. All ceiling surfaces are of close timber slatting which throw changes in contour into relief. Fascias are of hardboard painted white and the occasional sections of solid walling are clad in vertically ribbed plastic panels of a purple colour. The ground floor is laid with polished marble.


Below, the western side of the Yugoslav restaurant, built over a stream across the road from the main building. Its other side is shown in 45 on the facing page.

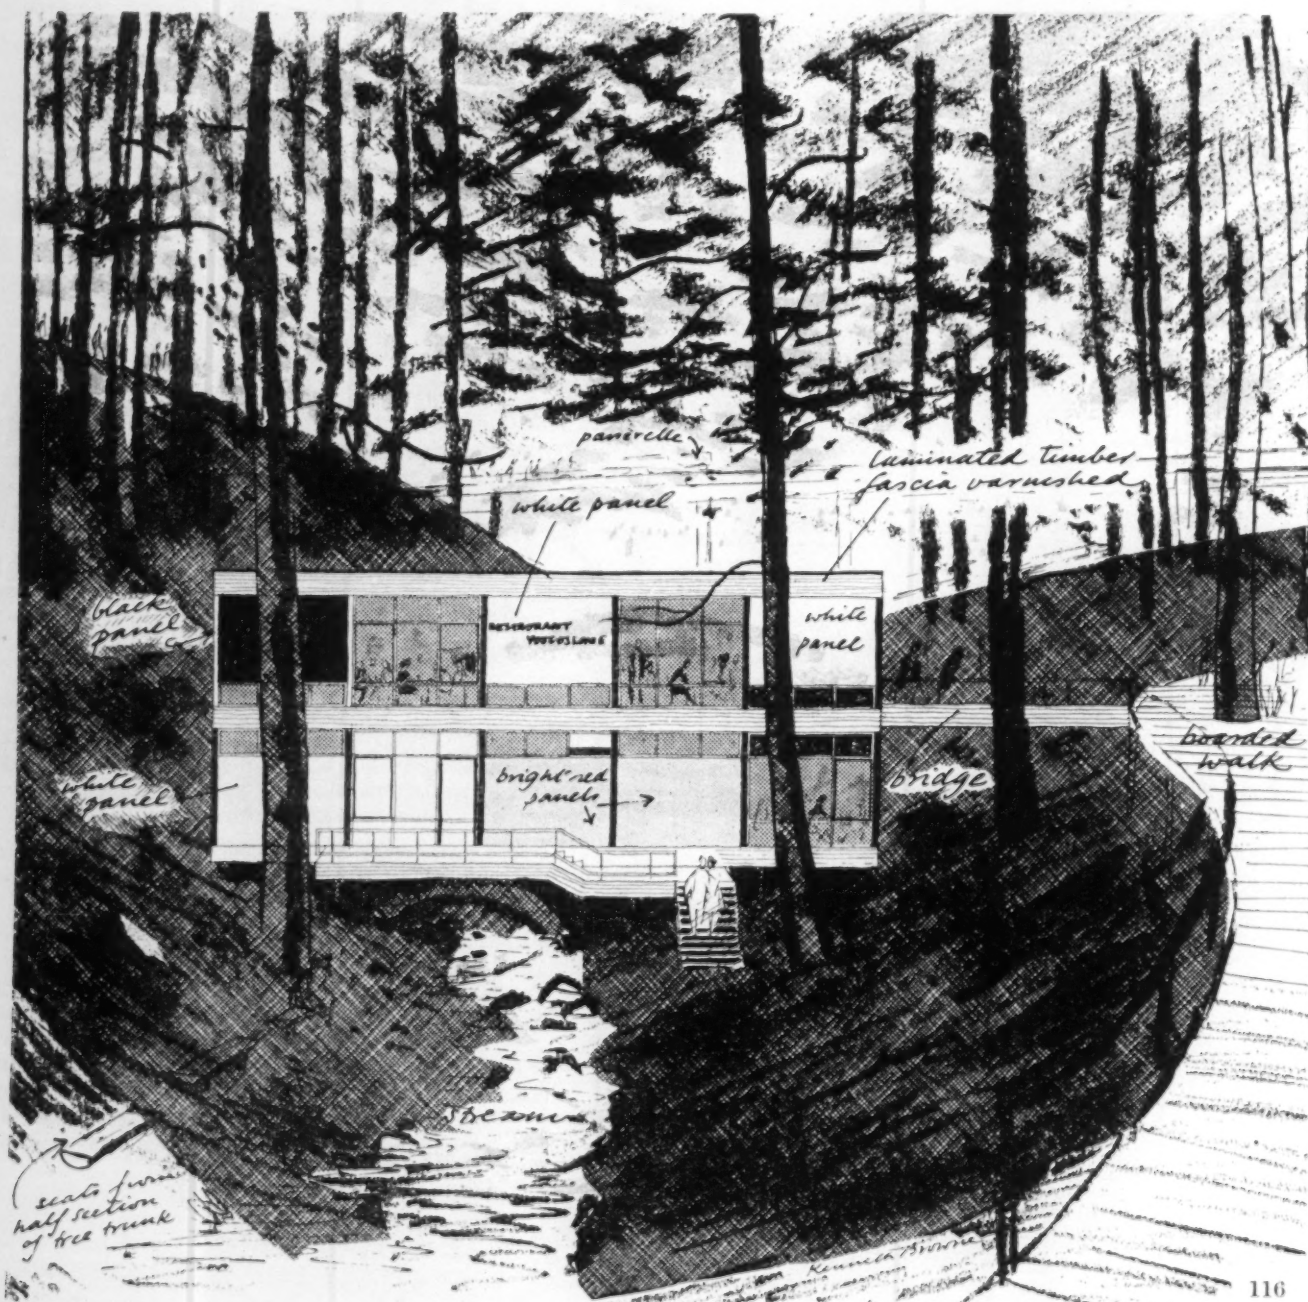



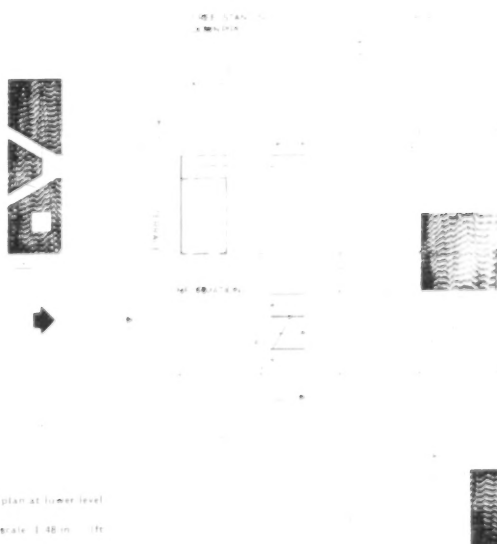

scale: 1/48 in. = 1 ft

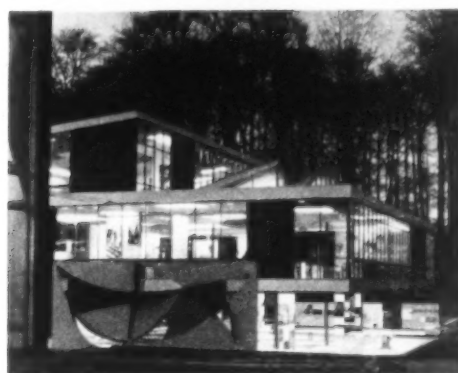

44




45



## 6. JUGOSLAVIA

architect: Vjenceslav Richter


Three rectangular galleries of different heights and at different levels are raised above ground and interpenetrate round a common staircase. The structure is of steel throughout, the steel stanchions being placed invariably some 14 ft. inside the building line. Another, outside, staircase leads direct from the upper galleries

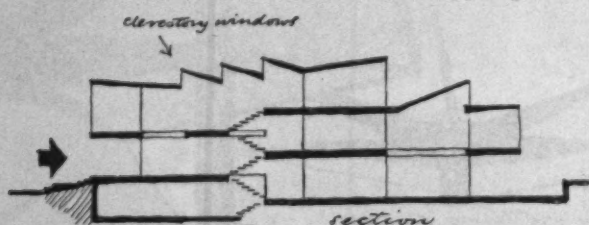

to the paved terrace across the front of the building. This is protected by the cantilevered overhang of the superstructure and has a timber boarded soffit.

The upper galleries are lit through a series of clerestory windows curved in elevation which create interesting geometrical shapes where their inside surfaces intersect the ceilings. All ceiling surfaces are of close timber slatting which throw changes in contour into relief. Fascias are of hardboard painted white and the occasional sections of solid walling are clad in vertically ribbed plastic panels of a purple colour. The ground floor is laid with polished marble.

Below, the western side of the Jugoslav restaurant, built over a stream across the road from the main building. Its other side is shown in 45 on the facing page.

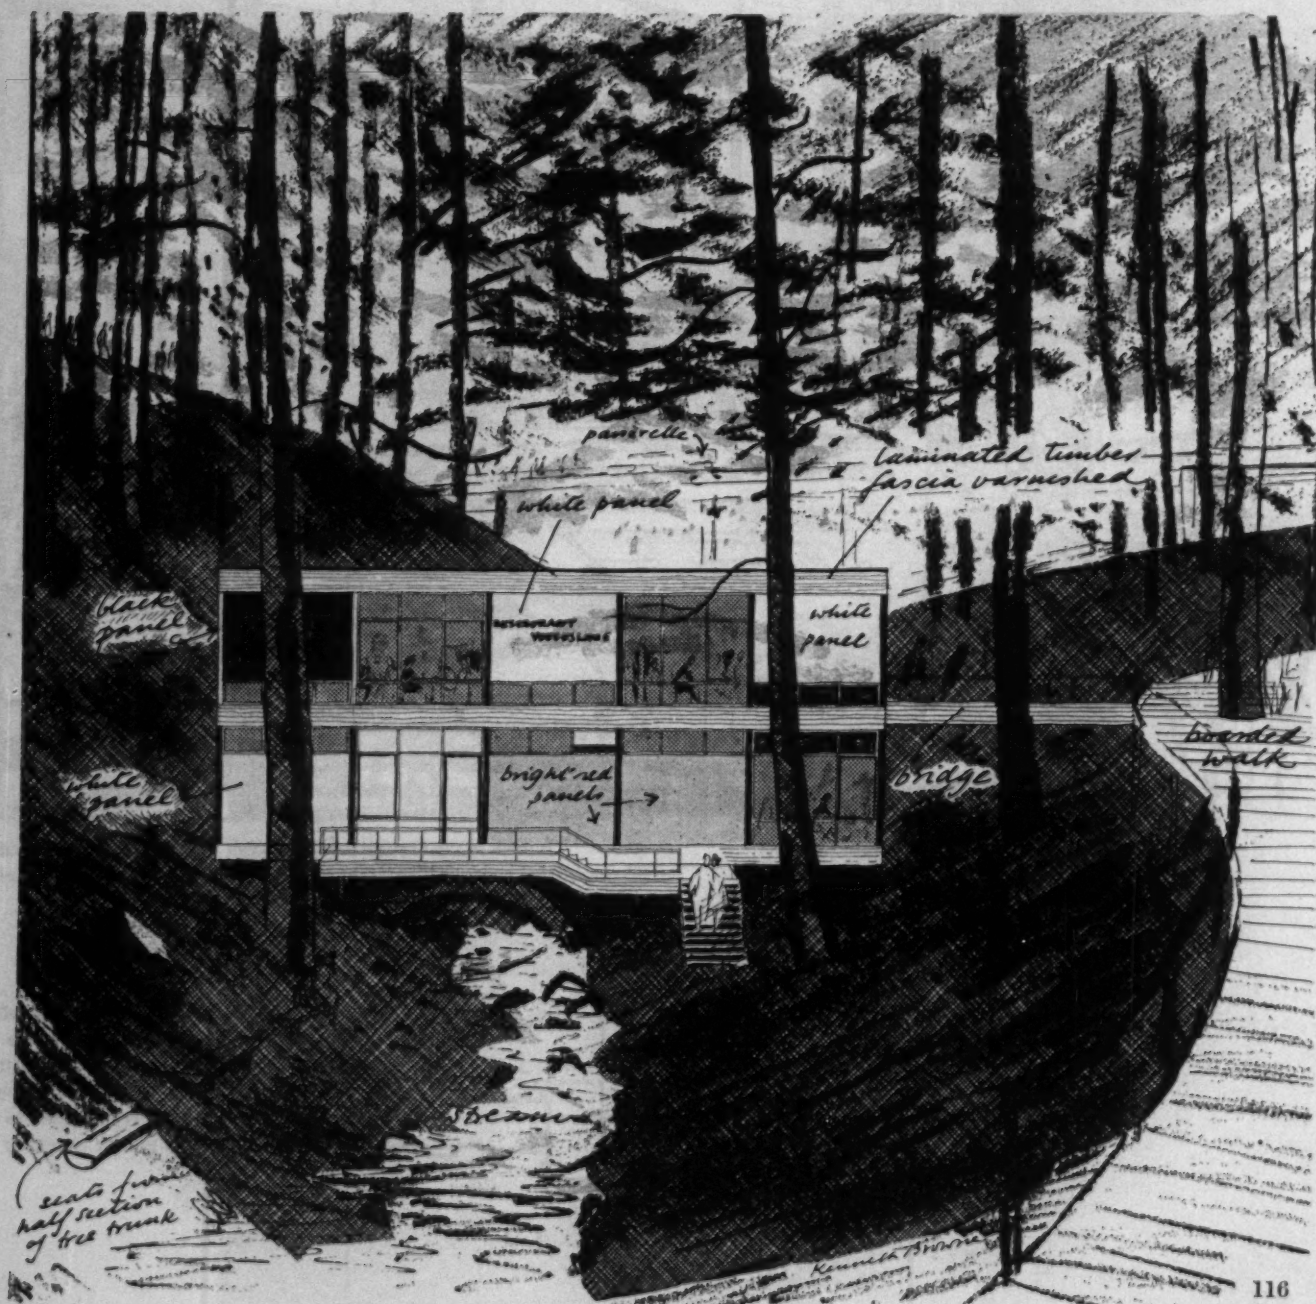


43. the entrance front of the Yugoslav pavilion, with main first-floor gallery cantilevered over a marble-paved terrace (see also next page).


44. the opposite side of the pavilion at night, showing the curved clerestory lights projecting above the roof. Across the road from the northern end of the pavilion (i.e. among the trees seen in the left of 43) is a two-storey restaurant, 45, spanning across a steep ravine so that the stream runs beneath the building, and reached by a bridge. The photograph shows the opposite side to that shown in the drawing on the facing page.



43

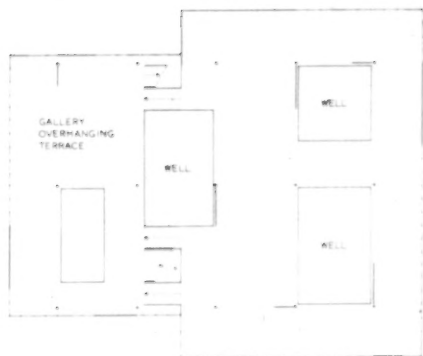

plan at upper level.

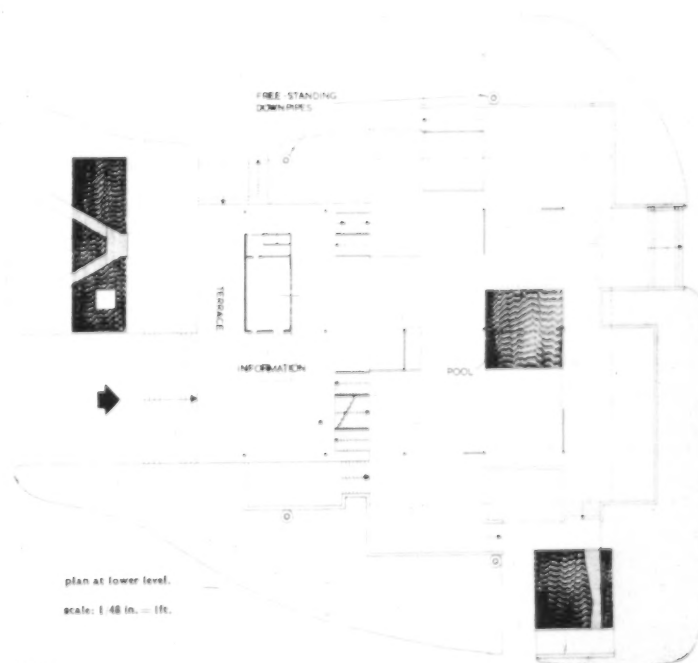

plan at lower level.  
scale: 1/48 in. = 1 ft.



44




45





46

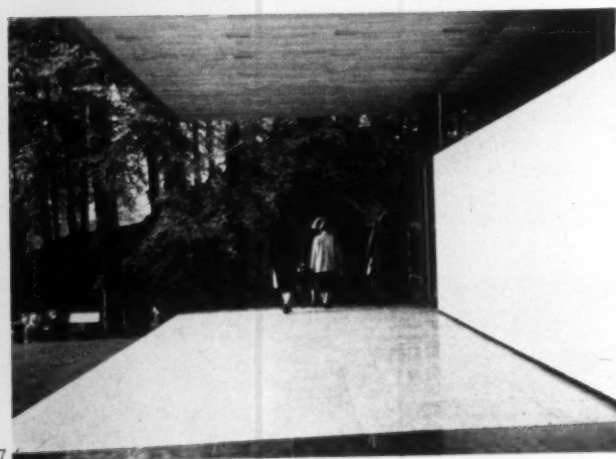


47

# **JUGOSLAVIA**

46, the corner of the main pavilion from below, showing the projection of the first floor gallery to form a roof to the terrace across the front.  
 47, looking along this terrace towards the steps shown in 46. The soffit of the oversailing roof is narrow timber boards, in which lights are set. The pavement is polished marble of a pinkish colour. The two photographs below show the complex inter-penetration of spaces inside and out.  
 48, the view outwards from the centre of the building, also shows the interesting ceiling shapes that arise from the use of curved clerestory lights. The ceilings are lined with timber.  
 49, the projecting end of the first-floor wing, of which the corner is shown in 46.



48

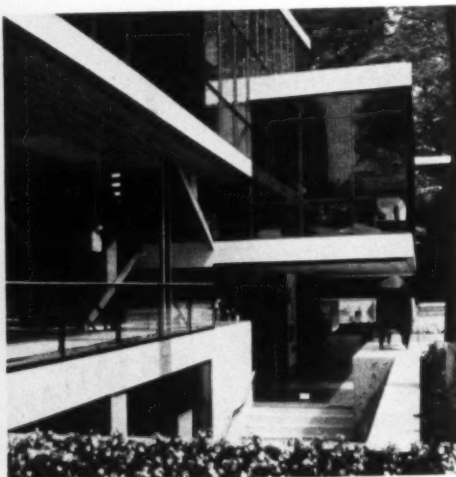

49




## TOWNSCAPE AND OTHER **DETAILS**

An exhibition is a temporary town, requiring the solution of the same problems of detail that confront the town-designer and that make so much difference to the quality of the visual picture it is his job to create. Exhibition buildings, moreover, though fulfilling a specialized purpose, contain many details, inside and out, of the same kind that the architect is always having to provide in his buildings. On the following pages, townscape and other details that seem worth the architect's attention are gathered from all over the exhibition, together with a few cautionary examples to remind the reader of how disastrously uneven detailing in the modern idiom still is, in Brussels as elsewhere. The architects of the foreign pavilions, from which most of these details are taken, are named on page 86.



1

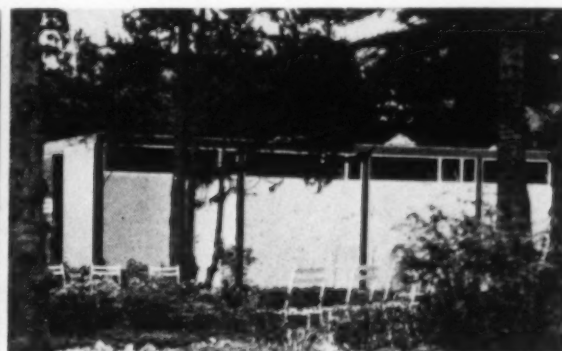

2

temporary structures


Each entrance to the exhibition has a different design, though the glass and metal payboxes are standard. 1 is the best: the *Porte des Nations*, at the eastern end of the main avenue through the foreign section, with folded plywood roof sheltering the payboxes (architects, P. Guillissen and J. Koning). 2, the neatly designed standard steel-framed lavatory block (architect, F. Van Hemelrijck).



3




4

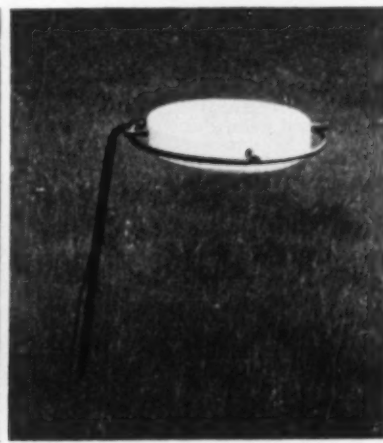


5

street furniture

The street furniture is standardized throughout the exhibition, the standard Belgian designs being used also in the foreign section except within the curtilage of individual pavilions. Some, above, are of neat and appropriate design; others, left, are noticeably poor. 3, outdoor seat composed of curved units, used in this case to form a serpentine shape; they can also form a semi-circle; in natural varnished wood, with legs painted black. 4, loudspeaker for broadcasting music and announcements: cylindrical cage of pierced metal, painted white, supported by steel rods painted black. 5, light-fitting for use near the ground on grass and under trees: steel rod painted black; white glass shade.



6



7

Two cautionary examples: 6, the standard signpost, indicating by symbols the direction in which the different sections of the exhibition lie: weak curves formed in neon tubing, each arm in a different colour. 7, the equally weak shape of the structure housing stamp-machines, etc.: in steel tube and obscured glass.



46



47


# **JUGOSLAVIA**

46, the corner of the main pavilion from below, showing the projection of the first floor gallery to form a roof to the terrace across the front.  
47, looking along this terrace towards the steps shown in 46. The soffit of the oversailing roof is narrow timber boards, in which lights are set. The pavement is polished marble of a pinkish colour. The two photographs below show the complex inter-penetration of spaces inside and out.

48, the view outwards from the centre of the building, also shows the interesting ceiling shapes that arise from the use of curved clerestory lights. The ceilings are lined with timber.  
49, the projecting end of the first-floor wing, of which the corner is shown in 46.



48

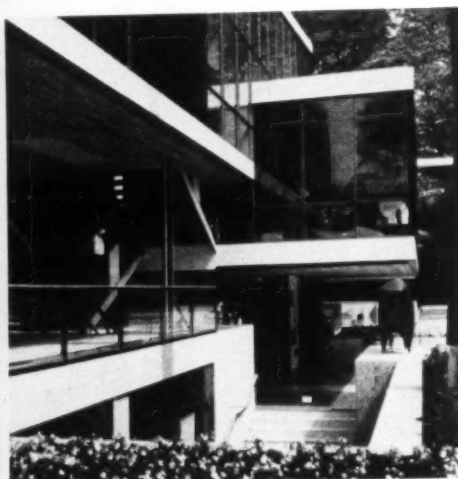


49

## TOWNSCAPE AND OTHER **DETAILS**

An exhibition is a temporary town, requiring the solution of the same problems of detail that confront the town-designer and that make so much difference to the quality of the visual picture it is his job to create. Exhibition buildings, moreover, though fulfilling a specialized purpose, contain many details, inside and out, of the same kind that the architect is always having to provide in his buildings. On the following pages, townscape and other details that seem worth the architect's attention are gathered from all over the exhibition, together with a few cautionary examples to remind the reader of how disastrously uneven detailing in the modern idiom still is, in Brussels as elsewhere. The architects of the foreign pavilions, from which most of these details are taken, are named on page 86.



1

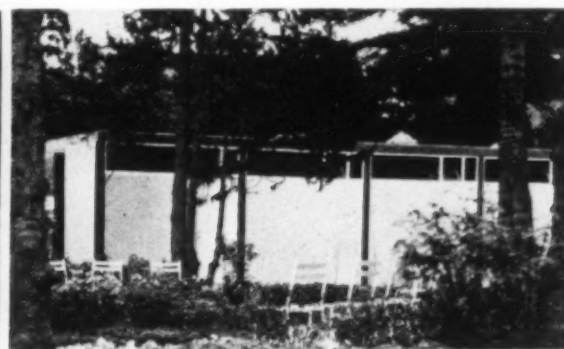


2

temporary structures

Each entrance to the exhibition has a different design, though the glass and metal payboxes are standard. 1 is the best: the *Porte des Nations*, at the eastern end of the main avenue through the foreign section, with folded plywood roof sheltering the payboxes (architects, P. Guillissen and J. Koning). 2, the neatly designed standard steel-framed lavatory block (architect, F. Van Hemelrijck).



3

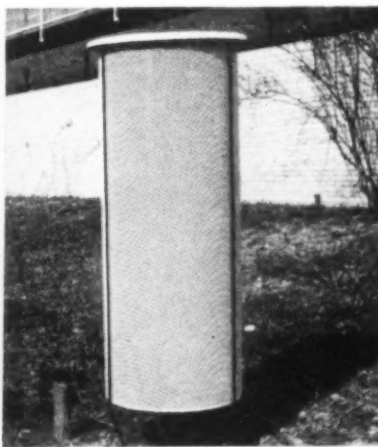


4




5

street furniture

The street furniture is standardized throughout the exhibition, the standard Belgian designs being used also in the foreign section except within the curtilage of individual pavilions. Some, above, are of neat and appropriate design; others, left, are noticeably poor. 3, outdoor seat composed of curved units, used in this case to form a serpentine shape; they can also form a semi-circle; in natural varnished wood, with legs painted black. 4, loudspeaker for broadcasting music and announcements: cylindrical cage of pierced metal, painted white, supported by steel rods painted black. 5, light-fitting for use near the ground on grass and under trees: steel rod painted black; white glass shade.




6



7

Two cautionary examples: 6, the standard signpost, indicating by symbols the direction in which the different sections of the exhibition lie: weak curves formed in neon tubing, each arm in a different colour. 7, the equally weak shape of the structure housing stamp-machines, etc.: in steel tube and obscured glass.




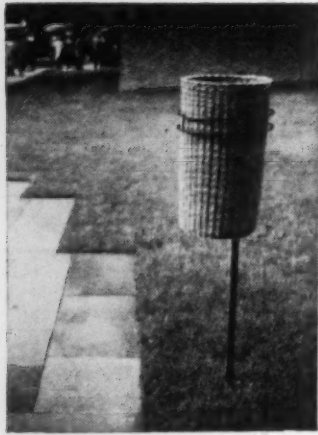

8



9

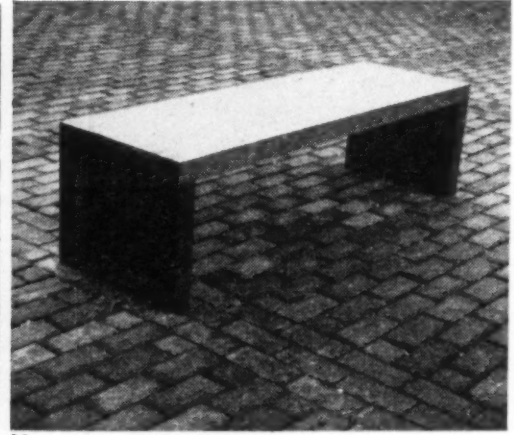


10

## street furniture


Three well-conceived examples of street furniture from the foreign section, designed by the architects of the pavilions on whose sites they stand: 8, a German litter-basket, in wicker set in a wire frame; 9, a Dutch floor-box, in exposed aggregate concrete—the undercut base enables it to take up the slope of the pavement; 10, a Dutch seat in polished hardwood with dovetailed corners.

## buildings and trees


The exhibition grounds, especially in the foreign section, are well furnished with trees, and some of the architects have used them effectively in close relation to their buildings and their approaches. One tree grows through the deck of a small terrace, 11, that is reached from the garden courtyard section of the British pavilion and overlooks the boat-pool. Trees similarly rise through the timber planking of the walk, 12, that separates the main Swiss pavilion from the Swiss transport exhibits, but here the bases of the tree-trunks can be seen from beneath the walkway, looking along the ravine. At the back of the Spanish pavilion, 13, the building is surrounded by trees which stand close to the glazed walls, giving skilfully contrived views of greenery from within.

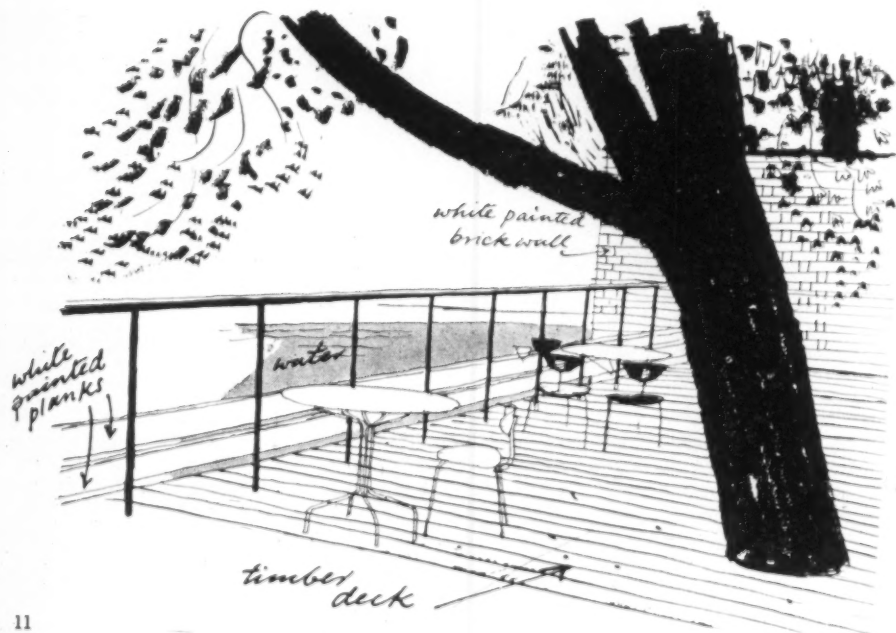

11

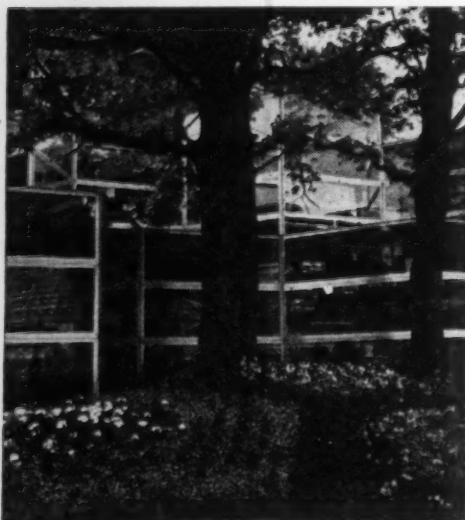

13

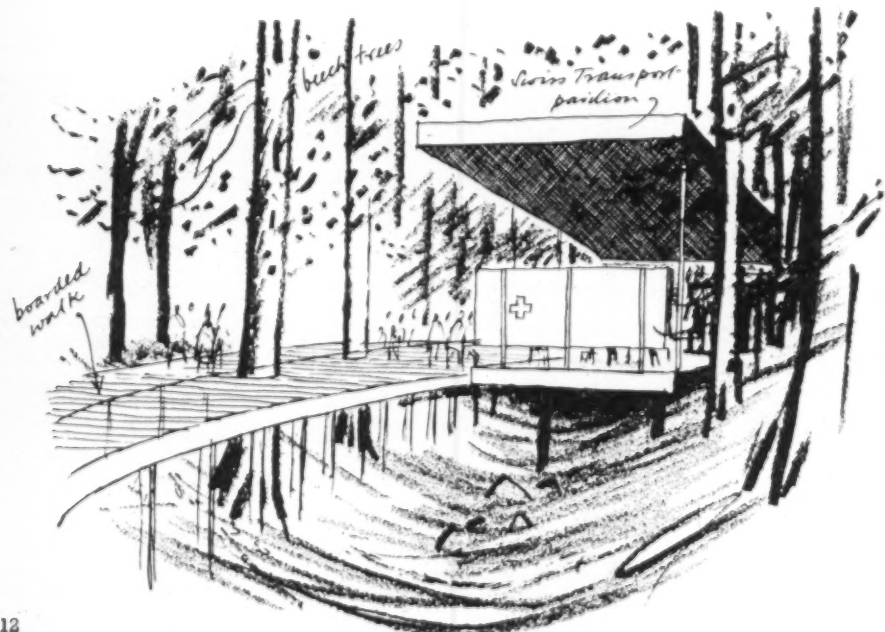


12




14

the timber ceiling

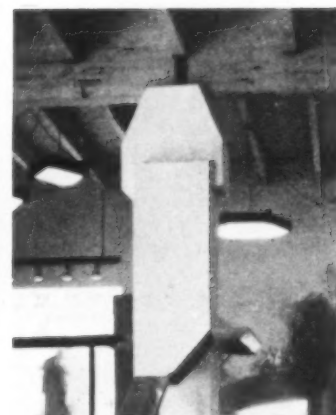

16



17



18



15

The foreign pavilions at Brussels demonstrate the remarkable variety of effect obtainable by the use of timber for ceilings. In the Yugoslav pavilion, 14, the whole roof is lined inside with close timber boarding, the interest of whose texture is enhanced by the play of light on the intersecting planes created by the segmental roof-lights. The Finnish pavilion, 15, has a false ceiling of timber rafters hiding the actual roof structure and also serving to screen the source of light—hence the projecting panels. Each unit in the Italian pavilion, 16, is roofed with exposed timber beams and boarding, the beams resting on concrete columns designed, it would seem, to emphasize as strongly as possible the contrasting harshness of this material. In the ceiling of the Spanish pavilion, 17, timber is used in the form of a light flat panel to fill in the triangular spaces between a framework of steel members. The Norwegian pavilion, 18, uses very heavy laminated timber beams, in pairs bolted together, between which is stretched a plastic material with something of the character of parchment.






8



9

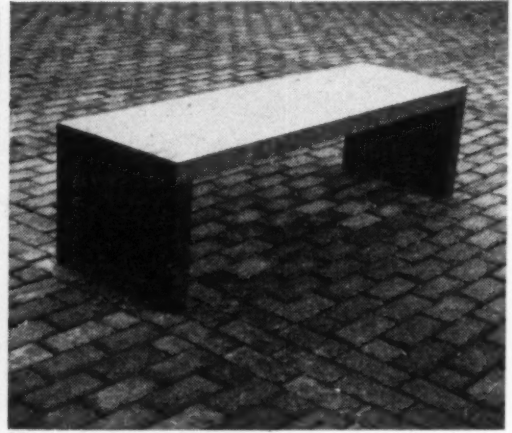


10

## street furniture


Three well-conceived examples of street furniture from the foreign section, designed by the architects of the pavilions on whose sites they stand: 8, a German litter-basket, in wicker set in a wire frame; 9, a Dutch floor-box, in exposed aggregate concrete—the undercut base enables it to take up the slope of the pavement; 10, a Dutch seat in polished hardwood with dovetailed corners.

## buildings and trees


The exhibition grounds, especially in the foreign section, are well furnished with trees, and some of the architects have used them effectively in close relation to their buildings and their approaches. One tree grows through the deck of a small terrace, 11, that is reached from the garden courtyard section of the British pavilion and overlooks the boat-pool. Trees similarly rise through the timber planking of the walk, 12, that separates the main Swiss pavilion from the Swiss transport exhibits, but here the bases of the tree-trunks can be seen from beneath the walkway, looking along the ravine. At the back of the Spanish pavilion, 13, the building is surrounded by trees which stand close to the glazed walls, giving skilfully contrived views of greenery from within.

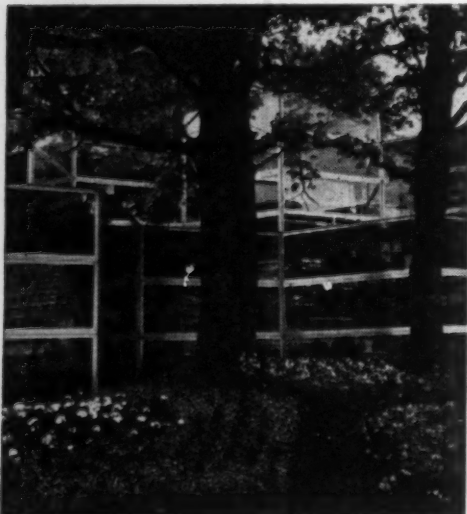

13

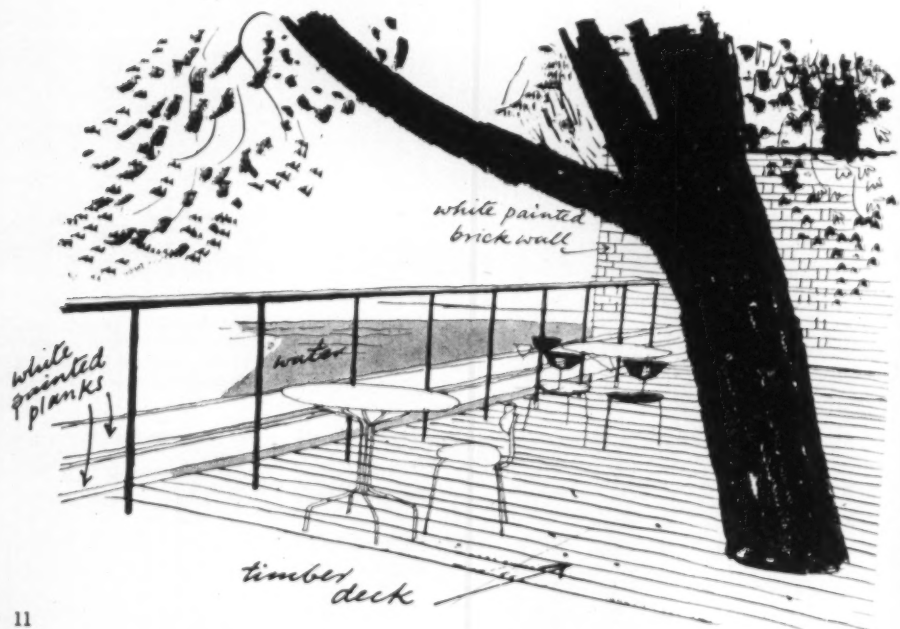

11

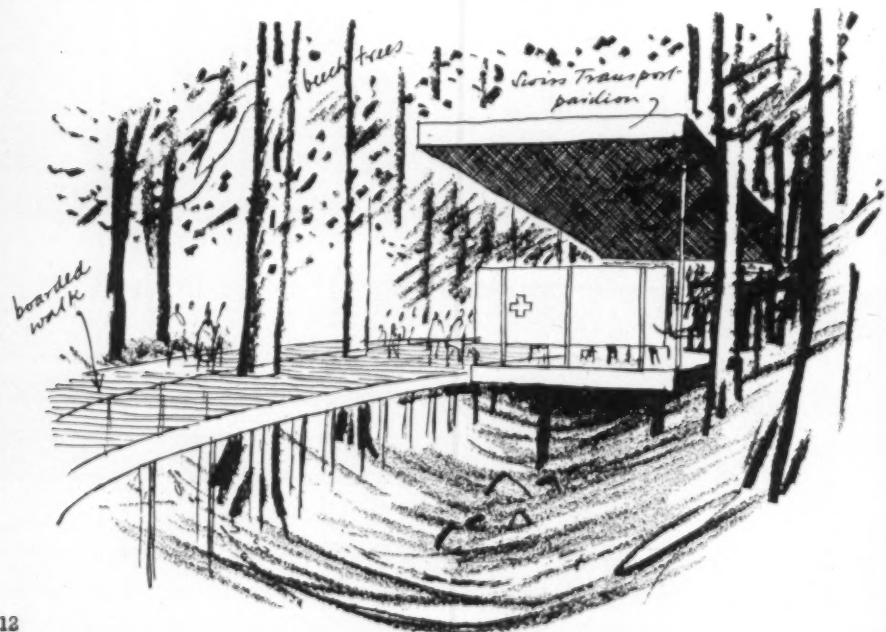

12






14




15

the timber ceiling

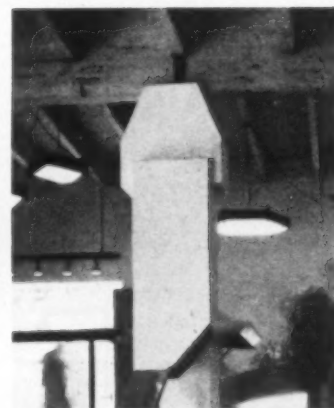

16




17




18

The foreign pavilions at Brussels demonstrate the remarkable variety of effect obtainable by the use of timber for ceilings. In the Yugoslav pavilion, 14, the whole roof is lined inside with close timber boarding, the interest of whose texture is enhanced by the play of light on the intersecting planes created by the segmental roof-lights. The Finnish pavilion, 15, has a false ceiling of timber rafters hiding the actual roof structure and also serving to screen the source of light—hence the projecting panels. Each unit in the Italian pavilion, 16, is roofed with exposed timber beams and boarding, the beams resting on concrete columns designed, it would seem, to emphasize as strongly as possible the contrasting harshness of this material. In the ceiling of the Spanish pavilion, 17, timber is used in the form of a light flat panel to fill in the triangular spaces between a framework of steel members. The Norwegian pavilion, 18, uses very heavy laminated timber beams, in pairs bolted together, between which is stretched a plastic material with something of the character of parchment.


## the window wall

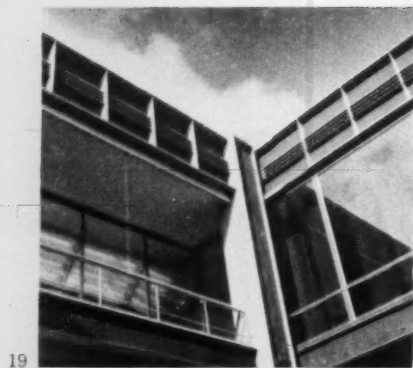

19

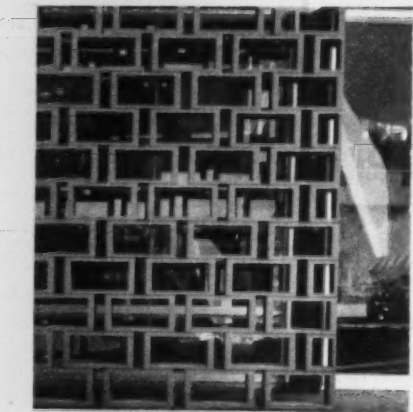


20

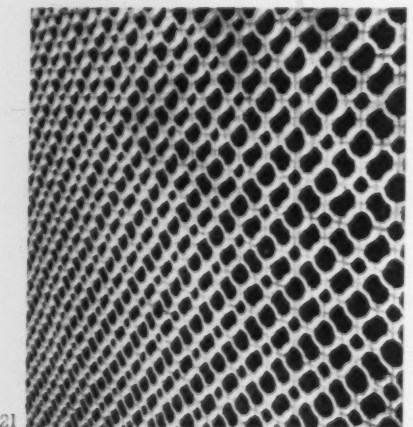


21

Framed buildings predominate in the exhibition, which means that windows and walls are one, and architectural character depends on the weight and detailing of the structure in relation to the glass infill. There are several unusually elegant examples of the metal and glass window-wall, notably the Austrian pavilion (19 shows the internal angle of the courtyard with the wall on one side recessed to form a balcony) and the Swiss, 22, on the right, glazed on the outer face with fin-like stiffeners inside. Some glass walls are protected from the sun by a ceramic grille, as in the Portuguese pavilion, 20, where the grille is of superimposed rectangular blocks, and the US cinema building, 21. In the restaurant of the Turkish pavilion, 23, protection is given by timber grilles fitted into the steel frame and timber panels that hinge upwards over the windows.

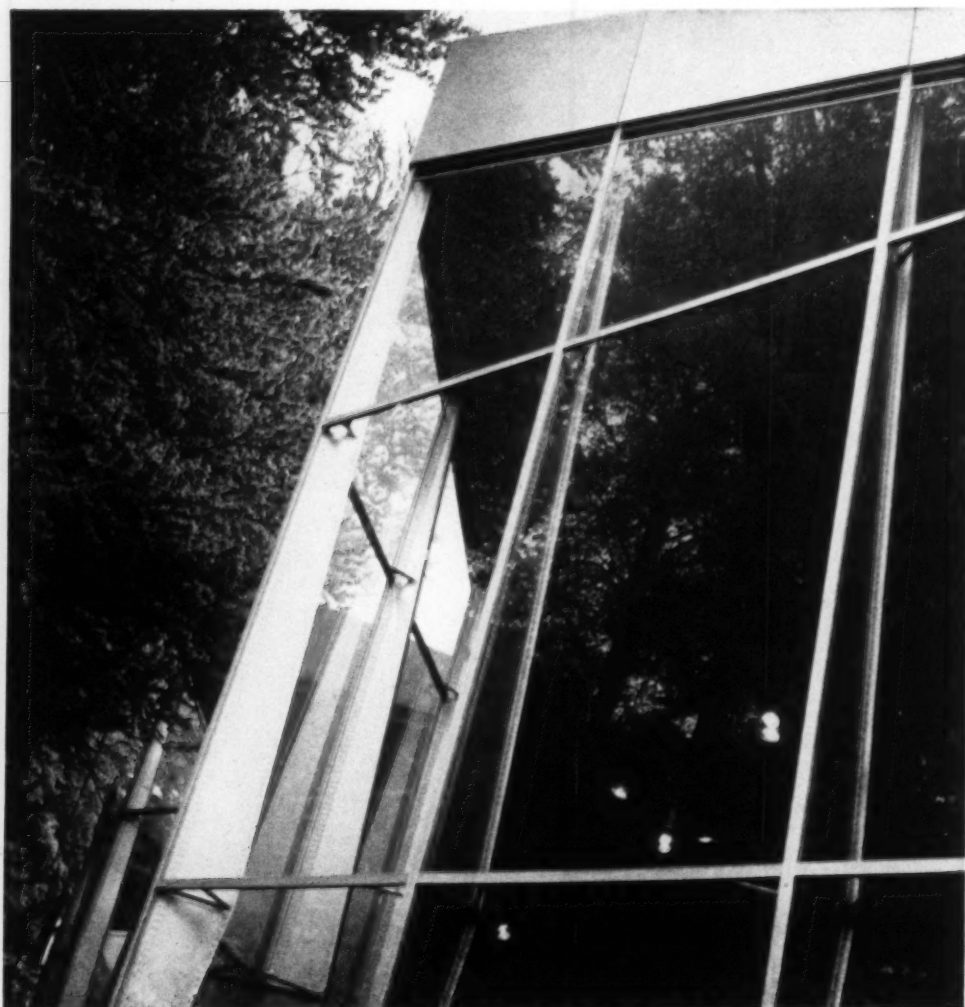


22

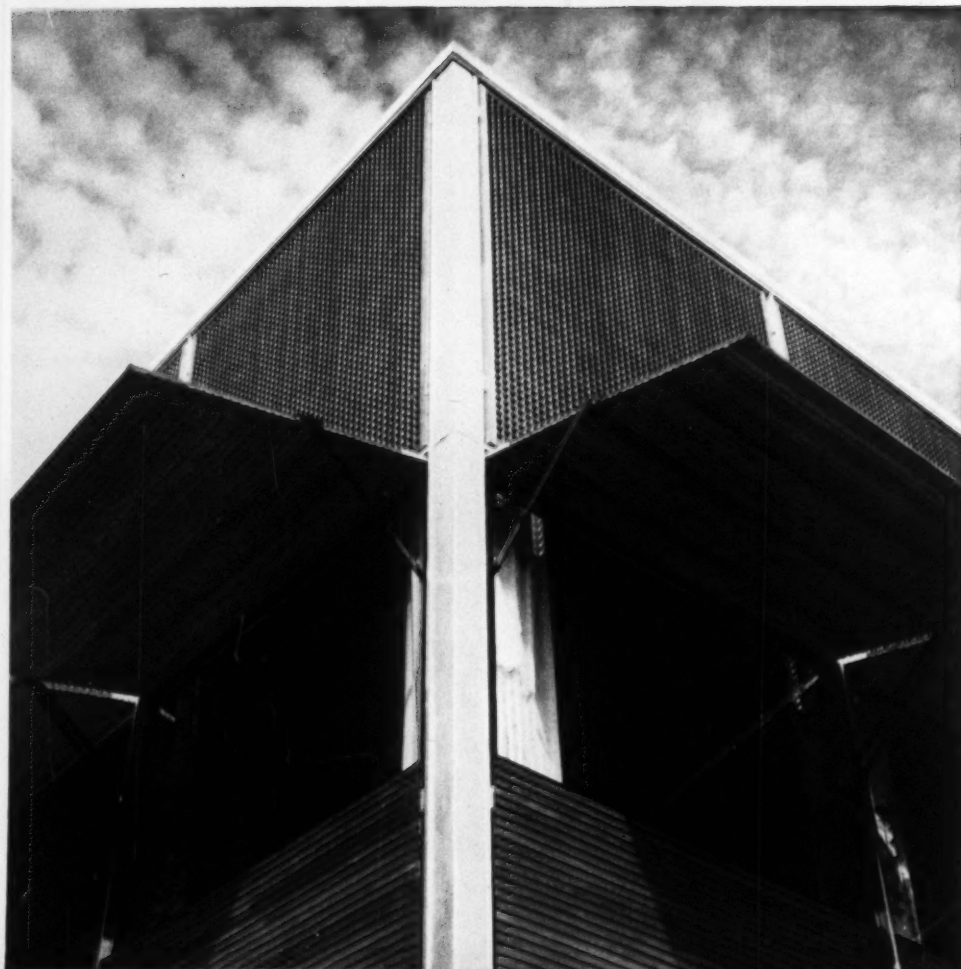


23



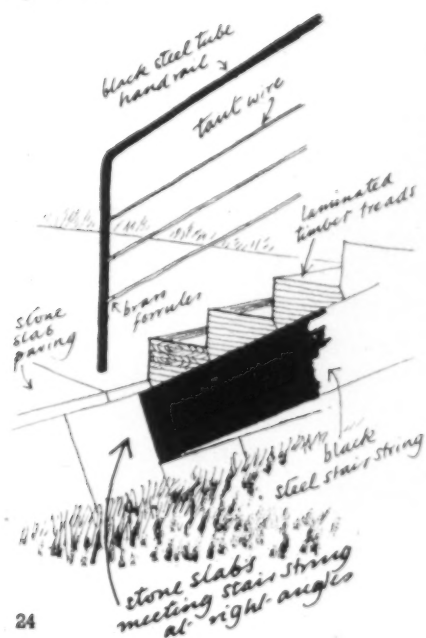

24

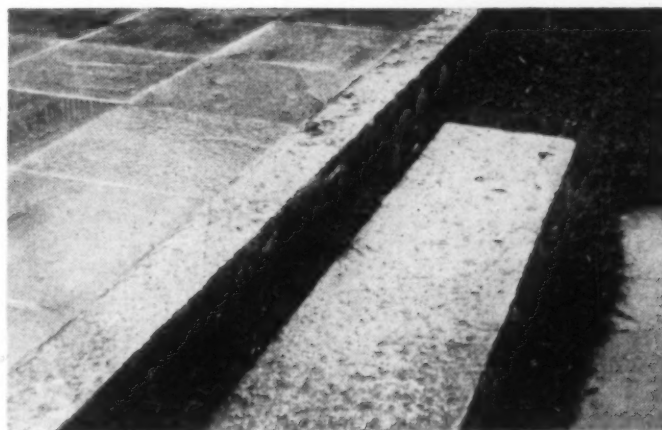


25

24, the neat finish at the foot of an outdoor stair leading down into one of the paved and grass-planted courtyards of the German pavilion. The grass ends at a sloping stone slab against which the steel string of the stair abuts. 25, the isolated step: the granite step that leads down from the terrace of the Norwegian pavilion is engagingly brought a few inches forward so that the grass grows all round.

steps

## paving patterns

Like the Norwegian steps above, the approach to the Israeli pavilion, 26, gets a charming effect by encouraging grass to grow between stone paving slabs. The slabs, interrupted by the trunks of trees, are informally laid with alternating wide and narrow courses. Below, three examples of interesting patterns obtained by the use of stone paving: 27, random square, circular and irregularly shaped pieces, arranged in panels separated by occasional straight joints, in the terrace surrounding the pool of the Swiss pavilion. 28, fine gravel alternating with irregular squared-up stone slabs in the garden courtyards of the British pavilion. 29, the well thought-out junction of stone paving and grass in the courtyard of the German pavilion.

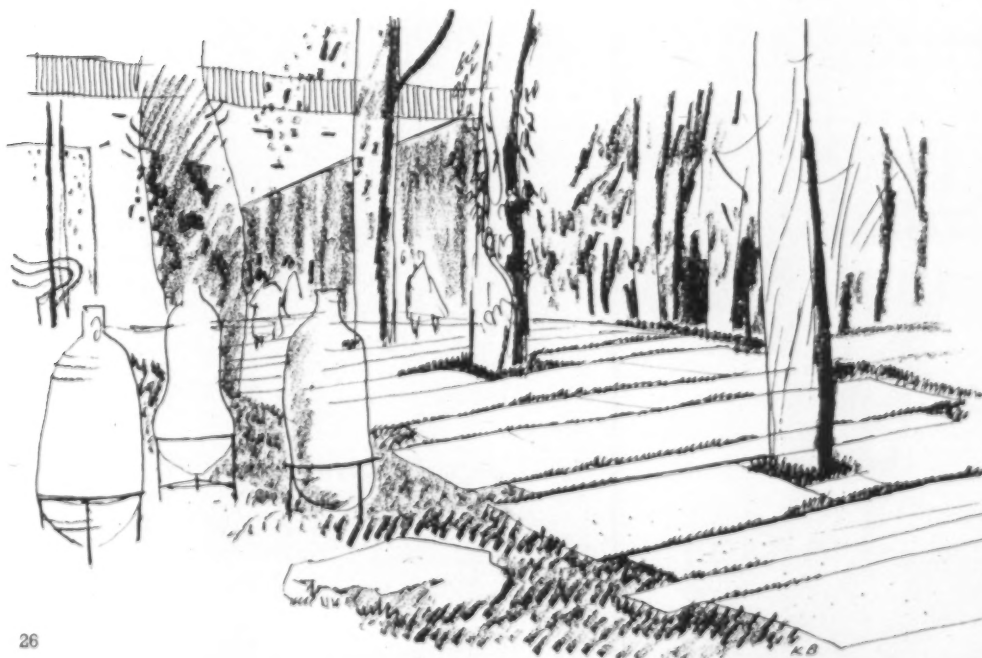


26



27



28

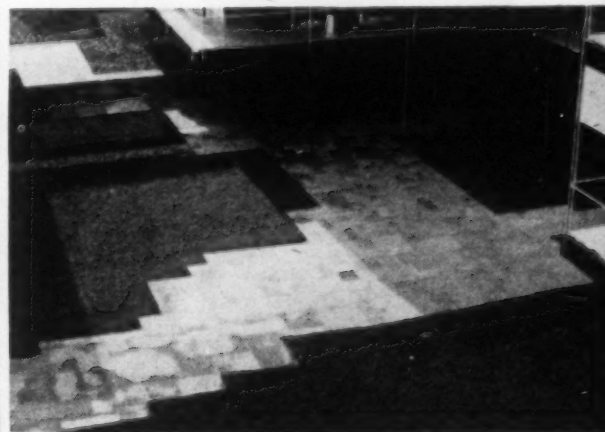


29




## stones and water

On the right, two examples of a carefully planned relationship between stones and water: 30, rocks, pebbles and granite chippings surrounding the pool in the garden at the back of the Japanese pavilion, all used with the sensitivity to the natural properties of materials typical of the Japanese. 31, a fountain outside the German pavilion, consisting of flat discs of marble from the centre of which water bubbles and flows over the discs to saturate the pebbles among which they are set.

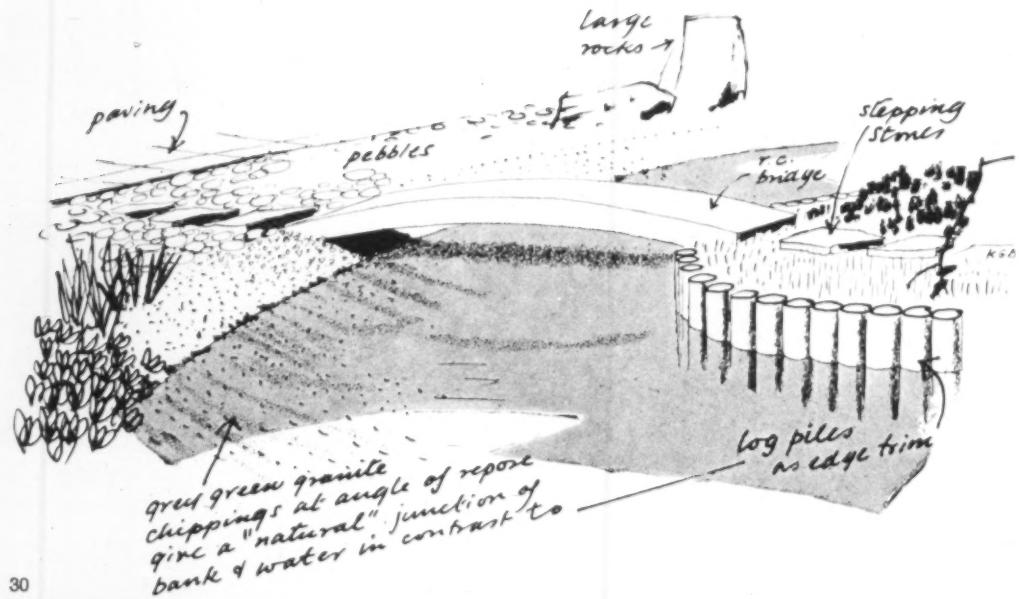

## lettering on buildings

Contrasts in character: 32 and 33, the precise, mechanistic style of lettering on the aluminium fascia and in the garden of the Swiss pavilion; 34, widely spaced letters, raised and with their flat surfaces gilded, spelling out the name of the Japanese pavilion; 35, the main label of the Dutch pavilion—bronze lettering mounted on a granite block, itself supported on a wall of granite setts.

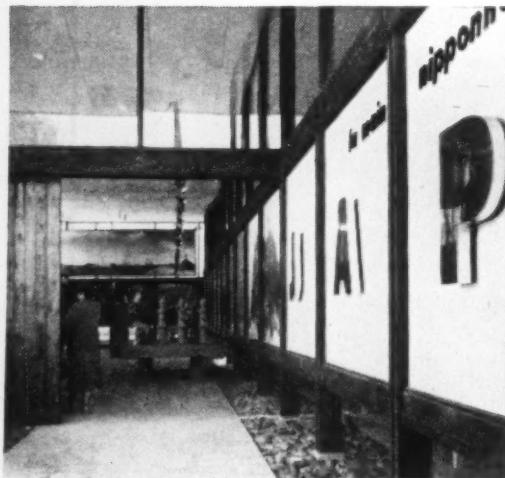



New West works for  
Mullins Metal Cylinders  
LONDON, ENGLAND, ENGLAND

fabricators and erectors of structural steelwork




BOULTON AND PAUL LIMITED NORWICH LONDON BIRMINGHAM

AP/CE 29

## stones and water

On the right, two examples of a carefully planned relationship between stones and water: 30, rocks, pebbles and granite chippings surrounding the pool in the garden at the back of the Japanese pavilion, all used with the sensitivity to the natural properties of materials typical of the Japanese. 31, a fountain outside the German pavilion, consisting of flat discs of marble from the centre of which water bubbles and flows over the discs to saturate the pebbles among which they are set.

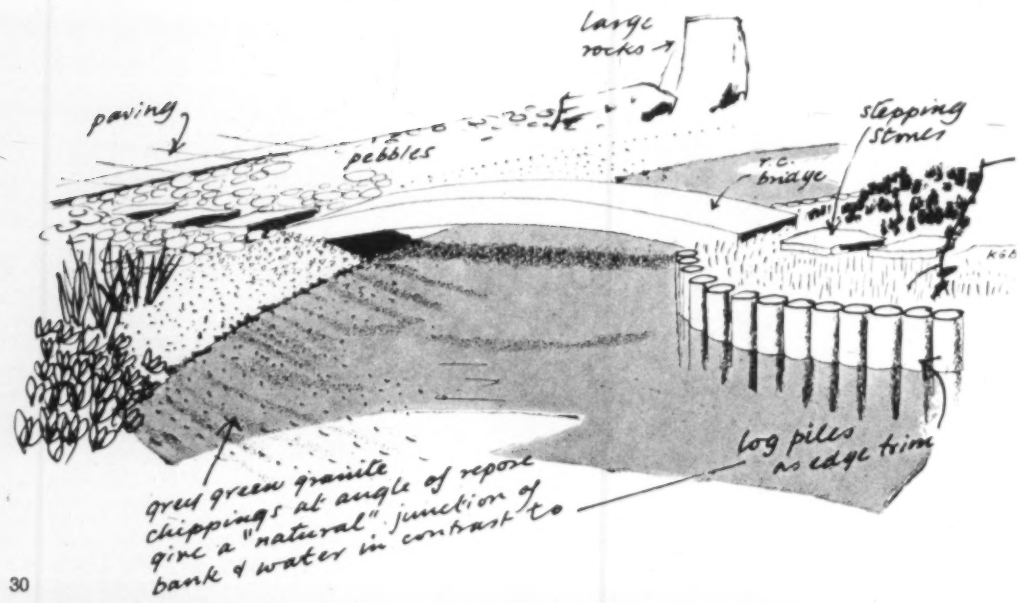


30

## lettering on buildings

Contrasts in character: 32 and 33, the precise, mechanistic style of lettering on the aluminium fascia and in the garden of the Swiss pavilion; 34, widely spaced letters, raised and with their flat surfaces gilded, spelling out the name of the Japanese pavilion; 35, the main label of the Dutch pavilion—bronze lettering mounted on a granite block, itself supported on a wall of granite setts.




31

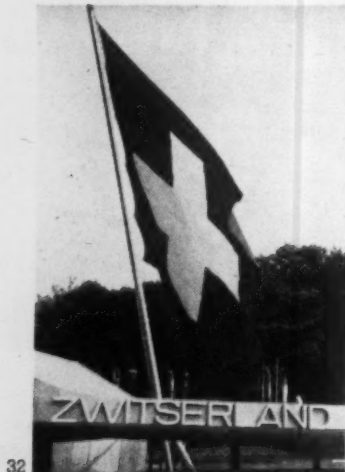

32



33

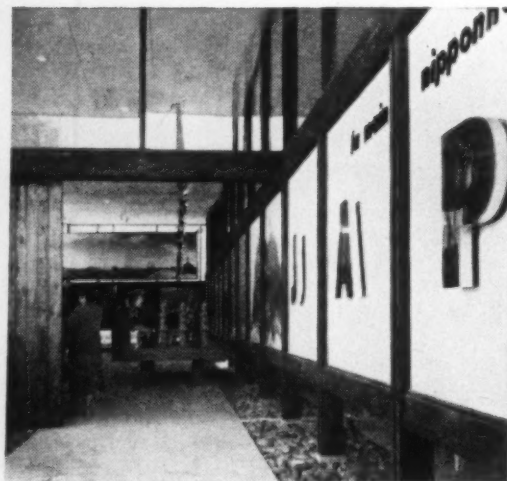


34



35



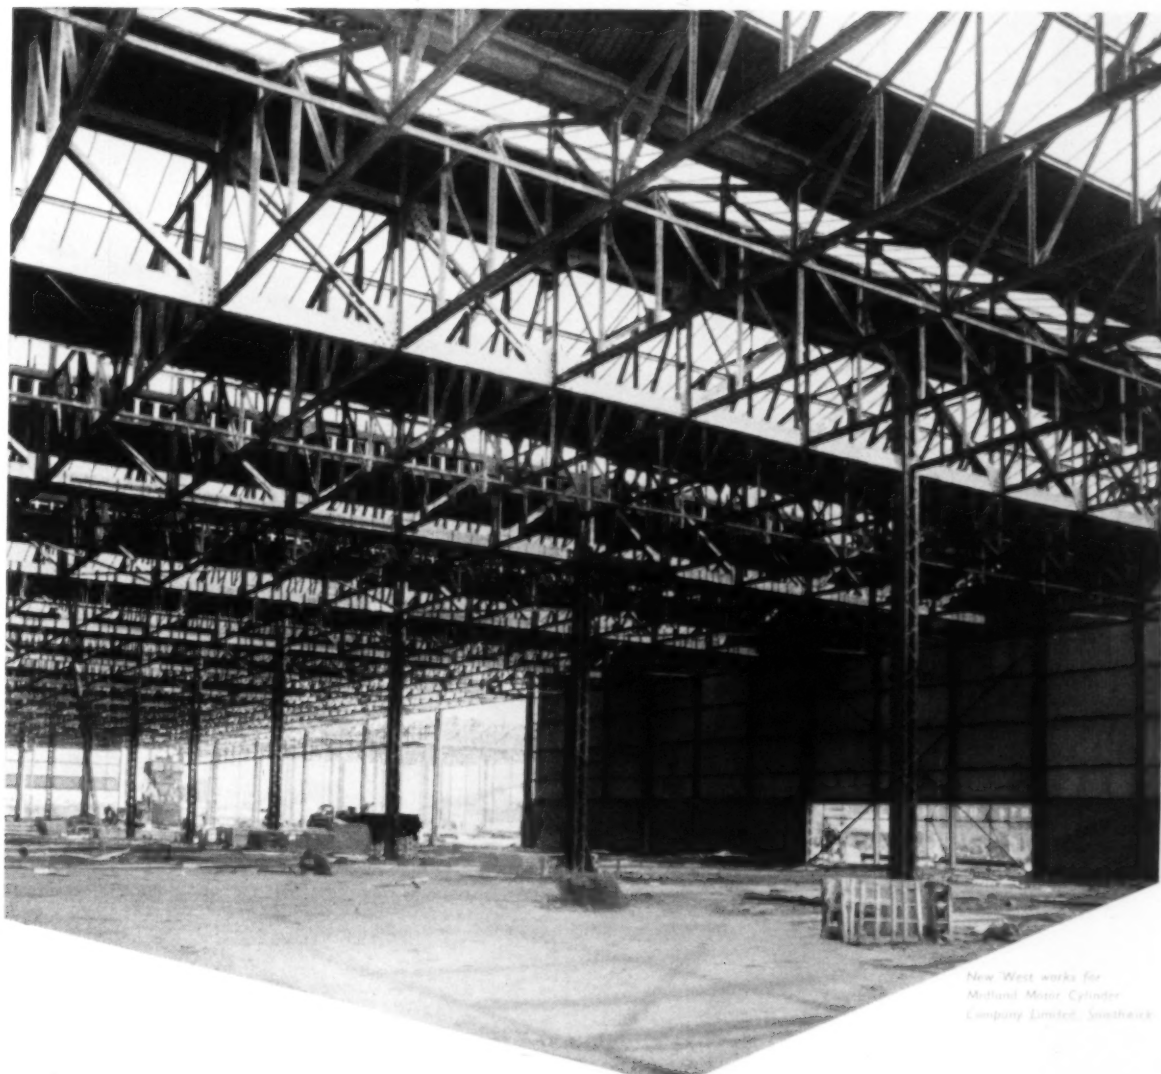

*New West works for  
Midland Motor Cylinder  
Company Limited, Southampton*


*fabricators and erectors of structural steelwork*



BOULTON AND PAUL LIMITED NORWICH LONDON BIRMINGHAM

AP/CE 29


## Putting in the Daylight

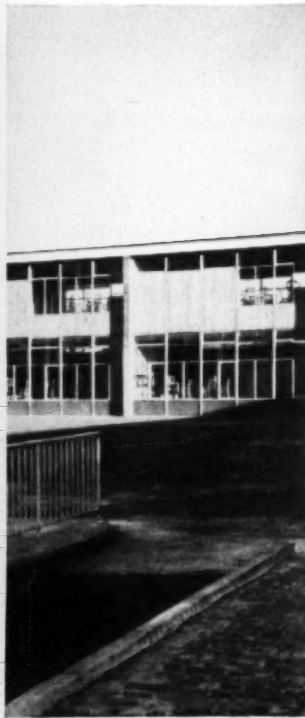

### at Pitcorthie Primary School, Dunfermline

Architect R. S. Lawrie

A.R.I.B.A., A.M.T.P.I., A.R.I.A.S.

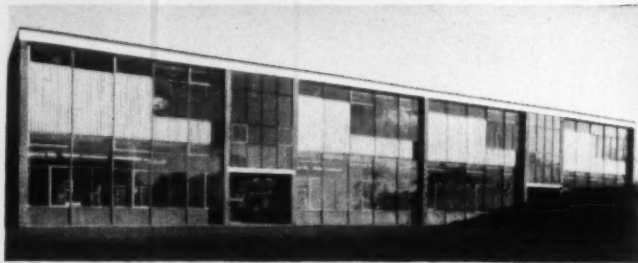

From dull dark brown abodes of unhappy learning, schools have over the years become cheerful places of enlightenment. In this transformation, Standard Maclean of Hamilton have contributed over the past decade to many of the most interesting up to date buildings. Standard Maclean Metal Windows capture every minute of natural light. The frames are simplicity itself, with the characteristic appeal of good workmanship. After manufacture Standard Maclean windows are electro-galvanised in what is probably the largest electro-galvanising plant in Europe. This special process plus two coats of paint, each stoved on separately, ensures a metal window which completely withstands the wear of wind, rain, snow and sun.


Architects, Contractors and their staffs are welcome to visit the factory. In addition to metal windows, light steel fabrications, fire escapes, door frames, roof lights, balconies, cat ladders and all types of hand railings are produced.

**Standard Maclean  
Limited**


STANDARD MACLEAN LIMITED, CADZOW WORKS LOW WATERS ROAD, HAMILTON, Lanarkshire. Hamilton 1410/4

ABERDEEN: 13 Bridge Street, Tel: Aberdeen 52331. EDINBURGH: 7 Albany Street, Tel: Waverly 2190. NEWCASTLE: 14a Pilgrim Street, Tel: Newcastle 27776. BELFAST: 32 Ann Street, Tel: Belfast 32003. LONDON, W.C.1: Warwick Court, High Holborn, Tel: Holborn 2462. WEST BROMWICH: Houghton Street, Tel: West Bromwich 0405. WORTHING: 30 Manor Road, Tel: Worthing 7495.

PD6

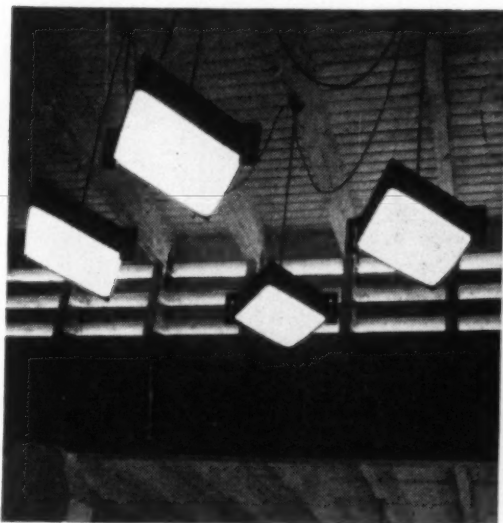

36

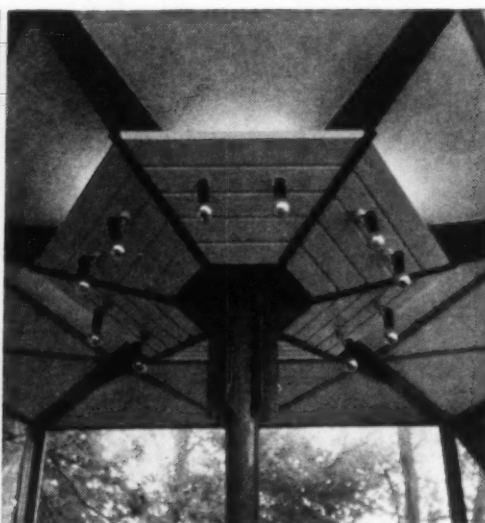


37




38

### interior lighting

36, in the Italian pavilion: flat square metal boxes with glass bottoms, suspended from the timber ceiling. The use of materials 'as found' and the casual arrangement of the looped cords conforms with the style the Italian architects have employed throughout. 37 and 38, two standard types of ceiling fitting in the Spanish pavilion: a circle of naked bulbs in small metal holders and a fitting consisting of concentric circles of black metal screening a double light-source. 39, detail of the neatly designed system of lighting along the edge of the ramp that descends round the central garden (see page 91) in the Brazilian pavilion. 40, suspended fitting in the restaurant of the Swiss pavilion. The bulbs are sandwiched between plates of perspex. There is also concealed lighting behind the louvres in the ceiling, not illuminated in this photograph. 41, in the Finnish pavilion: slatted timber structure screening the source of light set between the ceiling rafters. 42, conical shades at the end of metal tubes used for lighting the modern art section of the French pavilion.

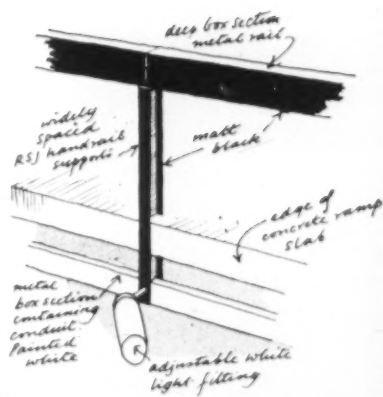


39

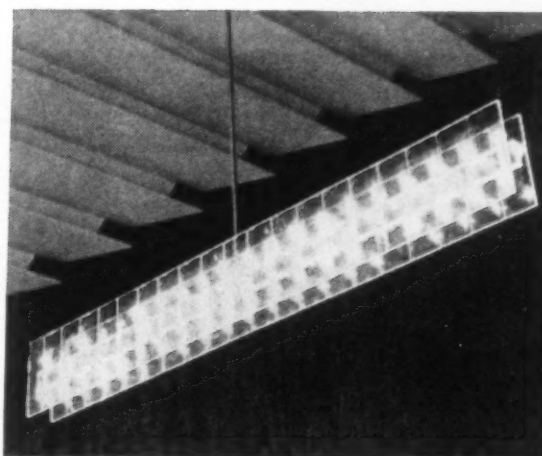

40




41

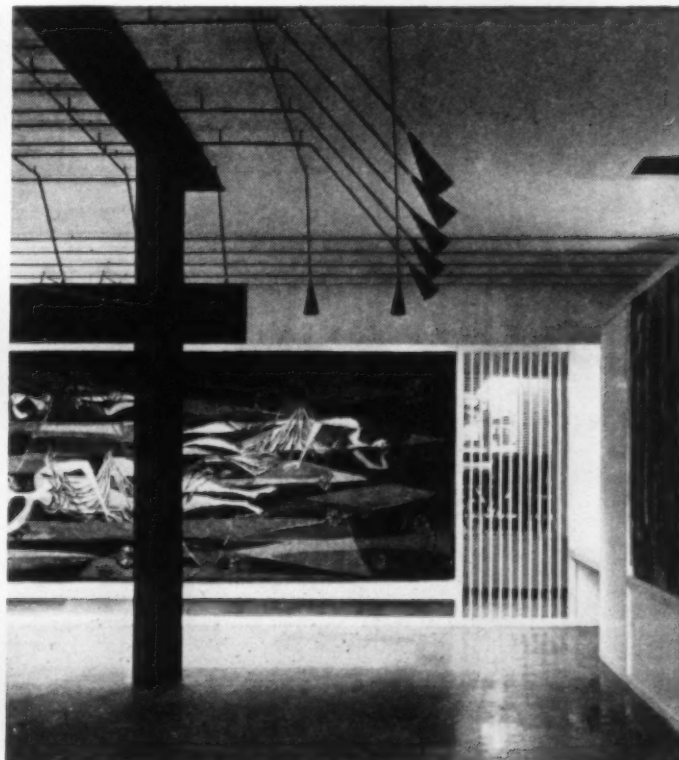

42




# Putting in the Daylight

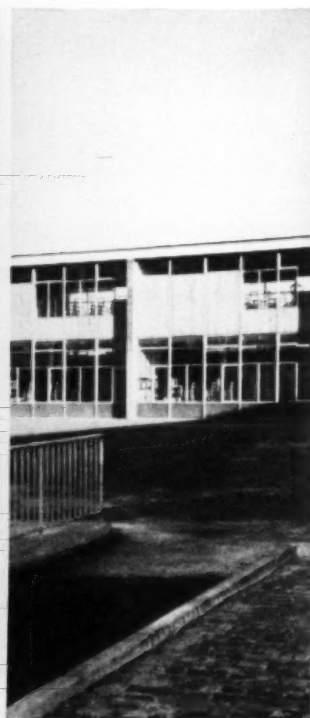

## at Pitcorthie Primary School, Dunfermline

Architect R. S. Lawrie

A.R.I.B.A., A.M.T.P.I., A.R.I.A.S.

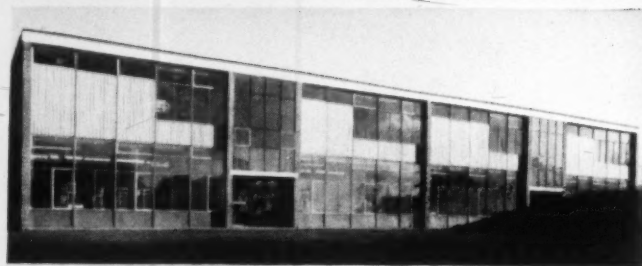

From dull dark brown abodes of unhappy learning, schools have over the years become cheerful places of enlightenment. In this transformation, Standard Maclean of Hamilton have contributed over the past decade to many of the most interesting up to date buildings. Standard Maclean Metal Windows capture every minute of natural light. The frames are simplicity itself, with the characteristic appeal of good workmanship. After manufacture Standard Maclean windows are electro-galvanised in what is probably the largest electro-galvanising plant in Europe. This special process plus two coats of paint, each stoved on separately, ensures a metal window which completely withstands the wear of wind, rain, snow and sun.

Architects, Contractors and their staffs are welcome to visit the factory. In addition to metal windows, light steel fabrications, fire escapes, door frames, roof lights, balconies, cat ladders and all types of hand railings are produced.

# Standard Maclean Limited


STANDARD MACLEAN LIMITED, CADZOW WORKS LOW WATERS ROAD, HAMILTON, Lanarkshire. Hamilton 1410/4

ABERDEEN: 13 Bridge Street, Tel: Aberdeen 52331. EDINBURGH: 7 Albany Street, Tel: Waverly 2190. NEWCASTLE: 14a Pilgrim Street, Tel: Newcastle 27776. BELFAST: 32 Ann Street, Tel: Belfast 32003. LONDON, W.C.1.: Warwick Court, High Holborn, Tel: Holborn 2462. WEST BROMWICH: Houghton Street, Tel: West Bromwich 0405. WORTHING: 30 Manor Road, Tel: Worthing 7495.

PD6



36

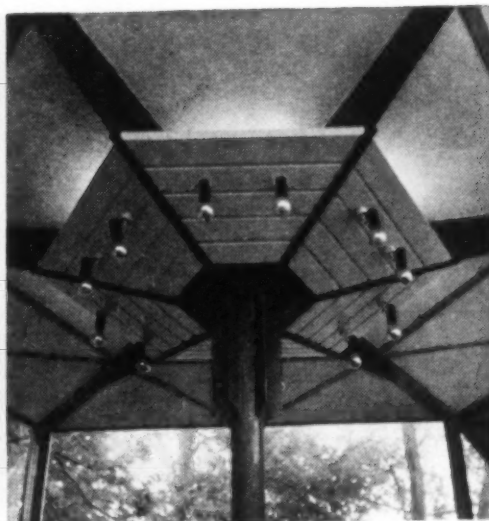


37




38

### interior lighting

36, in the Italian pavilion: flat square metal boxes with glass bottoms, suspended from the timber ceiling. The use of materials 'as found' and the casual arrangement of the looped cords conforms with the style the Italian architects have employed throughout. 37 and 38, two standard types of ceiling fitting in the Spanish pavilion: a circle of naked bulbs in small metal holders and a fitting consisting of concentric circles of black metal screening a double light-source. 39, detail of the neatly designed system of lighting along the edge of the ramp that descends round the central garden (see page 91) in the Brazilian pavilion. 40, suspended fitting in the restaurant of the Swiss pavilion. The bulbs are sandwiched between plates of perspex. There is also concealed lighting behind the louvres in the ceiling, not illuminated in this photograph. 41, in the Finnish pavilion: slatted timber structure screening the source of light set between the ceiling rafters. 42, conical shades at the end of metal tubes used for lighting the modern art section of the French pavilion.

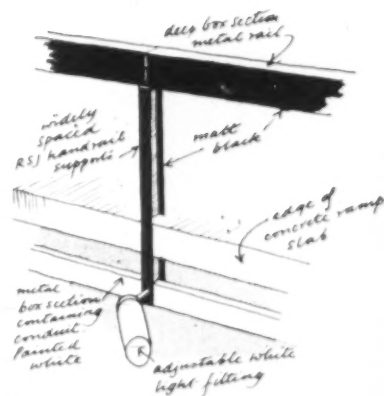


39

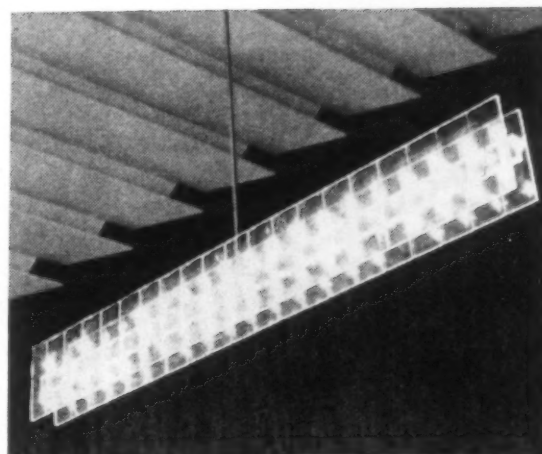

40




41

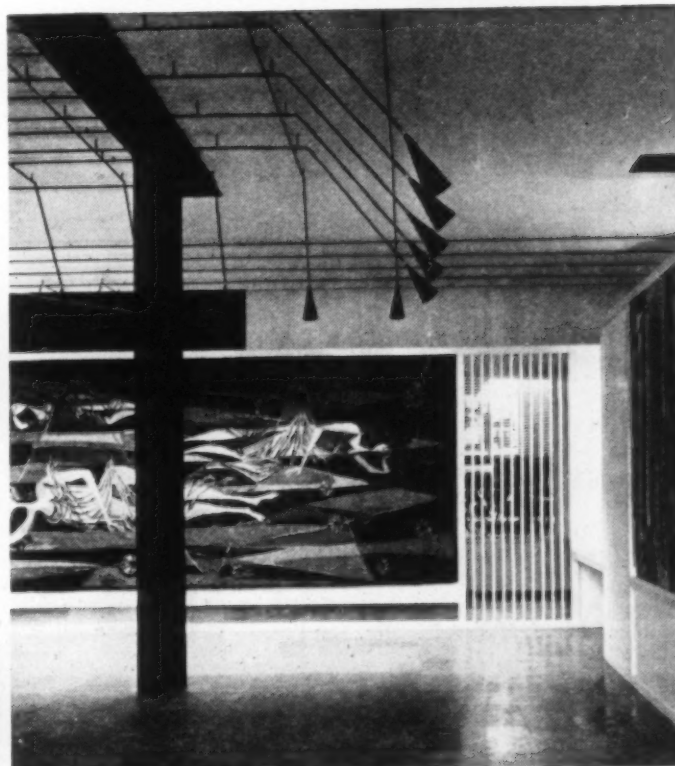

42

## door details


Some door details. 43, the main entrance to the Finnish pavilion: an expressively heavy timber door (natural wood, polished) of the simplest possible shape—carpentry rather than joinery. 44, typical of the emphasis on materials 'as found' throughout the Italian pavilion: set without a frame straight into the brick opening is a sheer leaf of plate glass with minimum pivot-hinge and locking-plate of brass. 45, the opposite type of sophistication: the standard door between units in the German pavilion (see also page 104), exquisitely finished in painted plywood with hardwood edge, pivoting from the centre of a stretched polythene canopy—its character is that of aeroplane construction. 46 (below), a cautionary example, the fussily over-designed doorhandles in the annexe to the British Industry pavilion: timber frame, wired glass panels, plastic-faced cross-rails with modernistic texturing, in front of which project flat metal handles to which are applied white plastic rosettes.




46



43

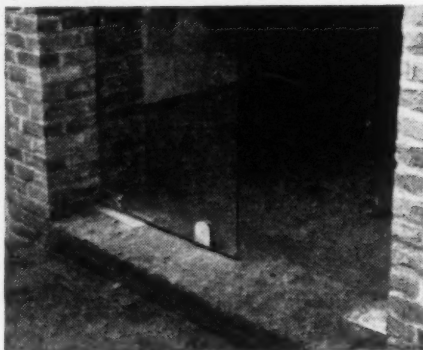


44

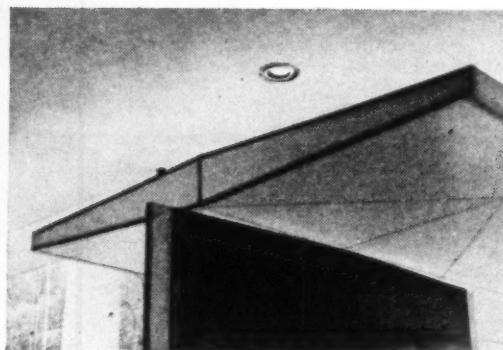


45

## technique of display

Another contrast between sophisticated elegance of design in the German pavilion, 47, and deliberate brutality in the Italian, 48. In the German showcase the metal members at top and bottom are reduced to the minimum; between is sheet glass, presenting hardly any obstruction to the eye. Jointing and source of lighting are unobtrusive. In the Italian showcase, the side walls are roughly laid brick; glass shelves butt directly against it; the wiring to the light-fitting trails where it will.

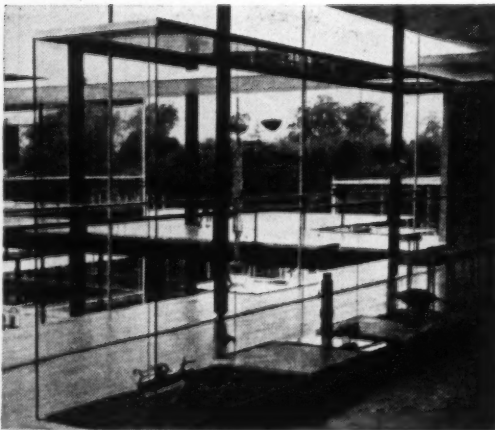

47

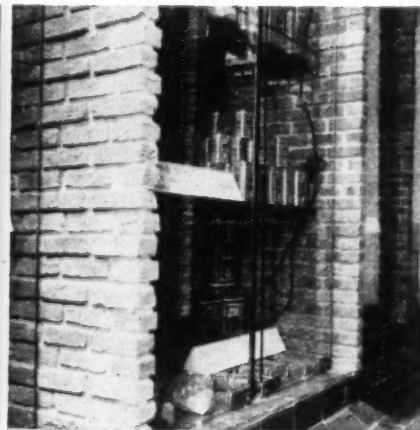

48




# STEEL

## on the site of the HOLBORN RESTAURANT

The illustration shows  
steelwork approaching  
completion on this  
important site at the  
corner of High Holborn  
and Kingsway, developed  
by Site Improvements Ltd.

*Architects:*  
Messrs. Fitzroy, Robinson & Partners  
*Main Contractors:*  
Messrs. Holland & Hannen  
and Cubitts Ltd.

**BRITISH CONSTRUCTIONAL  
STEELWORK ASSOCIATION**  
Artillery House, Artillery Row  
Westminster, London, S.W.1

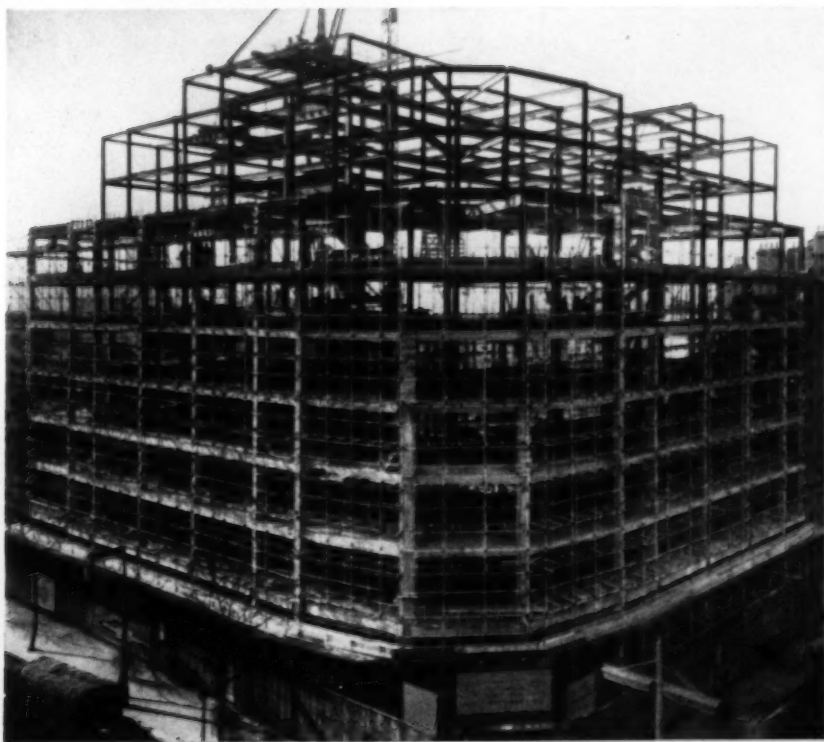


## SUSPENDED CEILINGS BY

# DRAFTSELE LIMITED INSULATION DIVISION

Specialists in...

SUSPENDED CEILINGS, THERMAL AND  
STRUCTURAL INSULATION, ACOUSTICAL  
CORRECTION AND SOUND DEADENING

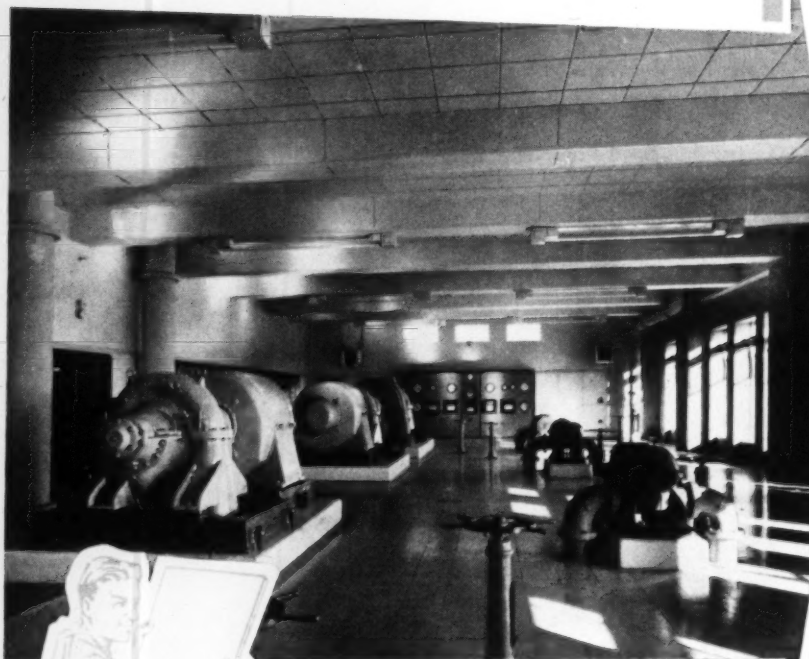

Engineer: T.S.R. Winter, M. Inst. C.E., A.M. Inst. W.E.  
Engineer and General Manager, Tees Valley Water Board  
Architect: Ronald Cowan, A.R.I.B.A., Stockton-on-Tees  
General Contractors: Sir Lindsay Parkinson & Co. Ltd.

*Illustrated:* Suspended ceiling installed in Broken Scar Pumping Station, Darlington. The scheme is carried out in 24" x 24" x 1" "UNITEX" acoustic tiles treated with fire retardant with beam casings of 1/2" "UNITEX" Insulation Board. Ceiling suspended from "T" sections spanning between concrete beam casing at 11' centres. Acoustic tiles employed to correct high-frequency sound conditions. Panels fixed with the "MeTeO" "C" HOOK Metal Fixing System, all metalwork concealed.

Draftsele Limited (Insulation Division) are equipped to undertake contracts of any size for the installation of suspended ceilings in any part of the United Kingdom. A preliminary consultation can be arranged on request without obligation.

#### CONTRACTORS TO:

The Admiralty  
The War Office  
The Air Ministry  
The Ministry of Supply  
The Ministry of Works  
The National Coal Board

The County Council  
Architects for the  
Counties of:  
Cumberland  
Durham  
Glamorgan  
Northamptonshire  
Northumberland  
Westmorland

The County Borough,  
Borough and City  
Architects for:  
Carlisle  
Darlington  
Gateshead  
Newcastle-on-Tyne  
Stockton-on-Tees  
West Hartlepool


J. Gerrard & Sons Ltd.  
John Laing & Son Ltd.  
Leslie & Co. Ltd.  
Sir Alfred McAlpine  
& Son Ltd.  
Sir Robert McAlpine  
& Sons Ltd.  
Sir Lindsay Parkinson  
& Co. Ltd.  
George Wimpey  
& Co. Ltd.

Bristol Aeroplane  
Co. Ltd.  
Clarke, Chapman  
& Co. Ltd.  
Cowans, Sheldon  
& Co. Ltd.  
Fodens Ltd.  
John Haig & Co. Ltd.  
Thomas Hedley  
& Co. Ltd.  
Handley Page Ltd.  
A. Reyrolle & Co. Ltd.  
Rowntree & Co. Ltd.  
Ruston & Hornsby Ltd.  
Rylands Bros. Ltd.  
The Metal Box Co. Ltd.  
Johnny Walker & Co. Ltd.  
Whitbread & Co. Ltd.  
Wright Anderson  
& Co. Ltd.  
I.C.F. Ltd. (Specified  
Sub-Contractors)


Telephone: 2-3696

**DRAFTSELE LIMITED (INSULATION DIVISION)** 44 DEAN STREET, NEWCASTLE UPON TYNE, 1  
Associate Company: DRAFTSELE (London) LTD., 47 The Parade, Leamington Spa, Warwickshire, Telephone 1771




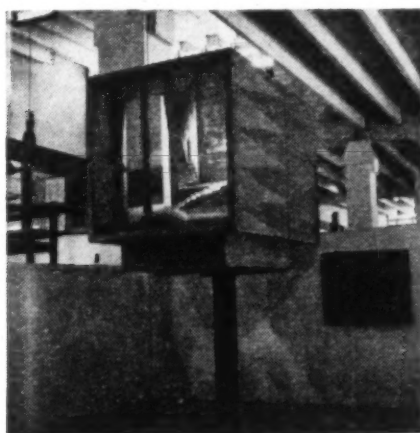

49

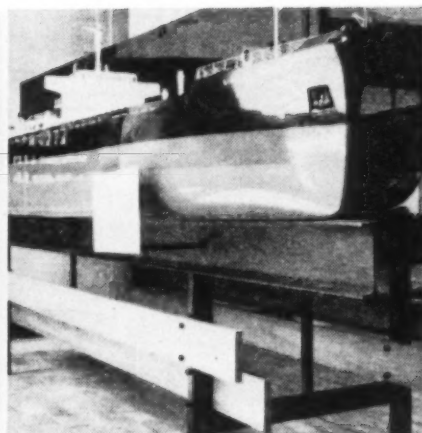


50

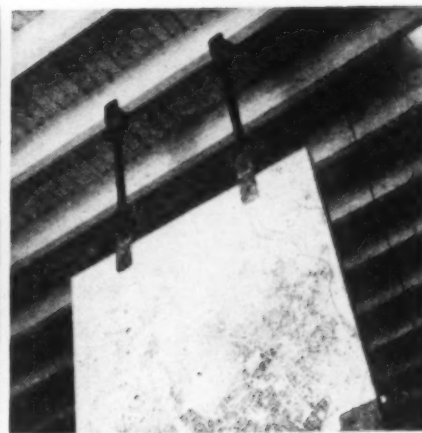


51

The Italian pavilion is notable for fertility of ideas about how to mount and display exhibits. Materials, mostly timber, iron and steel, are used in a forthright, ostentatiously functional way. 49, a box for showing films, of wood mounted on a steel column. 50, a stand for ship-models, of wooden planks and steel joists. 51, panels displaying maps and plans, suspended unframed from the timber ceiling by iron straps.

# technique of display

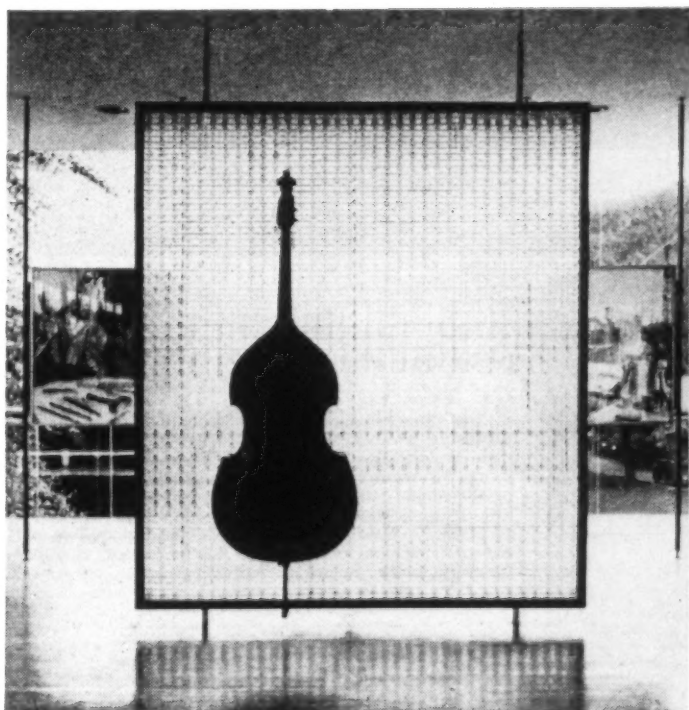


52

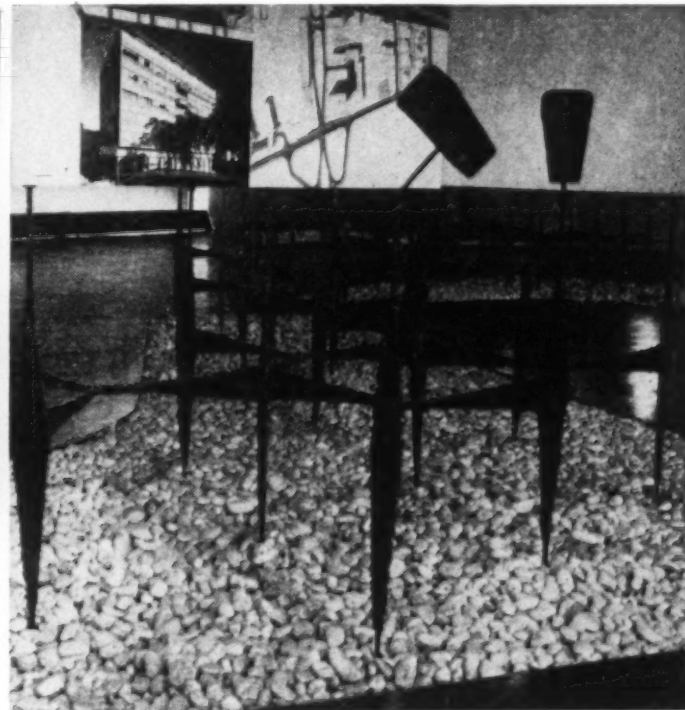

53


The exhibits in the German pavilion are widely spaced out and carefully positioned so as to provide the visitor's eye with a point on which to focus. 52, a cello seen in silhouette, mounted on a translucent screen filled with a plastic mesh. 53, in the Portuguese pavilion, a series of screens devoted to town-planning are mounted on a geometrical arrangement of angular, spindle-shaped iron legs, with connecting cross-pieces in similar style, all standing in a bed of pebbles.

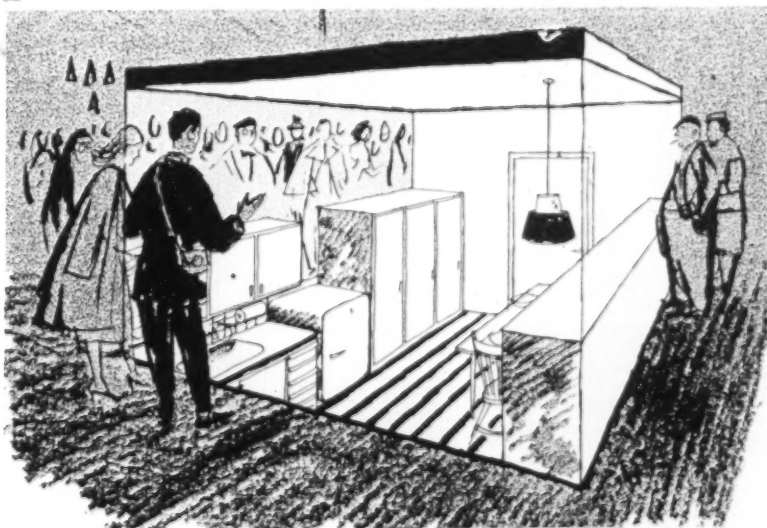


54

54, inside the Finnish pavilion a model kitchen is easily viewed because the whole room is sunk into the floor and the visitors look down on it through its enclosing glass walls.



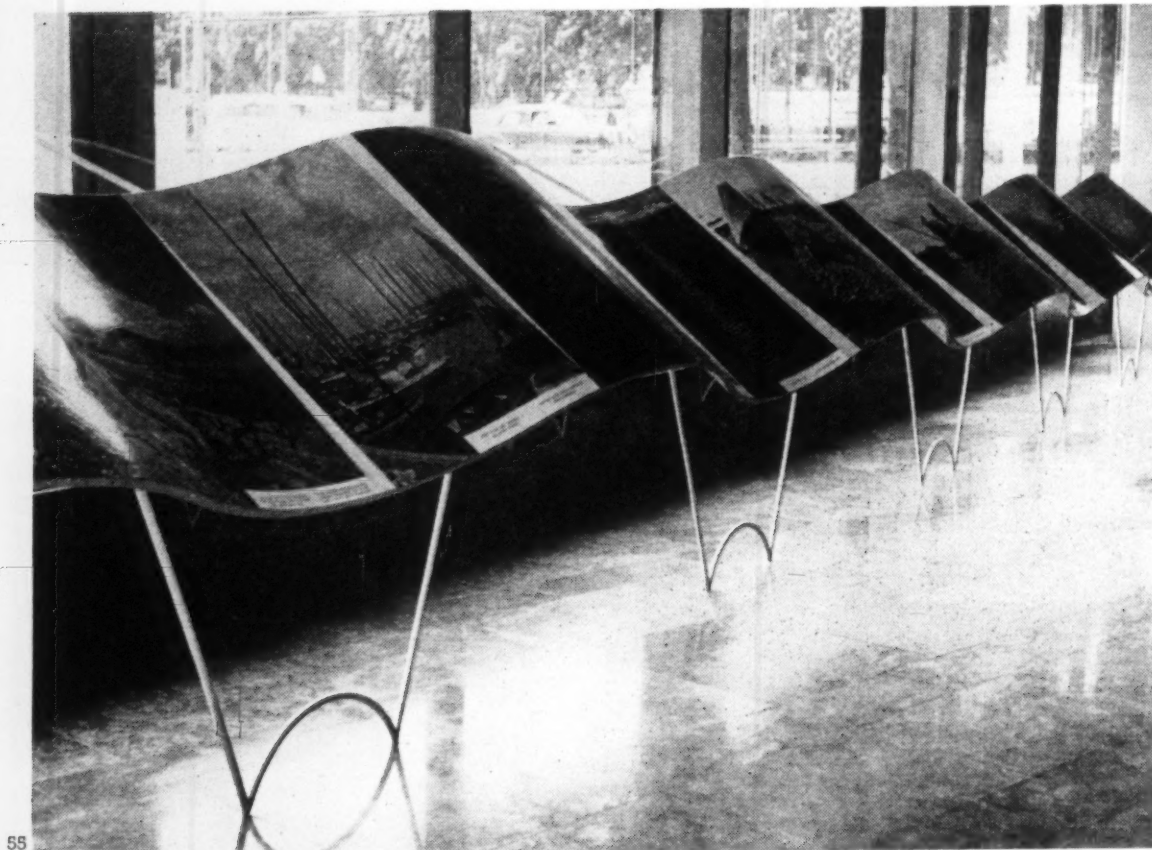

55

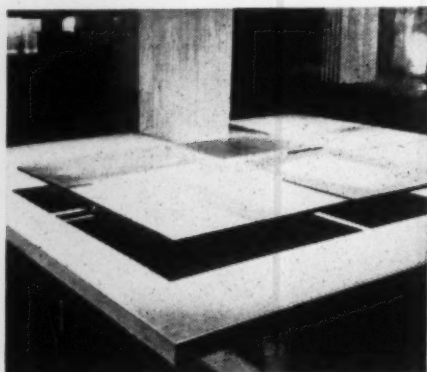

56



57

#### technique of display

55, an unexpectedly light and decorative technique of displaying photographs in the Hungarian pavilion: on a tilted undulating plywood surface, supported on a metal frame. 56, small objects displayed in the Finnish pavilion by the simple but effective technique of placing them, on low tables, in wooden boxes and covering them with sheets of glass. 57, books and similar exhibits displayed in the Austrian pavilion in a kind of double lectern, elegantly framed in hardwood and fronted with glass.

#### indoor planting

Textures belonging to the garden used decoratively indoors in various ways. 58, in the Portuguese pavilion, a series of wooden boxes containing plants growing in peaty soil in which egg-shaped pebbles are also placed. 59, the textures of vegetation, stones and concrete paving in the garden in the centre of the Brazilian pavilion. 60, potted plants framed in a window in the German pavilion.



58




59



60

## Lighting as you like it

Sieline Continuous Lighting Trunking is permanent—until you want to change it. Plan it as a whole, then alter it piecemeal to suit your changing needs. Reposition and adjust your lighting as often as you like. It is widely used in rented factories where the standard lighting power and distribution do not meet the requirements of the tenant, and it has already been supplied for installations costing from £20 to £20,000.

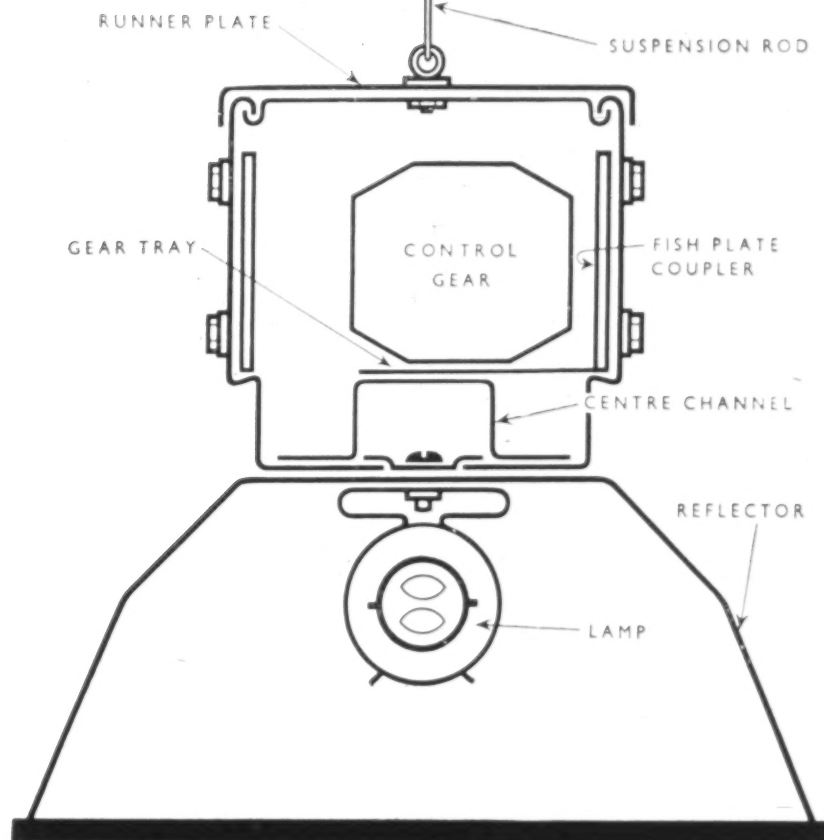


The trunking is delivered in an advanced state of assembly for easy erection. Control gear and lighting units can be spaced at any intervals. A complete range of suspensions (specimens illustrated) provides for erection under any type of roof. If you would like complete information about Sieline Continuous Lighting Trunking, write for leaflet F.22 or get in touch with your local Siemens Ediswan lighting engineer for advice—no obligation.

## **SIELINE** continuous lighting trunking



SIEMENS EDISON SWAN LIMITED *An A.E.I. Company*  
Lamps & Lighting Division: 38-39 Upper Thames Street, London, E.C.4  
Telephone: CENTral 2332. Telegrams: Sieswan Westcent London

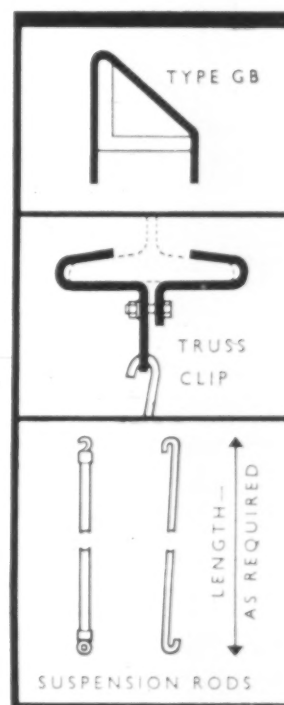

GRC 11 12



*Don't worry...Carrier have  
thought of everything*

With Conduit WEATHERMASTER, Carrier offer the most comprehensive air conditioning system yet available. Summer cooling, winter heating, constant supplies of clean air and temperatures controlled in individual rooms free from traffic noise — just a few of the many outstanding features of this revolutionary, space-saving, air conditioning system for multi-roomed buildings. Please ask for full particulars.




**Conduit WEATHERMASTER**  
**AIR CONDITIONING SYSTEM**

Regd.

CARRIER ENGINEERING COMPANY LTD • 24 BUCKINGHAM GATE, WESTMINSTER, S.W.1 • Telephone: VICtoria 6858

**The Pioneers of Air Conditioning**




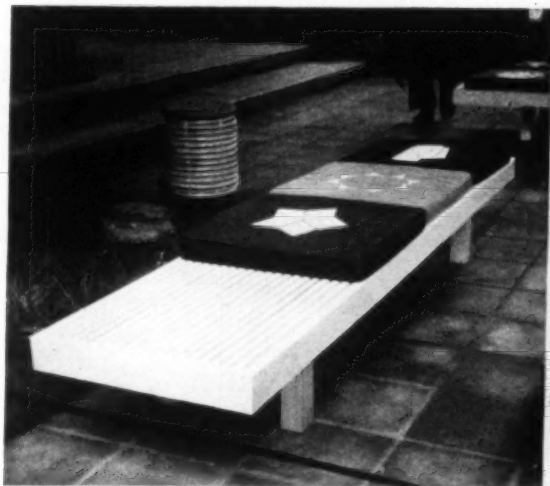

61



62

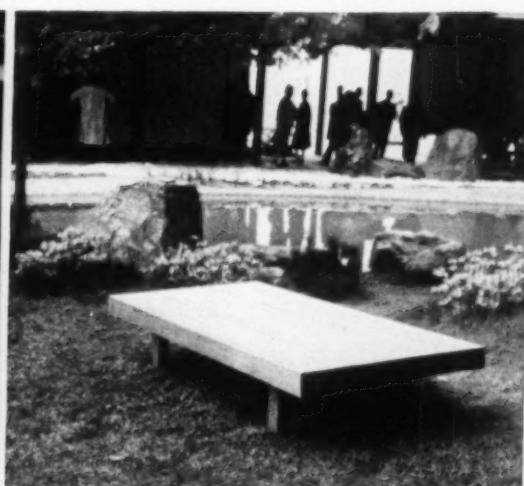

63


seats and chairs

Above, three simple but elegant designs for seats to be found in the Japanese pavilion: 61, low bench inside the galleries, of unpolished white softwood with slatted top, and square cushions brightly coloured and embroidered with emblems; 62, circular bamboo stools in the same gallery (see page 108)—also with coloured cushions; 63, garden seat beside the lake, in hardwood.



64

64, seats in softwood, unpainted, used throughout the Italian pavilion: deliberately weighty in design; the jointing in the backs and in front of the seats is reinforced by iron rods with exposed bolts. 65, a low wooden seat with slatted top surrounding a tree-trunk inside the United States pavilion.

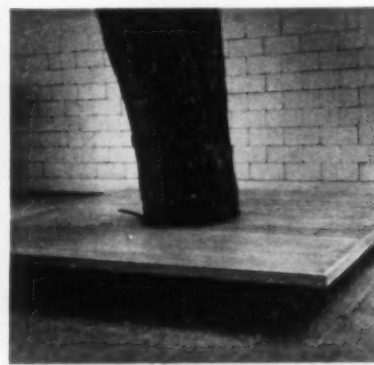

65



66



67

On the left, two oddities: 66, a plywood chair sewn together with leather thongs in the Mexican pavilion—ugly and somewhat absurd, it still has character; 67, basket-work chairs, painted white, in the courtyard of the German pavilion. Though wrong in scale and not very satisfactory in shape, they have an interesting effect as used because of the contrast with the transparent, rectilinear architecture of the building.

## seats and chairs


68, the standard aluminium chair, with pierced seat and back, used on all the café and other terraces of the Swiss pavilion. 69, metal framed armchair, with slatted back and seat of hardwood, on the terrace of the Austrian pavilion. 70, indoor furniture in steel rod and bent plywood in the Czechoslovak pavilion.



68



69

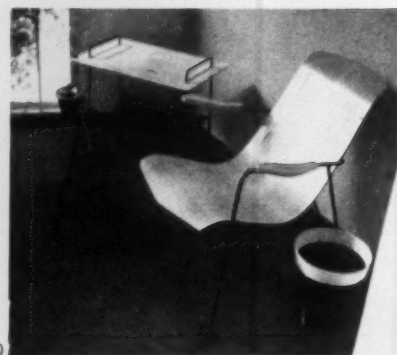


70

## sculpture for display

Sculpture effectively used as part of the furnishing of exhibition galleries: 71, in the Mexican pavilion, the funeral orchestra (a traditional local folk art) hung from the ceiling so that the visitor passes underneath it; 72, cage of hammered iron plates, mounted on a wooden frame, enclosing valuable exhibits in the Austrian pavilion. One section of the cage is hinged to form a door that can be shut at night.



71

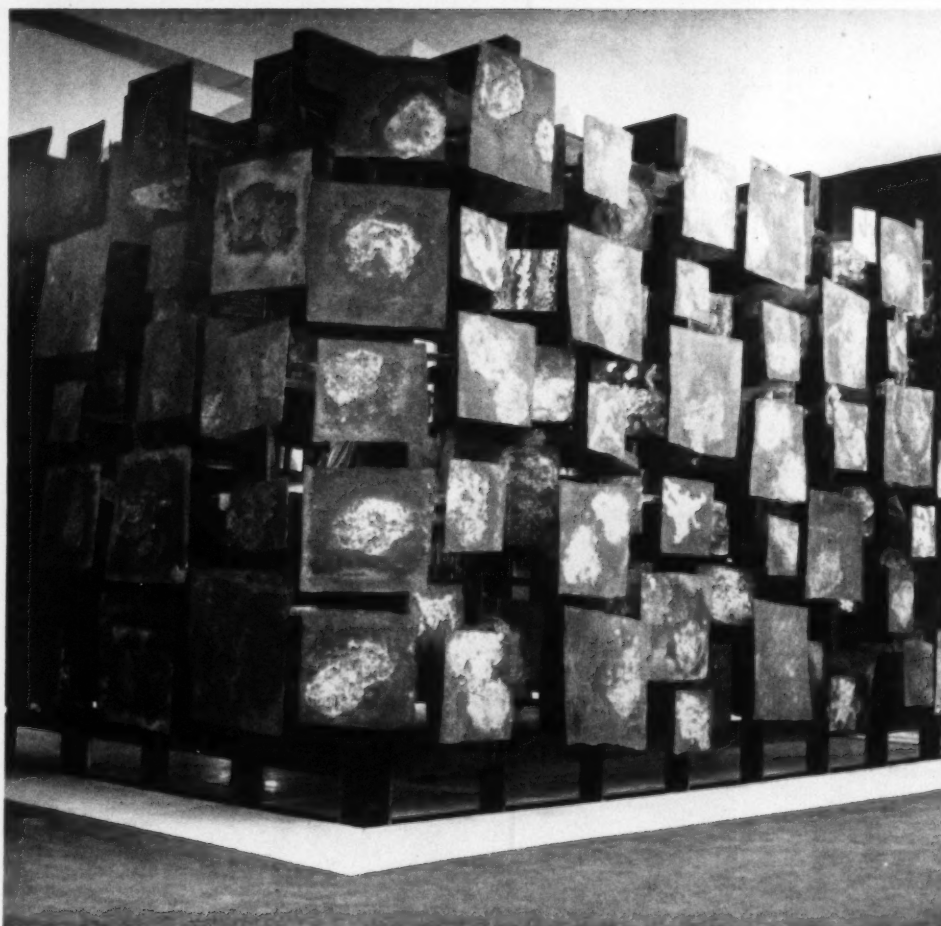

72

## Gay's Paints again




*The British Government Pavilion, Brussels Exhibition. Architects: Howard Lobb and Partners.*

The imaginative design of the British Pavilion at Brussels is, like most exhibition construction, a demonstration of new ideas and materials in architecture and engineering. Consequently, the responsible architects require close co-operation and the highest technical competence from their contractors and suppliers.

It is significant that Gay's Paints were chosen for the British Government Pavilion as they were for most of the South Bank buildings of the Festival of Britain.

When painting problems are encountered and failure would be disastrous, architects have found Gay's advice and Gay's Paints ready and reliable.

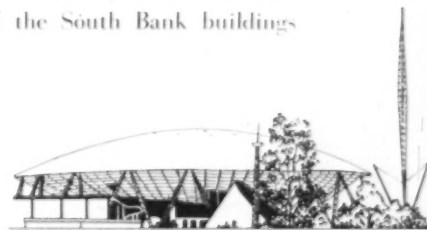

## Gay's Paints

R. GAY & CO., WESTMORLAND HOUSE, 127/131 REGENT STREET, LONDON, W.1 Telephone: REGent 0831


BRANCHES: BELFAST • BIRMINGHAM • BRISTOL • GLASGOW • LEEDS • MANCHESTER



## Britain's Pavilions at the Brussels Exhibition are

**COSTAIN built...**

*Architects:*  
British Government Pavilion and  
Co-ordinating Architects for  
the entire site:  
HOWARD V. LOBB & PARTNERS,  
F.R.I.B.A.  
Industrial Pavilion and Britannia Inn:  
EDWARD D. MILLS & PARTNERS, F.A.R.I.B.A.  
The "Fox & Hounds" Bar:  
HADFIELD, CAWKWELL & DAVIDSON,  
F.R.I.B.A.  
*Consulting Engineers:*  
MESSRS. FELIX J.  
SAMUELY & PARTNERS.

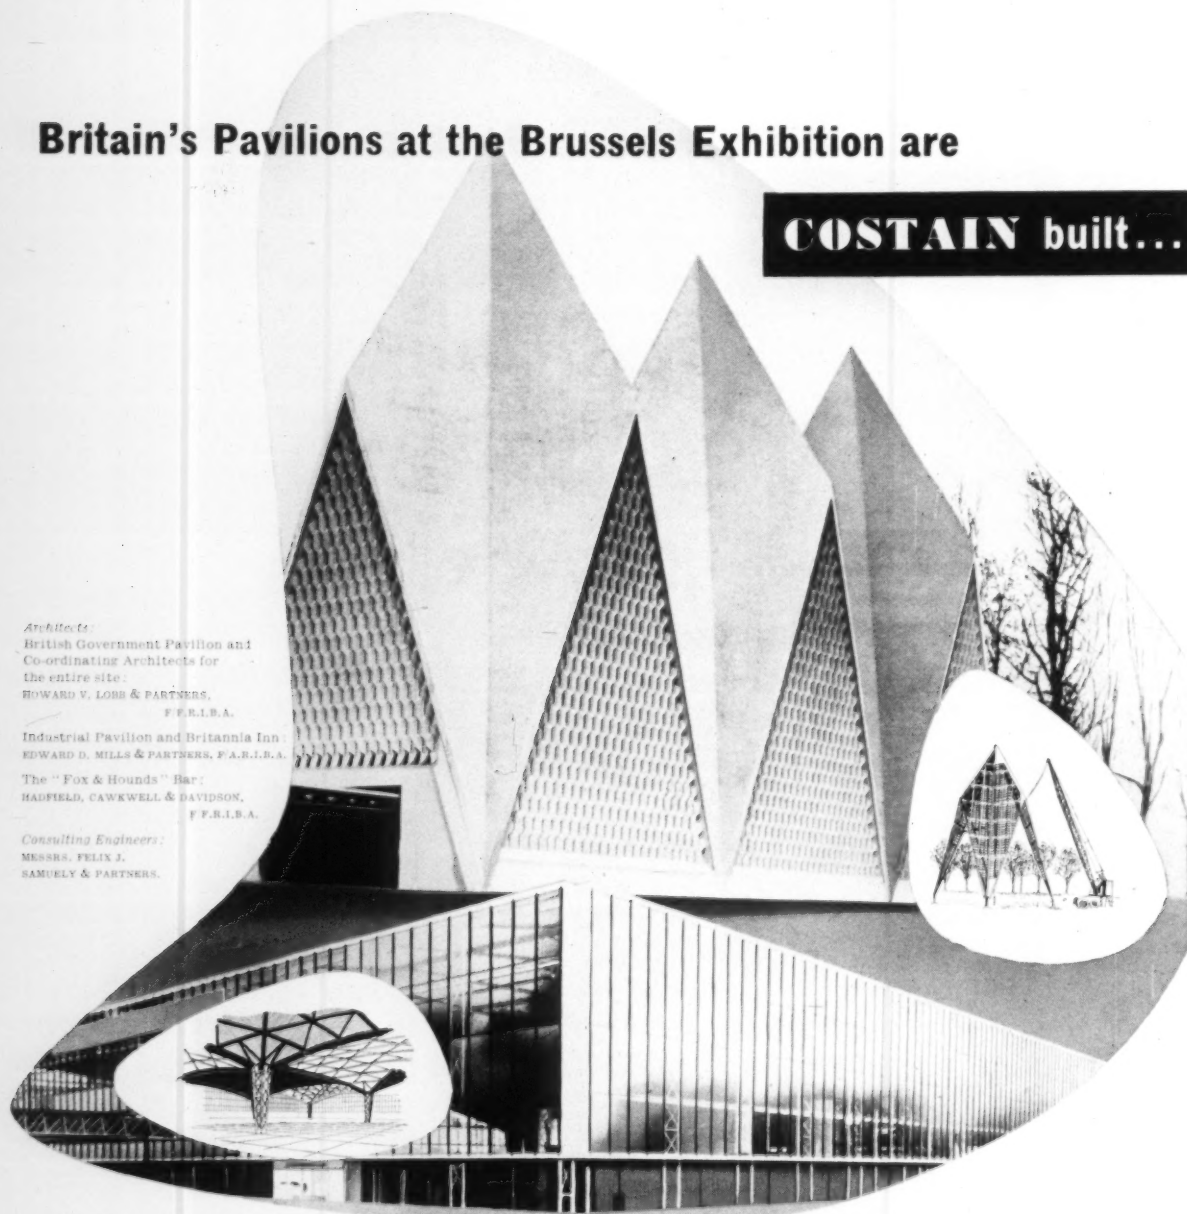

At the great Universal and International Exhibition in Brussels British constructional industry is represented by these two striking pavilions. The contract for constructional work on the entire British exhibit — which includes also the Britannia Inn and the Fox & Hounds Bar — was awarded to Richard Costain Ltd. and has been completed in association with the Belgian firm of Bleton-Aubert.

Between 35 and 50 million people are expected to visit the exhibition. This important British exhibit is another example of the Costain combination of technical skill, experienced organisation and versatility.


Make

Richard  
**COSTAIN**  
Limited

a part of your planning

BUILDING & CIVIL ENGINEERING CONTRACTORS · LONDON · ENGLAND


Middle East · Rhodesia · Nigeria · Canada · West Indies

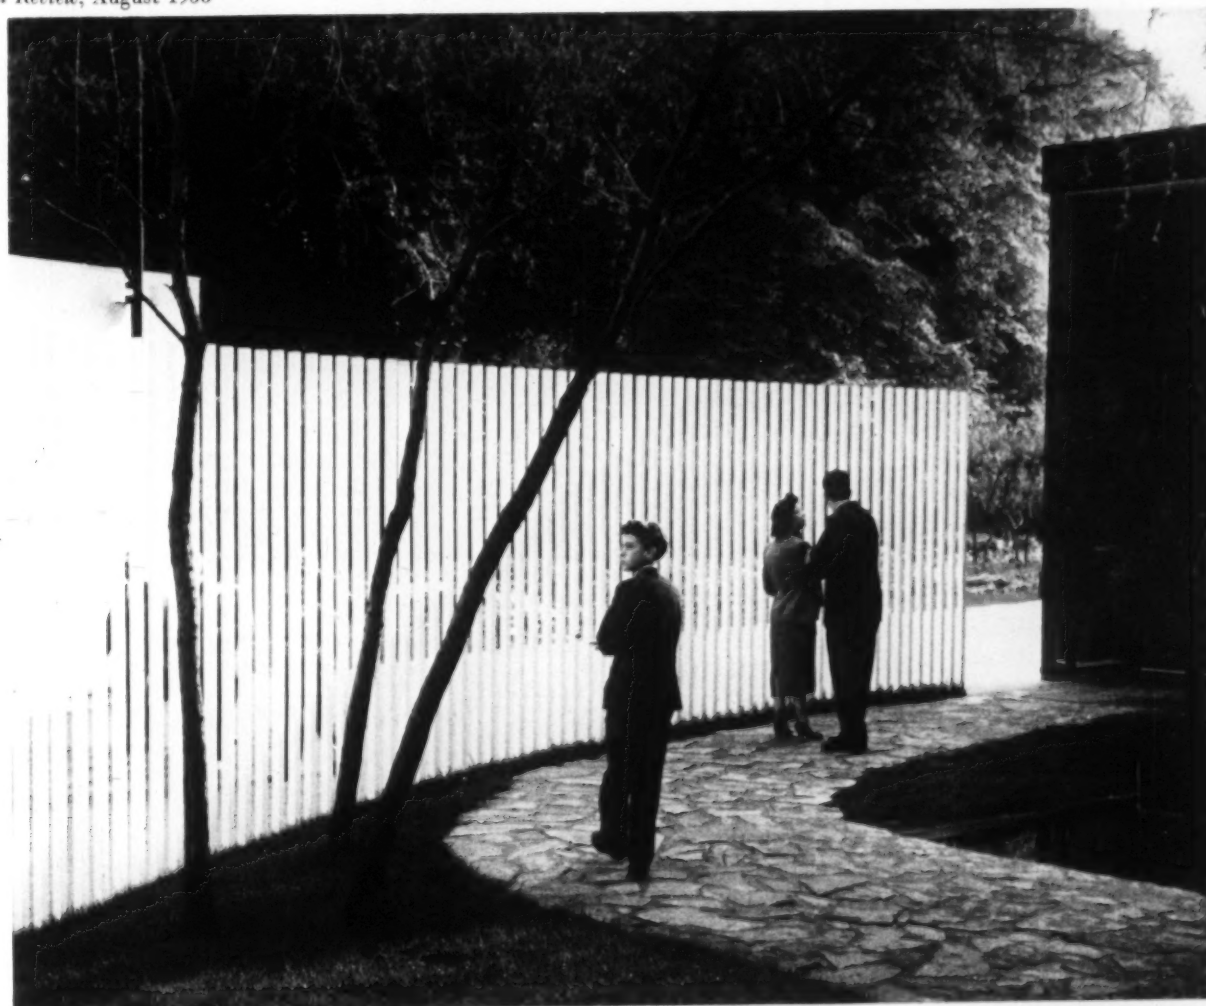


73

# barriers


The visitor emerges from the back of the Mexican pavilion into a courtyard, 73, containing a pool, around which sculpture is displayed (see page 90). This is open on one side to the avenue that separates the Mexican from the Brazilian pavilions, but is partly enclosed by this simple, functional yet very elegant palisade. It is composed of square-section hollow steel bars, painted white, driven into the ground and without any sort of lateral connections. It makes an almost opaque barrier in the oblique view but can be seen through when looked at directly—as in the photograph from outside, 74.



74

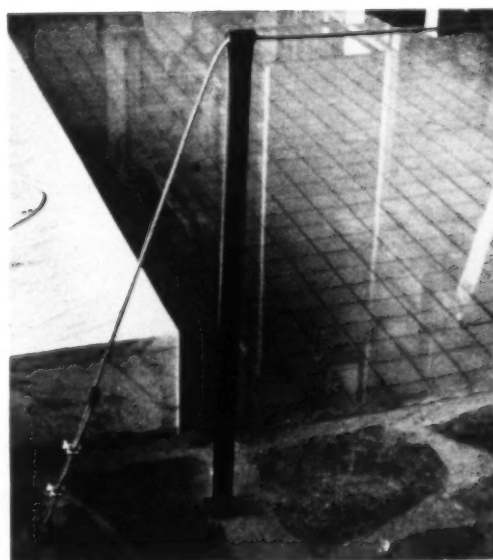

75

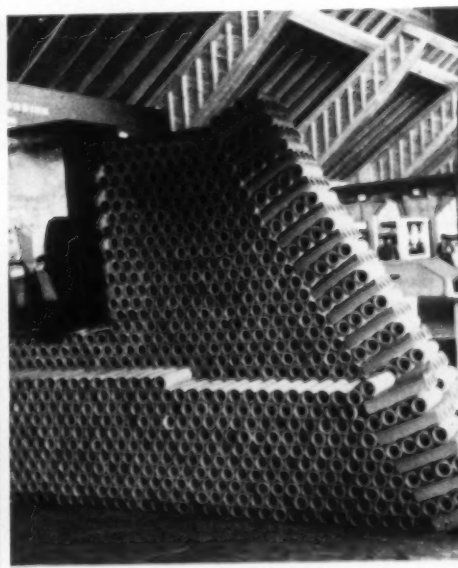

76




77

Three barriers, each well conceived for its purpose, in the Netherlands pavilion: 75, the minimum functional transparent barrier, composed of iron uprights, tensioned steel cable passing through a loop in top of the upright and plate glass; 76, an entertainingly appropriate barrier of land-drainage pipes, separating one bay from another in the agriculture building; 77, low barrier in the form of a raised flower-bed with walls of split logs, used to screen off an open-air café.



78

## walls as decoration

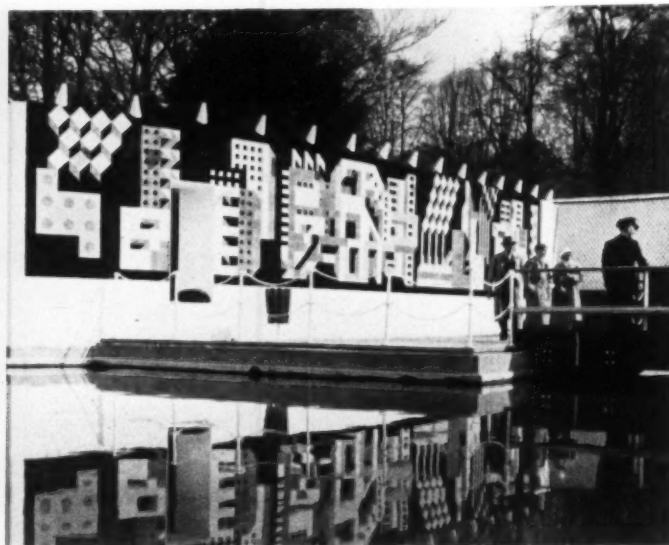


79


Two examples, one indoors and the other out, of decoration forming part of the substance of the walls themselves. 78, in the Portuguese pavilion: photomontage incorporated in the glazing of a curtain wall. 79, the screen wall at the end of the garden courtyard section of the British pavilion, facing the industrial building: abstract design in tiles by Peggy Angus.

technique of  
mural decoration

80, the royal arms in one of the courtyards of the British pavilion: a panel by Edward Bawden, executed in low relief. The design was cut on linoleum, then painted and finally rolled up with printing ink. 81, wall decoration by Soto in the entrance hall of the Venezuelan pavilion, in the form of a screen, standing just free of the wall surface of welded steel wire, woven into various patterns of mesh.

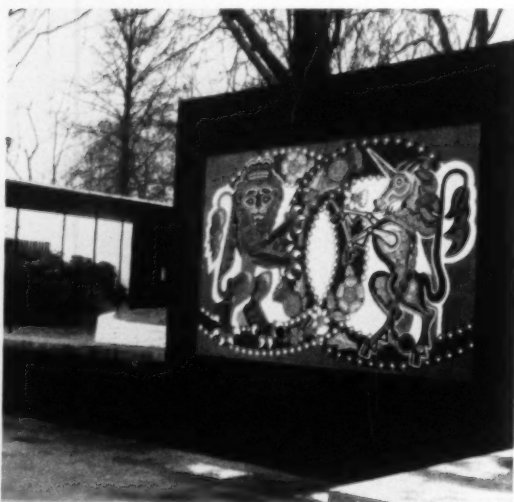


80

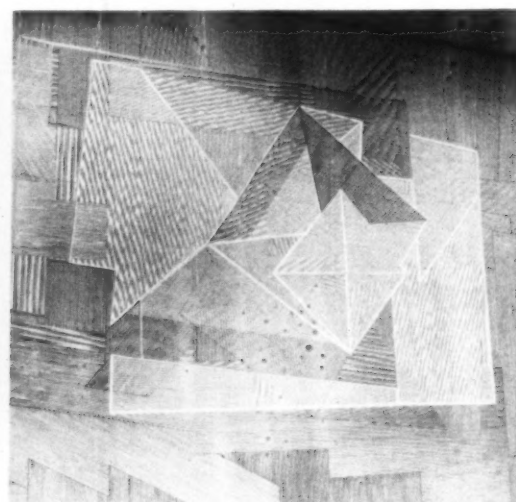


81

## use of photography

82, column faced with photographs on the edge of the pool in the United States pavilion (interior designer, Bernard Rudofsky—see also pages 94-95), mounted in faceted strips so that the picture changes with the viewpoint; also photographs on the balcony mounted on curved screens, so as to give an illusion of enclosure by the scene depicted. 83, a similar illusion created in the Zuyder Zee exhibit in the Netherlands pavilion, where an aerial photograph occupies a whole wall.

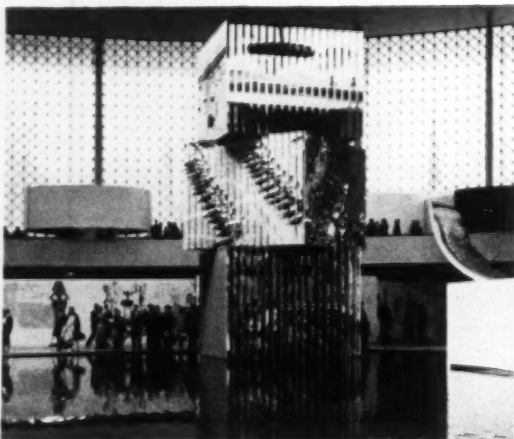

82

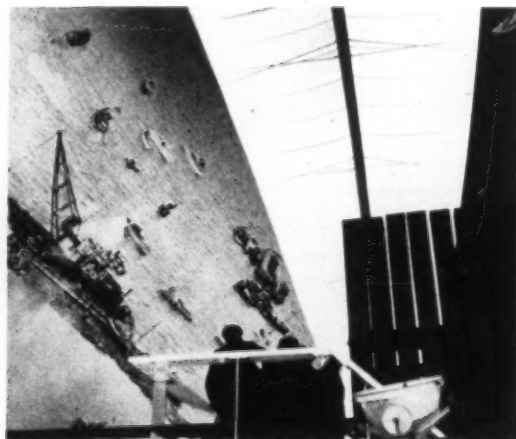

83





## Broughton Moor Light Sea Green Slate at the Brussels Exhibition



Architects: Howard Lobb and Partners

The British Pavilion at the Brussels Exhibition bears the Royal coat-of-arms, carved in 'Perspex' with a surround of Broughton Moor Naturally Riven Light Sea Green Slate. The traditional character of this slate contrasts well with the modern styling of the coat-of-arms. The beautiful texture is illustrated in the close-up of a section of the end wall reproduced at the left.


*Finely rubbed, sanded and frame sawn finishes are also supplied and technical pamphlets showing typical methods of fixing Broughton Moor stone are available as follows: 1. Flooring; 2. Facings; 3. Coping; 4. Cills; 5. Riven Face Slabs.*

**The Broughton Moor Green Slate Quarries Ltd.**

CONISTON, THE LAKE DISTRICT, LANCASHIRE

Telephone: Coniston 225

*Fitting into the scheme of things . . .*

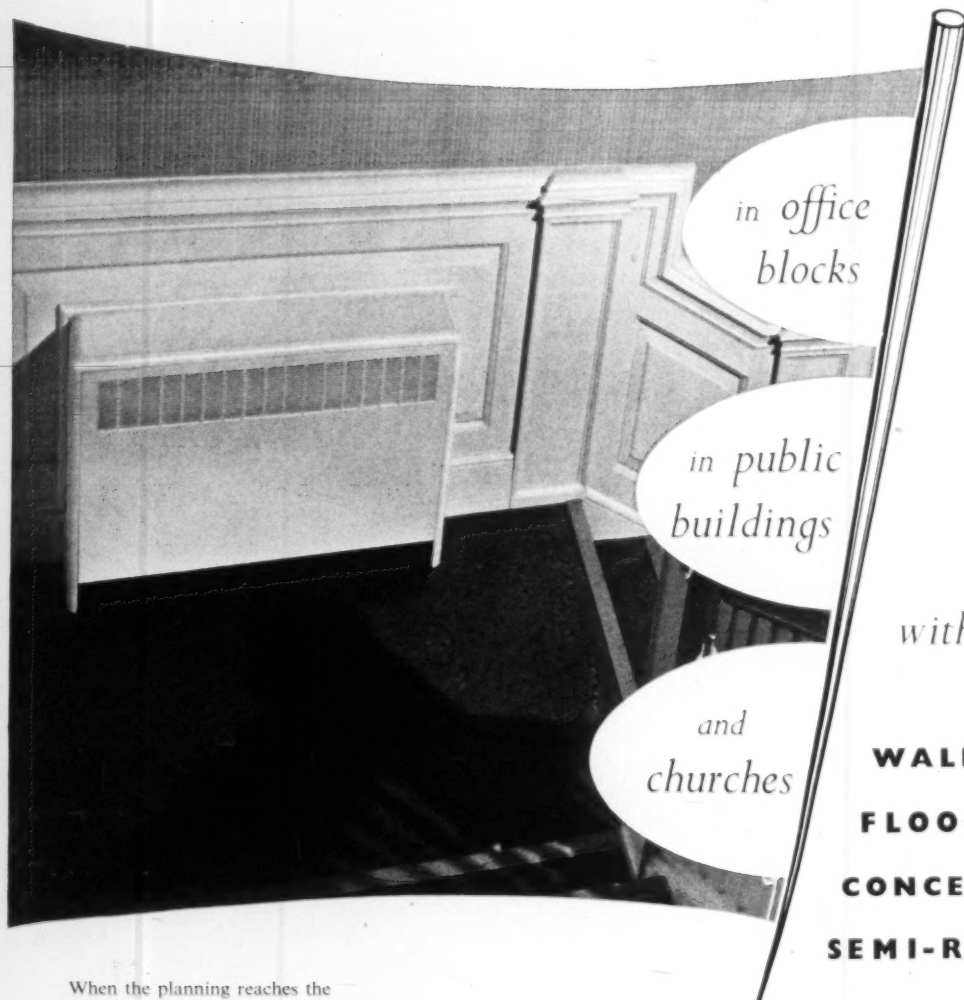

*in office  
blocks*

*in public  
buildings*

*and  
churches*

*with the*

**WALL TYPE  
FLOOR TYPE  
CONCEALED or  
SEMI-RECESSED**

When the planning reaches the heating stage remember Biddle "Vectairs". "Vectair" Convectors are simple to install, will operate from any existing steam or hot water system, and once fitted can be forgotten. They just go on, year after year—providing a clean comfortable atmosphere to live or work in, and the only 'maintenance' they ask is an occasional wipe over with a damp cloth. They are as good to look at as they are to use and do credit to any surrounding decor wherever it may be. Of simple but sturdy construction, and made from only the finest basic materials, each "Vectair" contains the famous Biddle heating coil.

Write for full particulars to:

**F. H. BIDDLE LTD**

(SALES DIVISION OF BRITISH TRANE CO., LTD.)

16 UPPER GROSVENOR ST., LONDON, W.1

Telephones: HYDe Park 0532/9 Cables: EFBIDDLE-AUDLEY-LONDON

**VECTAIR  
CONVECTOR**

"IT'S THE COIL THAT COUNTS"



# THE HANGING ROOF

by Renate Prince and Richard Hobin

*International exhibitions are an accepted trying-out ground for new structural forms. The contribution of Brussels in this field is unquestionably the experiments with 'hanging roofs'. The authors of this article describe and discuss these in the context of the previous development of 'hanging roofs', and conclude that general acceptance of the form is still held up by the lack of development of suitable materials.*

With such obvious exhibition giants as Paxton's Crystal Palace, the Eiffel Tower, and Maillart's 1939 pavilion at the back of the mind, one probably expects a little too much of a world fair, but certainly the conditions are almost ideal for some form of structural experiment. It is therefore at first sight rather disappointing to find that the most advanced structures at Expo '58 are in reality no more than revivals of the hanging roof and that they do not in fact show a final answer to the difficult problems which this poses. On reflection, however, one realizes that it is perhaps even more useful at the present time to clarify existing concepts and techniques than to add to an already unmanageable mass of technical invention; and that even though it is hard to find specific developments at Brussels which add to our technical grammar, we are much richer for the experience which has been gained there.


There are in all seven pavilions which make use, or appear to make use, of tension structures in some form or other. They are the pavilions of the United States, France, Brazil, the Vatican, OEEC, Philips, and the City of Paris. Of these, however, the last two are not discussed in detail here because Le Corbusier's Philips Pavilion is evidently *sui generis* and of little interest in the general problems of building technique, and the pavilion of the City of Paris is in any case small and information about it scanty. The commonest application of the principle is the hanging roof, and all five of the other pavilions named have this, the only possible exception being that of OEEC where the roof is only partially 'hanging'. Special note must also be made of the United States Pavilion (see pages 94-95) which has an exceedingly interesting tension wall in addition. The main use of the tension principle, however, is for roofing, and this is the real subject of this article. Before considering each pavilion in turn, it is necessary to discuss the principle of the hanging roof and to refer briefly to some of the more important examples prior to Brussels. But first a definition must be made.

For our purpose a 'hanging roof' is one whose main spanning element is a free hanging membrane or mesh. The principles governing this type of roof have been known and made use of since earliest times, from the first nomadic tents, through the Colosseum to Bogardus's projected amphitheatre in 1853 and on to Novicki's Raleigh Arena, the Schwarzwaldhalle, Notre Dame High School gymnasium, Frey


Otto's numerous canvas structures, and the Berlin Kongresshalle of the present day. There has, however, been no continuous development of hanging structures comparable, say, to the development of shell concrete since its first appearance early in this century. Designers have been unwilling to make it a part of their technical equipment. The reason for this will appear when we consider the inherent difficulties to which the form gives rise.

## The Types of Hanging Roof


Hanging roofs can be divided into three categories, according to the shape of the roof surface: single curvature or cylinder, 1, double curvature or saucer, 2, two-way opposed curvature or saddle roofs, 3. The

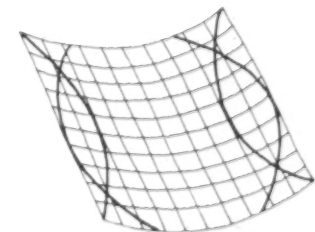

1. single curvature or cylindrical hanging roof.

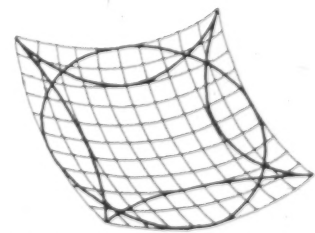

2. double curvature or saucer hanging roof.

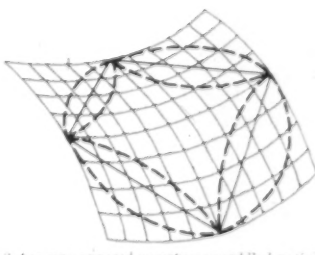


3. two-way opposed curvature or saddle hanging roof.

properties of cylinder and saucer roofs are similar; it will, however, be simpler to discuss these properties in terms of a free hanging cable, which

is statically a very close approximation. A thin flexible cable automatically takes up an equilibrium position under any load system; if the load changes, the cable changes shape. A cable is a tension arch, the equilibrium position reflects the thrust line of a compression arch; similarly the barrel vault and dome are the corresponding compression forms of cylinder and saucer hanging roofs. (Gaudi, for instance, determined the thrust line of his arch structures from models of the corresponding hanging roofs.)

The shape of saddle surfaces is entirely determined by the chosen generating curves. It is not a free hanging form and only elastic deformations can occur. A saddle roof if inverted remains a saddle roof, which suggests that this form is suitable for both tension and compression structures. Figure 4 shows a simplified saddle surface where the supported surface is reduced to a

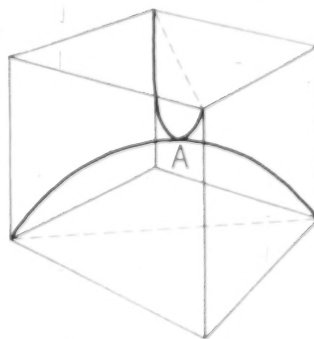

4. diagram of simplified saddle surface.


single point. If the members can resist tension only, a downward load at A is resisted by the two upper members and an upward load by the two lower members; if the members can resist compression only, the reverse is true. With all the members pretensioned, a load at A will increase the tension in two members and decrease the tension in the other two, which are then in effect resisting a compression force. The reverse applies if the members are pre-

compressed. In short, the unique characteristic of a saddle roof is that the external forces can be resisted with the membrane entirely in tension, or entirely in compression, or partly in tension and partly in compression. (N.B.—A hanging roof can be a saddle roof but a saddle roof is not necessarily a hanging roof.)

The efficiency of a hanging roof depends to a large extent on the way the tension in the roof membrane is resisted at the edges. These forces can be carried by the walls, but the overturning moment at the base of the walls would be enormous and it is usually more economic to resolve these forces at eaves level. This can be done in three ways: a compression solution with a stiff ring at the edges, a bending solution with beams or trusses lying in the plane of the membrane, and a tension solution with inward curving cables strung between points of support, which must in turn be braced back to the foundations.

The advantages and disadvantages of a hanging roof as a structural form can best be illustrated by comparison with its nearest 'relative' the arched roof. The diagrams in 5 show that for a given span and volume the overall height of a hanging roof is greater than that of an arched structure, and that the loads from the tension membrane are at the highest point, which is an obvious difficulty. The wall area is necessarily greater, and the internal clear height less, for a hanging roof, except in the case of a hanging roof supported or suspended at the centre. The major advantage is its potentially favourable weight-span ratio. A hanging roof is extremely efficient for uniform loads, but under changing systems such as wind and snow loading, the change of shape, which may be quite sudden, can be a very great disadvantage. Bad aerodynamic shapes, and necessarily high outside walls, give very large wind load areas and high unit wind load pressures. The main difficulty inherent in hanging roof structures, then, is to find a solution to the wind load problem.

Cylinder and saucer roofs (in their simple form) can only be stabilized

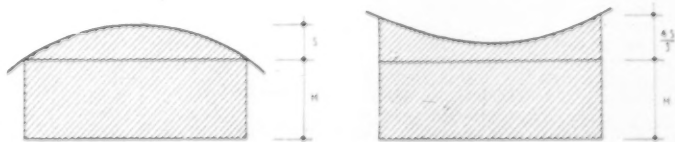

5. diagrams comparing the cross section of a structure with an arched roof (left) with one with a hanging roof (right).



against uplift by the self-weight of the membrane, but a heavy membrane negates one of the main potential advantages of a hanging roof structure. For example, Belli and Belli's gymnasium at Notre Dame High School, Illinois, has a cylinder roof spanning 155 ft. The membrane is  $\frac{1}{4}$  in. thick steel plate, but if it takes 10 lb./sq. ft. of steel to solve the wind load problems, the roof is obviously uneconomic. To make such roofs economic the membrane must be stiffened by trusses or beams, but this in turn complicates the structure to such an extent that the initially simple form becomes pointless.

With the development of the saddle roof all these problems have been resolved. It is, in fact, the ideal form for a tension membrane, since under wind and snow loads only elastic deformations are possible, and these deformations can only be small except in the case of very large and shallow saddles which are liable to flutter round the edges, where the curvature is least. Further, the stability of the structure is independent of the weight of the membrane. Novicki used a saddle roof at Raleigh and this form has been used for almost all permanent hanging roofs since.

To sum up the position before Expo 58, one can say, in brief, that the geometric properties of the various forms of the hanging roof had been established and evaluated, that the remaining unsolved problems were mainly those connected with finding some suitable form of membrane material, and that none of the examples of hanging roofs built so far have fully exploited the potential use of this structural system, with one exception—the various canvas structures designed by Frey Otto, but these, of course, intentionally by-pass the problem of permanence.

We come to the main point—have the designers at Brussels at least assimilated the existing knowledge and if so have they contributed anything new?

#### Roof Types at Brussels

At Brussels all three types are to be seen. The Brazilian, Vatican and United States Pavilions are examples of the saucer, the French Pavilion is an example of the saddle, and the OEEC and City of Paris Pavilions, in so far as they are classifiable as hanging roofs at all, are examples of the cylinder.


#### Brazil

The roof of the Brazilian Pavilion (architect Sergio Barnardes) is a saucer 200 ft. long by 120 ft. wide with column supports on all four sides at about 25 ft. intervals (see figures 7, 8 and 9). At first sight it appears to be supported mainly from a system of cables suspended from the four corner towers. In fact the weight of the roof is taken, not by the corner towers (which are far too light for the purpose) but by cables spanning the long direction which pass over steel columns at the ends and are tied down to anchor blocks in the earth. It seems that the designers of this pavilion had some preconceived idea of a light elegant structure—a thin membrane between four thin pylons—but they have chosen a structural form where stability is directly dependent on weight. Faced with this dilemma, the designers have chosen to 'express' a make-believe structure and to disguise the actual (e.g. the main) columns, which appear to do no more than hold up the decorative screens, are heavily plated on the inside and actually carry four-

fifths of the load of the roof, whereas the four 'main' pylons could probably be omitted altogether. The main purpose of the corner pylons is to take the horizontal wind load on the long walls. The reverse wind load is taken by the dead load of the deck which is of concrete, thickened at the ends where the uplift will be greatest, and laid on a permanent shuttering of asbestos cement and m.s. tees spanning between the cables; but also by guy wires attached to a circular steel ring trimming a central opening. It is interesting to notice that the span of this pavilion is only slightly smaller than that of the French Pavilion.

#### The Vatican

The Church, 6, the of Vatican Pavilion

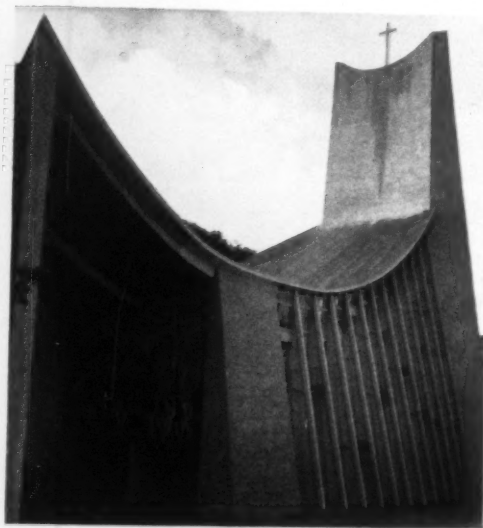


6, the Vatican pavilion church.

(architect Paul Rome) is roofed with a saucer which is fan-shaped on plan. This, like the Brazilian roof, shows a major discrepancy between the visual effect and the structural reality. Supported at one end 66 ft. up a concrete tower, it sweeps down and rises


to a second peak at the other end, the visual inference being that the whole curve forms part of a single structural system. In fact the hanging roof proper stops immediately at the back of the nave, at the lowest point of the curve, where the main cables are anchored in a series of reinforced concrete buttress walls forming the divisions between the confessionals. Transverse cables, curved on plan (which suggests that they are carrying little weight) span between nailed timber 'fins' cantilevering from the foundations at the outside walls. All cables are eased in timber and the panels between are spanned with a diagonal 'eggcrate' of timber carrying the roof. Apparently the weight of the roof is enough to stabilize against uplift. The length is

#### THE HANGING ROOF

separate structural systems: a hanging roof which hangs between a wide edge rim and the top of a central steel hub, and a suspension system supporting the steel hub. (See front cover.) Under reverse wind loading the top membrane would act as a saucer and the suspension cables would be unstressed. The wall structure, 10, is a 50 ft. high hyperboloid membrane midway between the two rows of columns, stretched from the roof edge beam to a ring beam at door-head height. The membrane is a mesh of 2 in. by  $\frac{1}{4}$  in. steel flats in three directions. First the diagonals are fixed in position and tightened until they are straight, forming a shape similar to a wire waste paper basket. Next the verticals are placed behind the

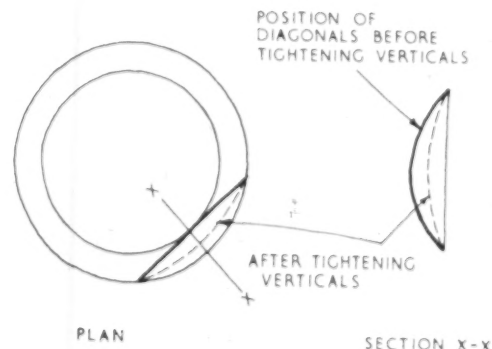

10, diagrams of tension wall of United States pavilion showing, top, plan and elevation of verticals before and after tightening and, right, the finished wall. The curvatures are much exaggerated.

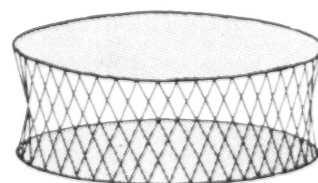


140 ft. and the width varies between 40 ft. by the tower to 140 ft. at the back of the nave. From the structural point of view the hanging roof is a reasonable choice for the job and the solution is straightforward and simple.

#### United States


The American Pavilion (architect Edward Stone) is a rotunda 330 ft. in diameter. The roof, 300 ft. in diameter, is a hybrid structure as it is really two

diagonals and tensioned. This reduces the vertical curvature of the membrane and causes each diagonal member to bow outwards. This stretches the diagonals. Any wind pressure loads are then taken on the verticals and any suction on the diagonals, which also completely brace the structure. In the complete structure only the columns and the edge beam are in compression. The US pavilion is rather difficult to assess, because the dominantly formal approach left few problems to be solved in primarily technical terms. This is clearly shown in the roof


[continued on page 136]

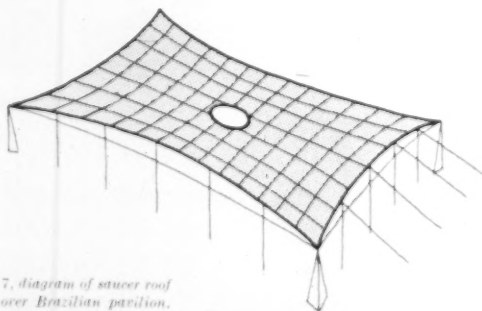


7, diagram of saucer roof over Brazilian pavilion.

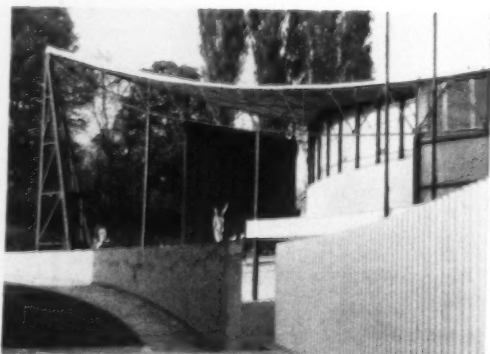

8, view of corner of Brazilian pavilion. Two of the guys which carry the main roof load can be seen behind the first column on the left (see also pages 90-91).

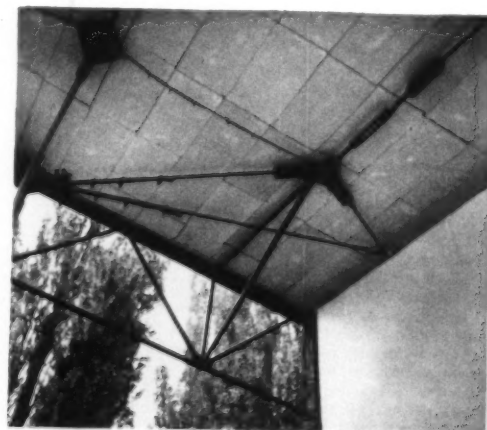


9, detail of roof of Brazilian pavilion showing connection of cables to edge truss.

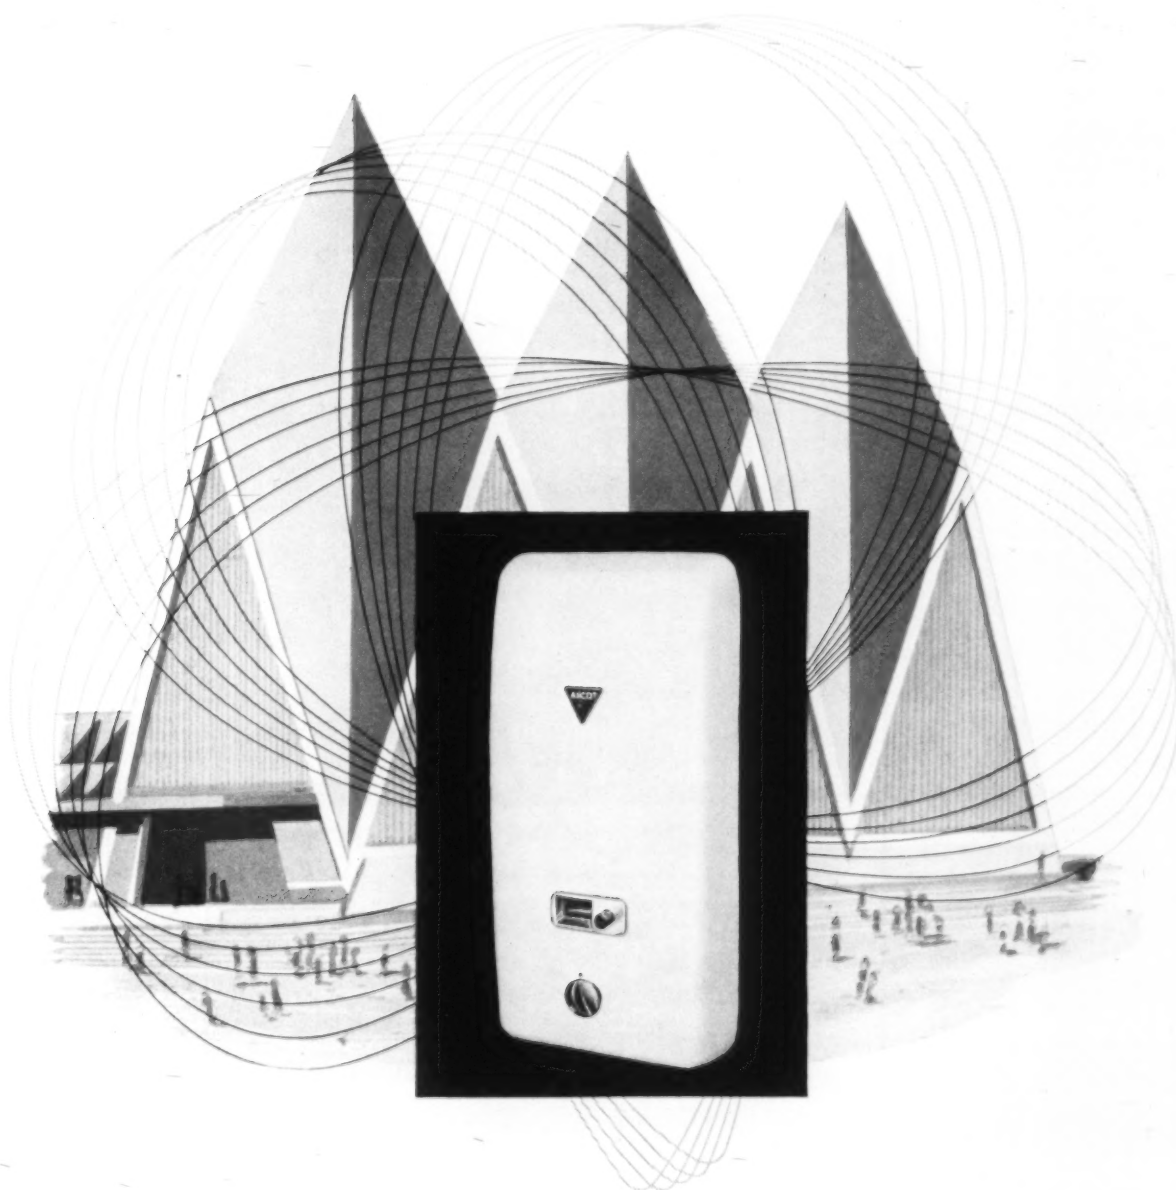

ASCOT 715 'balanced flue' multipoint  
—the instantaneous gas water heater selected  
by the Council of Industrial Design for display in  
the British Industries Pavilion among the "Design Review" exhibits.

ASCOT GAS WATER HEATERS LTD. 255 NORTH CIRCULAR RD. NEASDEN, LONDON N.W.10. TEL: WILLESDEN 1234  
WHG/A336

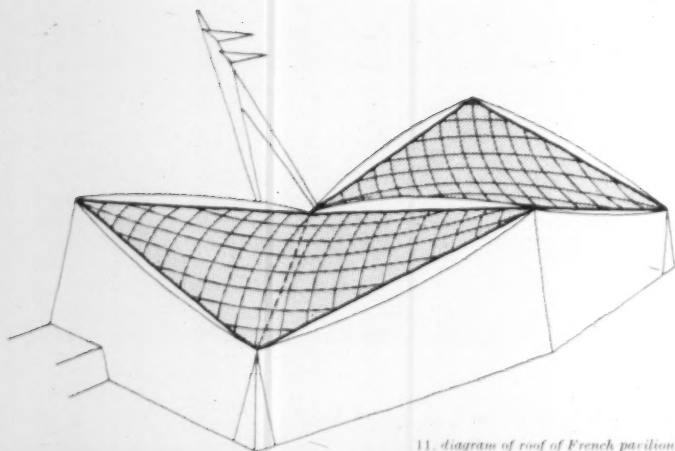

11. diagram of roof of French pavilion.

continued from page 134]

structure—the suspended ceiling is the chosen form, and the roof itself is merely a waterproof skin. The detail (which is unimportant formally) is not well worked out. A material (polyester glass fibre) with all the properties needed for a tension membrane, is laminated into stiff panels and joined with elaborate flexible joints, which ignores all the possibilities of the material. On the other hand the wall, which at first seems to be merely a decorative screen, is actually a brilliant technical innovation, and it must be conceded that the building as a whole is a very convincing use of tension membrane construction.


#### France

The French Pavilion roof (architect Guillaume Gillet) is of the saddle type and is in the form of two lozenge-


shaped hyperbolic paraboloids, each side of the lozenge being approximately 230 ft. long and sloping 1:5. The lower corners, on the shorter diagonal, are 57 ft. above floor level, and the higher corners, on the longer diagonal, are 110 ft. above floor level. The saddle roof surfaces are formed by cables hung parallel to the longer diagonal and held in position by cables parallel to the shorter diagonal. 11. The ends of the trusses at the two higher corners of the building were first erected above the final position and, after stringing the cables in a just-tight condition, were lowered into place. This automatically introduced the required stress into each cable. The tension forces in the cables are resisted at the edges by bow-string trusses lying in the roof plane. The cables act as a tie between the higher corners, and so each lozenge is virtually balanced on the enormous arms cantilevered out from the base of the tower. This tower helps to counterbalance the roof, and most of the roof load is taken on the foundation at its base, the remaining load being taken by inverted V props at the end of the arms. The roof is insulated with a glass fibre blanket and sheathed with 10 ft. squares of sheet-steel waterproofed with a plastic skin.

The designers claim that the structural system chosen was necessary in order to avoid the tunnel running underneath the building. This is doubtful, and in any case the initial concept in no way justifies the disastrous complexity of the end product. Two examples will make this clear. First, the maximum slope of the roof cables (as distinct from the girders) is approximately 1:6. The load on the edge girders will equal the dead load multiplied by the

[continued on page 138

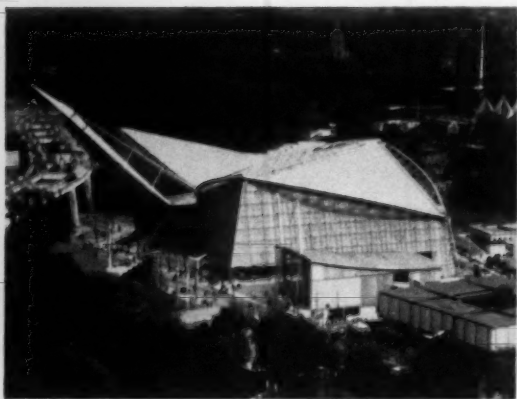

12. general view of French pavilion.

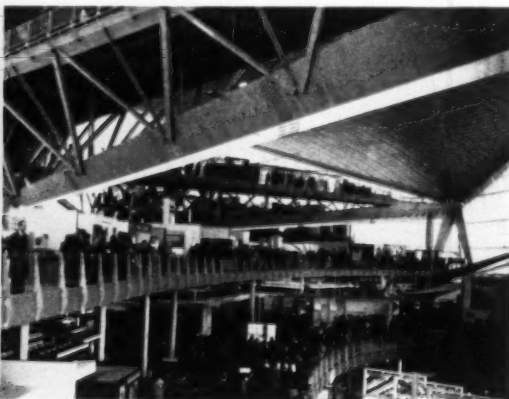

13. interior of French pavilion looking towards one of the lower corners.



BY APPOINTMENT  
TO  
**HER MAJESTY  
THE QUEEN**  
SUPPLIERS OF  
WALLPAPERS & PAINTS

*A wide selection  
of  
Traditional and  
Contemporary  
Wallpapers*

**JOHN LINE  
& SONS LTD**  
213-214  
TOTTENHAM COURT ROAD  
LONDON · W1



**THE 'DOUBLE VENETIAN' DECORATION**

**LINE**

*Makers of  
Fine Wallpapers  
and  
Paints*

*You are cordially  
invited to visit  
our Showrooms*

BRANCHES AT  
BIRMINGHAM · BOURNEMOUTH  
BRISTOL · CROYDON · DONCASTER  
DUNDEE · EDINBURGH  
MANCHESTER · MIDDLESBROUGH  
NEWCASTLE · NOTTINGHAM  
PLYMOUTH · READING  
SUNDERLAND · TAUNTON





# HOPE'S

## *Standard Reversible Windows for Multi-storied Dwellings*

*can be cleaned, glazed or painted from inside the highest block of flats with ease and safety, by reversing the horizontally pivoted casements through 180°.*


Casements, fitted with a bronze handle, are friction-held in any open position by specially designed water-tight pivots.

*For Ventilation and Safety*, a side-arm restricts the opening to a few inches, thereby preventing children from falling out.

*For Cleaning*, the side-arm can be released by a responsible person, when the casement will turn inside out, where it is held fast by an automatic catch.

*Finish*: hot-dip galvanized, despatched unpainted.

PATENT APPLIED FOR

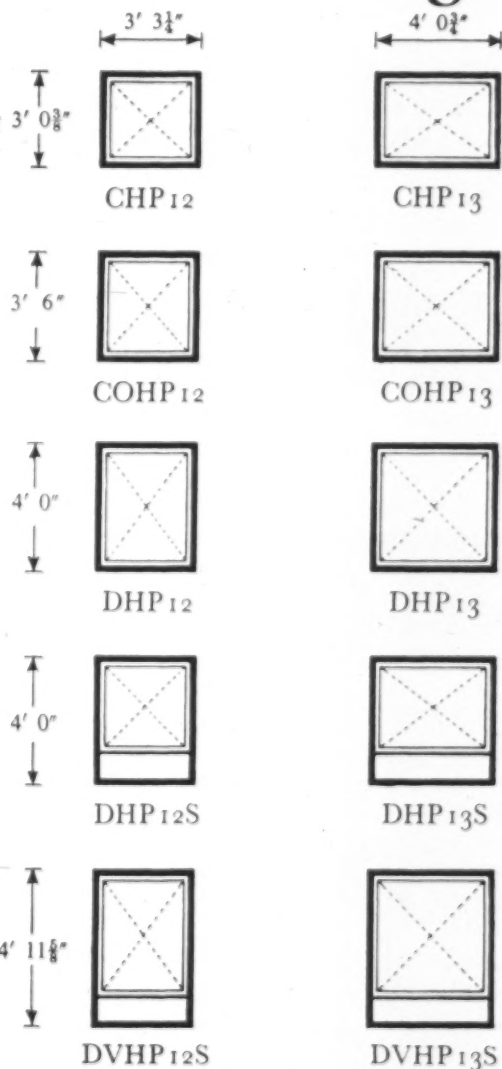



## HENRY HOPE & SONS LTD

Smethwick, Birmingham & 17 Berners Street, London, W.1

MEMBER OF THE METAL  WINDOW ASSOCIATION

14. diagrammatic section through OEEC pavilion.

SUPPORTING CABLES STRETCHED BETWEEN TOWERS

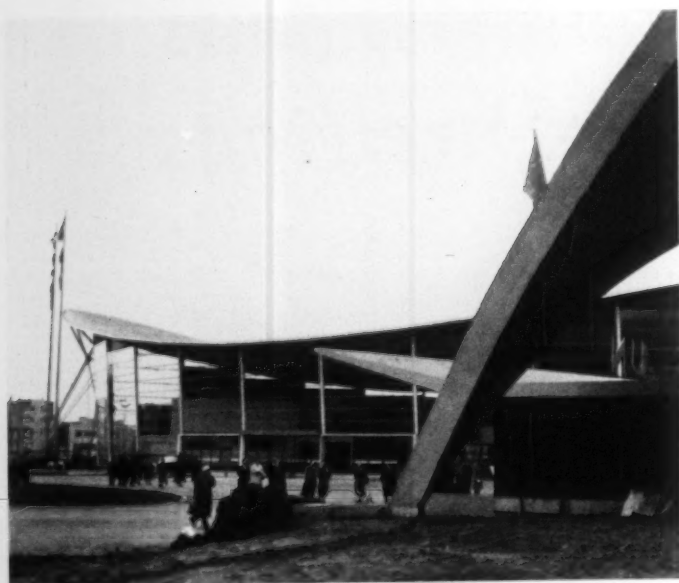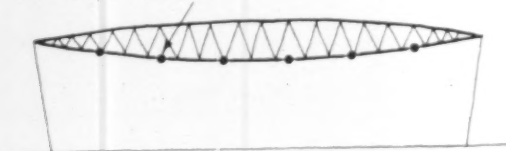

15. general view of OEEC pavilion.

continued from page 136]

reciprocal of the maximum gradient of the cable (i.e. the steeper the gradient the less the load). Therefore the total load on the edge girders must be at least six times as great as the vertical component of the reactions from the membrane. This is about three-quarters of the total load on the roof. This means that the edge beams carry at least four and a half times the total load on the roof, and these beams (each weighing over 100 tons) use almost three times as much steel as would be necessary for a standard roof of the same span. Secondly, in the construction of the outside walls, almost every brace, web and chord member is of different length or section, which involves an enormous amount of labour in calculation, drawing and fabrication, and must greatly increase the possibility of error.

#### OEEC

The last roof to be considered here, that of the OEEC Pavilion (architect Karl Schwazer), if it is to be classified as a hanging roof at all, is probably a cylinder, since the transverse camber on the roof surface is produced not by transverse cables, as in a saddle roof, but by the top booms of a series of tapering transverse trusses, 14. Steel cables run the long way of the roof, being suspended from two end pylons, and pass under the bottom booms of the transverse trusses. Part of the load on the trusses is carried by the cables and part by columns in the side walls. The actual roof membrane is cocoon plastic sprayed on to close-spaced wires stretched over cables which run the length of the building on

top of the trusses. The roof structure is approximately 250 ft. long and 150 ft. wide. The clear height at the centre is approximately 33 ft. and at the ends 57 ft. Reverse wind loads are carried by the trusses, and wind loads on the walls are carried to the pylons by arched girders in the roof plane at eaves level, 15.

The designers state that this construction has been adopted because it spreads the load evenly over the foundations, but this could be done much more simply. Perhaps a more convincing explanation of the structure is the symbolism used by the designers to explain the forces in the roof: 'The trusses represent the individual members, and the cables running lengthwise the support given by the OEEC, and without this mutual support neither system could carry the load.' The designer has set himself a much more complicated problem than was necessary, but his solution is competent and well detailed, though of little significance in the development of hanging roofs.

#### Conclusions

One thing is shown very clearly by the roofs discussed in this article: that the choice of a tension membrane structure imposes a rigid discipline in design and detail, and it is only by accepting such a discipline that the very great potential of these structures can be realized. In the end, the use of a new structural system is usually dependent on the use of a new material and it seems that the hanging roof, though theoretically completely evolved, will not be widely adopted until its particular materials have been further developed.



#### A special carpet for a fine new store . . .

Illustrated here is part of a showroom in the new Bourne & Hollingsworth Store in Southampton. 1500 yards of carpet were woven specially for this store by Carpet Trades Limited, to the specifications of the Architect. Yet another example of the Personal Contract Service offered by Carpet Trades Limited, by which the client's individual preferences and requirements can be studied and worked out through personal discussion and consultation with all concerned, thus saving much time and trouble and ensuring satisfaction all round.

*You, too, can have a carpet specially woven for you. Write for full particulars of this service to CARPET TRADES LIMITED, KIDDERMINSTER. (Carpets supplied through normal trade channels only)*

The carpet made specially for Messrs. Bourne & Hollingsworth is a blue Brussels Weave, with a special through to the back construction giving maximum resistance to wear. The main staircase and ground floor of the store are carpeted in plain blue; the carpet on the first floor has a spot design. All 1500 yards of carpet used were laid and fitted by Carpet Trades' planners.

## ABSOLUTELY OUTSTANDING!

Two winters' weathering proves Manderlac's superiority.

As a test, an architect in North Wales had eight caravans on one of his sites painted with different manufacturers' materials. Two and a half years' weathering have left the caravan painted with Manderlac as good as new—in the Architects own words, "Manderlac is absolutely outstanding".

a **MANDERS** case history



MANDERLAC Alkyd Enamel dries quickly, to a hard surface that stays bright, and keeps its protective powers for years. It is easy to apply and easy to clean, covers well even on sharp edges and is so lustrous that it 'looks wet when it's dry'.

WRITE FOR FULL DETAILS AND COPIES OF THE WONDERFUL MANDERLAC COLOUR RANGE.

# MANDERLAC

... proved the best

MANDER BROTHERS LTD., Dept. F8 WOLVERHAMPTON • Tel. WOLVERHAMPTON 20601



## CONTRACTORS etc

Contractors, sub-contractors and suppliers of materials for the British Government and the British Industry pavilions.

The co-ordinating architects for the British section of the exhibition were Howard Lobb and John C. Ratcliff of Howard Lobb & Partners (who also designed the Government Pavilion); the co-ordinating designer was James Gardner (who was also display designer of the Government Pavilion). M. J. Blower was resident architect for both pavilions.


**Government Pavilion. Architects:** Howard V. Lobb & Partners. **Display designer:** James Gardner. **Sub-section designers:** Beverley Pick, Gordon Bowyer and members of the Royal College of Art—a design group under the chairmanship of Sir Hugh Casson. **Landscaping consultant:** G. P. Youngman. **Consultant engineer:** Felix J. Samuely. **Quantity surveyors:** C. E. Ball & Partners. **General contractors:** R. Costain & Enterprises Bilton-Aubert. **Nominated sub-contractors:** **Toilers and V.I.P. pavilion:** Rainham Timber Engineering Co. **Space deck units and steelwork block '6':** Space Decks Ltd. **Electrical work:** Troughton & Young (Electrical) Ltd. **Planting and landscape work:** Wm.

Wood & Sons Ltd. **Suspended ceilings:** Anderson Construction Co. **Tiled mural:** Carter Tiles Ltd. **Flooring to Hall of Technology:** Marley Tile Co. **Flooring to administration block:** Armstrong Cork Co. **Flooring to canopy:** Semtex Ltd. **Extract ventilators:** Colt Ventilation Ltd. **Plate glass:** Pilkington Bros. Ltd. **Sanitary fittings:** Shanks & Co. **Front entrance doors:** F. Sage & Co. **Perspex louvers:** Imperial Chemical Industries. **Fabrication of louvers:** Talbot Designs Ltd. **Slate facing:** Broughton Moor Green Slate Quarries Ltd. **Plastic lining to pool:** Marley Tile Co. **Paint:** R. Gay Ltd. **Tapes to crystalline halls:** Winn & Coates Ltd. **Coloured glass eyelets:** James Hetley & Co. **Main display contractors:** F. W. Clifford Ltd.

**British Industry Pavilion. Architects:** Edward D. Mills & Partners. **Display designer:** John Lansdell. **Assistant display designer:** Arthur Braven. **Quantity surveyor:** Leslie W. Clark. **General contractors:** R. Costain Ltd., & Enterprises Bilton-Aubert. **Main Pavilion: Steel frame:** Concrete & Structural Products Ltd.; **Carter Horseley Ltd. Curtain wall framing:** Rainham Timber Engineering Co. **Bitumetal roofing:** Wm. Briggs Ltd. **Extractor units:** Brooks Ventilation Ltd. **Abstract mural:** Plyglass Ltd. **Glazing:** Pilkingtons Ltd. **Mastic bedding to glass:** Secomastic Ltd. **Paint for steel frame:** Walpamur Ltd. **Paint for bitumetal roofing:** Lewis Berger Ltd. **Lighting fittings:** A. E. I. Lighting Ltd. **Electrical installation:** James Kilpatrick Ltd. **Sub-station equipment:** English Electric Co.; The Pyrene Co.

**Plastic to counter fronts and screens:** Bakelite Ltd. **Thermoplastic flooring:** Armstrong Cork Co. **Rain sealer chutes:** Rainham Timber Engineering Co. **Illuminated title panel:** Pearce Signs Ltd. **Mezzanine floor offices:** Thermoplastic tiles: Armstrong Cork Co. **Lighting fittings:** A.E.I. Lighting Ltd. **Automatic telephone equipment:** Standard Telephones & Cables Ltd. **Sanitary fittings:** Doulton Ltd. **Illuminated title panel:** Pearce Signs Ltd. **Muraglass infill panels:** Pilkingtons Ltd. **Ironmongery:** Dryad Ltd. **Plymax partitions:** Venesta Ltd. **South End Zone: Steel frame, woodwork roofing slabs, curtain walling, precast concrete cladding units, fibrous plaster ceiling panels:** Hills (West Bromwich) Ltd. **Glazed asbestos panels:** Universal Asbestos Manufacturing Co. **Extractor units:** Brooks Ventilation Ltd. **Paint:** International Paints Ltd. **Ironmongery:** Dryad Ltd. **Cement paint:** Cement Marketing Co. **Cinema: carpets, seats:** Rank Precision Ltd. **Cinematograph equipment:** Rank Precision Ltd.; Major Equipment Ltd. **Screen and gear:** Rank Precision Ltd. **Lighting fittings:** Troughton & Young (Lighting) Ltd. **Screen curtains:** Tibor Reich. **Glazing:** Pilkington Bros. **Ironmongery:** Dryad Ltd. **Lighting equipment:** Major Equipment Ltd.; Strand Electric Ltd. **Self-service shop:** Thermoplastic flooring: Armstrong Cork Co. **Display racks and counters:** F. Sage Ltd. **Illuminated entrance sign:** Pearce Signs Ltd. **Ironmongery:** Dryad Ltd. **Suspended ceiling:** Laminated Ceilings Ltd. **Main entrance canopy:** Space Decks Ltd. **Lighting fittings thereto:** A.E.I. Lighting Ltd. **Asbestos cement trays:** Turners Asbestos Cement Co. **Vertical feature:**

**Steel tube and channel rings:** Carter Horseley Ltd. **Prestressed steel rods and prestressing equipment:** Lee McCall Ltd. **Lighting fittings:** Thorn Electric Ltd. **Fluorescent paint:** Strand Electric Ltd. **Fog detector unit:** Stone-Chance Ltd. **Britannia Inn: Glued laminated columns and beams:** Rainham Timber Engineering Co. **Thermoplastic flooring:** Semtex Ltd. **Extractor units:** Brooks Ventilation Ltd. **Timber windows:** Kings of Teddington Ltd. **Paint:** Hadfields Ltd. **Wallpaper:** Sanderson & Co. **Sanitary fittings:** Doulton Ltd. **Refrigeration units:** English Electric Co. **Lighting fittings:** G.E.C.; Courtney Pope Ltd.; Falk Stadelmann Ltd. **Counter fittings, etc.:** F. Sage Ltd. **Outdoor furniture:** Ernest Race Ltd. **Curtain fabrics:** Tibor Reich. **Folding doors:** Modernfold Ltd. **Illuminated signs:** Pearce Signs Ltd. **Built-in seating and tables:** Charles Pateman Ltd. **Hardboard ceiling panels:** Celotex Ltd. **Plastic table tops:** Wareite Ltd. **Chairs:** Goodearl Bros. **Carpets:** S. J. Stockwell (Carpets) Ltd. **Upholstery fabric to furniture:** Edinburgh Weavers Ltd. **Hide upholstery:** Connolly Bros. **Ironmongery:** Dryad Ltd. **Cement paint:** Cement Marketing Co. **Lighting fittings to bridge:** A.E.I. Lighting Ltd. **Lighting fittings to balcony:** G.E.C. Ltd. **Kiosk shops:** Steel frame and timber roof units, glazing, paint: F. Sage Ltd. **Ironmongery:** Dryad Ltd. **Cement paint:** Cement Marketing Co. **Landscaping contractor:** Wm. Wood & Sons Ltd. **Public lavatory block:** W.C. partitions: Venesta Ltd. **Sanitary fittings:** Doulton Ltd. **Cement paint:** Cement Marketing Co. **Ironmongery:** Dryad Ltd.

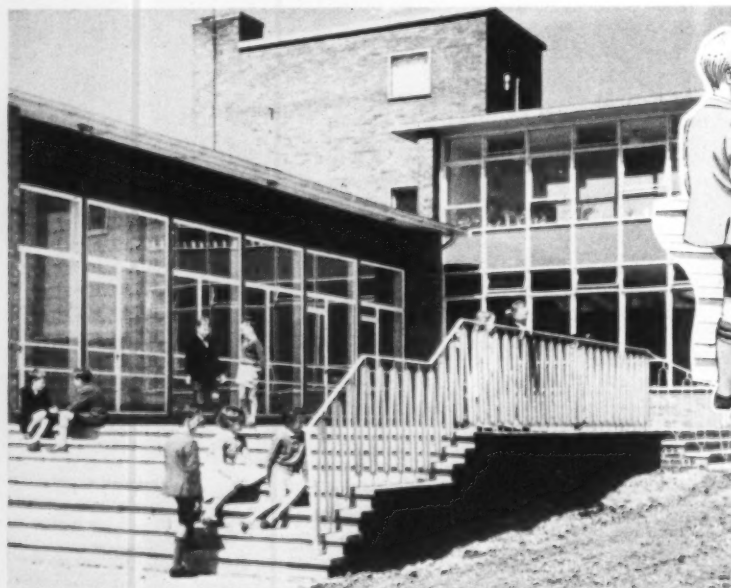

"Melloclad" Curtain Walling specified by the City Architect, J. L. Womersley, Esq. F.R.I.B.A., M.T.P.L., for the Bradway County Primary School, Sheffield.




**MELLOWES & CO. LTD.**  
SHEFFIELD · LONDON · OLDHAM

Member of the  Metal Window Association.

*a place in  
the sun!*

Education  
plus  
daylight  
sunshine  
and  
vitality

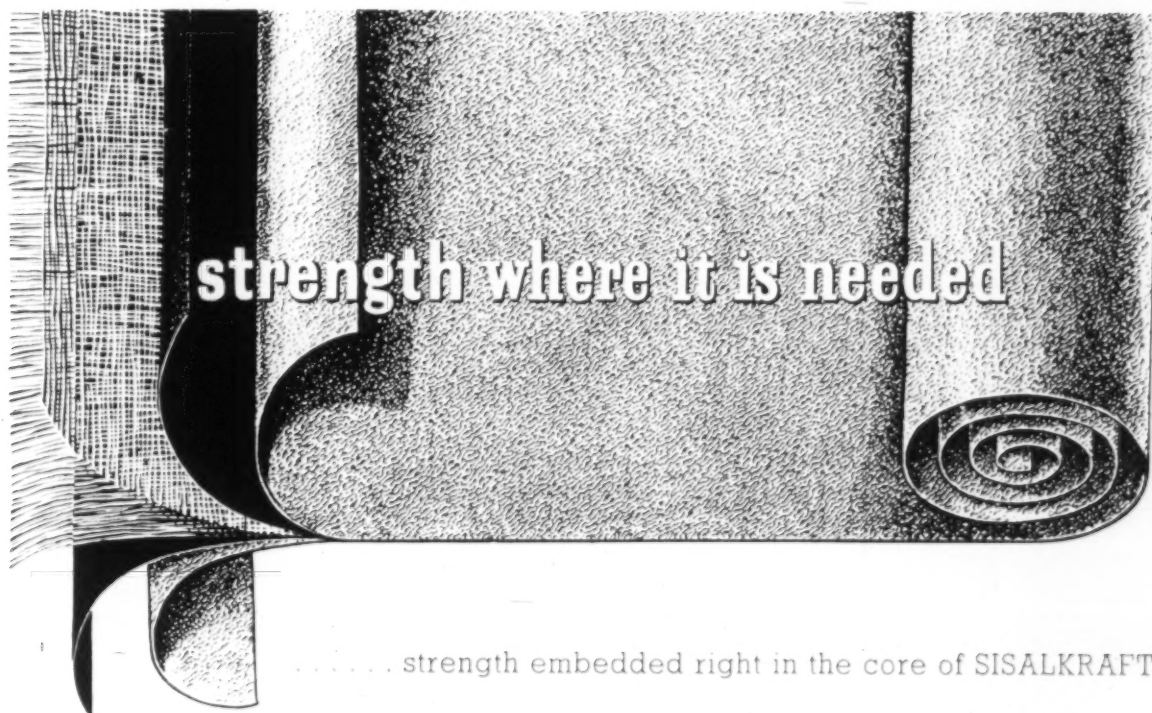

..... strength embedded right in the core of SISALKRAFT by the unique reinforcement of tough, nonhygroscopic, unspun sisal fibres that are laid in both directions and sealed in two layers of high grade bitumen and covered by outer sheets of stout kraft paper. This 6 ply construction gives the tough, supple strength of SISALKRAFT, making it easy to handle yet exceptionally tear resistant and proof against moisture and damp.



*the supreme building paper*

A PRODUCT OF BRITISH SISALKRAFT LIMITED

*Please write for information and samples to the SOLE DISTRIBUTORS:*

ESTABLISHED OVER A CENTURY

**J.H. SANKEY & SON LTD**

ESSEX WORKS · RIPPLE ROAD · BARKING · ESSEX

PHONE

RIPpleway 3855

GRAMS

BRICKWORK · BARKING

# atlas sylvalume

—a new wall-to-wall lighting system  
with unlimited design possibilities

*Based on the Sylvalume system developed by Sylvania Electric Products, Inc., in the U.S.A.*



Atlas Sylvalume is a new wall-to-wall fluorescent lighting system. The visible ceiling is formed of interchangeable plastic diffusers and acoustic baffles arranged on a 3 ft. modular grid. The diffusers and baffles are available in different colours, and forms, thus enabling the designer to explore pattern, colour, texture, mood and style with complete freedom.

The lighting equipment, concealed by the grid, comprises a modified form of Atlas trunking, complete with appropriate fluorescent fittings, gear and tubes, suspended from the true ceiling. Atlas Sylvalume is very quickly and easily installed in an almost endless variety of patterns. It is also easy and economical to operate.

ATLAS LIGHTING LIMITED (A SUBSIDIARY COMPANY OF THORN ELECTRICAL INDUSTRIES LTD.) 233 SHAFTESBURY AVE LONDON WC2



More than half-a-million square yards of  
Gyproc Plasterboard used internationally★  
throughout the exhibition . . .

**GYPROC**

**AT BRUSSELS**



Gyproc Plasterboard was used in  
the following features:

**BELGIAN SECTION:**

Town & Country Planning  
Grand Palace  
Palaces 3, 4, 5 and 9  
Buildings and Dwellings  
Foodstuffs Industry

**BELGIAN CONGO SECTION:**

Catholic Mission

**FOREIGN SECTION PAVILIONS:**

Austria  
Canada  
Great Britain  
Morocco  
Spain  
Tunisia  
U.S.A.




**INDIVIDUAL PAVILIONS:**

Franco-Suisse Cheese  
I.B.M.  
Meurisse Chocolates  
Victoria Biscuits  
Wanson

**MISCELLANEOUS:**

Main Auditorium  
Police Headquarters  
Merry Belgium  
Logexpo Reservations Services  
Heysel Motels  
Expo Motels



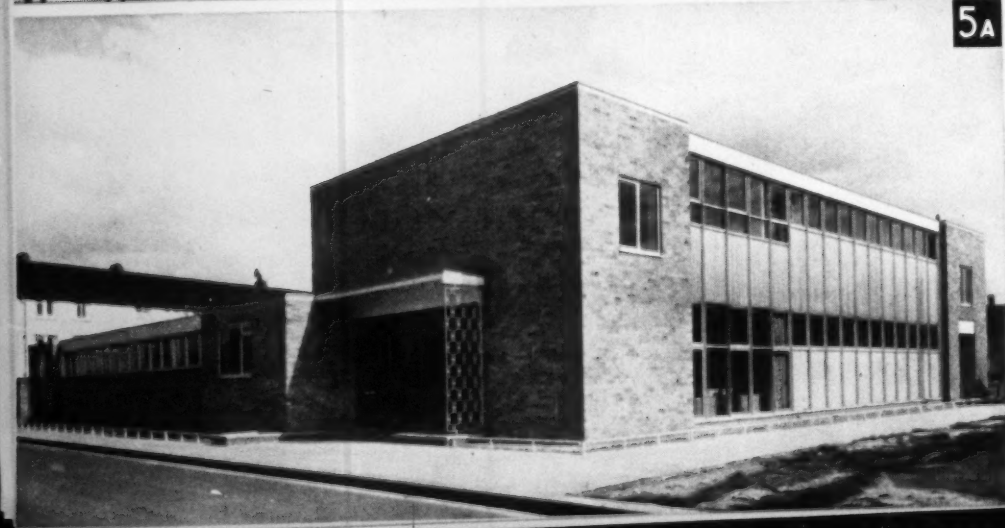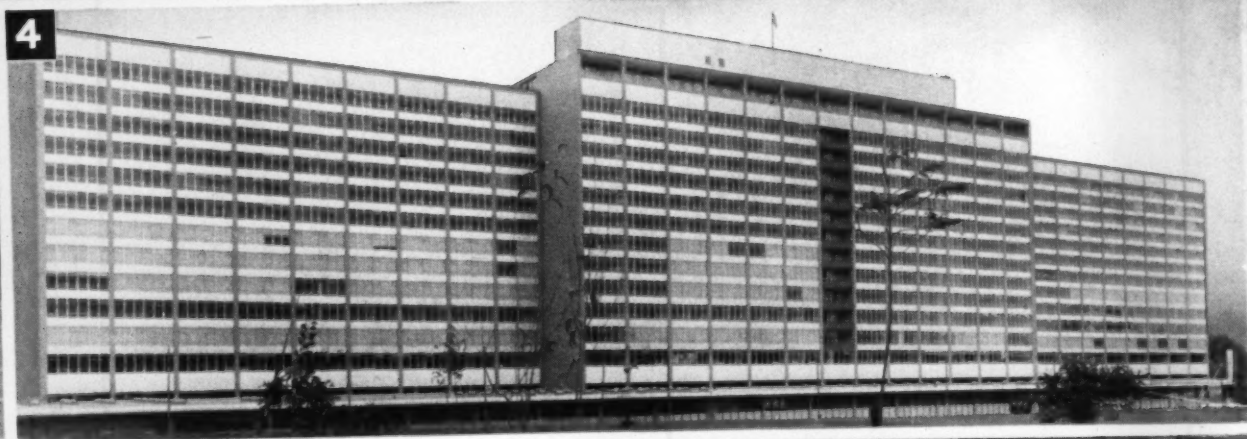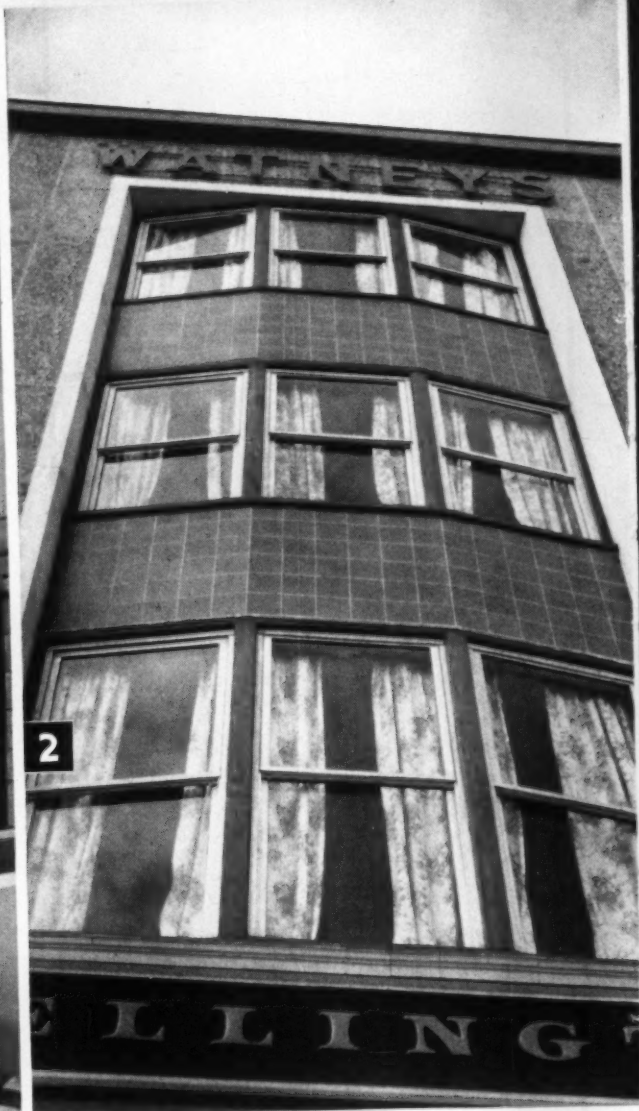

# monthly review by

**WILLIAMS & WILLIAMS**

## CANADA'S NEWEST HOTEL HAS THE 'WALLSPAN' LOOK

**1** The entire cladding contract for the new Lord Simcoe Hotel (the second largest in Canada) was placed with Williams & Williams. And 'Wallspan' is used for the vast areas of curtain walling.

The 20 stories of this 900 room, 10 million dollar hotel make an imposing addition to Toronto's skyline. Viewed from a distance, the giant structure appears to be bathed in a greenish aura. This strangely impressive effect is obtained by the combination of green porcelain enamelling and grey muroglass infilling panels.

All of the vertical columns and horizontal trims of the curtain wall are covered by the green porcelain enamelled panels. This looks to be a grey-green colour when reflected by the muroglass—33,000 square feet of it in the spandrels of the 'Wallspan' grid.

Williams & Williams purpose-made aluminium windows were used in the 'Wallspan.' And the actual arrangement of the windows over 'divided' infill panels is somewhat unusual.

Apart from the aesthetic considerations, a valuable point in favour of using 'Wallspan' was its speed of erection. In this particular instance, the choice of 'Wallspan' curtain walling effected a considerable saving in time—from the moment the first sod was dug to the official opening ceremony, took only seventeen months.

## 'ALOMEGA' WINDOWS EXCEED ARCHITECT'S EXPECTATIONS

**2** The Wellington Hotel, Hastings, situated right beside the sea, now boasts a proud new facade. And its 'Alomega' windows, invulnerable to the corrosive action of salt-laden sea air, have been widely praised. The architect himself, had several enthusiastic things to say about them.

"I am very pleased indeed with the 'Alomega' windows," he writes. "They have certainly exceeded all my expectations and are draught and weather-proof. The tenants are equally amazed at their efficiency and simplicity."

"I have had many pleasing comments from my friends on the appearance of the windows, and I shall use them wherever I can after the testing they have had in this very exposed position."

## SPACIOUS SHOWROOM HOUSES — PERMANENT EXHIBITION

**3** The modern London showroom at 36 High Holborn, W.C.1, contains a comprehensive selection of Williams & Williams products. Here, in comfort and at your convenience, you can view and examine examples of all the products mentioned on this page. This is a permanent exhibition of the latest developments by Williams & Williams. It is open daily from 9 a.m. to 5.30 p.m.

## THE CASE OF THE FLYING WINDOW

**4** It would perhaps be a slight exaggeration to say that the team of Williams & Williams window fixers got the full red carpet treatment when they landed at Lima Airport. Nevertheless, the window that they brought with them was inspected by the President of Peru. And a huge and valuable contract did go to Williams & Williams.

The events leading up to this happy occasion were triggered off by an invitation to Williams & Williams. They were asked (at rather short notice) to quote (in competition with the Americans) for the windows, which were to be made of aluminium, for the new Lima Hospital.

Seven men worked round the clock for seven days (over the Easter holiday, as it turned out). The result was that the tender and drawings were flown out in the nick of time before the closing date.

Williams & Williams price turned out to be easily the lowest. But in the meantime the Peruvian authorities, in some inexplicable way, had got hold of an idea that our windows might possibly be inferior to those made on the other side of the Atlantic. We were asked to prove different!

We pulled out all the stops and made a sample window (to specification) in one week. Thereupon the aforementioned team of fixers plus window were loaded into a fast aeroplane and flown to Miami. There they but paused to take breath (and change aeroplanes) before continuing to Lima. The rest of the story you know.

## 'WALLSPAN' PRESCRIBED FOR MILLBROOK CLINIC

**5** This clinic has to provide maternity, child welfare, school medical and dental services for the entire develop-

ment carried out by the Southampton Borough Council at Millbrook. The building contains an unusually large number of small rooms, which required varying degrees of natural daylight, ventilation and privacy. Conventional fenestration would have led to an unhappily fussy facade, and therefore it was decided that the main elevations should be treated as all embracing window walls, within which variations in sizes and types of windows could readily and tidily be made. These window walls are in fact areas of Williams & Williams 'Wallspan'. The floors and roofs are carried by the load bearing cross-walls.

In the construction, special steps were taken to give added protection against the spread of fire and to eliminate airborne sound between rooms and stories. The gaps between the mullions and crosswalls at the reveals are closed with a felt-lined, recessed timber closing member; and the horizontal gap between the first floor beams and the curtain wall is closed by carrying the insulation board false ceiling right up to the 'Wallspan' transoms.

Buildings that already existed nearby were a school, the community centre, garages and shops. And the general appearance of these was taken into account when designing the clinic's external finish. On the ground floor, 'Wallspan' infilling panels are of hydraulically pressed asbestos cement slabs. First floor infillings are of grooved western red cedar.

## WILLIAMS & WILLIAMS RELiance WORKS • CHESTER




Member of the Metal Window Association

- 1** THE LORD SIMCOE HOTEL, TORONTO  
Architect: H. T. Langston.
- 2** THE WELLINGTON HOTEL, HASTINGS  
Architect: Norman A. E. Wyatt,  
L.R.I.B.A., F.I.A.S.
- 3** WILLIAMS & WILLIAMS  
NEW SHOWROOM  
Architects: Bronek Katz & R. Vaughan.
- 4** THE LIMA HOSPITAL, PERU  
Architect: Ricardo Malachowski.
- 5** THE MILLBROOK CLINIC  
Architect: L. Berger, DIP. ARCH., A.R.I.B.A.,  
Borough Architect, Southampton.

**A** View from North-West with entrance to school medical wing.

**B** General view. Covered way from gates leading to maternity waiting room.



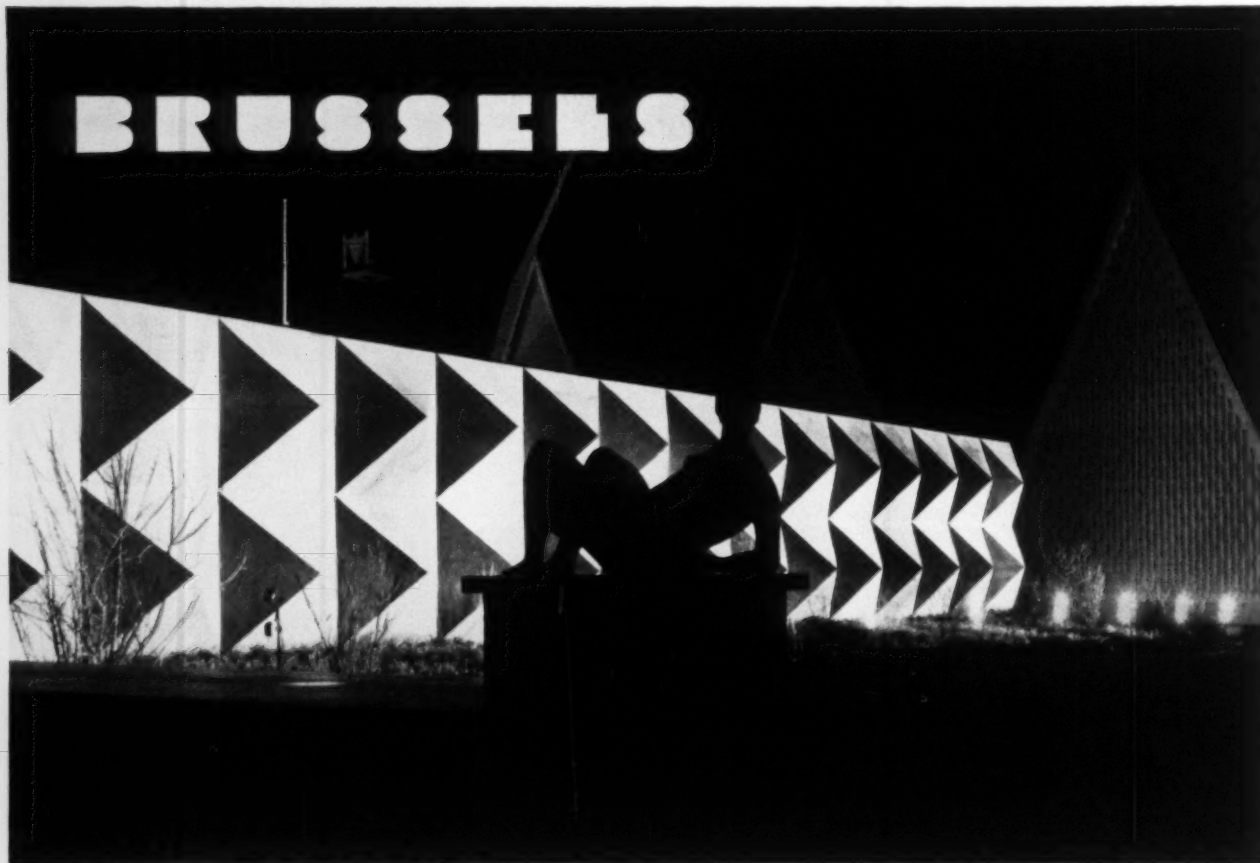

International exhibitions such as the current Brussels show call forth the best in design and construction which industry can offer. It is therefore with some pride that we announce that the Anderson Construction Company was chosen to erect suspended ceilings in the British Government Pavilion.



*Our illustration shows the asbestos insulation board suspended ceiling, erected by our concealed fixing method to the specification of the architects (Howard V. Lobb & Partners, F.R.I.B.A.) main contractors Costain-Blaton-Aubert Association.*

*A.C.C. can offer an unrivalled service in contracting for suspended ceilings of many kinds, thermal insulation, acoustic treatment, and office partitioning.*

*Enquiries are cordially invited.*

ANDERSON CONSTRUCTION COMPANY LTD.  
Clifton House • Euston Road • London • NW1  
Agents throughout Great Britain and  
in countries abroad. Telephone Euston 7465



# ESCALATORS

## THE SILENT SERVICE

Up and down the country J. & E. Hall escalators are daily doing their work of carrying customers from one sales floor to another—quietly, safely, efficiently, economically, and in numbers up to 8,000 per hour.

But in addition to providing an essential service, J. & E. Hall escalators lend charm and dignity to any setting. This is well brought out by the illustration which shows two of four installations in the Regent Street, London store of Dickens & Jones Ltd.

For further information, send for our attractively produced brochure, "Escalators"—or ask for Publication 1004A.



**J. & E. HALL LIMITED, DARTFORD, KENT**

LONDON OFFICE: 10 ST. SWITHIN'S LANE E.C.4. TEL.: MANSION HOUSE 9811

BRANCHES IN MANCHESTER, NEWCASTLE, BIRMINGHAM, BRISTOL & GLASGOW

**GLINEX 2,000,000**

**GLINEX 2,000,000**

**GLINEX 2,000,000**

## Brussels

World Exhibition 1958

GLINEX is available in five densities and nine standard thicknesses. The very wide variety of applications of GLINEX at Brussels proves once again its great versatility.

Its uses in building and allied trades are, in fact, almost limitless. Ask for full technical details now. 2,000,000 square feet of GLINEX are incorporated in the Brussels Exhibition buildings — in walls, partitions, doors, roofs and sub-floors. 2,000,000 square feet of GLINEX means 2,000,000 square feet of efficient thermal and acoustic insulation; permanently decorative in its natural state, and capable of receiving a wide variety of facing materials.

**GLINEX 2,000,000**

## Gliksten Building Materials

Carpenters Road, London, E.15 Telephone: AMHerst 3300

87, Lord Street, Liverpool, 2 Telephone: CENtral 3441



\* ONE OF THE GLIKSTEN GROUP OF COMPANIES



## Everything


including the kitchen sink

comes within the design responsibility  
of the architect.

Fireclay sinks are available in so many  
shapes and sizes that

they can be readily integrated with  
such built-in fitments

as may be desired by architects who

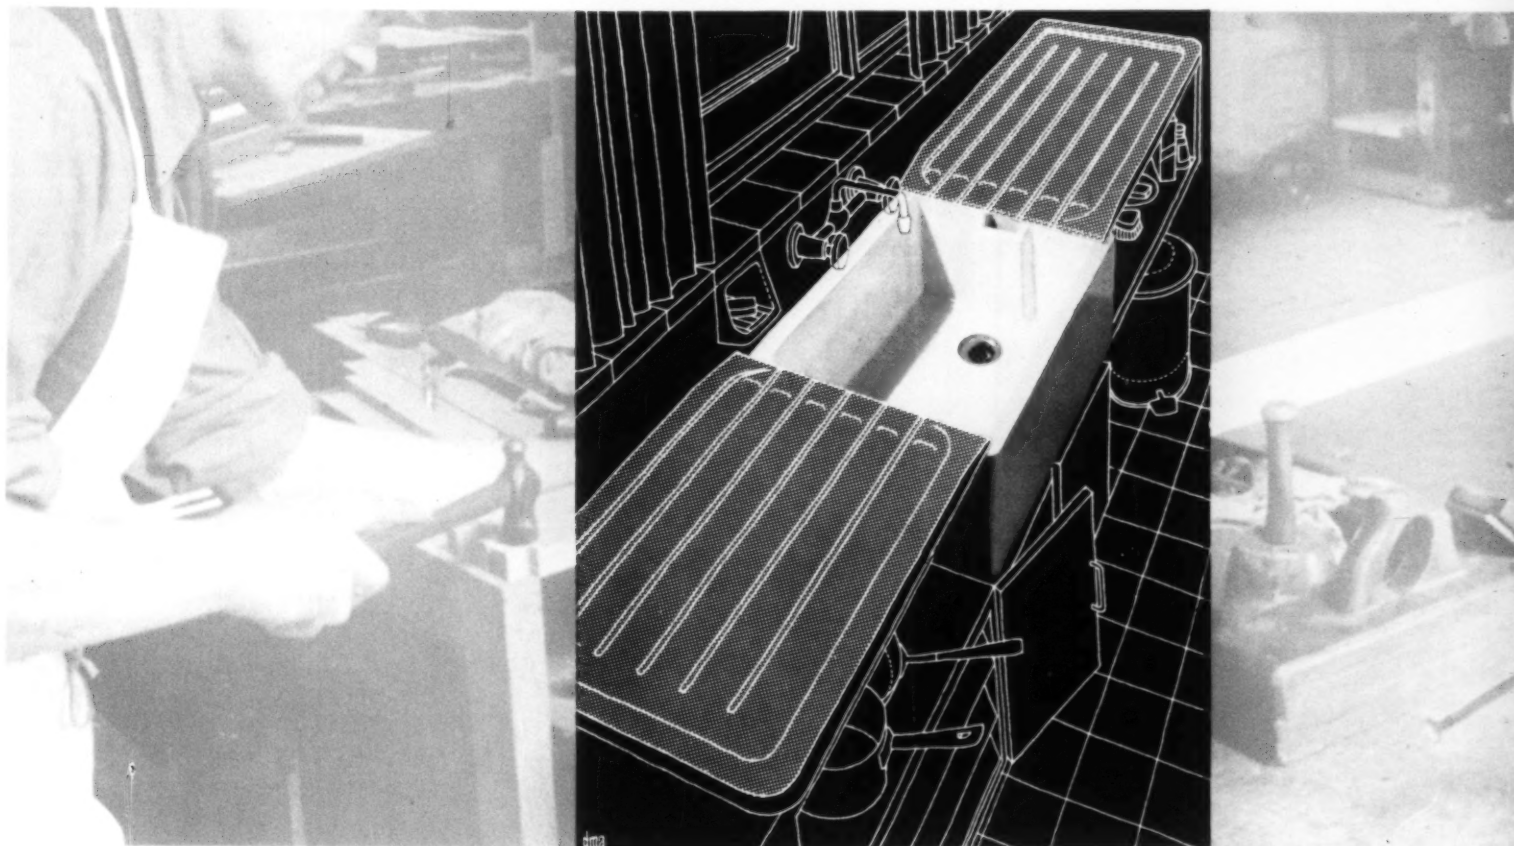


naturally specify

dependable

# ceramic glazed fireclay

CLAY PRODUCTS TECHNICAL BUREAU DRAYTON HOUSE GORDON STREET LONDON W.C.1

The  
Glass Age  
is  
here

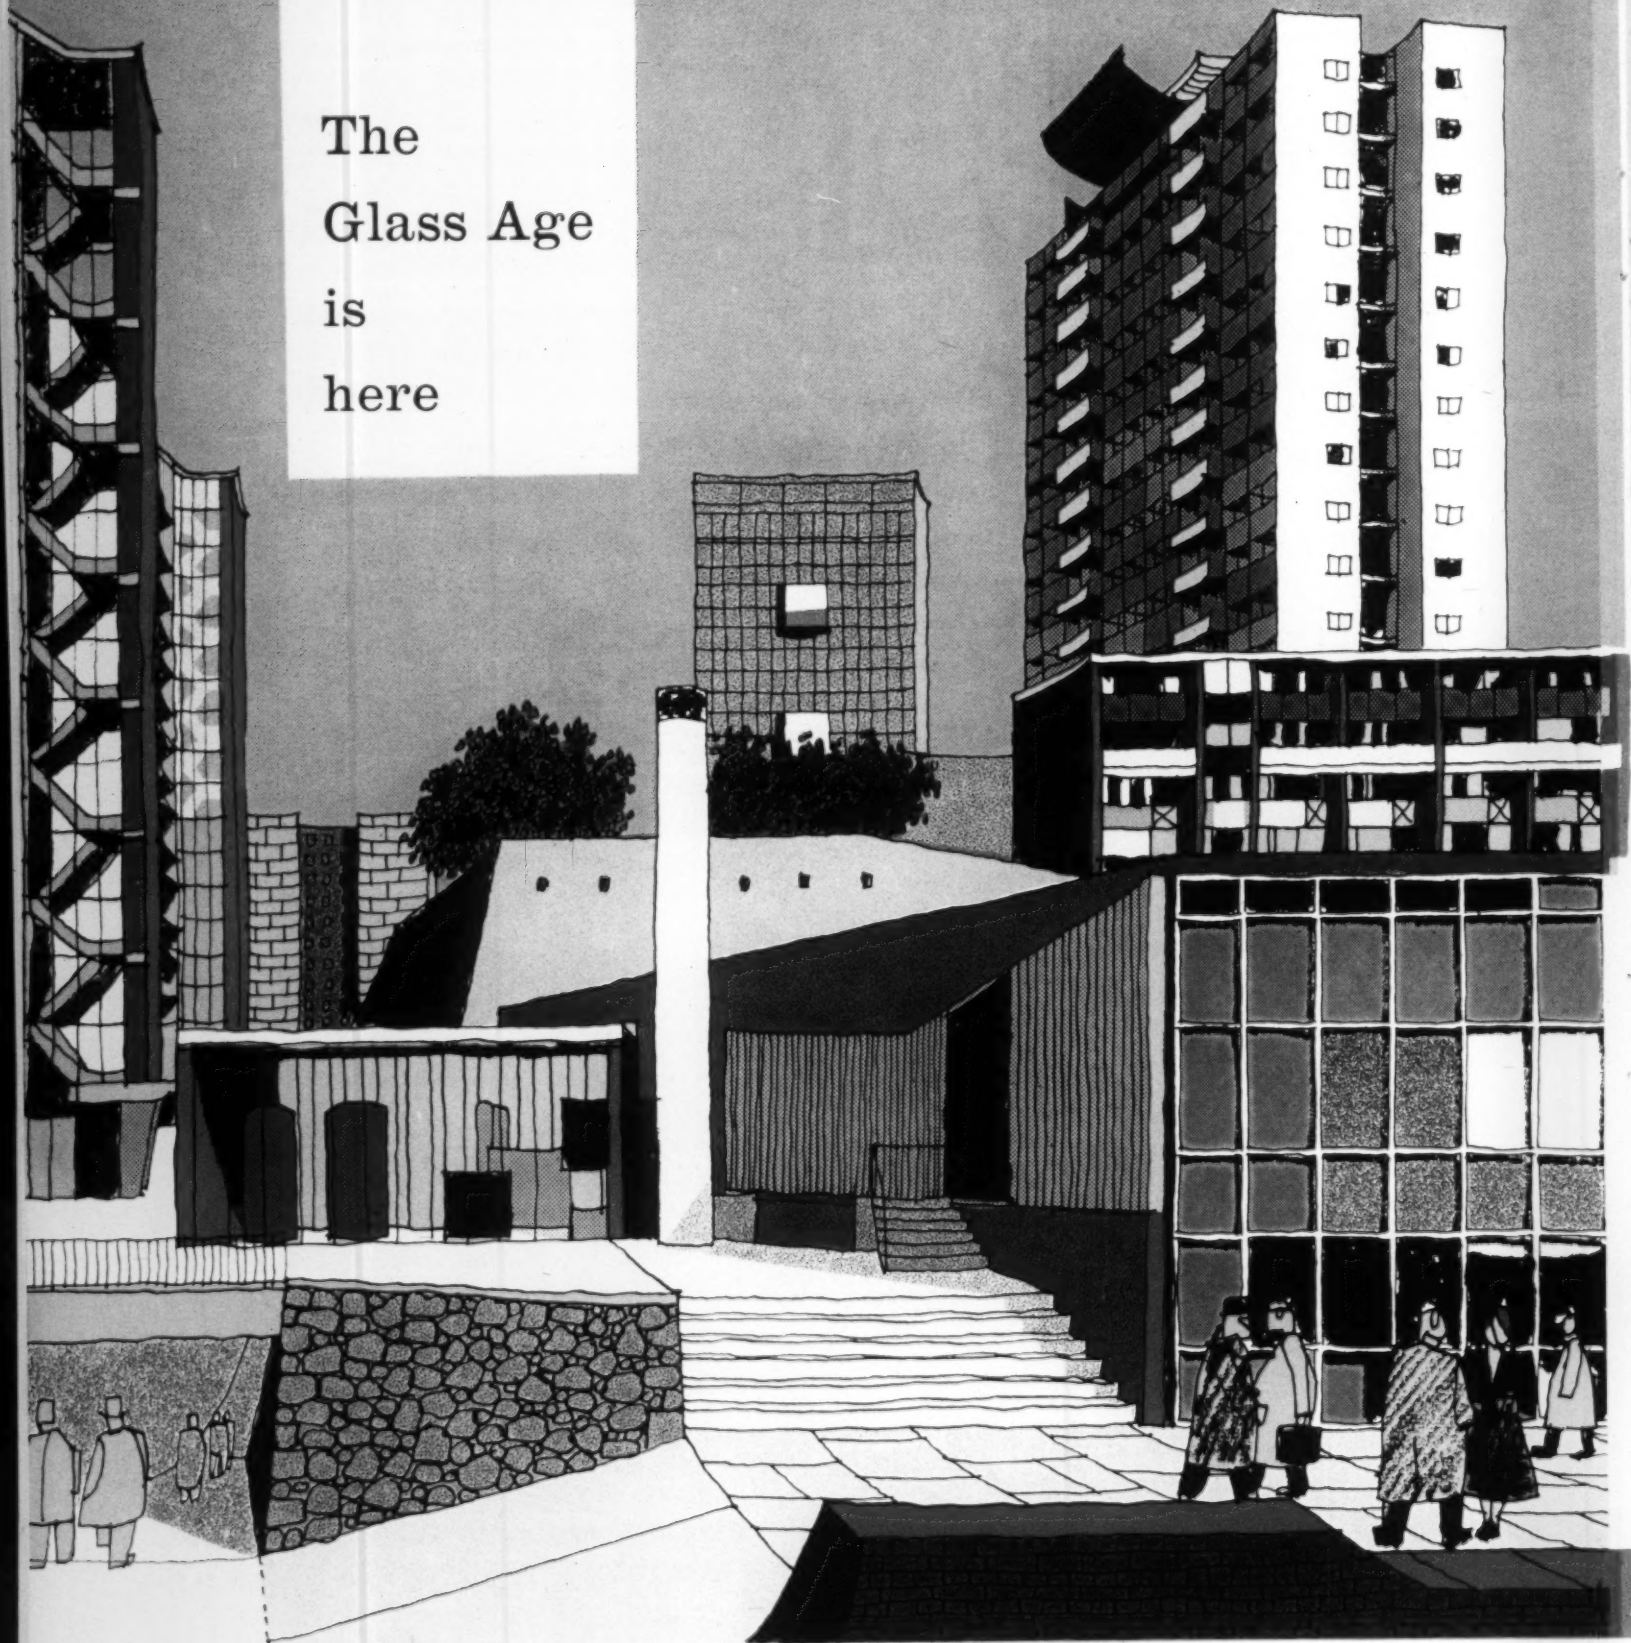

## No dream city...

This city exists: not yet as a coherent, related whole, but as individual structures which rise in and around London and show the part glass plays in architectural technique. Here, eight contemporary buildings have been brought together—by Gordon

Cullen—rather as Wren's buildings were once assembled in Cockerell's famous drawing. This is not a glimpse of a city of the future: it is a city for which all the components have been designed and built today. The Glass Age is here.





1 *Pimlico Flats — Architects:  
Powell and Moya, F.R.I.B.A.*

2 *Headquarters Offices  
for National  
Dock Labour Board —  
Architect: Frederick Gibberd,  
C.B.E., F.R.I.B.A., M.T.P.I.*

3 *Golden Lane Housing — Architects:  
Chamberlin, Powell & Bon, A.A.R.I.B.A.*


4 *Factory at Hemel Hempstead,  
Herts, by Ove Arup and Partners*

5 *Housing Project, Roehampton,  
by the Architect to the  
London County Council*

6 *Royal Festival Hall, by the  
Architect to the  
London County Council*

7 *School at Putney —  
Architects: Powell and Moya*

8 *School at Tulse Hill, by the  
Architect to the  
London County Council*

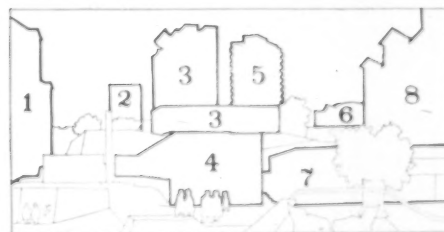


**PILKINGTON BROTHERS LIMITED**

Makers of all types of structural glass · St. Helens, Lancashire






# **WE MAKE FRAMES.....** *but not this kind*

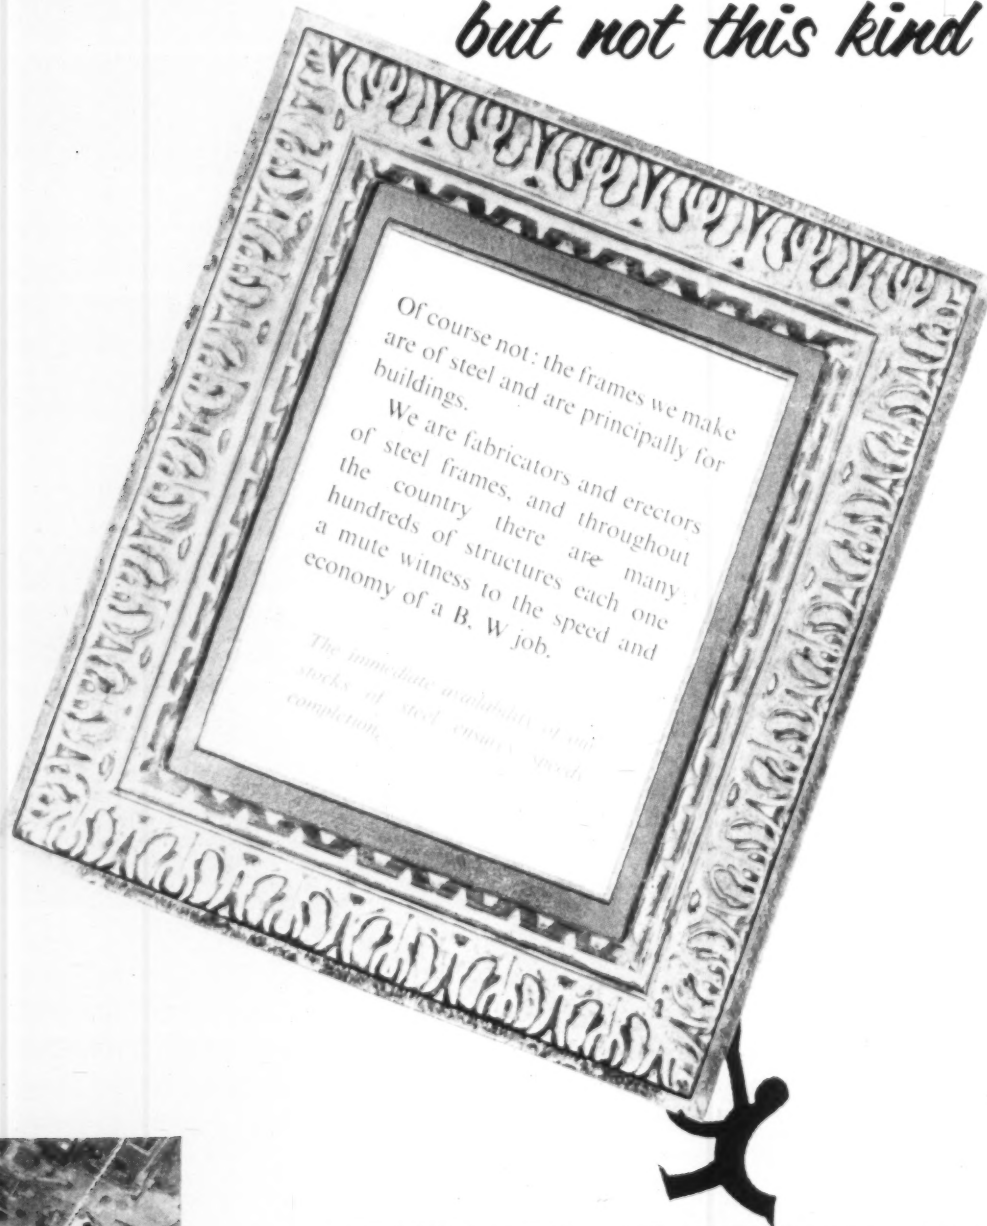

Of course not: the frames we make are of steel and are principally for buildings.

We are fabricators and erectors of steel frames, and throughout the country there are many hundreds of structures each one a mute witness to the speed and economy of a B. W. job.

*The immediate availability of our stocks of steel ensures speedy completion.*



**Banister, Walton build in steel**

MCN3111


BANISTER, WALTON & CO LTD - Structural Steel Engineers and Stockholders - MANCHESTER - LONDON - BIRMINGHAM

*We have pleasure in announcing that we have been entrusted  
by the Architects, Basil Spence and Partners, Edinburgh and London  
and the Contractors, John Laing and Son Limited, London,  
with the contract for the Copper Roofing of the new*

COVENTRY CATHEDRAL

FREDK. BRABY & CO LTD · London · Crayford · Liverpool · Glasgow · Bristol

AP109

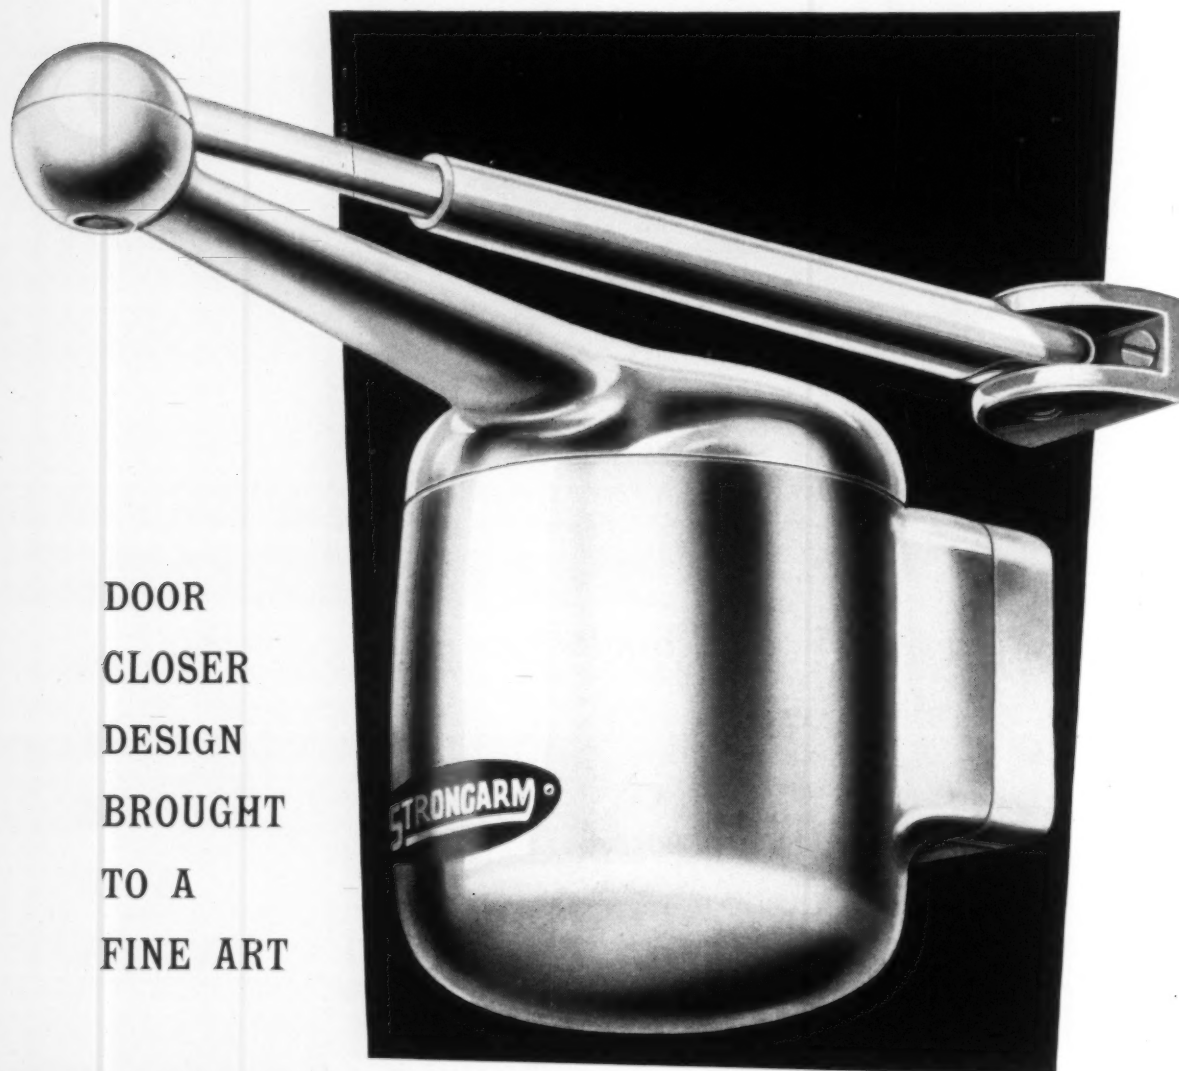


DOOR  
CLOSER  
DESIGN  
BROUGHT  
TO A  
FINE ART

## **STRONGARM** HYDRAULIC DOOR CLOSER

The selective eyes of architects are taking a long look at the Strongarm new look Door Closer. For the first time in the world door closer design, in making a bold break with its rather ugly past, has reached the highest concepts of present taste and preferences. The Strongarm encompasses an efficient mechanism of watch-like precision in its beautiful, compact shape. The quiet perfection of its operation is accountable to the skill, ingenuity and knowledge pooled by some of Britain's foremost hydraulic engineers. Fresh, current thinking has blown away the cobwebs of antiquated design and produced the clean, simple, dustfree lines of the Strongarm. It is the most advanced Door Closer design in Europe or the U.S.A. We suggest you write soon for substantiating data, Leaflet APL.42/C.

SMOOTH - SILENT - POSITIVE



**ARMSTRONG PATENTS CO. LTD.**

EASTGATE · BEVERLEY · YORKSHIRE



► For the true appeal & long life of all new floors-

*SPECIFY*

## SPOSS FLOOR SEAL

- right from the start!



What happens, all too often, to a new floor after it's been laid? You know, and we know, that in a very short time the appeal has been marred, perhaps for good, by dirt and even grease trodden into the surface. Dressing then applied only seals in the dirt. New floors should *always* be treated immediately. Not only will the surface be perfectly preserved throughout its life but your own professional reputation safeguarded. Sposs Floor Seal and Dressings are formulated specifically for every kind of modern floor.

*LEFT* Wood-block flooring at Gamage's Stores, High Holborn, treated with Sposs Floor Seal and Dressing. No special treatment was given to the floor before this photograph was taken. Sposs Dressing had been applied 2-3 weeks before, and normal daily maintenance had been carried out. Despite the high gloss the surface is non-slip.

SPOSS  
FLOOR DRESSINGS  
WERE USED IN  
THESE CONTRACTS:

ROYAL INSTITUTE OF  
BRITISH ARCHITECTS

GEORGE WIMPEY  
& CO. LTD.

LIMMER & TRINIDAD  
LAKE ASPHALT CO. LTD.

ROWAN & BODEN LTD.

GLAMORGAN C.C.

LANARK C.C.

MINISTRY OF WORKS

MINISTRY OF SUPPLY

THE ROYAL NAVY

U.S. AIR FORCE

### ECONOMICAL

Sposs Floor Seal provides exceptionally good coverages. 1 gallon will seal 150-200 sq. yds. When comparing the price of different Floor Seals this is a very important factor.

### PERMANENCE:

Once a floor has been sealed with Sposs it is protected throughout its life. Subsequent maintenance with Sposs Floor Dressing is all that is required—further applications of seal are quite unnecessary.

### PENETRATION:

The Seal penetrates the surface and combines with the top fibres of the floor, forming a hard, waterproof skin which protects and preserves porous surfaces.

### FINISH:

Although not in itself a polish, Sposs Floor Seal will dry with a pleasing gloss. An application of Sposs Floor Dressing will combine with the Seal to produce a brilliant, non-slip and easily cleaned surface.

### SPECIAL PROPERTIES:

Sposs Floor Seal is quick-drying (4 to 6 hours, or less according to weather). It is available in Light Oak, Dark Oak, Red and Natural colours. Can be used to revive old floors with an open grain.



FLOOR SEAL  
GYMNASIUM SEAL

FLOOR DRESSING  
(for wood, lino, cork, etc.)

SPECIAL DRESSINGS  
(for asphalt, composition and  
thermo-plastic tiles)

CEMENT FINISH  
TERRAZZO FINISH

## SPOSS floor seal AND LIQUID FLOOR DRESSINGS

YOU'D LIKE MORE  
INFORMATION?


Cut out and post  
this coupon now  
whilst the matter is  
fresh in your mind.  
Full details of  
SPOSS Floor Seal  
and Dressings will be  
sent to you in return.

TO SPOSS PRODUCTS LTD, 10, SOVEREIGN ST, LEEDS  
Please send full details of SPOSS Floor Dressings

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

AR 8/58

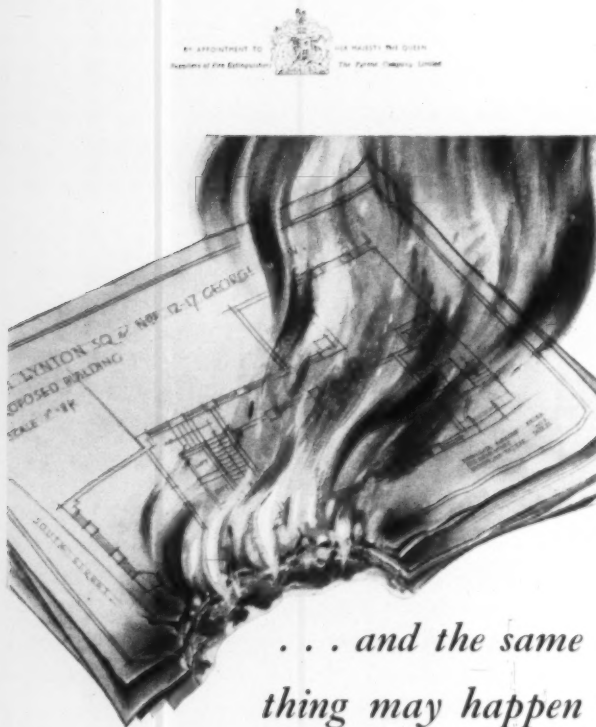

*... and the same  
thing may happen  
to the building itself—unless  
it has **PLANNED**  
**FIRE PROTECTION***

In the design and construction of modern buildings the planning of Fire Safety is of vital importance, demanding careful consideration at the very outset. The co-operation of The Pyrene Company's Fire Engineers has been at the service of Architects and Surveyors for over 40 years and today their expert and impartial advice is relied upon universally.

"Pyrene" Fire Protection includes Hand-operated and Portable equipment of every type, including Hose and Hydrants, Hose reels, Foam, CO<sub>2</sub> and Dry Chemical Installations. There are also "Pyrene" Fire Detecting Systems designed to give automatic warning of fire at any time—day or night.

The "Pyrene" Fire Extinguisher Hire Maintenance Plan, available to Architects' clients, provides the right number and types of extinguishers with constant inspection and maintenance.

For full information and advice please write to Dept.A.R.4.



**THE PYRENE COMPANY LTD**

9 GROSVENOR GARDENS, LONDON, S.W.1. Tel: Victoria 3401  
Head Office & Works: BRENTFORD, MIDDLESEX Canadian Plant: TORONTO

Gas Showrooms  
at BURSLEM  
Stoke-on-Trent



**MALKIN**  
\*  
**REDHILL**

## WALL TILES

Tiles are part of the contemporary scene.  
To their historic practical qualities Malkin  
have added today's wide scope of colour  
and design, so that architects are using  
them to advantage in an increasing number of ways and places.


For further details write to:—

**THE MALKIN TILES (Burslem) LTD.**, Burslem, Stoke-on-Trent. Tel. 87287

Members of the Glazed and Floor Tile Manufacturers' Association

# DUPLUS


## DOMELIGHTS

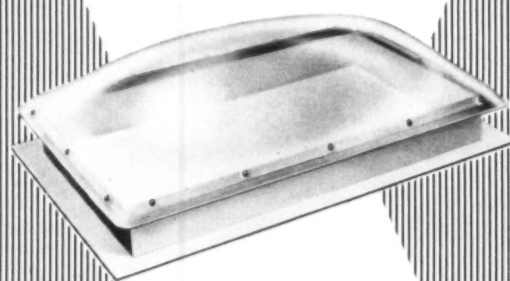

THE NAME AT THE TOP  
OF TOPLIGHTING



**DUPLUS DOMES LTD. ALBION ST. LEICESTER**

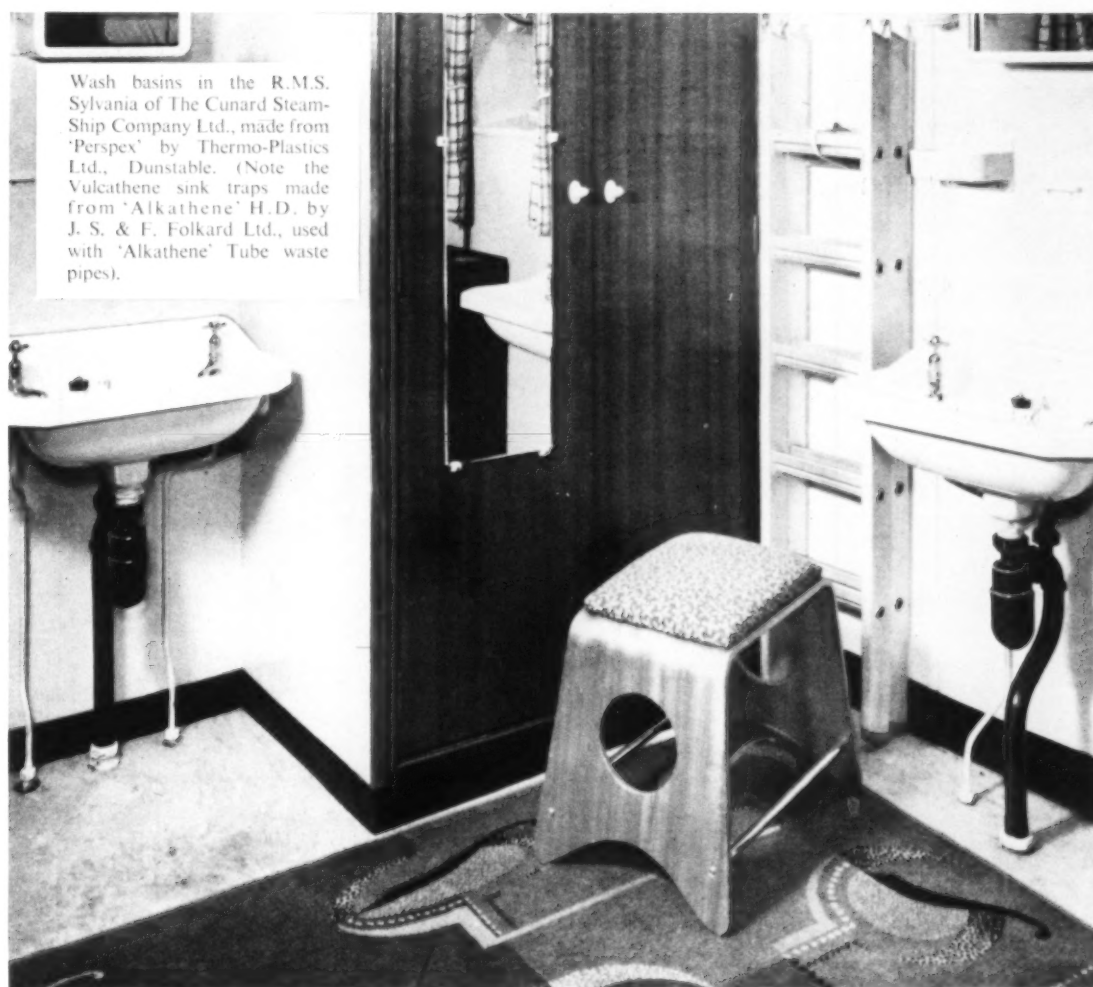

## The R.M.S. Sylvania has six basins made of 'Perspex'

ALL OVER THE world 'Perspex' acrylic sheet is being used for colourful modern domestic fittings. Such items as baths, sinks and drainers as well as wash basins are being made from this outstanding material.

Recently The Cunard Steam-Ship Company Limited used it experimentally for six new wash-basins in the R.M.S. Sylvania.

'Perspex' is a tough, attractive material easy to keep clean without abrasives. At the

same time it is light, and economical to install.

'Perspex' is a handsome material which will not stain or tarnish in normal conditions of use. It is available in a wide range of transparent, translucent or opaque colours.

**'PERSPEX'**

*'Perspex' is the registered trade mark for the acrylic sheet made by I.C.I.*

IMPERIAL CHEMICAL INDUSTRIES LIMITED • LONDON • S.W.1







## Stainless Steel Electric Sterilizing Sinks

in sink or drainer units.  
As illustrated or as independent  
sterilizers.

by

**PLANET**  
REG. TRADE MARK

We manufacture a large range of washing and sterilizing units and caterer's sinks to suit almost every type of kitchen, also special units made up to your own requirements. We are, therefore, able to meet your demands no matter what type of unit you may need. (Sterilizing sinks can also be made for steam or gas heating.)

## THE STAINLESS STEEL SINK CO. LTD.

Head Office: RING ROAD, LOWER WORTLEY, LEEDS 12 • Phone: Leeds 638711/2/3  
London Office: 14 GREAT PETER STREET, LONDON, S.W.1 • Phone: Abbey 1575

### SPECIFY WITH PLANNING THE NEW SUGG HALCYON SELECTIVE AIR HEATER

IMMEDIATE WARMTH . . . FOR  
SEVERAL ROOMS . . . BY SIMPLE  
FINGER-TIP CONTROL

CAPITAL COST UNDER £100



The flexibility of the Halcyon Gas Heater makes it an eminently suitable heating installation for every type of residence - from bungalows and houses to flats.

Built for operating in a very small cupboard, its unusual compactness, combined with its many outstanding

features, have made instant impact on architectural plans in all parts of the country.

Halcyon offers highly efficient heat transference to the air flow, resulting in a discharge of pure warmed air within a few minutes. Halcyon is silent - there is no smoke - there are no fumes.

*Full literature and technical details available  
from the manufacturers:*

**WILLIAM SUGG & COMPANY LTD.**  
67-73 REGENCY ST., LONDON, S.W.1 Tel: VICToria 3211

*Strong,  
Durable,  
will not fracture*

'Harco' Rainwater Goods in light gauge pressed steel to B.S. 1091-1946 and hot-dip galvanized after manufacture by the 'Harco' process, are easy to handle, long lasting and resist impact. The complete range includes H.R. and O.G. Gutters, Angles, Nozzles, Stop Ends and Brackets, Rainwater Pipes, Elbows, Shoes, Offsets and Heads.

Please send for  
List No. AR 793.

**Harvey**

**'HARCO'**  
LIGHT GAUGE PRESSED STEEL  
**RAINWATER  
GOODS**

G. A. HARVEY & CO. (LONDON) LTD · Woolwich Road · London · S.E.7 · GRGreenwich 3232 (22 lines)




## At your disposal . . . Southalls incinerators

Southalls Gas Incinerators ensure quick, individual, hygienic disposal of sanitary towels — solving this problem once and for all. These excellent machines are an essential service for your women staff . . . and a boon to your maintenance. (Electric models are also available if preferred.) Simple to install, fully automatic, and backed by a country-wide installation and maintenance service. Write for particulars and for full details of our comprehensive cloakroom service.

**Southalls**

Obtainable only from

**SMITH & NEPHEW SOUTHALLS LTD.**, (Dept. H3), Charford Mills, Birmingham 8  
MAKERS OF SANITARY TOWELS FOR OVER 70 YEARS


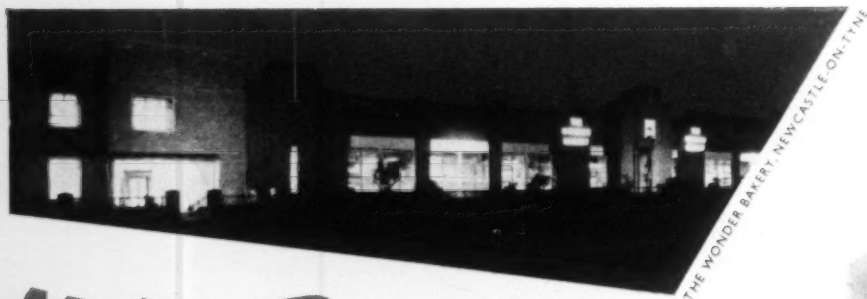


THE WONDER BAKERY, NEWCASTLE-ON-TYNE

# Mellor Bromley

HEATING, VENTILATING AND AIR CONDITIONING  
ENGINEERS AND CONTRACTORS

THE PERCIVAL WHITLEY COLLEGE OF FURTHER EDUCATION Architect: Mr. Richard Pickles, A.R.I.B.A., Halifax

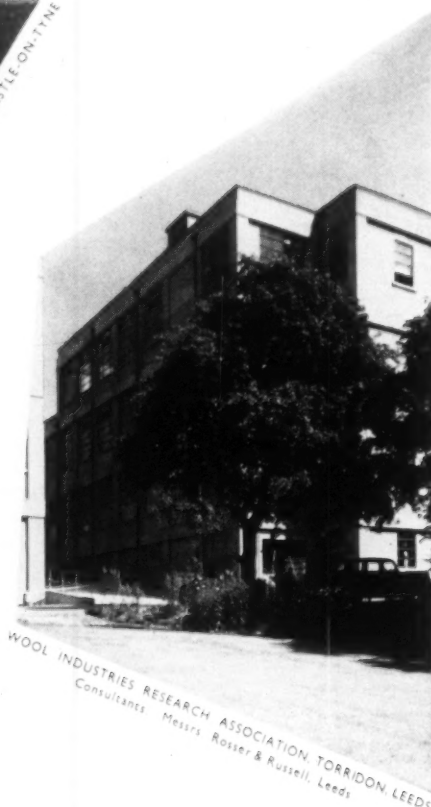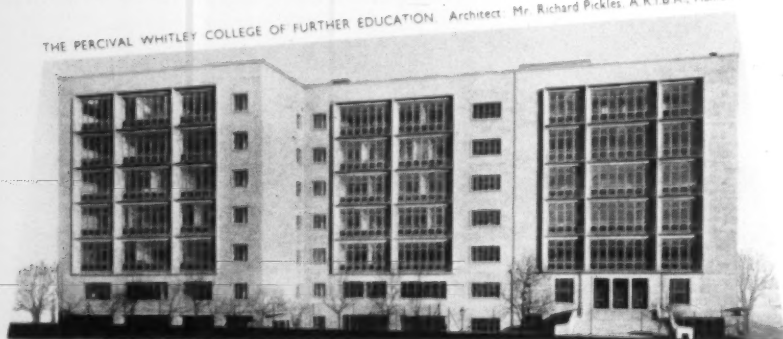

WOOL INDUSTRIES RESEARCH ASSOCIATION TORRIDON, LEEDS  
Consultants: Messrs. Rosser & Russell, Leeds

MELLOR BROMLEY (AIR CONDITIONING) LTD., BARKBY ROAD, LEICESTER (Member of the Bentley Group)


Telephone Leicester 66651

AC 18



**NO** PELMETS  
VALANCES  
HOOKS

*it's NEW  
it's DECORATIVE  
it's EXCITING  
it's*



Patent applied for

the "do-it-yourself" curtain rail  
for the contemporary home

HARRISON (BIRMINGHAM) LTD

P.O. BOX 223, BRADFORD STREET WORKS

BIRMINGHAM, 12

- EASY TO FIT
- UNOBSTRUSIVE
- SOLID ALUMINIUM RAIL
- NYLON FITTINGS
- QUIET IN OPERATION
- NON-CORROSIVE
- FOUR ATTRACTIVE COLOURS
- STANDARD LENGTH
- ATTRACTIVELY PACKAGED

*and it's made by*

**HARRISON**

MAKERS OF THE FAMOUS '950' SERIES BRASS CURTAIN RAIL



Design Of The Year award as an outstanding design



Brussels Exhibition, Fox and Hounds Inn furnished with our chairs, tables and stools including this easy chair



Also at Brussels, this chair and its matching arm-chair chosen as standard equipment by a well-known international company




We now make an extremely interesting contract bed

## Stafford Furniture Ltd

7 Sedley Place  
Woodstock Street  
London W1  
Mayfair 7153

Our new showrooms, just off the top of New Bond Street, have a much wider selection than we have been able to show before. Call and see our new designs, or write for our illustrated brochure.

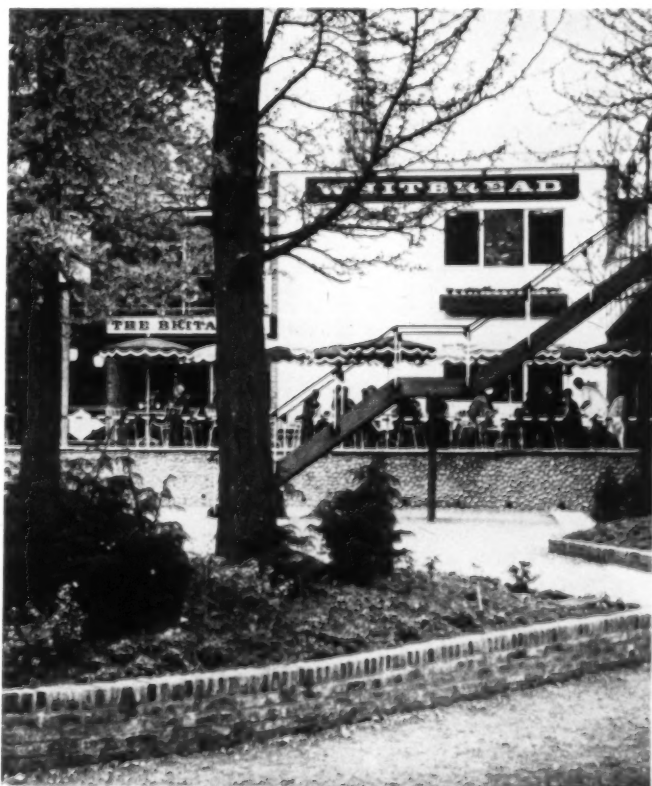

A part of the British site at the Brussels Exhibition. The landscape Architect was G. P. Youngman, Esq., F.I.L.A. The architects for the site were Howard V. Lobb and Partners, F.R.I.B.A. and Edward D. Mills and Partners, F.A.R.I.B.A. All landscaping and planting by William Wood & Son Limited.

By appointment to  
H.M. Queen Elizabeth II  
Garden Contractors and  
Horticultural Builders  
William Wood & Son Ltd.



By appointment to  
H.M. Queen Elizabeth  
the Queen Mother  
Garden Contractors and  
Horticultural Builders  
William Wood & Son Ltd.

## Landscaping at Brussels


We carried out all the landscaping to the British site at the Universal and International Exhibition at Brussels. We are also engaged in the maintenance of the site until the end of the Exhibition.

We offer to architects a service based on teams of skilled foremen and craftsmen, conscientious supervisors and a specialised technical staff.

The photograph shows a small part of the planting, and in the background the Britannia Inn where, under a separate contract, we were responsible for outdoor planting, interior plant decoration and maintenance.

## William Wood & Son Limited

TAPLOW · BUCKINGHAMSHIRE

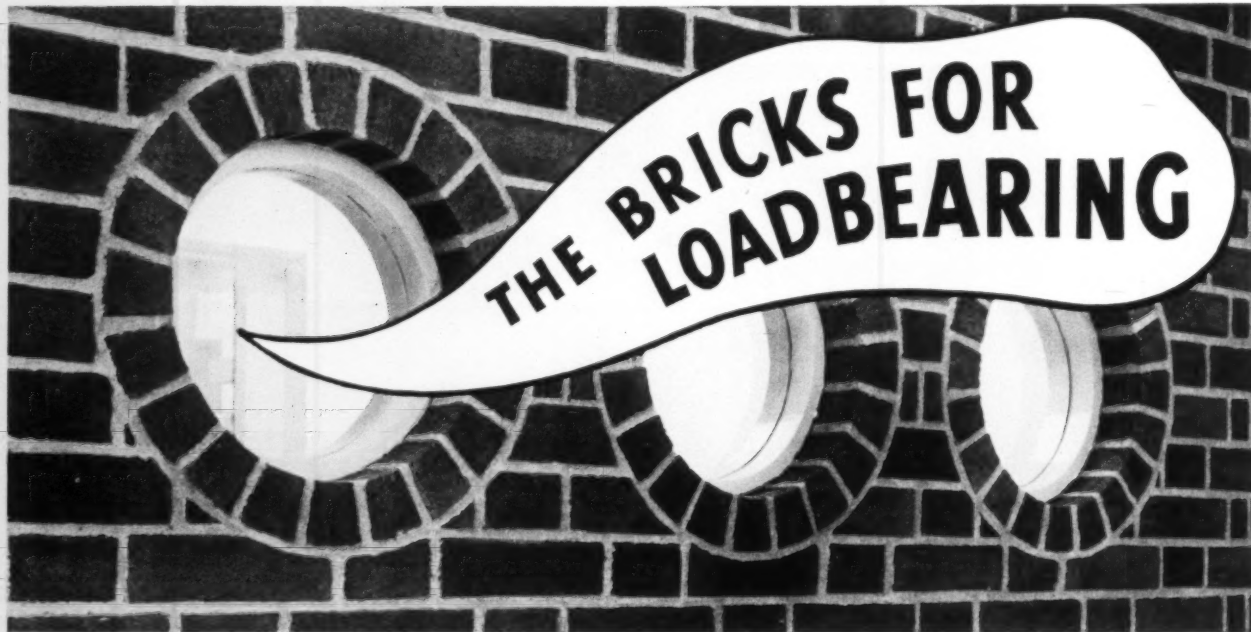

## ACCRINGTON 'Nori' Bricks

The use of brick for high loadbearing purposes need not entail any sacrifice of appearance.

Combining the crushing strength of Class A' Engineering Bricks with the aesthetic qualities of the highest grade facings, Accrington 'Nori' Bricks are the obvious choice for all heavy-duty structures.


*Samples on request*

THE ACCRINGTON BRICK & TILE CO. LTD., ACCRINGTON, LANCs.

PHONE: ACCRINGTON 2684

Southern Representative: L. G. Rogers, Oak Lea, Main Road, Westerham Hill, Kent.

Telephone No.: Biggin Hill 0538

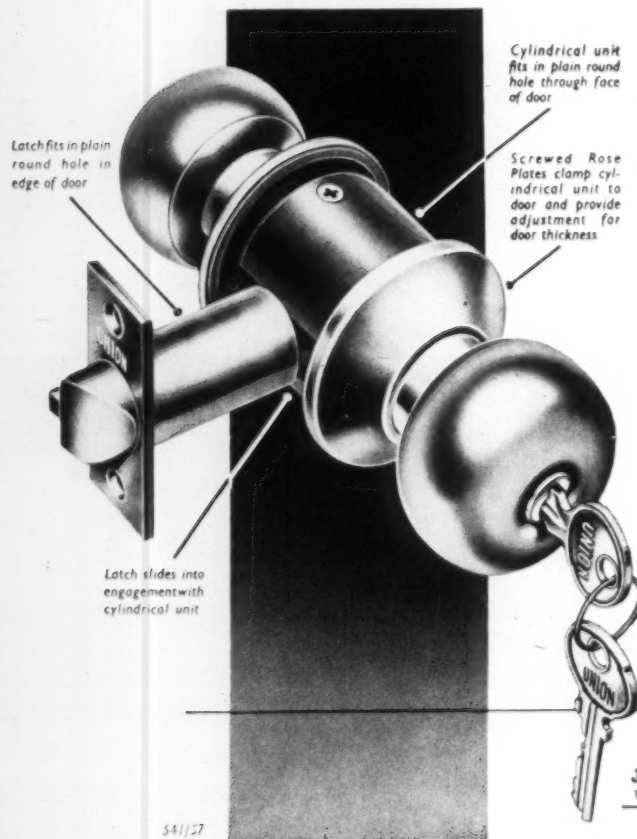

## KNOBSETS

**UNION** RONDO KNOBSETS have now been on the market for several months, and already many thousands have been made, sold and fitted. Even this short experience has proved that as regards quality these new knobsets are worthy of our trade mark.

You can therefore specify them with every confidence. An illustrated brochure containing full details of the complete range of **UNION** knobsets is now available, write now for your free copy.


Though supplies are obtainable only through Builders' Hardware Merchants, our expert advice is always at your disposal.

**JOSIAH PARKES & SONS LTD**  
UNION WORKS WILLENHALL STAFFS ENGLAND

BUSH HOUSE, LONDON • JOHANNESBURG, SOUTH AFRICA  
ENGLISH OWNED AND CONTROLLED



541/27

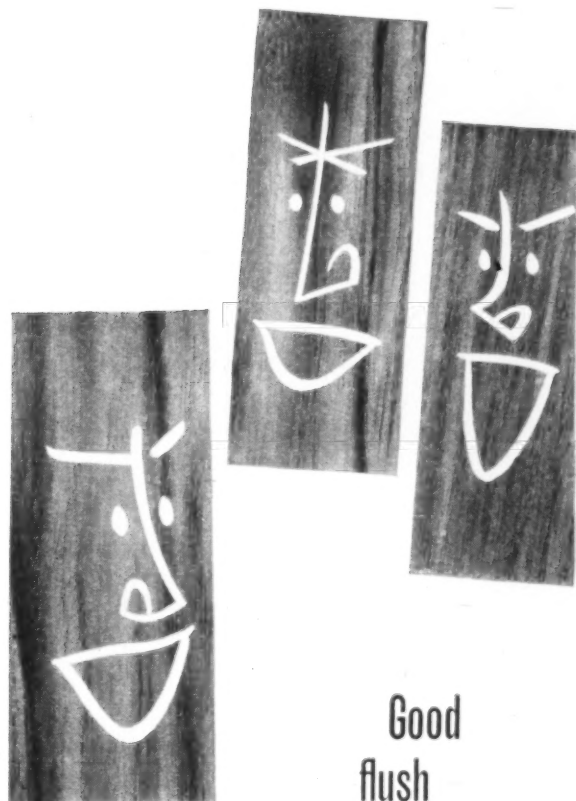

Good  
flush  
doors  
speak for themselves...

There is no mistaking the outstanding high quality of Leaderflush flush doors wherever they are seen—it is a quality born of many years experience in specialised manufacture—a quality which speaks for itself.

**STOCKISTS.** LEADERFLUSH DOORS can be obtained immediately ex stock from the following officially appointed distributors for the areas stated, as well as direct from the Works at Trowell, Nottingham.

|                                           |                                                 |                              |                                           |
|-------------------------------------------|-------------------------------------------------|------------------------------|-------------------------------------------|
| DURHAM                                    | J. M. & J. Bartlett Ltd.                        | BRISTOL & SOMERSET           | Iron & Marble Co. Ltd. Bristol            |
| NORTHUMBERLAND and N. RIDING OF YORKSHIRE | Newcastle-upon-Tyne                             | DEVON & CORNWALL             | Jewsons Ltd., Plymouth                    |
| BIRMINGHAM & W. MIDLANDS                  | British Door Marketing Co. Ltd. Burton-on-Trent | EDINBURGH & EAST OF SCOTLAND | Alexander MacKenzie & Co. Ltd., Edinburgh |
| CUMBERLAND & WESTMORLAND                  | Wm. Coulthard & Co. Ltd., Carlisle              | SOUTH WALES                  | H. R. Paul & Son Ltd., Barry              |
| GLASGOW & WEST OF SCOTLAND                | Gardner & Greenhields Ltd., Glasgow             | ANGLESEY & CAERNARVONSHIRE   | Wm. Roberts & Co. Ltd., Menai Bridge      |
| ABERDEEN & N. SCOTLAND                    | George Gordon & Co. Ltd., Aberdeen              |                              |                                           |
| GLoucs., WORcs., WILts., BERKS.,          | — Sharpe & Fisher Ltd., Cheltenham              |                              |                                           |

**"DELIVERY ON TIME"** To all parts of Great Britain and the world is the recognised policy of LEADERFLUSH.

LITERATURE giving full specification of LEADERFLUSH doors will be gladly sent on request.


# Leaderflush

BRITAIN'S FINEST FLUSH DOORS

LEADERFLUSH (DOORS) LTD., TROWELL, NOTTINGHAM

Telephone: ILKESTON 623 (5 lines). Telegrams: LEADAFUSH, ILKESTON, NOTTINGHAM

★ THERE ARE OVER 2,000,000 LEADERFLUSH DOORS IN USE TODAY

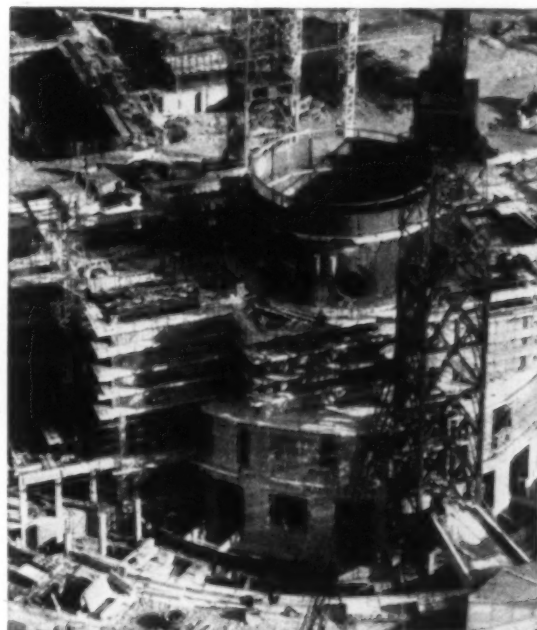

Nuclear Power Station under construction at Berkeley, Gloucestershire.

## Electricity— today's power and tomorrow's wealth

OUR COUNTRY'S ECONOMY depends on electricity; more electric power will bring higher production in the factories, greater comfort and pleasure in our everyday lives. As our economy expands, so does the need for power, and at the present rate it doubles every ten years.

Electricity from nuclear powered generating stations will play a part of ever increasing importance in meeting this steadily rising demand. Already construction work has started on three nuclear power stations with an aggregate capacity of 1,100,000 kilowatts; by 1966/67, 5 to 6 million kilowatts of nuclear energy will be available.

Not all electricity will be generated by nuclear power, however, and conventional generating stations will continue to be needed. The Central Electricity Generating Board has recently placed contracts for the largest 3,000 r.p.m. turbo-alternator and associated unit boiler in the world—a 550 megawatt unit for the projected new station at

Thorpe Marsh. Another projected new station—Blythe 'B'—will be equipped with 275 megawatt 'in line' units; these, too, are the biggest of their kind yet designed.

Though these are projects which will not be completed for some time, the work of the Central Electricity Generating Board is playing an important part in today's fight against inflation. Power stations are being built now at an overall cost no greater than in 1948—£50 per kilowatt installed. And though the output capacity of the power stations has doubled since 1948, the increase in manpower is only about one third.

\*\*\*

By providing today for the power we shall need in years to come, the Central Electricity Generating Board is building a secure foundation for our future expanding prosperity.



THE CENTRAL ELECTRICITY  
GENERATING BOARD





Architects for the Gatwick Airport terminal buildings Yorke, Rosenberg and Mardall F FRIBA's

# hille

FURNITURE DESIGNED BY ROBIN DAY AT THE NEW GATWICK AIRPORT

Enquiries to showrooms Hille of London Ltd. 39-40 Albemarle Street London W.1 HYD 9576

24 Albert Street Birmingham 4 Midland 7378 9

*The solution to Your problem may be a...*



**A FLEXIBLE SYSTEM OF  
PREFABRICATED CONSTRUCTIONS**

# KENKAST building

*For Details and Full Technical Service*

**KENKAST CONCRETE LIMITED  
ASTLEY • MANCHESTER**

**Telephone : ATHERTON 729**

# SADD'S QUALITY FLUSH DOORS

...the choice of the  
discerning  
ARCHITECT,  
CONTRACTOR and  
BUILDING OWNER

| Design                                       | Core       | Feature, Use                                                               |
|----------------------------------------------|------------|----------------------------------------------------------------------------|
| 'MALDON'                                     | Solid      | Stability, Fire Retardant<br>Hi-Fi                                         |
| 'CHELMER'                                    | Semi-Solid | 50% solid<br>Public Buildings                                              |
| 'BEELEIGH'                                   | Skeleton   | Architectural Spec.<br>Domestic                                            |
| 'F.D.15'                                     | Skeleton   | Internal: Hardboard<br>facings for paint                                   |
| 'F.D.20'<br>(B.S. Fundamentals)<br>'F.D.20x' | Skeleton   | F.D.20 Internal: For<br>painting F.D.20x External<br>grade plywood facings |

## 5 STANDARD DESIGNS

and flush doors  
to architects' details

Write for full details

# JOHN SADD

AND SONS LTD

WHARF FD 5, MALDON, ESSEX

Telephone: Maldon 131

LONDON OFFICE:

329 HIGH HOLBORN, W.C.1

Telephone: CHAncery 7214

*Chosen for Design . . . .  
to Represent Britain  
at Brussels*



*Selected  
by  
the  
Council  
of  
Industrial  
Design  
for  
the  
BRUSSELS  
INTERNATIONAL  
EXHIBITION*

Conceived by an expert  
in Industrial Design,  
the Queen-Heater was  
selected on merit by the  
C.O.I.D. as the only  
solid fuel appliance to  
represent this section of  
industry at the Brussels  
Fair (April-October  
1958). The Queen-  
Heater is available in a  
variety of attractive  
colours at a very com-  
petitive price. On the  
Ministry of Power's  
Approved List of  
Appliances.

Other Queen Products worthy of the highest priority  
for efficient and economical domestic heating, include  
the Queen (Underfloor Draught) Fire, the Queen (Drop  
Front) Fire and the Queenette (Low Front) Fire.

All of the above Appliances have been tested and  
approved on smokeless fuels and are most suitable for  
use in smoke controlled areas.

Fullst details on request to the Manufacturers:

**GRAHAMSTON IRON CO. LTD.**

P.O. BOX No. 5 · FALKIRK · STIRLINGSHIRE

## CYGNACRETE


### ALL-ASPECT MONITOR ROOF BUILDING saves time and money



MULTI-BAY LAYOUT




RIIDGE TYPE PORTAL

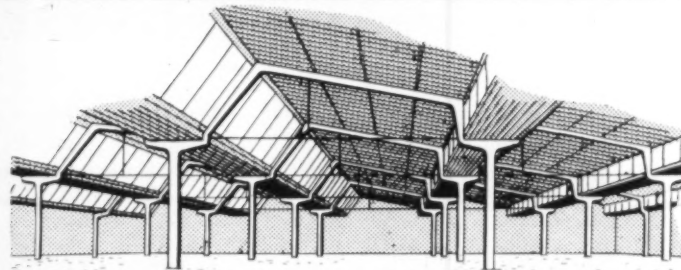

Cygnacrete Pre-cast Concrete Units for Monitor Roof Buildings are as satisfactory in every way as traditional construction plus the advantages of low labour, initial and maintenance costs. Because the Monitor Roof Building has mechanical not wet joints it is rapidly erected regardless of weather conditions and no time is lost through waiting for joints to set. It provides balanced light intensity on the work plane, reducing factory lighting costs, possesses high thermal insulation and fire risk is low.

For complete information and advice on the design and erection of concrete industrial buildings, contact:

**WILLIAM TOWNSON & SONS LTD. Dept. ARC. HIGHER SWAN LANE, BOLTON** Telephone Bolton 1840/4  
Sheene Road, Bedminster, Bristol 3. 9, St. James Row, Sheffield 1. New Street Chambers, New Street, Birmingham 2.

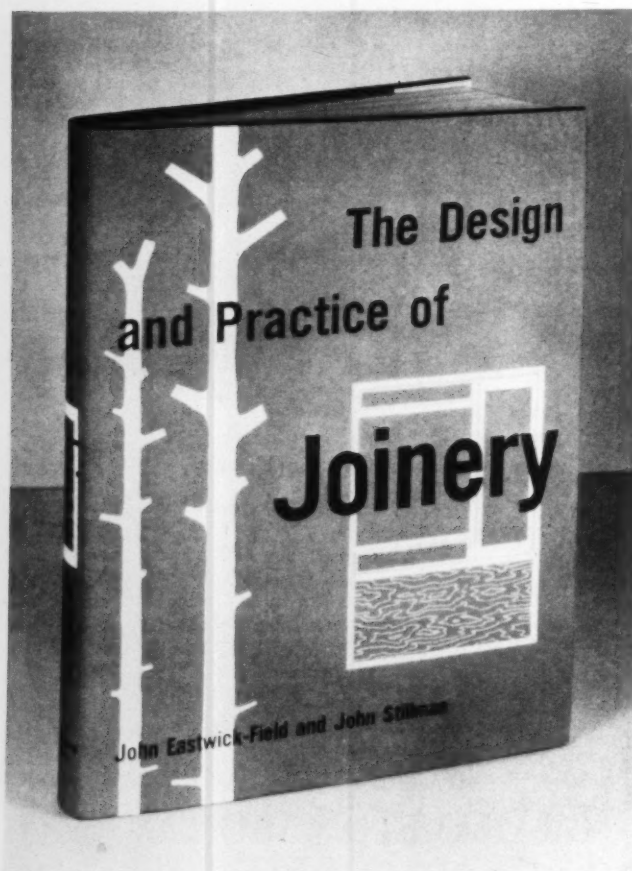

## The Design and Practice of Joinery

by *John Eastwick-Field*, B.A.ARCH.(HONS), A.R.I.B.A. and *John Stillman*, DIPL.LONDON, A.R.I.B.A.

Foreword by *Robert H. Matthew*, C.B.E., M.A., F.R.I.B.A.

THIS, THE ONLY AUTHORITATIVE, UP-TO-DATE BOOK about present-day joinery practice, is published at the recommendation of the Text and Reference books Committee of the Royal Institute of British Architects and is intended primarily for architects, assistants and students of architecture. But, because its scope is broad and because it is concerned with the basic principles of design and practice, it will also be of great interest and value to the members of kindred professions, especially quantity surveyors, and to all who are engaged in the handling and conversion of timber, including joinery manufacturers, joiners, cabinet makers, carpenters, shop fitters and other woodworkers.

The text includes chapters on the timber yard; moisture movement in timber; an analysis of construction; the design and machining of sections; and of joints; specification and practice. Among its useful appendixes are a selection of timbers suitable for joinery, set out in tabular form, a complete list of British Standard Specifications and Codes of Practice applicable to joinery, and a general bibliography. It is comprehensively illustrated: there are nearly 90 photographs and over 200 specially drawn line illustrations—more than 80 in the chapter on joints. And there is a good index.

Size 9½" by 7½". 224 pages, over 290 illustrations in halftone and line, including 200 line drawings specially drawn by Robert Maguire. Price 42s. net, postage 1s. 9d.

THE ARCHITECTURAL PRESS, 9-13 Queen Anne's Gate, London, S.W.1.



## UNIVERSALLY APPROVED..



### ARBOLITE

#### METAL CASEMENT PUTTY

The only putty containing "Arbosyn" which ensures freedom from cracking, freedom from wrinkling, greater durability, better keying properties, good setting properties, easy working consistency, longer keg life

### ARBOMAST B.1

#### BEDDING MASTIC

Withstands extremes of temperature without shrinking, running, sagging or staining. The most reliable bedding mastic available to the Trade. Write for technical leaflets.

**ADSHEAD RATCLIFFE & CO LTD BELPER DERBY**

Telephone: BELPER 351/2

Telegrams: PREMIER, BELPER

## CYGNET

*Craftsmen in Laboratory Furniture*

### RECENT IMPORTANT CONTRACTS

*include laboratory  
installations for—*

Beecham Maclean Limited—New Research Laboratories, Brentford.  
Salford Grammar School. Architects—Taylor & Young. F.A.R.I.B.A.  
Philblack Limited—Laboratories at Avonmouth.  
Architects—Sir Percy Thomas & Son. F.A.R.I.B.A.  
Royal Grammar School, Newcastle—Science Block extension.  
Architects—Spence & Price. A.R.I.B.A.  
Transparent Paper Limited—Bury.  
University College, London.  
Architects—Corfiato, Thomson & Partners. F.A.R.I.B.A.  
Warwickshire County Council—Polesworth School.  
Department of Health for Scotland—Brown Trout Research Laboratories, Pitlochry.  
Natural Sciences Building, Swansea.  
Architects—Sir Percy Thomas & Son. F.A.R.I.B.A.  
North Western Gas Board, Lostock Hall, Preston and at Denton.  
Dunlop Cotton Mills Ltd.—Rochdale.

Send for  
full details  
now.



Built to meet the most exacting demands, "CYGNET" Benches, with heat and acid-resisting tops, Racks, Fume Cupboards, Cabinets and Shelving, are made in a large range of standard units or to specification.

**CYGNET JOINERY LTD • DEPT. ARJ HIGHER SWAN LANE • BOLTON**

## TWO BOOKS BY TETSURO YOSHIDA



### THE JAPANESE HOUSE AND GARDEN

*This book, which fully describes and finely illustrates the traditional Japanese house and its intimate, harmonious relationship with the garden in which it stands, offers to Western architects an invaluable object lesson in the practical application—with centuries of tradition to prove its success and versatility—of the principle of modular construction. The module is the standard sized 'mat' and the building components are all standardized in dimensions related directly to this. Size 10½ in. by 8½ in. 206 pages, 250 halftone and line illustrations and a frontispiece in colour. 60s. net, postage 2s.*



### GARDENS OF JAPAN

*In this book, the same author presents a full-scale study of the Japanese Garden, considered from the viewpoint of design. He analyses all the simple basic elements traditionally used—trees, shrubs, rocks, stone and water—defines their symbolic significance, and the accepted rules for their arrangement; he deals with design details—ground coverings in grass, moss, pavings and cobbles; and, with plans and photographs, he shows how Japanese designers achieve a perfect harmony of house and garden. Size 11 in. by 8½ in. 196 pages including 224 illustrations, with a frontispiece and three plates in colour. 63s. net, postage 2s.*

**THE ARCHITECTURAL PRESS**

9 Queen Anne's Gate, S.W.1

## What is *YOUR* RINGELMANN NUMBER?



**CLEAN AIR ACT 1956**

4 & 5 Eliz.2Ch.52

Section 34 (2) provides:—

"In this act 'dark smoke' means smoke which, if compared . . . with a chart known . . . as the Ringelmann Chart, would appear to be as dark as or darker than Shade 2 on the chart."

### No. 3 RINGELMANN

IS A FLAGRANT OFFENCE UNDER THE ACT

### No. 2 RINGELMANN

FAILS TO COMPLY WITH THE ACT

### No. 0 RINGELMANN

IS ASSURED WITH THE:

## OLDBURY CHAIN GRATE STOKER

*which anticipated the Clean Air Act by 14 years*

Today more than 5,000 Oldbury Stokers are serving industry, burning solid fuels in the widest variety, **EFFICIENTLY, SMOKELESSLY.** Leave nothing to doubt. To comply with the Act, consult Edwin Danks at Oldbury or the nearest Branch Office.



**EDWIN DANKS & CO**

(OLDBURY) LTD.

OLDBURY near BIRMINGHAM

Tel.: (Stoker Division) Brierley Hill 7731

LONDON • CARDIFF • GLASGOW • LEEDS  
MANCHESTER • NEWCASTLE-ON-TYNE



At the TULSEHILLS SCHOOL, London, where 'Pyrotenax' also serves. Architect: Prof. Sir Leslie Martin (former Architect to the London County Council) Chief Engineer: J. Rawlinson, Esq., C.B.E., M.Eng., M.I.C.E., M.I.Mech.E.

Write for full details and  
Technical data B102

CATHEDRAL,  
SCHOOL and...



LIVERPOOL CATHEDRAL in which 'Pyrotenax' plays its vital part.  
Architect: Sir Giles Gilbert Scott, O.M., R.A.

... Factories and Works. Laundries. Breweries. Hotels, Flats. Atomic Pile Installations and Research Establishments. Electric Power Station, Oil Pumping and Storage Installations. Cathedrals, Churches, Galleries and Museums. Oil Tankers. Passenger and Cargo Ships, Warships, etc.

**Pyrotenax**  
COPPER COVERED MI CABLES  
PERFECTED BY EXPERIENCE

non-fire causing — heat resisting —  
moisture proof — non-ageing — rust-  
proof — safe against overload —  
resistance to mechanical maltreat-  
ment — resistance to noise trans-  
mission.

**PYROTENAX LIMITED, HEBBURN-ON-TYNE**

Telephone: HEBBURN 83-2244 8

LONDON: Abbey 1654/5 BIRMINGHAM: Midland 1265 MANCHESTER: Blackfriars 6946 LEEDS: Leeds 27826 GLASGOW: City 3641/2 CARDIFF: Cardiff 23689  
SD 102

## PAROPA PAVES BALCONIES

Frazzi craftsmen have just completed another PAROPA installation. At Minster House, Arthur Street, London, E.C.4, they have laid 1,100 square yards of attractive non-slip PAROPA, much of it circular on plan.

For roofs, terraces, forecourts, swimming pool surrounds and all such work, PAROPA stands supreme. It can be laid *in situ* to any area, shape or angle; on any wood, brick, concrete or asphalt surface.

For the best results, always specify PAROPA (Regd.) flat roofing by Frazzi. Illustrated folder available on request.

### REINFORCED CONCRETE

For over fifty years Frazzi Limited have specialised in both the design and the erection of all kinds of reinforced concrete structures, including fire-resisting floors and roofs. Our technical staff is at all times available to discuss any project involving reinforced concrete construction.

## FRAZZI LIMITED

SPECIALISTS IN ROOF AND FLOOR CONSTRUCTION

**LENNOX HOUSE, NORFOLK STREET, STRAND, W.C.2**

Telephone: TEMPLE BAR 5371

**DUTTON ROAD, SHEFFIELD 6** Telephone: SHEFFIELD 44798

Associate Company:

PAROPA (Scotland) Limited, 10 Claremont Terrace, Glasgow C.3



Architects: Messrs. Trehearne and Norman, Preston and Partners.

Agents: Robert Kirk Ltd., Exchange Street, Belfast. Murphy Bros., 3 Castlewood Avenue, Dublin.



## DRYAD IRONMONGERY

was selected by the Architects, Messrs. Edward D. Mills & Partners, for the BRITISH INDUSTRY PAVILION and for THE BRITANNIA INN at BRUSSELS EXHIBITION.


Many purpose-made handles for the large swing doors were also designed and made at our works.

**DRYAD METAL WORKS LTD.**  
SANVEY GATE, LEICESTER

London Distributors:  
A. J. Binns (Hardware) Ltd., 29 Store Street, London, W.C.1



## BRONZE PLAQUES

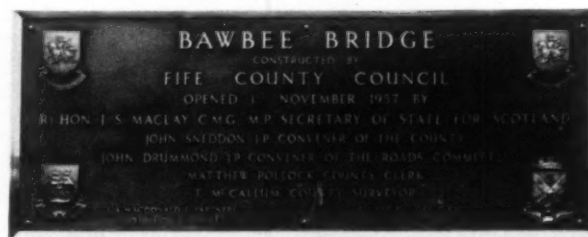

DESIGN No. 11,206

CAST BRONZE PLAQUE SIZE: 5'-6" x 2'-6"

SPECIALISTS IN THE DESIGN AND  
MANUFACTURE OF COMMEMORATIVE  
PLAQUES OF ALL TYPES IN BRONZE  
AND BRASS

**CHARLES HENSHAW**

AND SONS LIMITED

RUSSELL ROAD EDINBURGH

ILLUSTRATED BROCHURE SENT ON REQUEST

Jermyn Street, W.1



Architects: Messrs. Forbes & Tate, London

CONSTRUCTED BY

*Masons*  
THE STOREFITTERS

GELDERD ROAD  
LEEDS, 12

128 BAKER STREET  
LONDON, W.1

**S.L.R.**


**DESIGNED by DESIGNERS  
for DESIGNERS**

An entirely new range of flashed opal  
ceiling fittings with cadmium plated  
"invisible" metalwork introduced by

**S.L.R.  
ELECTRIC  
LTD**

Four sizes are available from stock for immediate  
delivery:—

- C 90—10" dia. x 4" deep—for 60 watt pearl lamp
- C 91—12" dia. x 4" deep—for 2 x 75 watt pearl lamps
- C 92—14" dia. x 4½" deep—for 2 x 100 watt pearl lamps
- C 93—16" dia. x 4½" deep—for 2 x 150 watt pearl lamps

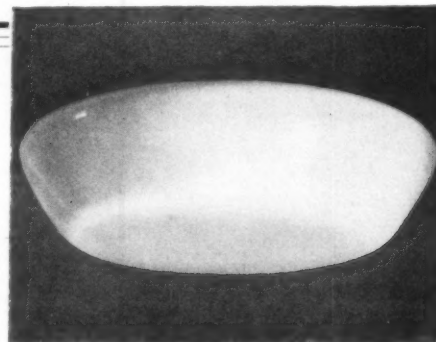

WELBECK WORKS, WELBECK ROAD, SOUTH HARROW MIDDLESEX • Telephone: BYRON 3273 5

## LATEX and PLASTIC FOAM CUSHIONING for LONG LENGTH SEATING

as used in

- HOTELS, BARS & CLUBS
- MUNICIPAL BUILDINGS
- RECEPTION AND WAITING ROOMS
- SCHOOLS AND LECTURE HALLS
- WINDOW BAYS AND ALCOVES
- EXHIBITION STANDS



Dunlopillo cushions and backrests supplied to any specification, uncovered or covered and ready for installation on site.

SEND FOR ILLUSTRATED LIST

**LATEX UPHOLSTERY LTD.**  
THE LEADING SPECIALISTS  
41, LONSDALE ROAD, LONDON, W.11  
Telephone: BAYSWATER 6262-5

**JAMES**  
make good  
**METAL**  
**WINDOWS**

**W. JAMES & CO. LTD.**  
Hythe Rd. Willesden Junction  
LADBroke 6471 (6 lines) N.W.10

## A Picture of Efficiency




**Manloves Hi-Speed**  
**STERILIZING**

means HIGHER TEMPERATURE · HIGHER VACUUM ·  
**REALLY RAPID STERILIZING**

If you have a Sterilizing problem let **Manloves** solve it.

**MANLOVE ALLIOTT & CO LTD**  
BLOOMSGROVE WORKS · NOTTINGHAM  
London Office: 416-42 PARLIAMENT STREET · WESTMINSTER S.W.1  
Telephone: WHITEHALL 5951-2

**SMITH'S**  
TWO-WAY REINFORCED  
SUSPENDED FLOORS & ROOFS

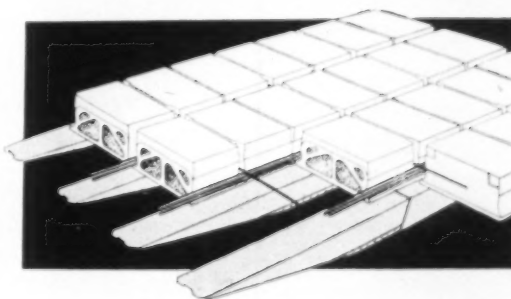

Smith's TWO-WAY reinforced Floor has gained the reputation of being the finest for modern building. It combines advantages of both precast and in situ Floors, which guarantees a better load distribution.

For full particulars apply to

**SMITH'S FIREPROOF FLOORS LTD**  
IMBER COURT, EAST MOLESEY, SURREY

'Phone: Emberbrook 3300

## ALPHABETICAL LIST TO ADVERTISERS

|                                              | PAGE       |                                                | PAGE        |                                         | PAGE          |
|----------------------------------------------|------------|------------------------------------------------|-------------|-----------------------------------------|---------------|
| Acerington Brick & Tile Co. Ltd.             | XXVI       | Falk Stadelmann & Co. Ltd.                     | IXV         | Mellor Bromley (Air Conditioning), Ltd. | XXIV          |
| Adamsz Ltd.                                  | XXVI       | Fordham Pressings, Ltd.                        | XII         | Mellowes & Co. Ltd.                     | XXIV          |
| Adsheld Ratchiffe & Co. Ltd.                 | XXVI       | Fox, Samuel, & Co. Ltd.                        | IV          | M. K. Electric, Ltd.                    | XXIII         |
| A.E.I. Lamp & Lighting Co. Ltd.              | XXX        | Frazzi, Ltd.                                   | CXXIII      |                                         |               |
| Aerialite, Ltd.                              | XII        |                                                |             | Newman, William, & Sons, Ltd.           | XII           |
| Anderson Construction Co. Ltd.               |            | Gay, R., & Co.                                 | IXXXV       |                                         |               |
| Anderson, D., & Son, Ltd.                    | IXX        | General Electric Co. Ltd.                      | IXXXVI      | Parkes, Josiah, & Sons, Ltd.            | XXVI          |
| Architectural Press, Ltd., The               | CXX, CXXII | Glazed & Floor Tile Manufacturers' Association | IVII        | Pilkington, Bros., Ltd.                 | XIII, CIV, CV |
| Armstrong Patents Co. Ltd.                   | CXXII      | Gliksten, J., & Sons, Ltd.                     | CH          | Plyglass, Ltd.                          | XI            |
| Ascot Gas Water Heaters, Ltd.                | IXXXIX     | Grahamston Iron Co. Ltd.                       | CXIX        | Pressure Piling Companies, Ltd., The    | XXIV          |
| Atlas Asbestos Cement Co. Ltd.               | XIII       | Greenwood & Airvac Ventilation Co. Ltd.        | IXXXIII     | Pyrene Co. Ltd.                         | IX            |
| Atlas Lighting Ltd.                          | XCVI       | Gyproc Products, Ltd.                          | XXVII       | Pyrotex, Ltd.                           | CXXIII        |
| Automatic Telephone & Electric Co. Ltd.      | XVII       |                                                |             | Quicktho (1928), Ltd.                   | IXXXIV        |
|                                              |            | Hall, J. & E., Ltd.                            | CI          |                                         |               |
| Banister Walton & Co. Ltd.                   | CVI        | Harrison (Birmingham), Ltd.                    | CXIV        | Rainham Timber Engineering Co.          | IXVI          |
| Biddle, F. H., Ltd.                          | IXXXVIII   | Harvey, G. A., & Co. (London) Ltd.             | CXIII       | Rawplug Co. Ltd., The                   | XIX           |
| Bilston Foundries, Ltd.                      | XXIII      | Haskins, Ltd.                                  | IX          | Robertson Thain Ltd.                    | XV            |
| Blundell Spence & Co. Ltd.                   | IXXVI      | Henshaw, Charles, & Sons, Ltd.                 | CXXIV       | Rotaflex, Ltd. (Great Britain)          | IXI           |
| Bolding, John, & Sons, Ltd.                  | XXII       | Hill, Richard, Ltd.                            | XIV         | Rubercoid Co. Ltd., The                 | XXIII         |
| Boulton & Paul, Ltd.                         | IXXIX      | Hille of London, Ltd.                          | CXXIII      |                                         |               |
| Braby, Frederick, & Co. Ltd.                 | CVII       | Hills (West Bromwich) Ltd.                     | IXVIII      | Sadd, John, & Sons, Ltd.                | CXIX          |
| Brady, G., & Co. Ltd.                        | XX         | Holoplast, Ltd.                                | IXIV        | Sanderson, Arthur, & Sons, Ltd.         | X             |
| Briggs, William, & Sons, Ltd.                | CXXVII     | Hope, Henry, & Sons, Ltd.                      | XCI         | Sankey, J. H., Ltd.                     | XIV           |
| British Constructional Steelwork Association | IXXXI      |                                                |             | Shanks & Co. Ltd.                       | IXXXIII       |
| British Paints, Ltd.                         | XVI        | Ideal Boilers & Radiators, Ltd.                | IXII, IXIII | Siemens Edison Swan, Ltd.               | IXXXIII       |
| British Sanitary Fireclay Association        | CHI        | Imperial Chemical Industries, Ltd.             | CXI         | Simpson, W. B., & Sons, Ltd.            | XVI           |
| British Titan Products Co. Ltd.              | I          | Intermit, Ltd.                                 | XLIV        | S.L.R. Electric, Ltd.                   | CXXIV         |
| Broughton Moor Green Slate Quarries, Ltd.    | IXXXVII    |                                                |             | Smith & Walton, Ltd.                    | II            |
|                                              |            | James, W., & Co. Ltd.                          | CXXV        | Smiths' Fireproof Floors, Ltd.          | CXXV          |
| Cablers, Ltd.                                | IXVII      | Jones & Broadbent, Ltd.                        | XXIX        | Southalls (Birmingham), Ltd.            | CXII          |
| Canadian Government                          | XXV        |                                                |             | Spencer Wire Co. Ltd.                   | IXXV          |
| Carpet Trades, Ltd.                          | XCI        | Kenkast Concrete, Ltd.                         | CXXVIII     | Spess Products, Ltd.                    | CX            |
| Carrier Engineering Co. Ltd.                 | IXXXIV     | Kilpatrick, James, & Son, Ltd.                 | XXII        | Stafford Furniture, Ltd.                | CXX           |
| Celotex, Ltd.                                | XXV        |                                                |             | Stainless Steel Sink Co. Ltd., The      | CXII          |
| Central Electricity Authority                | CXXV       | Latex Upholstery, Ltd.                         | CXXV        | Steel Radiators, Ltd.                   | IXIX          |
| Colthurst Symons & Co. Ltd.                  | IV         | Leaderflush, Ltd.                              | CXXVII      | Steele, I. & C., & Co. Ltd.             | IV            |
| Concrete & Structural Products, Ltd.         | II         | Leeds Fireclay Co. Ltd.                        | XXVII       | Stockwell, S. J., & Co. (Carpets) Ltd.  | IVIII         |
| Costain, Richard, Ltd.                       | IXXXVI     | Limmer & Trinidad Lake Asphalt Co. Ltd.        | IXI         | Sugg, William, & Co. Ltd.               | CXII          |
| Cox & Co. (Watford) Ltd.                     | XIII       | Line, John, & Sons, Ltd.                       | XC          |                                         |               |
| Crane, Ltd.                                  | VII        | London Brick Co. Ltd.                          | III         | Teleflex Products, Ltd.                 | II            |
| Crittall Manufacturing Co. Ltd.              | III        | London Sand Blast Decorative Glass Works, Ltd. | XIV         | Thermalite, Ltd.                        | IXXXVIII      |
| Crossley, J., & Sons, Ltd.                   | XXVI       | Lumenated Ceilings, Ltd.                       | IXXXVI      | Thermocentral Installations Co. Ltd.    | IXVII         |
| Cygnat Joinery, Ltd.                         | CXXI       |                                                |             | Tibor Reich, Ltd.                       | IX            |
|                                              |            | Maclea & Co. (Metal Windows) Ltd.              | IXXX        | Townson, William, & Son, Ltd.           | CXX           |
| Danks, Edwin, & Co. (Oldbury) Ltd.           | CXXII      | Malkin Tiles (Burslem), Ltd., The              | CX          | Trussed Concrete Steel Co. Ltd.         | IXXXVII       |
| Dartnalls, Ltd.                              | XIII       | Mallinson, William, & Sons, Ltd.               | XXI         |                                         |               |
| De La Rue, Thomas, & Co. Ltd.                | IXXXVIII   | Mander Bros., Ltd.                             | CXIII       | United Steel Structural Co. Ltd.        | VI            |
| Demolition & Construction Co. Ltd., The      | IXXII      | Manlove, Albion & Co. Ltd.                     | CXXV        |                                         |               |
| Dorman Long, Ltd.                            | IXXXVII    | Marley Tile Co. Ltd.                           | IXXXVIII    | Warerite, Ltd.                          | IXXIV         |
| Draftsle, Ltd.                               | IXXXII     | Marshall, S., & Sons Ltd.                      | IXXXIII     | West's Piling & Construction Co. Ltd.   | CXXVI         |
| Dryad Metal Works, Ltd.                      | CXXII      | Mason, Joseph, & Co. Ltd.                      | IX          | William & Williams, Ltd.                | IXVIII, XIX   |
| Duplus Domes, Ltd.                           | CX         | Mason, William, & Sons, Ltd.                   | CXXIV       | Wood, William, & Sons, Ltd.             | CXX           |
|                                              |            | Matthew Hall & Co. Ltd.                        | IXXXIII     |                                         |               |
| Elliott, Samuel, & Sons (Reading), Ltd.      | X          |                                                |             | Yale & Towne Manufacturing Co.          | XI            |
| English Electric Co. Ltd.                    | IXXI       |                                                |             |                                         |               |

# the foundation of stability

West's Shell Pile consists of a precast reinforced concrete sectional outer shell which is driven to a calculated 'set' in the load-bearing stratum, and a reinforced concrete core, cast in-situ after driving is complete. The firmness and consolidating effect of the positively driven pile are therefore retained, the final 'set' is undisturbed—but there is no fatigue in the pile core. These are the main factors which ensure stable foundations for many different structures, particularly those imposing great weight per unit of area occupied.



PLEASE WRITE FOR OUR LATEST PUBLICATIONS

## WEST'S SHELL PILING SYSTEM

WEST'S PILING &amp; CONSTRUCTION CO. LTD

Foundation Specialists . Design &amp; Construction in Reinforced Concrete

BATH ROAD, HARMONDSWORTH, MIDD. TEL: SKYPORT 5222

Branche in London, Birmingham, Manchester, Glasgow

Australasia: West's Shell Piling (Asia) Pty Ltd, Melbourne &amp; Sydney


Southern Africa: The Roberts Construction Co. Ltd, Johannesburg

France: Compagnie Générale de Construction de Fours, Paris

Ireland: Farrans Limited, Dunmurry, Belfast




# BITUMETAL on Top at BRUSSELS

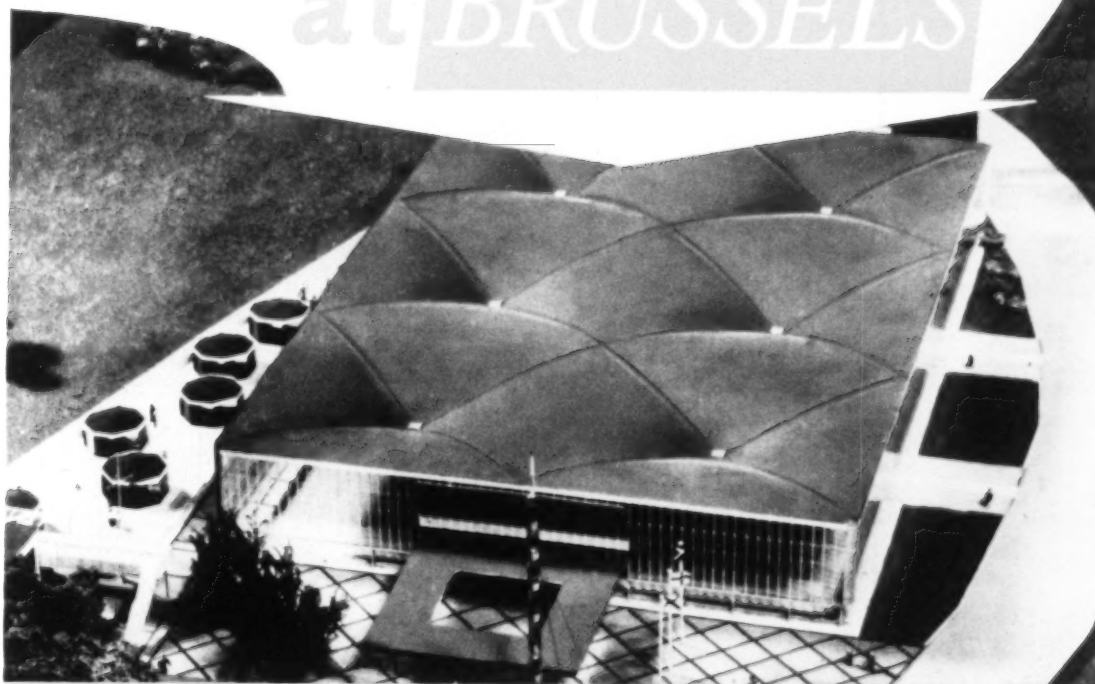

BRITISH INDUSTRIES PAVILION

Architects: EDWARD D. MILLS & PARTNERS, LONDON  
Contractors: RICHARD COSTAIN LIMITED, LONDON

ERE at Brussels Exhibition for the world to see are gathered many of Britain's finest products under one roof; a roof which itself testifies to the integrity of British Industrial skill. "Bitumetal" provides in one unit, roof plus ceiling plus insulation, and additional advantages are economy and quick erection with virtually no maintenance. Full details from any of the undernoted area offices.

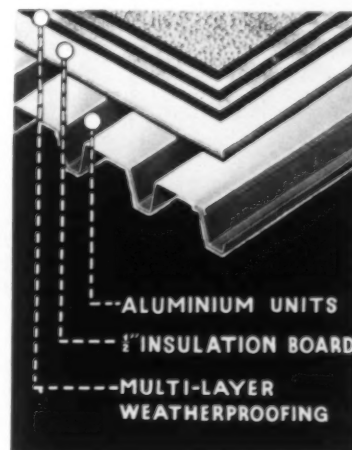


WILLIAM **BRIGGS** & SONS LIMITED

VAUXHALL GROVE, LONDON S.W.8 • REGD. OFFICE: DUNDEE

OFFICES AND DEPOTS ALSO AT ABERDEEN • BELFAST • BRADFORD • CARDIFF • DUBLIN  
BRISTOL • EDINBURGH • GLASGOW • LEICESTER • LIVERPOOL • NORWICH

***Thermal Insulation need not be an extra***

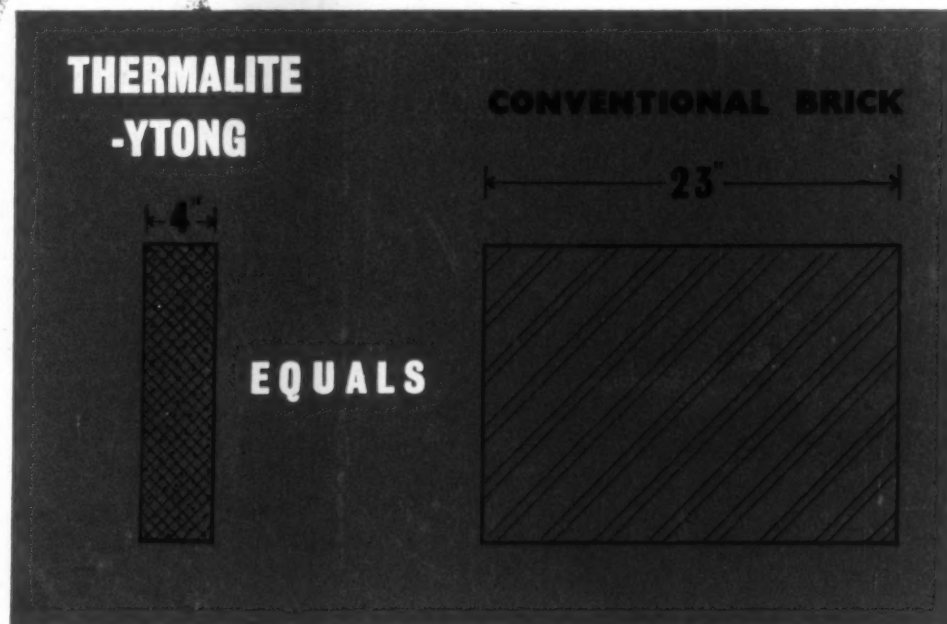

**THERMAL INSULATION  
LOAD BEARING  
HIGH SPEED OF LAYING  
LIGHT WEIGHT  
WORKABILITY  
DIRECT FIXING  
FIRE RESISTANCE  
REDUCES THE RISK  
OF CONDENSATION**

With THERMALITE-YTONG building blocks, it is possible to design load bearing external walls with a high thermal resistance, and at a cost comparable with traditional brickwork or concrete construction.

The lightweight blocks nominal size 18" x 9" are made in various thicknesses to suit specific needs, have exceptional working properties, and allow for speedy laying, being easily cut and shaped with bricklayers tools or handsaw.

How infinitely more economical it is to build with thermal insulation instead of needing an additional operation with the consequent increased costs.

**THERMALITE-YTONG**

***Load bearing insulating building blocks***

*For further details and technical data apply to:*

**THERMALITE LIMITED, Shepherds House Lane, Earley, Reading, Berkshire. Telephone: Reading 62694.**